

Time-Optimal Control via Heaviside Step-Function Approximation

Kai Pfeiffer¹, Quang-Cuong Pham^{1,2}

Abstract—Least-squares programming is a popular tool in robotics due to its simplicity and availability of open-source solvers. However, certain problems like sparse programming in the ℓ_0 - or ℓ_1 -norm for time-optimal control are not equivalently solvable. In this work, we propose a non-linear hierarchical least-squares programming (NL-HLSP) for time-optimal control of non-linear discrete dynamic systems. We use a continuous approximation of the Heaviside step function with an additional term that avoids vanishing gradients. We use a simple discretization method by keeping states and controls piece-wise constant between discretization steps. This way, we obtain a comparatively easily implementable NL-HLSP in contrast to direct transcription approaches of optimal control. We show that the NL-HLSP indeed recovers the discrete time-optimal control in the limit for resting goal points. We confirm the results in simulation for linear and non-linear control scenarios.

I. INTRODUCTION

Time-optimal control (TOC) can be considered a powerful tool when as fast as possible task fulfillment of a dynamic system is desired. However, optimal control methods based on direct methods for problem discretization are not easily implementable [1] or their solution relies on proprietary software [2]. In this work we propose a non-linear hierarchical least-squares programming (NL-HLSP) that can be easily implemented (~ 20 lines of code if a non-linear solver and a task library are available) and that is provably convergent to the true discrete time-optimal control (DTOC) in the limit and for resting goal points (that is the system is able to remain at these points; for example a robot is not able to remain at a Cartesian point if at the same time the desired velocity is not zero). Furthermore, our method is applicable to dynamics of any form (for example the inverse dynamics equations popular in robotics due to their computational efficiency [3]), unlike other trajectory optimizers [4] or differential dynamic programming methods [5].

Optimal control is the problem of identifying a control u such that a dynamic system with states x is driven to a desired goal state f_d while minimizing a defined cost on control u , the state x or linear / non-linear functions of it. A desired goal is thereby a state that the system should end up in while considering constraints on the controls u and / or the states x . This boils down to a constrained optimization problem with Ordinary Differential Equations

(ODE), that describe the dynamic system behavior, and algebraic equations, that describe physical relations [6].

Analytic solutions to certain specifications of the continuous optimal control problem have been proposed. A solution to the linear quadratic regulator (LQR) with linear dynamics can be found in [7]. The authors in [8] propose a solution with limits on the controls. However, for complicated non-linear systems, and especially constrained problems, analytical solutions are usually too difficult or impossible to formulate. Instead, in order to be machine solvable, the original optimal control problem can be discretized and then be solved as a non-linear programming (NLP), commonly referred to as direct transcription method [9]. Different methods have been proposed which differ in the polynomials and collocation points (at which the functions are evaluated) that are used to approximate the continuous controls and states. The authors in [10] use Legendre-Gauss-Radau quadrature as it allows easy constraint formulation and is shown to possess high stability for systems of high order ODE's. Legendre-Gauss-Lobatto points however provide the smallest interpolation error in a least-squares sense [11]. The open-source matlab implementation GPOPS of a direct transcription method is described in [1]. However, the corresponding C++ implementation [2] is proprietary and furthermore relies on the proprietary NLP solver SNOPT [12].

A specific form of optimal control is time-optimal control [13]. Here, the cost function specifically aims to minimize the time at which a desired goal state is reached. The resulting control usually exhibits a ‘bang-bang’ profile as a limit control for given bounds on the control inputs [14].

TOC is a complex problem, especially when the controls and states are considered at the same time, for example for whole-body robot trajectory optimization [15]. One way to reduce its complexity is to reduce DTOC to a simpler problem by only considering the controls while the states are assumed to be known. This method, referred to as time-optimal path parametrization, has seen significant leaps in the recent past in terms of accuracy, convergence and computational complexity [16], [17]. However, how to choose the states is oftentimes not entirely clear but might be taken for example from kinematic solutions or motion capture.

Aside direct collocation methods, optimal control can also be discretized to reasonable accuracy for example by the explicit Euler-method [18]–[20]. In this case TOC can be considered a mixed-integer non-linear programming [21] where the discrete optimal time is represented as an integer and the corresponding states and controls are continuous. Such problems, even in the linear case [22] or for example expressed as optimization problems with ℓ_0 -norm cost

¹The authors are with the School of Mechanical and Aerospace Engineering, Nanyang Technological University, Singapore.

²HP-NTU Digital Manufacturing Corporate Lab, Nanyang Technological University, Singapore.

This research was conducted in collaboration with HP Inc. and supported by National Research Foundation (NRF) Singapore and the Singapore Government through the Industry Alignment Grant (I1801E0028).

functions for sparsity enhancing linear regression [23], are very expensive to solve due to their combinatorial nature. A simplified approach only considering a robot's end-effector position in a traveling salesman scenario has been treated in [24]. Another approach is to turn the ℓ_0 - into a weighted ℓ_1 -norm optimization problem. Thereby, different weights have been proposed in the literature [23], [25], [26] which aim to represent the original problem as closely as possible. This approach has been borrowed for discrete linear dynamic systems for example in [18]. A similar approach is followed in [27], confirming that ℓ_1 -norm optimization can provably retrieve an equivalent solution to DTOC in the linear case. The authors in [28] propose a similar method based on a sliding window but formulated as an ℓ_2 -norm optimization problem. The window is iteratively shifted until the time-optimal control is contained within.

Control problem formulation as least-squares problems (ℓ_2 -norm) is oftentimes appropriate and sufficient in robot control and planning [29], [30] and enjoys great popularity because of its simplicity and availability of open-source solvers [31]. A special formulation of least-squares programming is hierarchical least-squares programming [32]. Here, constraints and objectives can be further prioritized within such that a more efficient robot control can be achieved [33]. Especially the separation of regularization tasks is oftentimes very helpful as the actual objectives can be fulfilled to higher accuracy as has been demonstrated in [34]. However, there are problem settings that are not equivalently solvable in the ℓ_2 -norm. An example would be the above mentioned problem in the ℓ_1 -norm for DTOC [18], [27]. In this work we propose a provably equivalent approximation of linear and non-linear DTOC in the ℓ_2 -norm based on the approximate heaviside function [35]. The heaviside function has been treated in different works. The authors in [36] use a heaviside step-function approximation in order to indicate mechanical stress violations in topology optimization. The authors in [37] directly optimize over the discontinuous Heaviside step-function and propose an appropriate Newton's method to do so.

Our contribution is therefore threefold:

- Approximate discrete time-optimal control (ADTOC) as an easily implementable NL-HLSP that can be solved by off the shelf non-linear least-squares solvers.
- Provable equivalence to true DTOC.
- Applicability to both linear and non-linear systems.

First, we outline continuous TOC and our discretization of it, see Sec. II. Secondly, we describe ADTOC and the weight function based on the heaviside step-function approximation (Sec. III). In Sec. IV we show the equivalence to true DTOC in the limit and for resting goal points. Lastly, the algorithm is evaluated for linear and non-linear discrete dynamic systems (Sec. V).

II. PROBLEM DEFINITION

In this work, we consider TOC of the form

$$\min_{x,u,T} \int_0^T dt \quad (\text{TOC})$$

$$\begin{aligned} \text{s.t} \quad & \dot{x}(t) = f_{\text{dyn}}(x(t), u(t)) \\ & f_{\text{ter}}(x(T)) = 0 \\ & x(t), u(t) \in \Omega \end{aligned}$$

The states $x(t) \in \mathbb{R}^{n_x}$ and $u(t) \in \mathbb{R}^{n_u}$ are continuous in time t . The goal is to minimize the time T that it takes to reach the terminal (ter.) state $f_{\text{ter}}(x(T)) = 0$. We define

$$f_{\text{ter}}(x(t)) := f_{\text{task}}(x(t)) - f_d(t) \quad (1)$$

where $f_{\text{task}}(x(t))$ is some task function and f_d is the corresponding desired value. The dynamics f_{dyn} determine the behavior of the control system by some possibly non-linear relationship. Ω is a constraint polytope which both the states and controls are constrained to.

The problem can be discretized for example by direct transcription methods. These methods provide an equivalent solution to the original continuous optimal control problem (TOC) with strong convergence and stability properties [10]. However, they are not easily implementable or rely on proprietary software. We therefore discretize our problem by the explicit Euler method by assuming piece-wise constant states and controls over each discretization instance $i = 0, \dots, N-1$ [18]–[20] (in contrast to higher order polynomials as in direct transcription methods). We refer to the following optimization problem as the 'true discrete time-optimal control' (DTOC) throughout the remainder of the paper:

$$\begin{aligned} \min_{x,u,N^*} \quad & T = N^* \Delta t \quad (\text{DTOC}) \\ \text{s.t} \quad & f_{\text{dyn}}(x(0), u(0), x(1), \dots, u(N-1), x(N)) = 0 \\ & f_{\text{ter}}(x(N^*+1), x) = 0 \\ & x(0) = x_0 \\ & x(i+1), u(i) \in \Omega, \quad i = 0, \dots, N-1 \end{aligned}$$

Δt is the discretization time step. N is the number of collocation points of the discrete problem. N^* is the last time step at which $f_{\text{ter}}(x(N^*), x) \neq 0$ while at the consequent step we have $f_{\text{ter}}(x(N^*+1), x) = 0$. The dependence $f_{\text{ter}}(x(i), x)$ indicates that f_{ter} is necessarily dependent on $x(i)$ but possibly also from x (for example in case of finite differences or Euler integration schemes). The discrete states x and controls u are defined as

$$\begin{aligned} x &:= [x(1)^T \quad \dots \quad x(N)^T]^T \\ u &:= [u(0)^T \quad \dots \quad u(N-1)^T]^T \end{aligned} \quad (2)$$

The initial state is given by $x(0) = x_0 \in \mathbb{R}^{n_x}$. Note that we have generalized the dynamics f_{dyn} without explicit dependence on the state derivatives. This can be advantageous in robotics if the Newton-Euler equations are used (see also Sec. V-B).

DTOC can be solved by means of ℓ_0 optimization. However, due to its combinatorial nature an approximation based on the ℓ_1 -norm is usually solved instead. Different weight functions have been proposed which aim to approximate the original ℓ_0 -problem as close as possible. However, such ℓ_1 -problems can not be equivalently solved by least-squares

l	$f_l(x, u, N^*) \leq v_l$
	with $i = 0, \dots, N-1$
1	$\begin{bmatrix} u_i - u_{\max} \\ u_{\min} - u_i \end{bmatrix} \leq v_{1,i+1}$
1	$f_{\text{dyn}}(x_0, u_0, \dots, u_{N-1}, x_N) = v_1$
2	$\begin{bmatrix} N^* \Delta t \\ w(0, N^*) f_{\text{ter}}(x(0), x) \\ \vdots \\ w(N-1, N^*) f_{\text{ter}}(x(N-1), x) \end{bmatrix} = v_2$
3	Regularization of x, u, N^*

TABLE I: ADTOC

programming. The reason is that the Hessian of the Taylor approximation of the problem is always positive-definite and not zero as required by ℓ_1 programming (ℓ_1 problems can be for example be solved by quadratic programming, or specialized linear programming solvers). Least-squares programming is a very popular tool due to its simplicity and availability of open-source solvers. Furthermore, it allows for hierarchical optimization, a tool that has gained considerable attention in the recent past, especially in the context of robot control. In this work we therefore propose a NL-HLSP for TOC which is applicable both to linear and non-linear dynamic systems and task functions.

III. APPROXIMATE DISCRETE TIME-OPTIMAL CONTROL VIA HEAVISIDE STEP-FUNCTION APPROXIMATION

In this section we recast DTOC into an NL-HLSP of the following form:

$$\begin{aligned} \min_{z, v_l} \quad & \frac{1}{2} \|v_l\|^2 \quad l = 1, \dots, p \quad (\text{NL-HLSP}) \\ \text{s.t.} \quad & f_l(z) \leq v_l \\ & \underline{f}_{l-1}(z) \leq \underline{v}_{l-1} \end{aligned}$$

Each of the p priority levels contains constraints of the form $f_l(z) \leq v_l$. The symbol \leq indicates both equality and inequality constraints. v_l is a slack variable of level l that is minimized in a least-squares sense while being subject to the constraints of the levels 1 to l while not increasing the already identified optimal slacks $\underline{v}_{l-1}^* = [v_1^{*T} \dots v_{l-1}^{*T}]^T$ of the previous levels 1 to $l-1$ [34], [38]. This problem can be solved by sequential hierarchical least-squares programming (S-HLSP) as proposed in [33], [39].

Concretely, ADTOC as an NL-HLSP is given in Tab. I. The variable vector is chosen as $z = [x^T \ u^T \ N^*]$. For better readability we abbreviate variables b at time t as $b_t := b(t)$. ADTOC (Tab. I) has three levels $p = 3$. On the first priority level we define control constraints with minimum and maximum control values u_{\min} and u_{\max} , respectively. Furthermore, the dynamics constraints f_{dyn} are defined.

The second level contains the approximation of TOC. First, it contains the time minimization term $N^* \Delta t$. Furthermore, for each discretization step $i = 1, \dots, N$ we introduce the terminal constraint $f_{\text{ter}}(x(i))$ weighted by the function

$$w(i, N^*) = h(i, N^*)(i - N^* + 1)^k \quad (3)$$

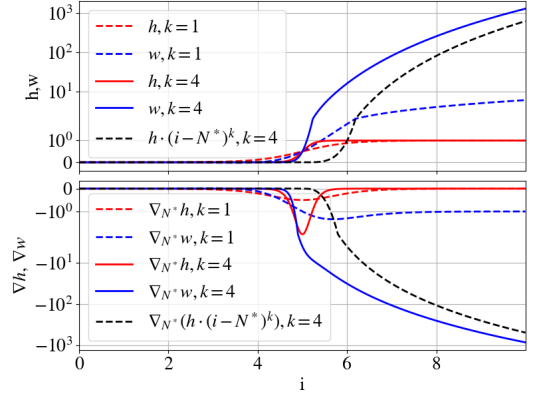


Fig. 1: Function and gradient values of $h(i, N^*)$, $w(i, N^*)$ and $h(i, N^*)(i - N^*)^k$ for $N^* = 5$ and $k = 1$ and $k = 4$.

The term $(i - N^* + 1)^k$ is outlined further down this section. $h(i, N^*)$ is a differentiable approximation of the heaviside step function [35]

$$h(i, N^*) = (0.5 + 0.5 \tanh(k(i - N^*))) \quad (4)$$

The parameter $k > 0$ regulates the steepness of the step approximation. Specifically, for $k \rightarrow \infty$ we have $h(i < N^*, N^*) = 0$, $h(N^*, N^*) = 0.5$ and $h(i > N^*, N^*) = 1$ for some $i \in \mathbb{R}$ and $N^* \in \mathbb{R}$. The same holds for the function w . Instead of using the infinite limit we define a more numerically sensible threshold k_ϵ as follows.

Definition 3.1 (Limit k_ϵ): The limit k_ϵ fulfills the bracket condition $h(i - 1, i - 0.5) = \epsilon$ and $h(i, i - 0.5) = 1 - \epsilon$ for any $i \in \mathbb{Z}_{\geq 0}$. k_ϵ is then given by

$$k_\epsilon = 2 \arctan \left(\frac{0.5 - \epsilon}{0.5} \right) \quad (5)$$

ϵ signals a numerical threshold. Notably, k_ϵ is independent of Δt .

Note that while k_ϵ is independent of Δt we have $k \rightarrow \infty$ for $\epsilon \rightarrow 0$. The parameter ϵ therefore needs to be chosen to a reasonable value compromising between the desired accuracy of ADTOC and numerical stability. Throughout this work we speak of ‘vanishing’ functions even though this truly applies only in the limit $\epsilon \rightarrow 0$.

Let us now further explain the term $(i - N^* + 1)^k$ in the weight function $w(i, N^*)$ (3) by looking at the derivative of $w(i, N^*)$ with respect to N^*

$$\begin{aligned} \nabla_{N^*} w(i, N^*) &= \\ \nabla_{N^*} h(i, N^*) (i - N^* + 1)^k - k h(i, N^*) (i - N^* + 1)^{k-1} \end{aligned} \quad (6)$$

The derivative of the heaviside approximation is given by

$$\nabla_{N^*} h(i, N^*) = -0.5k(1 - \tanh(k(i - N^*)))^2 \quad (7)$$

It can be observed that for $k = k_\epsilon$ the derivative $\nabla_{N^*} h(i, N^*)$ vanishes for any $i \in \mathbb{Z} \setminus N^*$. In contrast, $\nabla_{N^*} w(i, N^*) \neq 0$ for any $i \in \mathbb{Z}_{> N^*}$ due to the second term of (6). This has numerical advantages as we further explain in Sec. IV-A.

A depiction of w and h and its derivatives is given in Fig. 1.

It can be observed that both the time minimization term and the terminal constraints are not separated as constraint and objective as for DTOC. This means that we have turned the original TOC problem into a weighted optimization problem with weights w on the terminal constraints f_{ter} . However, we show in Sec. IV that with our choice of weights we can indeed recover DTOC in the limit $\Delta t \rightarrow 0$, $k = k_\epsilon$ and for resting goal points.

The hierarchical problem formulation allows us to define the regularization task on a separate level $l = 3$ from the actual objective of finding the time-optimal control on level 2. The above problem can also be defined as a conventional constrained least-squares programming ($p = 2$) by defining the (often desirable) regularization task on the second level with a small weight. However, this would negatively influence the task performance of the second level [34].

IV. CONVERGENCE OF THE APPROXIMATE DISCRETE TIME-OPTIMAL CONTROL PROBLEM

In this section we investigate the convergence behavior of ADTOC (Tab. I). Similarly to [6] we proceed from a numerical viewpoint. We show that the true time-optimal control \hat{u} and \hat{x} poses a global minimum / first-order accumulation point / Karush-Kuhn-Tucker (KKT) point to Tab. I. For this we look at following simplified optimization problem by assuming $x, u \in \Omega$ where Ω is the feasible constraint polytope with respect to the control, state and dynamics constraints:

$$\min_{x, u \in \Omega, N^*} \frac{1}{2} \left\| \begin{bmatrix} N^* \Delta t \\ w(0, N^*) f_{\text{ter}}(x) \\ \vdots \\ w(N-1, N^*) f_{\text{ter}}(x) \end{bmatrix} \right\|^2 \quad (8)$$

We assume that $N > \hat{N}^*$ is reasonably chosen such that a feasible solution to the TOC exists. Therefore, in the following we only consider the unconstrained version of (8) (we could argue that for example controls at the limits are simply removed from the optimization problem in the sense of null-space methods [39]). The corresponding first order optimality conditions $K_{x, u, N^*} := \nabla_{x, u, N^*} \mathcal{L} = 0$ derived from the Lagrangian $\mathcal{L} := \frac{1}{2} \left\| \begin{bmatrix} N^* \Delta t & \cdots & w(N-1, N^*) f_{\text{ter}}(N-1)^T \end{bmatrix}^T \right\|^2$ are

$$\begin{bmatrix} K_x \\ K_u \\ K_{N^*} \end{bmatrix} := \begin{bmatrix} \sum_{i=0}^{N-1} w(i, N^*)^2 f_{\text{ter}}(x(i))^T \nabla_x f_{\text{ter}}(x(i)) \\ \sum_{i=0}^{N-1} w(i, N^*)^2 f_{\text{ter}}(x(i))^T \nabla_u f_{\text{ter}}(x(i)) \\ N^* \Delta t^2 + \Sigma(x, N^*) \end{bmatrix} = 0$$

$\Sigma(x, N^*)$ is defined as

$$\Sigma(x, N^*) := \sum_{i=0}^{N-1} w(i, N^*) \nabla_{N^*} w(i, N^*) \|f_{\text{ter}}(x(i))\|^2 \quad (9)$$

We now proceed as follows. We first show that the solution N^* is contained within the horizon $0 \leq N^* \leq N-1$, see Sec. IV-A. This is important for algorithm coherence since

a negative N^* would be an irrational solution. Similarly, $N^* > N-1$ would mean that the terminal constraint f_{ter} vanishes from the optimization problem. We then proceed by showing the convergence of ADTOC (Tab. I) to DTOC in the limit and for resting goal points, see Sec. IV-B.

A. Coherent solution $0 \leq N^* \leq N-1$

We can make following statement about $\Sigma(x, N^*)$:

Theorem 1: The sum $\Sigma(x, N^*) < 0$ is negative for any $N^* \in \mathbb{R}$ and $k = k_\epsilon$.

Proof: We look at the expression

$$\sum_{i=0}^{N-1} w(i, N^*) \nabla_{N^*} w(i, N^*) = \sum_{i=0}^{N-1} (i - N^* + 1)^{2k} \quad (10)$$

$$\left(h(i, N^*) \nabla_{N^*} h(i, N^*) - \frac{kh(i, N^*)^2}{i - N^* + 1} \right) < 0$$

The first term is negative since $(i - N^* + 1)^{2k} > 0$, $h(i, N^*) > 0$ and $\nabla_{N^*} h(i, N^*) < 0$. The second term is positive for all $i < N^* - 1$ since we have $(i - N^* + 1)^{2k-1} < 0$ on this interval. However, with the assumption $k = k_\epsilon$, $h(i < N^* - 1, N^*)^2 < \epsilon$ can be neglected for $i < N^* - 1$, effectively rendering the second term negative as well. ■

We show in the evaluation (Sec. V) that we achieve good convergence even with rather large ϵ (and therefore not strict negativity of $\Sigma(x, N^*)$)

Importantly, due to the additional term $(i - N^* + 1)$ in w any $f_{\text{ter}}(x(i)) \neq 0$ with $i > N^*$ contributes to the sum $\Sigma(x, N^*)$. This would not be the case for the pure heaviside function with $k = k_\epsilon$. Here, any Newton step $K_{N^*}(u + \Delta u)$, $K_{N^*}(x + \Delta x)$ or $K_{N^*}(N^* + \Delta N^*)$ would not lead to reduction of the error $w(i, N^*) f_{\text{ter}}(x(i)) \neq 0$ with $i > N^*$.

The choice of the factor 1 in $(i - N^* + 1)^k$ ensures that the crossing of $h(N^*, N^*)(N^* - N^* + 1) = 0.5$ at $i = N^*$ is the same as the original desired function $h(N^*, N^*) = 0.5$ (see Fig. 1 for $h \cdot (i - N^*)^k$ as a counterexample).

We now make a statement about the range of the obtained solution N^* .

Theorem 2: The obtained N^* is within the range $0 \leq N^* \leq N-1$ for $k = k_\epsilon \geq 1$.

Proof: The Newton step ΔN^* with respect to N^* is

$$K_{N^*}(N^* + \Delta N^*) \approx K_{N^*}(N^*) + \Delta N^* \nabla_{N^*} K_{N^*}(N^*) =$$

$$N^* \Delta t^2 + \Sigma(x, N^*) + \Delta N^* \left(\Delta t^2 + \sum_{i=0}^N \right. \quad (11)$$

$$\left. (\nabla_{N^*} w(i, N^*)^2 + w(i, N^*) \nabla_{N^*}^2 w(i, N^*)) \|f_{\text{ter}}(x(i))\|^2 \right)$$

For $k = k_\epsilon \geq 1$ and $N^* \leq 1$, the above sum is positive. First, for $k = k_\epsilon$ any derivative of h vanishes for $i \geq 0$ and $N^* < 0$. We then have $\nabla_{N^*}^2 w(i, N^*) = h(i, N^*) k(k-1)(i - N^* + 1)^{k-2} \geq 0$ which is positive for $i \geq 0$, $N^* \leq 1$ and $k \geq 1$. The Newton step with respect to N^* then becomes

$$\Delta N^* = \frac{-N^* \Delta t^2 - \Sigma(x, N^*)}{\Delta t^2 + \sum_{i=0}^N (\dots) \|f_{\text{ter}}(x(i))\|^2} > 0$$

with both positive numerator (using theorem 1 for $\Sigma(x, N^*) < 0$) and denominator. This means that for any negative N^* we get a positive Newton step ΔN^* until $N^* + \Delta N^* \geq 0$. For $N^* > N - 1$ all sums in (11) vanish entirely. The resulting Newton step $\Delta N^* = -N^* < 0$ is negative until $N^* \leq N - 1$. ■

The latter ensures that the constraint $f_{\text{ter}} = 0$ never entirely vanishes from the optimization problem.

B. Convergence to the true discrete time-optimal control

We first make a statement about the possible set of KKT points within the given control horizon.

Theorem 3: Any $0 \leq N^* \leq N - 1$ poses a KKT point to ADTOC (Tab. I) if any $\|f_{\text{ter}}(x(i))\|^2 > 0$, with $i \geq N^*$ and some x , poses a feasible point to the constraint polytope Ω .

Proof: Since $N^* \Delta t^2 > 0$ and $\Sigma(x, N^*) < 0$, we get $K_{N^*} = 0$ for any N^* if we can find a corresponding x , $u \in \Omega$ (and therefore $\|f_{\text{ter}}(x)\|$). ■

With this foundation let's look at the overall convergence behavior of ADTOC (Tab. I).

Theorem 4: ADTOC (Tab. I) represents DTOC if $\Delta t \rightarrow 0$, $k = k_\epsilon$ and the desired point f_d is a resting point such that $\|f_{\text{ter}}(i > \hat{N}^*)\|^2 = 0$.

Proof: Assume the time-optimal control \hat{u} and state \hat{x} such that $\|f_{\text{ter}}(i > \hat{N}^*)\|^2 = 0$ (which implies a resting goal point f_d).

First, we consider the case $N^* \geq \hat{N}^* + 1$. Then the sum $\Sigma_{k_\epsilon} = 0$ (9) vanishes for all $N^* \geq \hat{N}^* + 1$ since $\|f_{\text{ter}}(i > \hat{N}^*)\|^2 = 0$. The resulting Newton step (11) is negative $\Delta N^* < 0$ and drives $N^* \rightarrow \hat{N}^* + 1$.

Secondly, we consider the case $N^* \leq \hat{N}^*$. The corresponding Lagrangian becomes $\mathcal{L}(N^*) = 0.5(N^* \Delta t)^2 + \sum_{i=0}^{N^*} w(i, N^*)^2 \|f_{\text{ter}}(x(i))\|^2$. We now consider the limit case $\Delta t \rightarrow 0$. We then have $\mathcal{L}(N^*) = \sum_{i=0}^{N^*} w(i, N^*)^2 \|f_{\text{ter}}(x(i))\|^2 > 0$. Furthermore, for $N^* = \hat{N}^*$ we have $\mathcal{L}(\hat{N}^*) = (\hat{N}^* \Delta t)^2$ and limit $\mathcal{L}(\hat{N}^*) \rightarrow 0$. Since $\mathcal{L}(N^*) \geq 0$ for all $N^* \in \mathbb{Z}_{\geq 0}$ this is a global minimum $\min \mathcal{L}$. This means that a global KKT point is within the interval $N^* \in]\hat{N}^*, \hat{N}^* + 1[$ since $\min \mathcal{L}$. Due to theorem 3 we therefore find an optimal point $\hat{x}, \hat{u} \in \Omega$ if it exists.

Now assume a sub-optimal (s) \hat{u}_s and \hat{x}_s that is optimal to $\hat{N}_s^* > \hat{N}^*$ with $\|f_{\text{ter}}(i > \hat{N}_s^*)\|^2 = 0$ but sub-optimal to \hat{N}^* . We then clearly have for the sub-optimal Lagrangian $\mathcal{L}_s(\hat{N}_s^*) = \hat{N}_s^* \Delta t^2 > \mathcal{L}(\hat{N}^*) = \hat{N}^* \Delta t^2$. This means that the true time-optimal \hat{N}^* poses a global optimum to ADTOC (Tab. I). ■

Note that in the above we do not make any assumptions about the structure of f_{dyn} or f_{ter} . Our algorithm is therefore applicable to both linear and non-linear systems as we demonstrate in the evaluation Sec. V. In the non-linear case, only a sub-optimal time-optimal control $\hat{N}_s > \hat{N}$ may be identified depending on the (local or global) convergence properties of the used optimizer.

We apply our method to both a linear point-mass and a non-linear robot manipulator control example. In order to solve the NL-HLSPs, we use the sequential hierarchical least-squares programming solver S-HLSP with trust-region and hierarchical step-filter proposed in [39]. It is characterized by global convergence to a local KKT point. S-HLSP is based on the sparse HLSP solver s- \mathcal{N} IPM-HLSP [39], [40]. All gradients and Hessians of the dynamics and task functions are computed analytically, for example according to [3], [41]. We choose $\Delta t = 0.1$ s, $N = 25$ (or $\Delta t = 0.01$ s with $N = 100$ and $N = 80$) and $k = 4$ with $\epsilon = 3.4 \cdot 10^{-4}$. While ϵ is relatively large (meaning that $\Sigma(x, N^*)$ can become positive, in contrast to theorem 1) we did not experience any negative influence on the algorithm convergence.

l	$f_l(x, u) \leq v_l$
	with $i = 0, \dots, N - 1$
1	$\begin{bmatrix} u_i - u_{\max} \\ u_{\min} - u_i \end{bmatrix} \leq v_{1,i+1}$
1	$f_{\text{dyn}}(x_0, u_0, \dots, u_{N-1}, x_N) = v_1$
2	$f_{\text{ter}}(x(N^* + 1), x) = v_2$
2	$\begin{bmatrix} f_{\text{ter}}(x(N^* + 1), x) \\ \vdots \\ f_{\text{ter}}(x(N), x) \end{bmatrix} = v_2$
3	Regularization of x, u

TABLE II: DTOC (blue) and ‘padded’ DTOC (PDTOC: red). N^* is fixed.

In order to confirm our results we compare our algorithm to the two optimization problems given in Tab. II. Both problems’ decision variables do not include N^* which is rather fixed at a chosen value. The first problem therefore corresponds to DTOC with the terminal constraint at $N^* + 1$. The other optimization problem is a ‘padded’ version of DTOC (PDTOC) with terminal constraints on the collocation points $N^* + 1$ to N . This reproduces the behavior of ADTOC (Tab. I) which can solve the original problem (DTOC) equivalently only if the desired state f_d is a resting goal point (see theorem 4). Furthermore, we report the results of GPOPS [1] which implements a direct transcription method for optimal control problems of the form (TOC). The resulting NLP is solved by the local optimizer SNOPT [12].

In order to preserve sparsity we set w to zero when it is close to 0 up to a numerical threshold

$$w(i, N^*) \leftarrow \begin{cases} 0 & \text{if } w(i, N^*) < 10^{-20} \\ w(i, N^*) & \text{otherwise} \end{cases} \quad (12)$$

Note that we do not cut values that are close to 1 since this would reintroduce the discontinuity that we are trying to circumvent to begin with.

We display the variable $T^* = N^* \Delta t$ which indicates the optimal time at which still $f_{\text{ter}} \neq 0$ (the time $(N^* + 1) \Delta t$ is the time where we first have $f_{\text{ter}} = 0$).

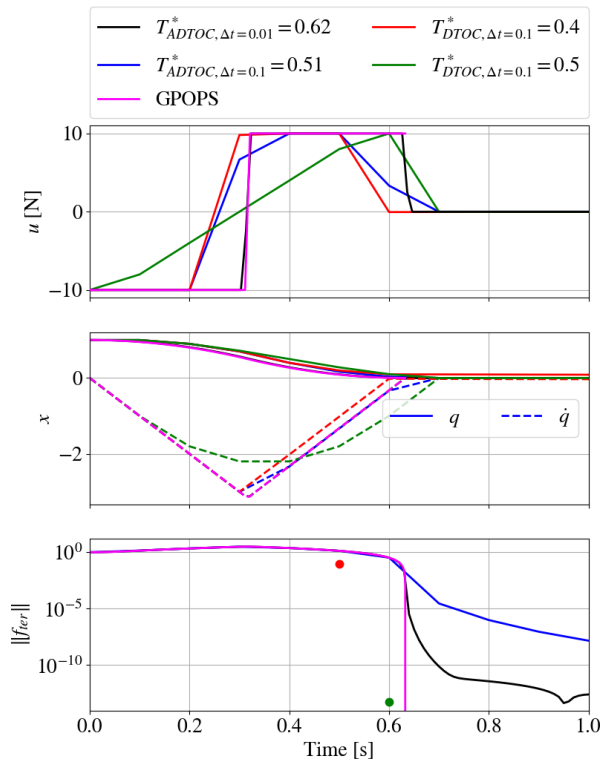


Fig. 2: Control u , states x and norm of task error $\|f_{\text{ter}}\|$ for a linear point mass moving on a plane for ADTOC (Tab. I) (T_{ADTOC}^*) and DTOC with fixed N^* (Tab. II) (T_{DTOC}^*).

A. Point mass

First, we apply our method on a simple point mass of $m = 1$ kg moving along a horizontal line with single-input force u and state $x = [q \ \dot{q}]$. The state q is the position of the point-mass. The state \dot{q} is the point-mass velocity. The initial state is chosen as $x_0 = [1 \ 0]$. The point-mass dynamics are linear in the state x and control u (using explicit Euler integration $x_{i+1} = x_i + \Delta t \dot{x}_i$ and $m\dot{q}_i = u_i$ with $i = 0, \dots, N-1$)

$$f_{\text{dyn}}(i) = x_{i+1} + \begin{bmatrix} -1 & -\Delta t \\ 0 & -1 \end{bmatrix} x_i - \begin{bmatrix} 0 \\ \Delta/m \end{bmatrix} u_i \quad (13)$$

The control limit is chosen to 10 N. We set our task function to $f_{\text{ter}} = x$ with $f_d = 0$.

The results of ADTOC (Tab. I) are given in Fig. 2. N^* is identified as $N^* = 5.1$ for $\Delta t = 0.1$ s and $N^* = 62$ for $\Delta t = 0.01$ s. As can be seen from the top graph, the identified control trajectories ($T_{\text{ADTOC}, \Delta t=0.1}^* = 0.51$ and $T_{\text{ADTOC}, \Delta t=0.01}^* = 0.62$) follow a bang-bang profile which indicates time-optimality. For $\Delta = 0.01$ s (computation time 4.5 s with 75 solver iterations, $N = 100$) the control is at the limit -10 N until control time 0.3 s and then at the limit 10 N from time 0.33 s. The control is zero from time 0.65 s onwards. A similar but less pronounced profile is observed for $\Delta t = 0.1$ s (computation time 0.7 s with 64 solver iterations, $N = 25$), seemingly confirming our convergence theorem 4 of equivalence of ADTOC (Tab. I) with DTOC

for $\Delta t \rightarrow 0$ (note that $\Delta t \rightarrow 0$ is prohibitive due to memory limitations since $N \rightarrow \infty$).

For comparison, we give the results of GPOPS (100 transcription nodes, computation time 0.88 s and 19 solver iterations). The corresponding control profile is very similar to that of our method with $\Delta t = 0.01$ s but with a slightly sharper switching point from control on the lower bound -10 N to the upper bound 10 N. This leads to a sharp drop of $\|f_{\text{ter}}\|$ at $t = 0.63$ s. On the other hand, the task error for our method $T_{\text{ADTOC}, \Delta t=0.01}^* = 0.62$ stays elevated until 0.62 s but then declines sharply to $\|f_{\text{ter}}\| \approx 10^{-11}$. For $\Delta t \rightarrow 0$ (and therefore DTOC according to theorem 4) we would expect a behavior similar to GPOPS with a finite jump of $\|f_{\text{ter}}\|$ to zero between the corresponding control iterations \hat{N}^* and $\hat{N}^* + 1$.

Furthermore, we give the results of DTOC (Tab. II) with fixed $N^* = 4$ and $N^* = 5$. For $N^* = 4$ ($T_{\text{DTOC}, \Delta t=0.1}^* = 0.4$) the control profile is sharper than for $T_{\text{ADTOC}, \Delta t=0.1}^* = 0.51$. The control then drops to zero at time 0.7 s. However, from the bottom graph it can be observed that the task error is only reduced to $\|f_{\text{ter}}\| = 0.1$. This is in contrast to the results for $T_{\text{DTOC}, \Delta t=0.1}^* = 0.5$ where the task error is reduced to $\|f_{\text{ter}}\| = 10^{-13}$ at time 0.6 s. However, the corresponding control profile is very conservative and does not follow a bang-bang profile. A good middle ground between time optimality and error reduction is identified for ADTOC (Tab. I) $T_{\text{ADTOC}, \Delta t=0.1}^* = 0.51$ (while not being as computationally expensive as $T_{\text{ADTOC}, \Delta t=0.01}^* = 0.62$). The task error at time 0.6 s is approximately of order $\|f_{\text{ter}}\| = 5 \cdot 10^{-4}$ which can be considered sufficiently accurate for this control application.

The task error for $T_{\text{DTOC}, \Delta t=0.1}^* = 0.5$ declines the fastest with $\|f_{\text{ter}}\| \approx 10^{-13}$ at time 0.6 s. However, while this is closest to the desired solution of DTOC, it does not fulfill higher order constraints like zero acceleration or jerk at convergence. These are implicitly fulfilled for ADTOC (Tab. I) and PDTOC with fixed N^* in Tab. II, depending on how much bigger $N > N^*$. Note that this is a matter of defining a more embracing task function f_{task} including acceleration and jerk regularization. On the other hand, due to theorem 4 requiring a resting goal point f_d , ADTOC (Tab. I) is not able to achieve the same results as DTOC with fixed N^* (Tab. II).

B. Planar manipulator with two joints

In this section we want to identify the time-optimal control for moving a 2D planar manipulator with fixed base and two joints from its initial task space position $f_{\text{task}}(x) = [2 \ 0]^T$ m to $f_d = [1 \ 1]^T$ m. The robot's link lengths are given by $L_1 = 1.25$ m and $L_2 = 0.75$ m. The robot state is given by $x = [q_{0,0} \ q_{1,0} \ \dot{q}_{0,0} \ \dot{q}_{1,0} \ \dots \ \dot{q}_{0,T-1} \ \dot{q}_{1,T-1}]$ where q_0 and q_1 are the joint angles of joint one and two, respectively. The initial state is given by $x_0 = [0 \ 0 \ 0 \ 0]$. Both joints are actuated by the torques $u = [\tau_1 \ \tau_2]^T$. The joint torques are limited to 5 Nm. We use the Newton-Euler equations as described in [42] with link masses $m_1 = m_2 = 1$ kg for the Euler explicit integration scheme $x_{i+1} = x_i + \Delta t \dot{x}_i$. Due to

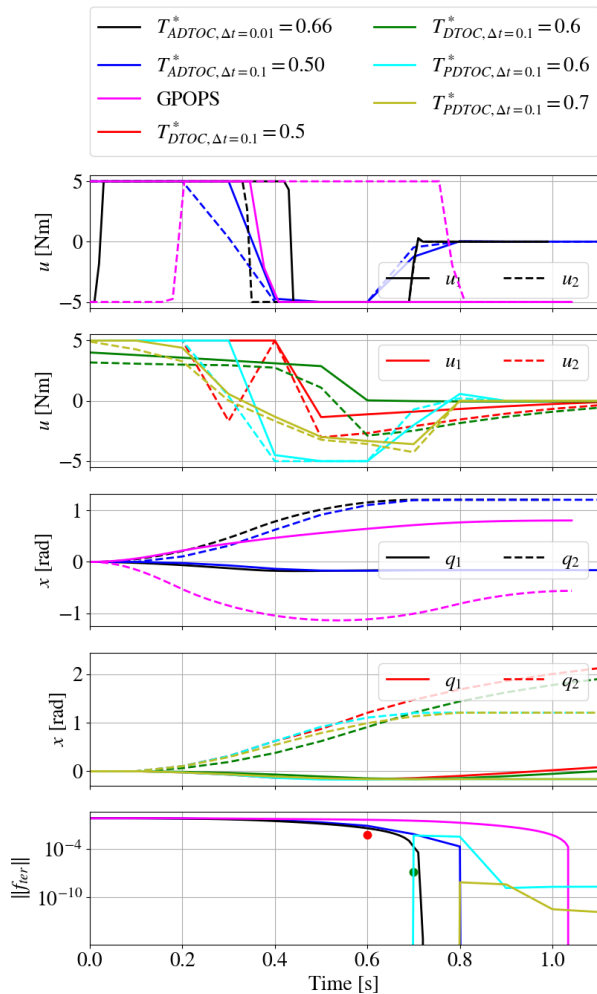


Fig. 3: Controls u , states x and norm of task error $\|f_{\text{ter}}\|$ for a non-linear 2D manipulator with two joints for ADTOC (Tab. I), DTOC and PDTOC (Tab. II).

the more generic form of the dynamics of DTOC compared to the continuous one (TOC), we do not rely on matrix inversion in order to obtain an explicit formulation of the joint accelerations \ddot{q}_1 and \ddot{q}_2 . Instead, we use the dynamics $f_{\text{dyn}} = M(\dot{q}_{i+1} - \dot{q}_i) + \Delta t \{M\ddot{q}_i\}$ where $q := [q_1 \ q_2]^T$, M is the joint space inertia matrix and the vector $\{M\ddot{q}_i\}$ represents the inverse dynamics equations [3].

The results are given in Fig. 3. Our algorithm ADTOC (Tab. I) with $\Delta t = 0.01$ s ($T_{\text{ADTOC}, \Delta t=0.01}^* = 0.66$) recovers a sharp bang-bang control profile for both τ_1 and τ_2 (computation time 22 s with 121 solver iterations, $N = 80$). The control vanishes at approximately 0.72 s with $\|f_{\text{ter}}\| \approx 10^{-15}$. This is in contrast to $\Delta t = 0.1$ s ($T_{\text{ADTOC}, \Delta t=0.1}^* = 0.57$, computation time 1.5 s with 88 solver iterations, $N = 25$) with the control and task error vanishing only at approximately 0.8 s.

Next, we report the results for GPOPS with 80 collocation points computed in 7.55 s and 28 solver iterations. We have $T^* = 1.04$ s (the last time with non-zero control and task error). As can be seen from the corresponding joint trajec-

tory, a different inverse kinematics solution to the boundary condition $f_{\text{ter}} = 0$ is found which is less time-optimal than the one found for our method (note that there is an infinite number of solutions due to robot redundancy [43]). This is due to the non-linear optimizer not finding a better solution to the problem. Nonetheless, the bang-bang control profile is time-optimal with respect to the identified joint trajectory.

Furthermore, the results of the problem Tab. II with fixed $N^* = 5$ and $N^* = 6$ are reported. For $N^* = 5$ ($T_{\text{DTOC}, \Delta t=0.1}^* = 0.5$) we have a limit control at the upper bound 5 Nm. However, the task error at 0.6 s is only decreased to $7 \cdot 10^{-3}$. This is in contrast to the control profile of $T_{\text{DTOC}, \Delta t=0.1}^* = 0.6$ with the more conservatively chosen terminal point $N^* = 6$. There is enough time to reduce the error to $2 \cdot 10^{-7}$. However, from the conservative control profile it can be concluded that $N^* = 6$ is not time-optimal. Unlike ADTOC (Tab. I) and PDTOC with known N^* (Tab. II), acceleration and jerk constraints are not implicitly fulfilled for DTOC with known N^* (Tab. II) and therefore enables quicker task convergence. This means that the point f_d is reached only instantaneously at times 0.6 s and 0.7 s with divergence afterwards, as can be seen from the non-stationary state trajectories in the second graph from the bottom.

The results of PDTOC (Tab. II) with fixed $N^* = 6$ and $N^* = 7$ follow closely the ones of our method ADTOC (Tab. I) with $\Delta t = 0.1$ s in terms of controls, states and task error reduction. Thereby, the same pattern as with the results for Tab. II is observed: for too low $N^* = 6$ a bang-bang control profile is obtained but the task error is reduced insufficiently ($\|f_{\text{ter}}\| = 5 \cdot 10^{-3}$); for too high $N^* = 7$ the task error is reduced significantly ($\|f_{\text{ter}}\| = 8 \cdot 10^{-9}$) but the control profile is not time-optimal / not a limit one.

VI. CONCLUSION

In this work we have formulated, implemented and evaluated an easily implementable NL-HLSP for ADTOC. We showed that the method corresponds to the true DTOC in the limits and for resting goal points. This behavior was confirmed in simulations with linear and non-linear systems, recovering the bang-bang control profiles typically seen in TOC.

In future work we would like to investigate whether the current limitation to resting goal points can be relaxed for a broader applicability of our method. Furthermore, while we demonstrated the applicability of our method to whole-body motion control, it is limited by its computational complexity. We therefore would like to investigate methods to reduce the computational burden, especially with respect to large robotic systems like humanoid robots.

VII. ACKNOWLEDGMENTS

We would like to thank Dr. Bing Song for her insightful comments on our work.

REFERENCES

- [1] A. V. Rao, D. A. Benson, C. Darby, M. A. Patterson, C. Francolin, I. Sanders, and G. T. Huntington, "Algorithm 902: Gpops, a matlab software for solving multiple-phase optimal control problems using the gauss pseudospectral method," *ACM Trans. Math. Softw.*, vol. 37, no. 2, apr 2010. [Online]. Available: <https://doi.org/10.1145/1731022.1731032>
- [2] M. A. Patterson and A. V. Rao, "Gpops-ii: A matlab software for solving multiple-phase optimal control problems using hp-adaptive gaussian quadrature collocation methods and sparse nonlinear programming," *ACM Trans. Math. Softw.*, vol. 41, no. 1, oct 2014. [Online]. Available: <https://doi.org/10.1145/2558904>
- [3] J. Carpentier and N. Mansard, "Analytical derivatives of rigid body dynamics algorithms," 06 2018.
- [4] M. Gifftaler, M. Neunert, M. Stuble, and J. Buchli, "The control toolbox — an open-source c++ library for robotics, optimal and model predictive control," *2018 IEEE International Conference on Simulation, Modeling, and Programming for Autonomous Robots (SIMPAR)*, pp. 123–129, 2018.
- [5] A. Pavlov, I. Shames, and C. Manzie, "Interior point differential dynamic programming," *IEEE Transactions on Control Systems Technology*, vol. 29, no. 6, pp. 2720–2727, 2021.
- [6] L. T. Biegler, A. M. Cervantes, and A. Wachter, "Advances in simultaneous strategies for dynamic process optimization," *Chemical Engineering Science*, vol. 57, no. 4, pp. 575–593, 2002. [Online]. Available: <https://www.sciencedirect.com/science/article/pii/S0009250901003761>
- [7] D. E. Kirk, "Optimal control theory : an introduction," 1970.
- [8] R. Goebel and M. Subbotin, "Continuous time constrained linear quadratic regulator - convex duality approach," in *Proceedings of the 2005, American Control Conference, 2005.*, 2005, pp. 1401–1406 vol. 2.
- [9] F. Biral, E. Bertolazzi, and P. Bosetti, "Notes on numerical methods for solving optimal control problems," *IEEJ Journal of Industry Applications*, vol. 5, pp. 154–166, 03 2016.
- [10] K. Shivakumar and L. T. Biegler, "Convergence rates for direct transcription of optimal control problems using collocation at radau points," *Computational Optimization and Applications*, vol. 41, no. 1, pp. 81–126, 09 2008.
- [11] D. Benson, G. Huntington, T. Thorvaldsen, and A. Rao, "Direct trajectory optimization and costate estimation via an orthogonal collocation method," *Journal of Guidance Control and Dynamics - J GUID CONTROL DYNAM*, vol. 29, pp. 1435–1440, 08 2006.
- [12] P. E. Gill, W. Murray, and M. A. Saunders, "Snopt: An sqp algorithm for large-scale constrained optimization," *SIAM Journal on Optimization*, vol. 12, no. 4, pp. 979–1006, 2002. [Online]. Available: <https://doi.org/10.1137/S1052623499350013>
- [13] L. Pontryagin, *Mathematical Theory of Optimal Processes*, ser. Classics of Soviet Mathematics. Taylor & Francis, 1987. [Online]. Available: <https://books.google.com.sg/books?id=kwzq0F4cBVAC>
- [14] R. Bellman, I. Glicksberg, and O. Gross, "On the "bang-bang" control problem," *Quarterly of Applied Mathematics*, vol. 14, no. 1, pp. 11–18, 1956. [Online]. Available: <http://www.jstor.org/stable/43634288>
- [15] O. Von Stryk and M. Schlemmer, *Optimal Control of the Industrial Robot Manutec r3*, 04 1998, vol. 115.
- [16] Q. C. Pham, "A general, fast, and robust implementation of the time-optimal path parameterization algorithm," *IEEE Transactions on Robotics*, vol. 30, 12 2013.
- [17] H. Pham and Q.-C. Pham, "A new approach to time-optimal path parameterization based on reachability analysis," *IEEE Transactions on Robotics*, vol. 34, no. 3, pp. 645–659, 2018.
- [18] D. Chen, L. Bako, and S. Lecoeuche, "The minimum-time problem for discrete-time linear systems: A non-smooth optimization approach," in *2012 IEEE International Conference on Control Applications*, 2012, pp. 196–201.
- [19] K. Flaßkamp and T. D. Murphey, "Structure-preserving local optimal control of mechanical systems," *Optimal Control Applications and Methods*, vol. 40, no. 2, pp. 310–329, 2019. [Online]. Available: <https://onlinelibrary.wiley.com/doi/abs/10.1002/oca.2479>
- [20] A. Meduri, P. Shah, J. Viereck, M. Khadiv, I. Havoutis, and L. Righetti, "Biconmp: A nonlinear model predictive control framework for whole body motion planning," *ArXiv*, vol. abs/2201.07601, 2022.
- [21] P. Belotti, C. Kirches, S. Leyffer, J. Linderoth, J. Luedtke, and A. Mahajan, "Mixed-integer nonlinear optimization," *Acta Numerica*, vol. 22, p. 1–131, 2013.
- [22] T. Marcucci and R. Tedrake, "Warm start of mixed-integer programs for model predictive control of hybrid systems," *IEEE Transactions on Automatic Control*, vol. PP, pp. 1–1, 07 2020.
- [23] E. J. Candes, M. B. Wakin, and S. P. Boyd, "Enhancing sparsity by reweighted l1 minimization," 2007. [Online]. Available: <https://arxiv.org/abs/0711.1612>
- [24] I. Gentilini, F. Margot, and K. Shimada, "The travelling salesman problem with neighbourhoods: Minlp solution," *Optimization Methods and Software*, vol. 28, no. 2, pp. 364–378, 2013. [Online]. Available: <https://doi.org/10.1080/10556788.2011.648932>
- [25] T. T. Cai and A. Zhang, "Sparse representation of a polytope and recovery of sparse signals and low-rank matrices," *IEEE Transactions on Information Theory*, vol. 60, no. 1, pp. 122–132, 2014.
- [26] S. Zhou, N. Xiu, Y. Wang, L. Kong, and H. Qi, "A null-space-based weighted l1 minimization approach to compressed sensing," *Information and Inference A Journal of the IMA*, vol. 5, pp. 76–102, 02 2016.
- [27] A. Dottinger and R. M. Kennel, "Near time-optimal model predictive control using an l1-norm based cost functional," in *2014 IEEE Energy Conversion Congress and Exposition (ECCE)*, 2014, pp. 3504–3511.
- [28] Y. Yang and A. M. Williamson, "Discrete minimum time control via iterative optimization and sliding window algorithm," in *2020 59th IEEE Conference on Decision and Control (CDC)*, 2020, pp. 1732–1737.
- [29] J. Vaillant, A. Kheddar, H. Audren, F. Keith, S. Brossette, A. Escande, K. Bouyarmane, K. Kaneko, M. Morisawa, P. Gergondet, E. Yoshida, S. Kajita, and F. Kanehiro, "Multi-contact vertical ladder climbing with an HRP-2 humanoid," *Autonomous Robots*, vol. 40, no. 3, pp. 561–580, 2016.
- [30] K. Pfeiffer, A. Escande, and A. Kheddar, "Nut fastening with a humanoid robot," in *IEEE/RSJ International Conference on Intelligent Robots and Systems*, Sep. 2017, pp. 6142–6148.
- [31] S. Agarwal, K. Mierle, and T. C. S. Team, "Ceres Solver," 3 2022. [Online]. Available: <https://github.com/ceres-solver/ceres-solver>
- [32] A. Escande, N. Mansard, and P.-B. Wieber, "Hierarchical quadratic programming: Fast online humanoid-robot motion generation," *The International Journal of Robotics Research*, vol. 33, no. 7, pp. 1006–1028, 2014.
- [33] K. Pfeiffer, A. Escande, P. Gergondet, and A. Kheddar, "The hierarchical newton's method for numerically stable prioritized dynamic control," *IEEE Transactions on Control Systems Technology*, pp. 1–14, 2023.
- [34] K. Pfeiffer, A. Escande, and A. Kheddar, "Singularity resolution in equality and inequality constrained hierarchical task-space control by adaptive nonlinear least squares," *IEEE Robotics and Automation Letters*, vol. 3, no. 4, pp. 3630–3637, Oct 2018.
- [35] E. Berg, *Heaviside's Operational Calculus as Applied to Engineering and Physics*, ser. Electrical engineering texts. McGraw-Hill Book Company, 1929. [Online]. Available: <https://books.google.com.sg/books?id=SbRCAAAAIAAJ>
- [36] C. Wang and X. Qian, "Heaviside projection based aggregation in stress constrained topology optimization," *International Journal for Numerical Methods in Engineering*, vol. 115, 06 2017.
- [37] S. Zhou, L. Pan, and N. Xiu, "Heaviside set constrained optimization: Optimality and newton method," 08 2020.
- [38] A. Escande, N. Mansard, and P.-B. Wieber, "Hierarchical Quadratic Programming: Companion report," Tech. Rep., Nov. 2013, 10p. [Online]. Available: <https://hal.archives-ouvertes.fr/hal-00970816>
- [39] K. Pfeiffer and A. Kheddar, "Sequential hierarchical least-squares programming for prioritized non-linear optimal control," 2023. [Online]. Available: <https://arxiv.org/abs/2302.11891>
- [40] K. Pfeiffer, A. Escande, and L. Righetti, "Nipm-hlsp: An efficient interior-point method for hierarchical least-squares programs," 2021. [Online]. Available: <https://arxiv.org/abs/2106.13602>
- [41] J. de Jong, A. Muller, and J. Herder, "Higher-order derivatives of rigid body dynamics with application to the dynamic balance of spatial linkages," *Mechanism and Machine Theory*, vol. 155, p. 104059, 2021. [Online]. Available: <https://www.sciencedirect.com/science/article/pii/S0094114X20302779>
- [42] M. Baccouch and D. Stephen, "A two-link robot manipulator: Simulation and control design," *International Journal of Robotic Engineering*, vol. 5, 12 2020.
- [43] B. Siciliano and J.-J. E. Slotine, "The general framework for managing multiple tasks in high redundant robotic systems," in *International Conference on Advanced Robotics*, 1991, pp. 1211 – 1216 vol.2.