

This means that without any setup time we can guarantee that the Hall probe moves along the mechanical axis. We also use the θ stage to rotate the shaft probe assembly. This allows measurements to be taken at different θ positions but ensuring the same radial distance from the mechanical axis.

Setup now consists of simply mounting the stator onto the kinematic mount and feeding the Hall probe shaft through the bearings. It then engages into a double universal joint which means that accurate alignment is not required. Figure 2.3.2 shows a picture of the measurement setup. (Is this clear enough – should be replaced with a drawing or sketch?)

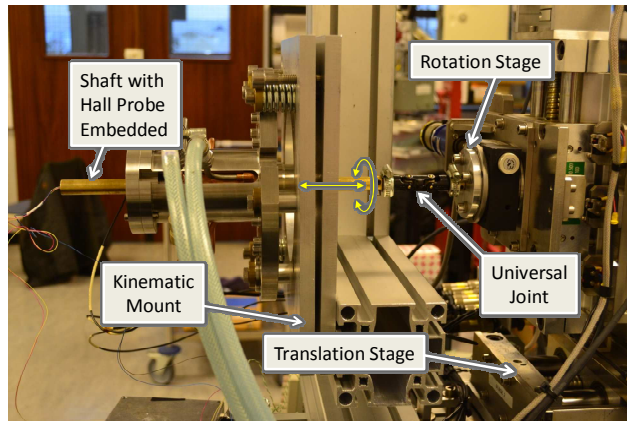


Figure 2.3.2. The revised stator measurement rig at Daresbury Laboratory. The Hall probe shaft is shown inserted into the stator. The directions of movement are indicated with yellow arrows.

Field mapping was carried out in two stages. Firstly, the stator's longitudinal field profile (B_z vs z) was measured. Secondly, the probe was moved to each peak in turn, and the shaft was rotated around the stator axis in order to measure the transverse field profile (B_z vs θ) for each coil.

Analysis of the field data consisted of fitting a pair of sinusoid functions to the data:

$$B_z(\theta) = B_0 + B_1 \sin(\theta + \phi_1) + B_2(2\theta + \phi_2)$$

This fit was generally found to be very accurate, with very low rms residuals (typically less than $10 \mu\text{V}$, on a field level of around $600 \mu\text{V}$). The B_1 term is related directly to the coil offset. This is modelled using Opera-3D to give an approximate formula linking coil offset to the magnitude of the first sinusoid:

$$\frac{B_1}{B_0} - 1 = a_2 d^2 + a_1 d + a_0$$

The coefficients a_2 , a_1 , and a_0 were found to be 0.0166 mm^{-2} , 0.0782 mm^{-1} and -2.7×10^{-6} respectively.

The B_2 term is a 'quadrupole-like' term and is thought to arise from a deformation of the coil. A coil with a highly elliptical shape would have a large B_2 term. In all the measured data, the B_2 term was not large enough to cause concern.

The newest version of the stator (S3) has an additional electrical connection – the 'star' connector. This allows individual phases (i.e. each set of eight coils – phases A, B, C) to be connected up

separately, and is of great help for measurements since it allows the field from individual coils to be distinguished more clearly.

The measured coil offsets for stator S3 are shown in Figure 2.3.3. The average coil offset is 87 μm , with a standard deviation of 41 μm .

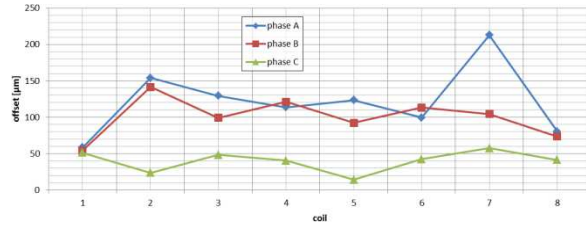


Figure 2.3.3. The measured offsets of each coil for stator S3.

Measurements were also done without using the star connector – in other words connecting two phases together (A-B, A-C, B-C). This was done to provide a comparison with previous stators that did not have a star connector. The previous stator, S1, was measured using this technique to provide a comparison.

The stators showed similar results (Table 2.3.1).

Table 2.3.1. Comparison of stators S1 and S3.

Stator	Mean coil offset	Stdev coil offset
S1	79 μm	30 μm
S3	83 μm	41 μm