

VBIM-Net: Variational Born Iterative Network for Inverse Scattering Problems

Ziqing Xing, Zhaoyang Zhang, Zirui Chen, Yusong Wang, Haoran Ma, Zhun Wei, Gang Bao

Abstract—Recently, studies have shown the potential of integrating field-type iterative methods with deep learning (DL) techniques in solving inverse scattering problems (ISPs). In this article, we propose a novel Variational Born Iterative Network, namely, VBIM-Net, to solve the full-wave ISPs with significantly improved flexibility and inversion quality. The proposed VBIM-Net emulates the alternating updates of the total electric field and the contrast in the variational Born iterative method (VBIM) by multiple layers of subnetworks. We embed the calculation of the contrast variation into each of the subnetworks, converting the scattered field residual into an approximate contrast variation and then enhancing it by a U-Net, thus avoiding the requirement of matched measurement dimension and grid resolution as in existing approaches. The total field and contrast of each layer’s output is supervised in the loss function of VBIM-Net, which guarantees the physical interpretability of variables of the subnetworks. In addition, we design a training scheme with extra noise to enhance the model’s stability. Extensive numerical results on synthetic and experimental data both verify the inversion quality, generalization ability, and robustness of the proposed VBIM-Net. This work may provide some new inspiration for the design of efficient field-type DL schemes.

Index Terms—Inverse scattering problem (ISP), variational Born iterative method (VBIM), deep learning.

I. INTRODUCTION

The inverse scattering problem (ISP) aims to determine the position, shape, and electromagnetic (EM) properties of unknown scatterers by measuring scattered fields [1]. This EM imaging technology has wide-ranging potential applications in geophysical exploration [2], [3], remote sensing [4], [5], security checks [6], [7], biomedical imaging [8], [9], integrated sensing and communication [10], [11], etc. However, the inherent nonlinearity and ill-posedness of ISP make it challenging to design inversion algorithms.

In order to obtain reliable inversion results, much effort has been devoted to addressing these two challenges, resulting in the iterative and non-iterative approaches, respectively. The non-iterative approaches are usually based on linear approximation or singular value decomposition (SVD), including Born approximation (BA) [12], Rytov approximation [13], back-propagation scheme (BPS) [14], and major current coefficient

method [15], which are computationally economical but suffer from limited inversion accuracy. The iterative approaches formulate the optimization problems and find the optimal solution via iterations, which can be divided into field-type methods and source-type methods respectively according to updated physical quantities. Born iterative method (BIM) [16] is a typical field-type method that applies BA in each iteration and alternately updates the contrast and the total field. Distorted Born iterative method (DBIM) [17] considers the variation of contrast as a disturbance to the inhomogeneous background, which improves the convergence of BIM but requires updating the Green’s function during iterations. Variational Born iterative method (VBIM) [18] also retrieves the contrast variation and achieves the same convergence as DBIM, but it keeps Green’s function unchanged to improve computational efficiency. Contrast source inversion (CSI) [19] and subspace optimization method (SOM) [20] are typical source-type methods, which update the contrast and contrast source alternately using a two-step conjugate-gradient (CG) method. Some works [21], [22] enhanced the performance of field-type iterative methods by incorporating SOM. In addition, regularization techniques are often introduced to ease the ill-posedness of ISP [23], [24], [25]. These iterative methods are able to obtain relatively high-quality inversion results, but the usually high computational overhead makes them difficult to perform real-time reconstruction.

Recently, researchers have successfully applied deep learning (DL) to solve ISPs. Compared with traditional approaches, DL has significant advantages in reconstruction quality and computational efficiency. The first type of DL-based ISP algorithm combines the low-accuracy inversion solver with the deep neural networks (DNNs). Usually, these methods use BPS to obtain a rough permittivity image and then enhance it through a image-to-image translation network such as U-Net [26] and generative adversarial network (GAN) [27]. Wei and Chen [28] proposed a dominant current scheme to replace BPS, aiming to generate a better input image for U-Net. Song et al. [29] designed a novel perceptual GAN to improve the image-to-image translation. Wei and Chen [30] introduced a induced current learning scheme to perform image translation in the contrast source domain instead of permittivity. Wang et al. [31] combined real space and frequency space information in parallel and serial ways to enhance the reconstruction quality of U-Net. Even though these methods yield satisfactory inversion results, they still lack physical insights, only incorporating physical information in the rough reconstruction stage, which limits their generalization ability.

The second type of DL-based algorithm integrates traditional iterative methods with DNNs to introduce physical information into network design. Sanghvi et al. [32] designed

This work was supported in part by National Natural Science Foundation of China under Grants 62394292 and U20A20158, Zhejiang Provincial Key R&D Program under Grant 2023C01021, Ministry of Industry and Information Technology under Grant TC220H07E, and the Fundamental Research Funds for the Central Universities. (*Corresponding author: Zhaoyang Zhang*)

Z. Xing (e-mail: ziqing_xing@zju.edu.cn), Z. Zhang (e-mail: ning_ming@zju.edu.cn), Z. Chen (e-mail: ziruchen@zju.edu.cn), Y. Wang (e-mail: 3170105272@zju.edu.cn), Z. Wei (e-mail: eleweiz@zju.edu.cn) are with the College of Information Science and Electronic Engineering, Zhejiang University, Hangzhou 310007, China. Z. Xing, Z. Zhang, Z. Chen are also with the Zhejiang Provincial Key Lab of Info. Proc., Commun. & Netw. (IPCAN), Hangzhou 310007, China. H. Ma (e-mail:12335002@zju.edu.cn) and G. Bao (e-mail:baog@zju.edu.cn) are with the School of Mathematical Sciences, Zhejiang University, Hangzhou 310007, China.

CS-Net to learn the noise space component of the contrast source current and embedded it into two-fold SOM [33], which has a satisfying generalization ability but is still time-consuming for the iterative process. Liu et al. [34] transformed the ISP into a constrained optimization problem and designed PM-Net to emulate the alternating direction method of multiplier (ADMM) iterative process, updating the contrast source and contrast alternately. Zhang et al. [35] embedded CSI method into a convolutional neural network (CNN) structure. Liu et al. [36] proposed SOM-Net by replacing the contrast source update step in SOM iteration with a U-Net. In general, the aforementioned schemes all combine source-type iterative methods with DNN design, which achieve better generalization than typical image-to-image translation schemes. In parallel, there has been a few works exploring the potential of integrating DNNs with field-type iterative methods, treating the contrast and the total field as inversion variables. Beerappa et al. [37] embedded two cascaded CNNs into the iteration of DBIM, which reduces the reconstruction error of DBIM, but still demands heavy computation within iterations. In [38], Shan et al. proposed the neural Born iterative method (NeuralBIM) by utilizing the physics-informed supervised residual learning (PhiSRL) [39] to fully unroll the BIM iteration. However, NeuralBIM directly concatenates the scattering field residual and the contrast image as the network input, which in general requires the measurement dimension to well match the resolution of the inversion grid. More importantly, although NeuralBIM attempts to use multiple layers of subnetworks of the same structure to unroll the iterations, the parameters within each of the intermediate layers are not fully physically constrained. As a result, its data flow fails to well conform to that of the original iterations, thus degrading the model's physical interpretability and generalization ability.

In this paper, we propose a novel variational Born iterative network, namely, VBIM-Net, by unrolling the VBIM algorithm to solve the full-wave ISPs, aiming at overcoming the limitations of the existing field-type DL schemes in terms of efficiency, flexibility, and inversion quality. The proposed VBIM-Net emulates the alternating updates of the total electric field and the contrast in VBIM by multiple layers of subnetworks, avoiding the complexity of traditional iterative calculations. In each subnetwork, we transform the scattered field residual into the approximate contrast variation in VBIM, which naturally lifts the limitation on measurement dimension and grid resolution in NeuralBIM without sacrificing computational efficiency. The predicted contrast and total field of each subnetwork are explicitly supervised in the loss function to make the data flow conform to an iterative process, thereby enhancing the model's reliability and interpretability. In the training stage, we adopt a hybrid dataset and design a training scheme with extra noise further to ensure the generalization ability and robustness of the model. Synthetic and experimental experiments both verify the superior performance of the proposed VBIM-Net over the existing ones. The main contributions of this work are summarized as follows.

- 1) The proposed VBIM-Net transforms the scattering field residual into approximate contrast variation through an

analytical computation. It aligns the input variables of the contrast update network in spatial dimensions and unifies them into the contrast domain. This avoids the requirement for matched measurement dimension and grid resolution in NeuralBIM and aids the network learning.

- 2) A loss function with a layer-wise constraint is designed, ensuring the outputs of each VBIM-Net layer to be consistent with the actual physical quantities, while providing more accurate physical quantity residuals for the next layer. This makes the data flow of VBIM-Net closer to a iterative algorithm, ensuring the reliability of the model.
- 3) In the training stage, we mix two synthetic datasets to enable the model to learn the inversion of homogeneous and inhomogeneous scatters. Besides, we implement a training scheme with extra noise and employ a loss function that scales with the signal-to-noise ratio (SNR), thereby enhancing the robustness of the model.
- 4) Extensive experiments have been performed on synthetic and experimental datasets, including challenging profiles with complex shapes, high contrast, and high noise level. The proposed VBIM-Net demonstrates significant advantages in terms of reconstruction quality, generalization ability, and robustness.

This article is organized as follows. Section II formulates ISPs and introduces BPS, BIM, and VBIM. In Section III, we introduce the design of the proposed VBIM-Net and analyze its computational complexity. Section IV shows experimental results on synthetic and experimental data for the performance verification. Finally, we conclude our work in Section V.

II. PROBLEM FORMULATION AND BASIC METHODS

For convenience of presentation, we consider the 2-D transverse-magnetic (TM) case, where the longitude direction is along \hat{z} . As shown in Fig. 1, the dielectric scatterers are placed in a domain of interest (DOI) $D \subset \mathbb{R}^2$, which individually illuminated by N_i transmitters (TXs) located at $\mathbf{r}_p^i, p = 1, \dots, N_i$. For each illumination, the scattered field is measured by N_r receivers (RXs) located at $\mathbf{r}_q^r, q = 1, \dots, N_r$.

A. Problem Formulation

We use $E^i(\mathbf{r})$, $E^t(\mathbf{r})$, and $E^s(\mathbf{r})$ to denote the incident field, the total field, and the scattered field at location \mathbf{r} , respectively. The E^t generated by E^i is determined by the Lippmann–Schwinger equation

$$E^t(\mathbf{r}) = E^i(\mathbf{r}) + k_0^2 \int_D g(\mathbf{r}, \mathbf{r}') \chi(\mathbf{r}') E^t(\mathbf{r}') d\mathbf{r}', \text{ for } \mathbf{r} \in D, \quad (1)$$

where k_0 is the wavenumber of the free space, and $g(\mathbf{r}, \mathbf{r}')$ is the scalar 2-D Green's function. The contrast is defined as $\chi(\mathbf{r}) = \epsilon_r(\mathbf{r}) - 1$ with the relative permittivity $\epsilon_r(\mathbf{r})$. The contrast source is derived by $J(\mathbf{r}) = \chi(\mathbf{r}) E^t(\mathbf{r})$. The scattered field is the re-radiation of the contrast source, so the E^s measured by the q th receiving antenna is

$$E^s(\mathbf{r}_q^r) = k_0^2 \int_D g(\mathbf{r}_q^r, \mathbf{r}') \chi(\mathbf{r}') E^t(\mathbf{r}') d\mathbf{r}'. \quad (2)$$

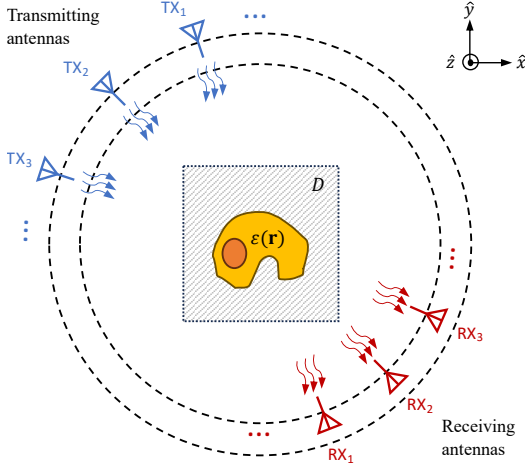


Fig. 1. The schematic of a 2-D ISP under TM illuminations, where targets are inside the DOI D , and transmitting and receiving antennas are located on the circumference.

Referring to [1], we divide D into an $M \times M$ grid, using \mathbf{r}_n to denote the center of the n th subunit with $n = 1, \dots, M^2$. The area of each subunit is S . By applying the method of moment (MoM), we can obtain the discretized forms of Eq. (1) and (2) as follows,

$$\mathbf{E}^t = \mathbf{E}^i + \mathbf{G}_D \text{diag}(\boldsymbol{\chi}) \mathbf{E}^t, \quad (3)$$

$$\mathbf{E}^s = \mathbf{G}_S \text{diag}(\boldsymbol{\chi}) \mathbf{E}^t, \quad (4)$$

where $\mathbf{E}^i, \mathbf{E}^t \in \mathbb{C}^{M^2 \times N_i}$, $\mathbf{E}^s \in \mathbb{C}^{N_r \times N_i}$. The $\boldsymbol{\chi} \in \mathbb{C}^{M^2 \times 1}$ if the targets are lossy scatterers, and $\boldsymbol{\chi} \in \mathbb{R}^{M^2 \times 1}$ otherwise. $\text{diag}(\boldsymbol{\chi})$ represents the diagonal matrix composed of elements from vector $\boldsymbol{\chi}$. The (3) is called the state equation, and the (4) is called the data equation. In the following, we use $\mathbf{E}_p^i, \mathbf{E}_p^t$, and \mathbf{E}_p^s to represent the incident field, total field, and scattered field under the p th incidence, which are the p th columns of $\mathbf{E}^i, \mathbf{E}^t$, and \mathbf{E}^s , respectively. The n th elements of $\mathbf{E}_p^i, \mathbf{E}_p^t$, and $\boldsymbol{\chi}$ represent the E^i, E^t , and χ at \mathbf{r}_n , and the \mathbf{E}_p^s denotes the scattered field measured at each receiving antenna. The $\mathbf{G}_D \in \mathbb{C}^{M^2 \times M^2}$ and $\mathbf{G}_S \in \mathbb{C}^{N_r \times M^2}$ are discrete forms of the Green's function,

$$\mathbf{G}_D[n, n'] = \begin{cases} \frac{jk_0\pi a}{2} J_1(k_0 a) H_0^{(1)}(k_0 |\mathbf{r}_n - \mathbf{r}_{n'}|), & \text{if } n \neq n' \\ \frac{jk_0\pi a}{2} H_1^{(1)}(k_0 a) - 1, & \text{if } n = n' \end{cases} \quad (5)$$

$$\mathbf{G}_S[q, n] = \frac{jk_0\pi a}{2} J_1(k_0 a) H_0^{(1)}(k_0 |\mathbf{r}_q^r - \mathbf{r}_n|), \quad (6)$$

where each square subunit is approximated as a circle with the same area, which has an equivalent radius $a = \sqrt{S/\pi}$. The $H_0^{(1)}(\cdot), H_1^{(1)}(\cdot)$, and $J_1(\cdot)$ denote the zeroth order, the first order of Hankel function of the first kind, and the Bessel function of the first order, respectively.

The forward problem is to compute the scattered field \mathbf{E}^s using the incident field \mathbf{E}^i and the contrast $\boldsymbol{\chi}$ of targets according to Eq. (3) and (4). Correspondingly, ISPs aim to solve the $\boldsymbol{\chi}$ based on the \mathbf{E}^i and \mathbf{E}^s .

B. Back-Propagation Scheme

BPS is an efficient noniterative inversion algorithm that can provide initial solutions for iterative algorithms [19], [20] and neural networks [28], [31]. BPS models the contrast source as proportional to the backpropagated field, which is effective in the weak scattering case [1]. For the p th incidence, the solution of contrast source is

$$\mathbf{J}_p^b = \gamma_p \cdot \mathbf{G}_S^H \mathbf{E}_p^s, \quad (7)$$

where the coefficient γ_p is

$$\gamma_p = \frac{(\mathbf{E}_p^s)^T (\mathbf{G}_S \mathbf{G}_S^H \mathbf{E}_p^s)^*}{\|\mathbf{G}_S \mathbf{G}_S^H \mathbf{E}_p^s\|^2}. \quad (8)$$

With Eq. (3), the total field of the p th incidence is

$$\mathbf{E}_p^{t,b} = \mathbf{E}_p^i + \mathbf{G}_D \mathbf{J}_p^b. \quad (9)$$

According to the definition of contrast source,

$$\mathbf{J}_p^b = \text{diag}(\boldsymbol{\chi}^b) \mathbf{E}_p^{t,b}, \quad (10)$$

the contrast $\boldsymbol{\chi}^b$ can be obtained by the least squares (LS) method, and its n th element is

$$\boldsymbol{\chi}^b(n) = \frac{\sum_{p=1}^{N_i} \mathbf{J}_p^b(n) [\mathbf{E}_p^{t,b}(n)]^*}{\sum_{p=1}^{N_i} \|\mathbf{E}_p^{t,b}(n)\|^2}. \quad (11)$$

C. Born Iterative Method and Its Variational Version

The BIM [16] is a classic iterative inversion algorithm that reconstructs scatterers by alternately updating the contrast $\boldsymbol{\chi}$ and the total field \mathbf{E}^t . The initial value of contrast $\boldsymbol{\chi}_{(0)}$ can be obtained using the BPS. For each iteration step k , the total field \mathbf{E}^t is calculated according to the Eq. (3),

$$\mathbf{E}_{(k)}^t = \left(\mathbf{I} - \mathbf{G}_D \text{diag}(\boldsymbol{\chi}_{(k-1)}) \right)^{-1} \mathbf{E}^i. \quad (12)$$

Then, BIM updates the contrast $\boldsymbol{\chi}$ by Born approximation for homogeneous background according to Eq. (4),

$$\mathbf{E}^s = \mathbf{G}_S \text{diag}(\boldsymbol{\chi}) \mathbf{E}_{(k)}^t, \quad (13)$$

which can be reduced to a LS estimation in noisy conditions,

$$\boldsymbol{\chi}_{(k)} = \arg \min_{\boldsymbol{\chi}} \left\| \mathbf{E}^s - \mathbf{G}_S \text{diag}(\boldsymbol{\chi}) \mathbf{E}_{(k)}^t \right\|^2. \quad (14)$$

In comparison, VBIM adopts the variational form of Eq. (13) in the $\boldsymbol{\chi}$ -update step,

$$\delta \mathbf{E}^s = \mathbf{G}_S \text{diag}(\delta \boldsymbol{\chi}) \mathbf{E}_{(k)}^t, \quad (15)$$

where $\delta \mathbf{E}^s = \mathbf{E}^s - \mathbf{E}_{(k)}^s$ is the residual of scattered field, $\mathbf{E}_{(k)}^s$ is the computed scattered field in the k th iteration,

$$\mathbf{E}_{(k)}^s = \mathbf{G}_S \text{diag}(\boldsymbol{\chi}_{(k-1)}) \mathbf{E}_{(k)}^t, \quad (16)$$

and $\delta \boldsymbol{\chi} = \boldsymbol{\chi}_{(k)} - \boldsymbol{\chi}_{(k-1)}$ is the difference between the contrast value in the k th and $(k-1)$ th iteration. Compared with BIM, VBIM has faster convergence and better inversion quality.

III. THE PROPOSED VARIATIONAL BORN ITERATIVE NETWORK

To fully leverage the nonlinear fitting capability of DNNs and avoid the computational overhead from iterative calculations, the proposed VBIM-Net simulates the VBIM iterations by multiple layers of subnetworks of the same structure. Each subnetwork embeds the contrast variation in VBIM to transfer the information from scattered field residual. In order to make the variables in each subnetwork correspond to physical quantities, we introduce a layer-wise constraint in the loss function, which ensures the model's reliability. Furthermore, we employ a training scheme with extra noise to enhance the robustness of the model.

In this section, we will introduce the specific design of VBIM-Net in network architecture and loss function, and analyze its computational complexity.

A. Network Architecture

As depicted in Fig. 2, VBIM-Net includes K layers of subnetworks to simulate the iterative process of VBIM. Assume that the initial value of contrast $\chi_{(0)}$ is calculated by BPS, and the initial value of total field $\mathbf{E}_{(0)}^t$ is set according to the first-order Born approximation [12], i.e., $\mathbf{E}_{(0)}^t = \mathbf{E}^i$. Here, we concatenate the incident field \mathbf{E}^i of N_i incidences to obtain a real-value tensor with $2N_i$ channels as the input to VBIM-Net, and the network outputs the estimated total field for N_i incidences at each layer. This allows the network to fully couple the data from multiple incidences to reconstruct the contrast of unknown scatterers. For lossless scatters, the channel number C of χ is 1, while for lossy scatters, $C = 2$.

Each layer of VBIM-Net consists of a \mathbf{E}^t -update step and a χ -update step. In the \mathbf{E}^t -update step, instead of using the full-wave forward calculation in Eq. (12), we adopt the form of PhiSRL [39], which emulates the fixed-point iterative method by a neural network (NN) with an input-output residual connection. In the k th layer of the VBIM-Net, the \mathbf{E}^t -update step first calculates the incident field residual

$$\delta \mathbf{E}_{(k)}^i = \mathbf{E}^i - \left(\mathbf{I} - \mathbf{G}_D \text{diag} \left(\chi_{(k-1)} \right) \right) \mathbf{E}_{(k-1)}^t, \quad (17)$$

and uses $\delta \mathbf{E}_{(k)}^i \oplus \mathbf{E}_{(k-1)}^t$ as the input of a NN, where \oplus is the concatenation operation. The network output is the variation of the total field

$$\delta \mathbf{E}_{(k)}^t = \mathcal{F}_k^{\delta \mathbf{E}^t} \left(\delta \mathbf{E}_{(k)}^i \oplus \mathbf{E}_{(k-1)}^t; \Theta_k^{\delta \mathbf{E}^t} \right), \quad (18)$$

where $\mathcal{F}_k^{\delta \mathbf{E}^t}$ denotes the NN for the calculation of total field variation and $\Theta_k^{\delta \mathbf{E}^t}$ represents the corresponding network parameters. Thus, the updated total field is

$$\mathbf{E}_{(k)}^t = \mathbf{E}_{(k-1)}^t + \delta \mathbf{E}_{(k)}^t. \quad (19)$$

According to $\mathbf{E}_{(k)}^t$ and $\chi_{(k-1)}$, we can obtain the scattered field residual $\delta \mathbf{E}_{(k)}^s$ for the k th iteration,

$$\delta \mathbf{E}_{(k)}^s = \mathbf{E}^s - \mathbf{G}_S \text{diag} \left(\chi_{(k-1)} \right) \mathbf{E}_{(k)}^t. \quad (20)$$

In the χ -update step, we first estimate the variation $\delta \chi$ of the contrast according to Eq. (15). By stacking the data of

N_i incidences, we can transform Eq. (15) into the following linear equation,

$$\mathbf{y}_{(k)} = \mathbf{A}_{(k)} \delta \chi, \quad (21)$$

where

$$\mathbf{A}_{(k)} = \begin{bmatrix} \mathbf{G}_S \text{diag} \left(\mathbf{E}_{(k),1}^t \right) \\ \vdots \\ \mathbf{G}_S \text{diag} \left(\mathbf{E}_{(k),N_i}^t \right) \end{bmatrix}, \mathbf{y}_{(k)} = \text{vec} \left(\delta \mathbf{E}_{(k)}^s \right), \quad (22)$$

and $\text{vec}(\cdot)$ is the vectorization operator for a matrix. The LS estimation of $\delta \chi$ is

$$\delta \chi_{(k)}^{\text{LS}} = \left(\mathbf{A}_{(k)}^H \mathbf{A}_{(k)} \right)^{-1} \mathbf{A}_{(k)}^H \mathbf{y}_{(k)}, \quad (23)$$

which contains $M^2 \times M^2$ -dimensional matrix inversion with high computational complexity of $O(M^6)$. It is difficult to extend to high reconstruction resolutions. Therefore, instead of using the LS estimation directly, we incorporate the idea of BPS and employ the following matched filter to estimate the approximate contrast variation,

$$\delta \tilde{\chi}_{(k)} = \gamma_{(k)}^{\delta \tilde{\chi}} \cdot \mathbf{A}_{(k)}^H \mathbf{y}_{(k)}, \quad (24)$$

where the coefficient $\gamma_{(k)}^{\delta \tilde{\chi}}$ is obtained through LS estimation,

$$\gamma_{(k)}^{\delta \tilde{\chi}} = \frac{\mathbf{y}_{(k)}^T \left(\mathbf{A}_{(k)} \mathbf{A}_{(k)}^H \mathbf{y}_{(k)} \right)^*}{\left\| \mathbf{A}_{(k)} \mathbf{A}_{(k)}^H \mathbf{y}_{(k)} \right\|^2}. \quad (25)$$

Although $\delta \tilde{\chi}_{(k)}$ is a suboptimal estimate, it is computationally efficient and already contains the information from $\delta \mathbf{E}_{(k)}^s$. Next, we reshape $\delta \tilde{\chi}_{(k)}$ into the dimension of $C \times M \times M$, and use $\delta \tilde{\chi}_{(k)} \oplus \chi_{(k-1)}$ as the input of a NN to get the refined variation $\delta \chi_{(k)}$ of contrast,

$$\delta \chi_{(k)} = \mathcal{F}_k^{\delta \chi} \left(\delta \tilde{\chi}_{(k)} \oplus \chi_{(k-1)}; \Theta_k^{\delta \chi} \right), \quad (26)$$

where $\mathcal{F}_k^{\delta \chi}$ denotes the NN for the calculation of contrast variation and $\Theta_k^{\delta \chi}$ represents the corresponding network parameters. Since the real and imaginary parts of the contrast are non-negative numbers, we use the rectified linear unit (ReLU) function to constrain $\chi_{(k)}$. Therefore, the updated contrast is

$$\chi_{(k)} = \left(\chi_{(k-1)} + \delta \chi_{(k)} \right)^+, \quad (27)$$

where $(\cdot)^+$ denotes the ReLU function.

The structure of each layer of VBIM-Net is shown in Fig. 3. We adopt U-Net [26] to build NNs $\mathcal{F}_k^{\delta \mathbf{E}^t}$ and $\mathcal{F}_k^{\delta \chi}$ for predicting the variation $\delta \mathbf{E}_{(k)}^t$ and $\delta \chi_{(k)}$, which efficiently integrates multi-level feature information and leverages the similarity between input and output, and has been widely applied to solve nonlinear ISPs [28], [30], [31], [40]. The spatial dimension and channel number of each layer of U-Net are marked in Fig. 3, where the number of input channel and output channel are denoted by C_{in} and C_{out} , respectively. For the total field update network $\mathcal{F}_k^{\delta \mathbf{E}^t}$, $C_{\text{in}} = 4N_i$, $C_{\text{out}} = 2N_i$. For the contrast update network $\mathcal{F}_k^{\delta \chi}$, $C_{\text{in}} = 2$, $C_{\text{out}} = 1$ for lossless scatterers, and $C_{\text{in}} = 4$, $C_{\text{out}} = 2$ for lossy scatterers. The CNNs in the U-Net consist of 3×3 convolutions, batch

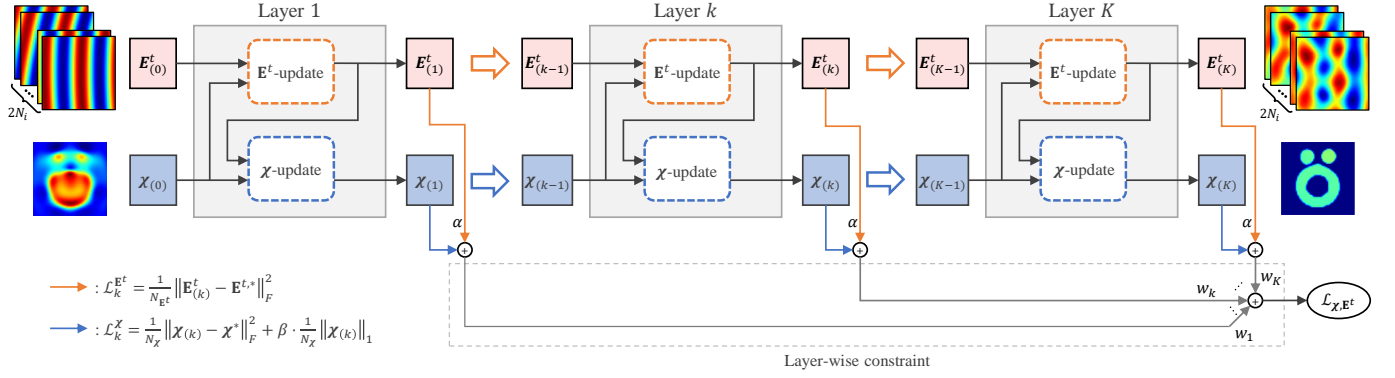


Fig. 2. The framework of the proposed VBIM-Net. VBIM-Net is composed of K -layer subnetworks with the same structure but independent parameters. The input of VBIM-Net is the incident field of N_i incidence and the rough contrast image obtained by BPS. The output of each VBIM-Net layer includes the predicted total field $\mathbf{E}_{(k)}^t$ and contrast $\chi_{(k)}$, $k = 1, \dots, K$. The loss function calculation is depicted under the network framework.

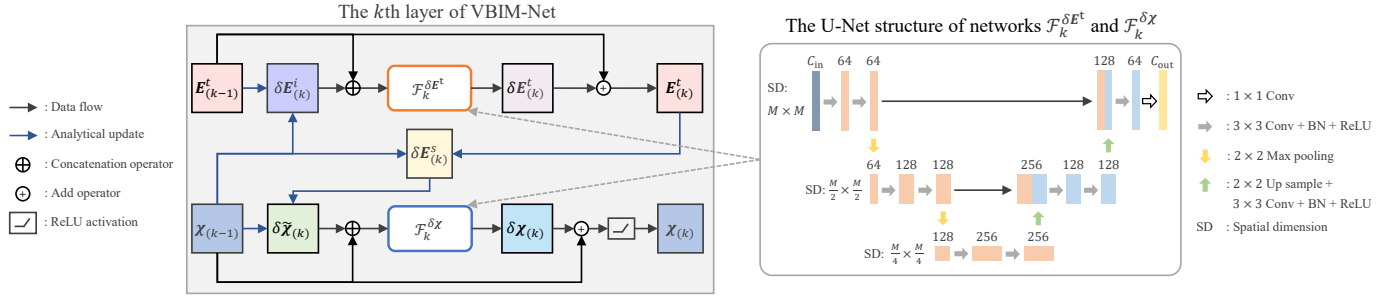


Fig. 3. The structure of each layer of VBIM-Net, in which the analytical update steps are indicated by blue arrows. The networks $\mathcal{F}_k^{\delta \mathbf{E}^t}$ and $\mathcal{F}_k^{\delta \chi}$ adopt U-Net with the same structure, as shown on the right side of the figure.

normalization (BN), and ReLU activation functions, and the final output layers use 1×1 convolution to project the feature map to the output space. Algorithm 1 summarizes the data flow of VBIM-Net. In this paper, VBIM-Net is assumed to consist of 7 layers of subnetworks, which share the same structure but have independent parameters.

B. Loss Function

In order to make each layer output of VBIM-Net corresponds to the actual physical quantity, we designed layer-wise constraint in the loss function, which explicitly constrain the output contrast and total field of each layer. The overall loss function is formulated as

$$\mathcal{L}_{\chi, \mathbf{E}^t} = \sum_{k=1}^K w_k \cdot \mathcal{L}_k^{\chi, \mathbf{E}^t}, \quad (28)$$

where $\mathcal{L}_k^{\chi, \mathbf{E}^t}$ is the loss on the predicted contrast and total field for the k th subnetwork, and w_k represents the weight of the k th layer. For the layer weight w_k , we adopt the form of exponential, i.e.,

$$w_k = c^{K-1-k}, \quad k = 1, \dots, K, \quad (29)$$

with constant $c \in [0, 1)$, which is set to 0.8 by default. In this way, the outputs of each subnetwork in VBIM-Net correspond to actual physical quantities, while also providing reasonable residual $\delta \mathbf{E}^i$ and $\delta \mathbf{E}^s$ for the next subnetwork. In general, the role of the layer-wise constraint is a kind of regularization,

which assists the data flow of VBIM-Net to consistent with the paradigm of iterative algorithms. In the following section, we will validate the importance of the layer-wise constraint.

In Eq. (28), the loss for the k th layer of VBIM-Net is

$$\mathcal{L}_k^{\chi, \mathbf{E}^t} = \mathcal{L}_k^{\chi} + \alpha \cdot \mathcal{L}_k^{\mathbf{E}^t}, \quad (30)$$

where the coefficient α is used to balance the importance of χ and \mathbf{E}^t and it is set to 0.5 in this paper. $\mathcal{L}_k^{\mathbf{E}^t}$ is the mean square error (MSE) of $\mathbf{E}_{(k)}^t$ output by the k th layer,

$$\mathcal{L}_k^{\mathbf{E}^t} = \frac{1}{N_{\mathbf{E}^t}} \|\mathbf{E}_{(k)}^t - \mathbf{E}^{t,*}\|_F^2, \quad (31)$$

where $N_{\mathbf{E}^t}$ denotes the element number of \mathbf{E}^t , $\mathbf{E}^{t,*}$ denotes the ground truth of the total field, and $\|\cdot\|_F$ is the Frobenius norm. \mathcal{L}_k^{χ} is the MSE loss of $\chi_{(k)}$ with total variation (TV) regularization,

$$\mathcal{L}_k^{\chi} = \frac{1}{N_{\chi}} \|\chi_{(k)} - \chi^*\|_F^2 + \beta \cdot \frac{1}{N_{\chi}} \|\chi_{(k)}\|_1, \quad (32)$$

where TV regularization is introduced to improve the spatial continuity of predicted contrast images and alleviate the ill-posedness of ISPs. N_{χ} denotes the element number of χ , χ^* denotes the ground truth of the contrast, $\|\cdot\|_1$ denotes the L1-norm, and β is fixed as 0.0001. The calculation process of the loss function is depicted in Fig. 2.

To enhance the model's robustness against noise, we randomly add Gaussian noise with a certain range of SNR to the scattered field measurements obtained from forward simulation, imitating actual measurement data in the training

Algorithm 1 The data flow in the VBIM-Net

Input: Scattered field \mathbf{E}^s , incident field \mathbf{E}^i , Green's function matrix $\mathbf{G}_D, \mathbf{G}_S$, the number of network layers K .

Output: The predicted contrast $\hat{\chi}$ and total field $\hat{\mathbf{E}}^t$.

1: **Initialization:** Use the BPS algorithm to calculate the initial value $\chi_{(0)}$ according to Eq.(7)-(11). $\mathbf{E}_{(0)}^t = \mathbf{E}^i$.

2: **for** $k = 1, \dots, K$ **do**

$$3: \quad \delta \mathbf{E}_{(k)}^i = \mathbf{E}^i - \left(\mathbf{I} - \mathbf{G}_D \text{diag} \left(\chi_{(k-1)} \right) \right) \mathbf{E}_{(k-1)}^t$$

$$4: \quad \delta \mathbf{E}_{(k)}^t = \mathcal{F}_k^{\delta \mathbf{E}^t} \left(\delta \mathbf{E}_{(k)}^i \oplus \mathbf{E}_{(k-1)}^t; \Theta_k^{\delta \mathbf{E}^t} \right)$$

$$5: \quad \mathbf{E}_{(k)}^t\text{-update: } \mathbf{E}_{(k)}^t = \mathbf{E}_{(k-1)}^t + \delta \mathbf{E}_{(k)}^t$$

$$6: \quad \delta \mathbf{E}_{(k)}^s = \mathbf{E}^s - \mathbf{G}_S \text{diag} \left(\chi_{(k-1)} \right) \mathbf{E}_{(k)}^t$$

$$7: \quad \mathbf{A}_{(k)} = \begin{bmatrix} \mathbf{G}_S \text{diag} \left(\mathbf{E}_{(k),1}^t \right) \\ \vdots \\ \mathbf{G}_S \text{diag} \left(\mathbf{E}_{(k),N_i}^t \right) \end{bmatrix}, \mathbf{y}_{(k)} = \text{vec} \left(\delta \mathbf{E}_{(k)}^s \right)$$

$$8: \quad \gamma_{(k)}^{\delta \tilde{\chi}} = \frac{\mathbf{y}_{(k)}^T \left(\mathbf{A}_{(k)} \mathbf{A}_{(k)}^H \mathbf{y}_{(k)} \right)^*}{\left\| \mathbf{A}_{(k)} \mathbf{A}_{(k)}^H \mathbf{y}_{(k)} \right\|^2}$$

$$9: \quad \delta \tilde{\chi}_{(k)} = \gamma_{(k)}^{\delta \tilde{\chi}} \cdot \mathbf{A}_{(k)}^H \mathbf{y}_{(k)}$$

$$10: \quad \delta \chi_{(k)} = \mathcal{F}_k^{\delta \chi} \left(\delta \tilde{\chi}_{(k)} \oplus \chi_{(k-1)}; \Theta_k^{\delta \chi} \right)$$

$$11: \quad \chi\text{-update: } \chi_{(k)} = \left(\chi_{(k-1)} + \delta \chi_{(k)} \right)^+$$

12: **end for**

$$13: \quad \hat{\chi} = \chi_{(K)}, \hat{\mathbf{E}}^t = \mathbf{E}_{(K)}^t$$

process. At this time, in order to enable the model to distinguish training data with different noise levels, we designed a loss weighting strategy proportional to the SNR of training samples. According to the definition of the noise level, it can be expressed as

$$\begin{aligned} \mathcal{L}_{\text{opt}} &= \gamma \cdot \text{SNR} \cdot \mathcal{L}_{\chi, \mathbf{E}^t} \\ &= \frac{\gamma}{\text{noise_level}^2} \cdot \mathcal{L}_{\chi, \mathbf{E}^t} \end{aligned} \quad (33)$$

where \mathcal{L}_{opt} is the final loss for optimizing the model parameters and the coefficient γ is empirically set to 0.04. This training scheme allows the model to adapt to variational noise levels and focus more on the reconstruction results at low noise levels.

C. Complexity Analysis

The computational complexity of VBIM-Net mainly consists of five parts:

- Preparing the initial value $\chi_{(0)}$ of contrast through the BPS algorithm.
- Calculating the incident field residual $\delta \mathbf{E}^i$.
- Calculating the scattered field residual $\delta \mathbf{E}^s$.

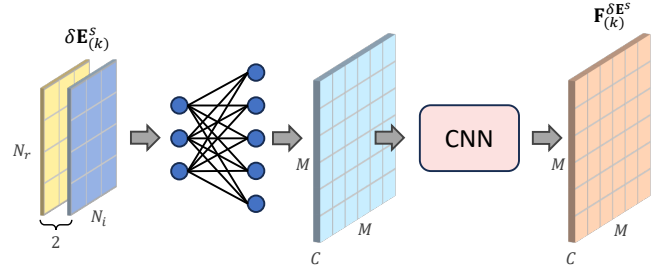


Fig. 4. Module executing the mapping $\delta \mathbf{E}^s \rightarrow \mathbf{F}^{\delta \mathbf{E}^s}$ for dimension transformation in each layer of the modified NeuralBIM.

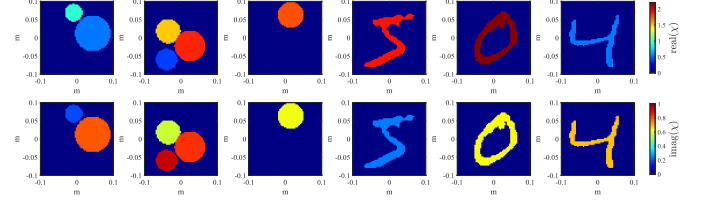


Fig. 5. Examples of lossy scatterers in the synthetic dataset.

- Calculating the approximate variation $\delta \tilde{\chi}$ of contrast.
- Updating the χ and \mathbf{E}^t via the U-Nets.

The main computational complexity of the BPS algorithm comes from calculating $\mathbf{G}_D \mathbf{J}^b$, which is $O(N_i M^2 \log M^2)$ [28] if the fast Fourier transform (FFT) is applied in the matrix–vector multiplication.

The data flow of each VBIM-Net layer is divided into the \mathbf{E}^t -update branch and the χ -update branch. In the \mathbf{E}^t -update branch, $\delta \mathbf{E}^i$ needs to be calculated first, and its complexity mainly comes from the $\mathbf{G}_D \text{diag}(\chi) \mathbf{E}^t$ term, which is $O(N_i M^2 \log M^2)$ if the FFT is applied in the matrix–vector multiplication. The computational complexity of $\delta \mathbf{E}^s$ calculation mainly comes from the matrix multiplication contained in the $\mathbf{G}_S \text{diag}(\chi) \mathbf{E}^t$ term, which is $O(N_r N_i M^2)$. In the χ -update branch, the approximate contrast variation $\delta \tilde{\chi}$ needs to be calculated first, and its complexity mainly comes from the preparation of matrix \mathbf{A} , the $\mathbf{A}^H \mathbf{y}$ calculation, and the $\mathbf{A}(\mathbf{A}^H \mathbf{y})$ calculation, all of which are $O(N_r N_i M^2)$, and we store the value of $\mathbf{A}^H \mathbf{y}$ to avoid duplicate computations.

The forward calculation of U-Net mainly consists of several basic operations, including convolution, activation function, and max pooling, where the computational complexity is dominated by convolutions. In the convolution operation, if the feature map size, the convolution kernel size, the number of input channels and output channels are denoted by $H \times W$, $K_h \times K_w$, C_i , and C_o , respectively, then the complexity is $O(C_i C_o H W K_h K_w)$.

IV. NUMERICAL RESULTS

In this section, we verify the effectiveness of VBIM-Net on synthetic and experimental data, and evaluate the model's reconstruction quality, generalization ability, and robustness.

A. Benchmark Algorithms and Performance Metrics

We select SOM [20] and NeuralBIM [38] as benchmark algorithms. SOM is a classic source-type iterative method that

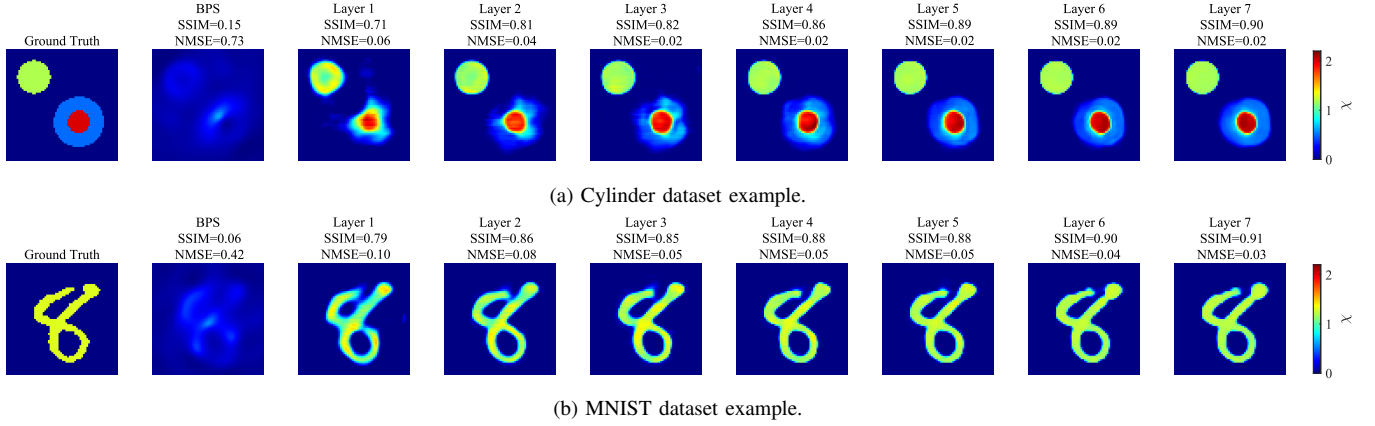


Fig. 6. Updated contrast reconstructions of dataset examples of VBIM-Net. From left to right, the ground truth of contrast, the initial value obtained by BPS, and the reconstruction result of each layer are shown. The constant $c = 0.8$.

decomposes the contrast current into a deterministic part and an ambiguous part through SVD, and uses a two-step CG algorithm to alternately optimize the contrast and ambiguous current component, which has good inversion performance in most scenarios [1], [20], [36].

NeuralBIM is proposed in [38], which is a representative field-type DL scheme that unrolls BIM and designs the update networks for contrast χ and total field \mathbf{E}^t based on PhiSRL [39]. Specifically, it uses the residuals of Eq. (3) and (4) as inputs of two ResNets respectively, simulating the fixed-point iterative method to solve χ and \mathbf{E}^t . However, the vanilla NeuralBIM simply uses $\delta\mathbf{E}^s \oplus \chi$ as the input of χ update network, which only suitable for cases where the scattered field dimension matches the reconstruction grid resolution [38]. In contrast, the proposed VBIM-Net transfers the information of residual $\delta\mathbf{E}^s$ through the approximate contrast variation $\delta\tilde{\chi}$, enabling it to handle more flexible measurement data dimensions and grid resolutions inherently. To facilitate comparison with VBIM-Net, this paper made some modifications to NeuralBIM. We add a dimension transformation module as shown in Fig. 4 to each layer of NeuralBIM, which maps $\delta\mathbf{E}^s$ with dimension $2 \times N_r \times N_i$ to a feature map $\mathbf{F}^{\delta\mathbf{E}^s}$ with dimension $C \times M \times M$ through a cascaded fully connected layer and CNN. We use $\mathbf{F}^{\delta\mathbf{E}^s} \oplus \chi$ as the input of χ -update subnetworks in the modified NeuralBIM. For the sake of fairness, we let the modified NeuralBIM have the same number of update layers as VBIM-Net and use the same dataset for training. The modified NeuralBIM adopts the supervised learning scheme in [38], which only supervises the final reconstruction results of contrast and electric field. Compared with the loss function of VBIM-Net, this original scheme lacks physical constraints on the parameters of the intermediate layers, resulting in the data flow of NeuralBIM not conforming well to the iterative regime, thus degrading the model's physical interpretability and generalization ability.

In order to evaluate the reconstruction quality, we take the normalized mean squared error (NMSE) and the structural similarity index measure (SSIM) as performance metrics. The

definition of the NMSE is

$$\text{NMSE}(\chi, \chi^*) = \frac{\|\chi - \chi^*\|_F^2}{\|\chi^*\|_F^2}, \quad (34)$$

and the definition of SSIM [41] is

$$\text{SSIM}(\chi, \chi^*) = \frac{(2\mu_\chi\mu_{\chi^*} + C_1)(2\sigma_{\chi\chi^*} + C_2)}{(\mu_\chi^2 + \mu_{\chi^*}^2 + C_1)(\sigma_\chi^2 + \sigma_{\chi^*}^2 + C_2)}, \quad (35)$$

where μ_χ and σ_χ are the mean and standard deviation of the elements in χ , respectively. $\sigma_{\chi\chi^*}$ is the covariance between χ and χ^* . $C_1 = (K_1 L_\chi)^2$, $C_2 = (K_2 L_\chi)^2$ are parameters used to ensure the stability of the division, where L_χ is the dynamic range of χ , and $k_1 = 0.01, k_2 = 0.03$ by default.

B. System Configurations and Training Details

The system configurations of the synthetic data is as follows: N_i line sources and N_r line receivers are equally placed on a circle with a radius of 1.67 m, where $N_i = 16, N_r = 32$ by default, and the other measurement dimensions will be discussed in Section IV-D. The frequency of the incident wave is 3 GHz. D is the DOI of size $0.2\text{m} \times 0.2\text{m}$ with a free space background. In the forward problem, D is discretized into a grid of 100×100 , and the MoM is used to simulate the scattered field \mathbf{E}^s , while in the inverse problem, D is discretized into a grid of 64×64 to avoid the inverse crime. The simulated \mathbf{E}^s is noise-free, so we add different levels of Gaussian noise to \mathbf{E}^s to simulate the actual measurement data. The noise level is defined as $(\|\mathbf{N}\|_F / \|\mathbf{E}^s\|_F)$, where \mathbf{N} is the noise matrix. During training, we randomly add 5%-35% noise to \mathbf{E}^s and employ the weighted loss in Eq. (33). By default, we assume that the scatterers are lossless, and we

TABLE I: Implementation Details of VBIM-Net and the Modified NeuralBIM

The number of layers (K)	7
Training epochs	80
Optimizer	Adam
Initial learning rate	1×10^{-4}
Learning rate scheduler	$\times 0.8$ every 10 epochs
Parameters (VBIM-Net)	29.24 Million
Parameters (modified NeuralBIM)	48.62 Million

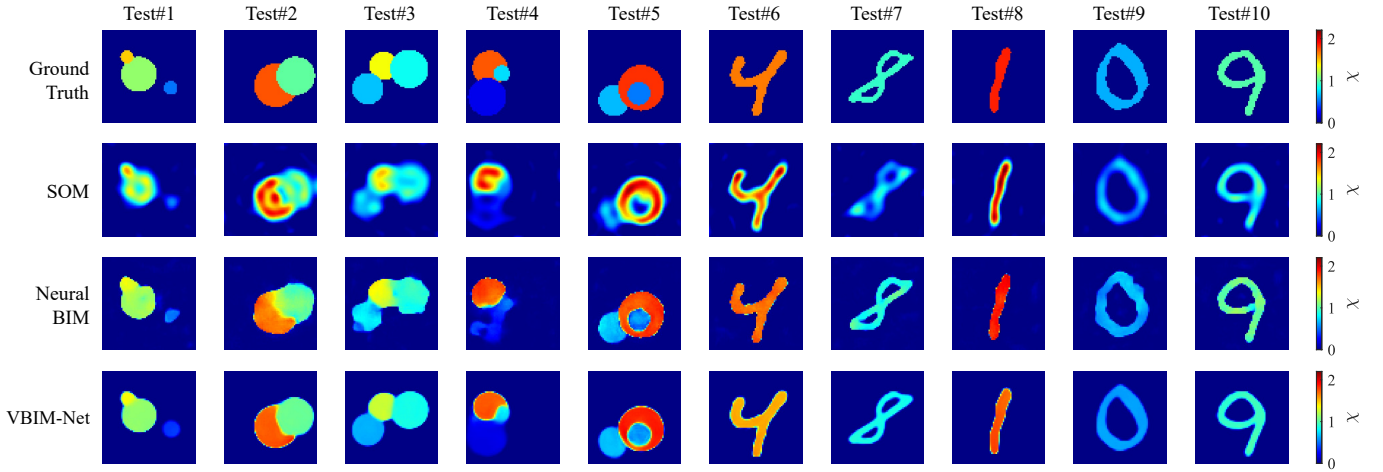


Fig. 7. Reconstruction results of within-dataset examples Test#1-Test#10 from the cylinder and MNIST test sets with 10% Gaussian noise.

TABLE II: Performance Metrics of Reconstruction Results for Test#1-Test#10

Method	Test#1		Test#2		Test#3		Test#4		Test#5	
	SSIM	NMSE	SSIM	NMSE	SSIM	NMSE	SSIM	NMSE	SSIM	NMSE
SOM	0.80	0.10	0.68	0.07	0.73	0.08	0.76	0.11	0.70	0.10
NeuralBIM	0.81	0.09	0.79	0.06	0.78	0.09	0.74	0.11	0.88	0.03
VBIM-Net	0.94	0.04	0.95	0.02	0.93	0.04	0.92	0.07	0.95	0.02
Method	Test#6		Test#7		Test#8		Test#9		Test#10	
	SSIM	NMSE	SSIM	NMSE	SSIM	NMSE	SSIM	NMSE	SSIM	NMSE
SOM	0.82	0.11	0.78	0.27	0.88	0.11	0.83	0.11	0.82	0.15
NeuralBIM	0.91	0.03	0.83	0.13	0.87	0.06	0.84	0.10	0.84	0.10
VBIM-Net	0.95	0.05	0.95	0.08	0.97	0.06	0.95	0.06	0.95	0.07

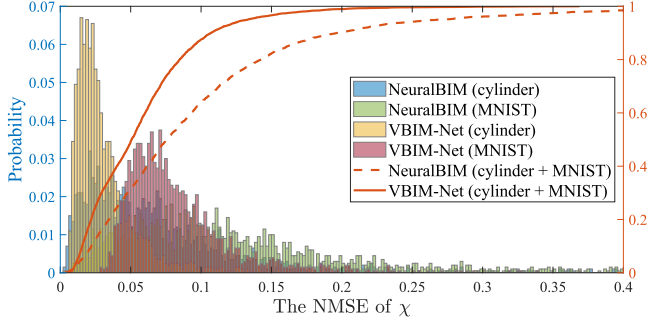


Fig. 8. The histograms and CDFs shows the NMSE distribution of reconstructed contrast images obtained by NeuralBIM and VBIM-Net on test sets, where 10% Gaussian noise is added.

will discuss the inversion results for lossy scatterers separately. The system configuration for the experimental data is slightly different, which will be described in Section IV-E.

We mix the MNIST [42] and cylinder dataset at a ratio of 1:1 to obtain the synthetic dataset, in order to increase the richness of the data, making the network to learn inversion tasks for homogeneous and inhomogeneous scatterers with various shapes. For the cylinder dataset, each scene contains 1 to 3 cylinders with a 0.01m-0.05m radius. For lossless scatterers, the contrast range is $[0.2, 2.2]$. For lossy scatterers, the range of the real part of the contrast is $[0.2, 2.2]$, and the range of the imaginary part is $[0, 1]$. Fig. 5 shows several examples of lossy scatters in the synthetic dataset. We randomly generate 20,000 data samples, of which 80% are for training and 20% for testing.

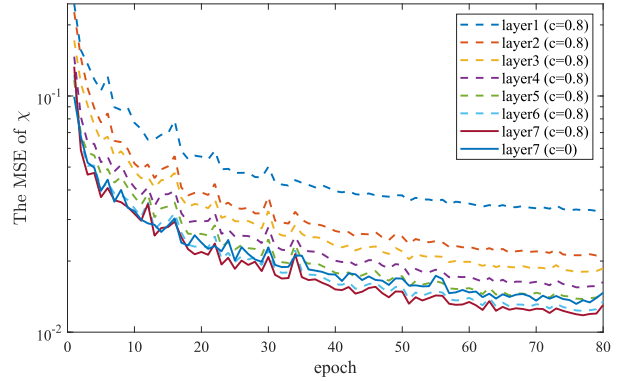


Fig. 9. The MSE of χ on the test set with ($c = 0.8$) / without ($c = 0$) the layer-wise constraint.

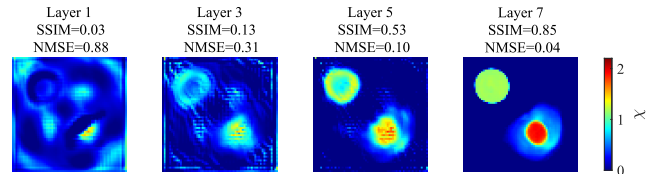


Fig. 10. The updated reconstructions of VBIM-Net without the layer-wise constraint.

VBIM-Net and the modified NeuralBIM are implemented in PyTorch and computed on a Nvidia V100 GPU, and they share the same training configuration. Table I summarizes the implementation details of both. Note that since the modified NeuralBIM adds a trainable dimension transformation module

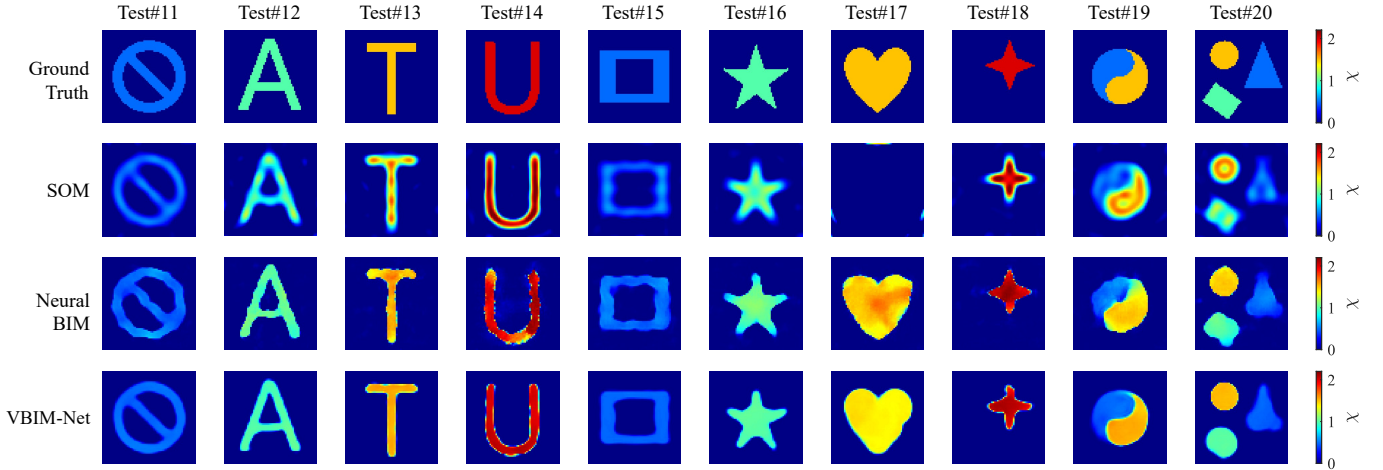


Fig. 11. Reconstruction results of cross-dataset examples Test#11-Test#20 with 10% Gaussian noise. The contrast of these scatterers is 0.5, 1.0, 1.5, and 2.0.

TABLE III: Performance Metrics of Reconstruction Results for Test#11-Test#20

Method	Test#11		Test#12		Test#13		Test#14		Test#15	
	SSIM	NMSE	SSIM	NMSE	SSIM	NMSE	SSIM	NMSE	SSIM	NMSE
SOM	0.81	0.10	0.80	0.13	0.83	0.12	0.76	0.11	0.76	0.12
NeuralBIM	0.82	0.12	0.84	0.12	0.85	0.13	0.61	0.17	0.82	0.11
VBIM-Net	0.92	0.05	0.93	0.06	0.97	0.03	0.83	0.15	0.90	0.07
Method	Test#16		Test#17		Test#18		Test#19		Test#20	
	SSIM	NMSE	SSIM	NMSE	SSIM	NMSE	SSIM	NMSE	SSIM	NMSE
SOM	0.77	0.12	-	-	0.81	0.12	0.74	0.07	0.66	0.10
NeuralBIM	0.83	0.10	0.71	0.06	0.84	0.09	0.80	0.07	0.78	0.07
VBIM-Net	0.90	0.08	0.88	0.05	0.91	0.12	0.93	0.03	0.82	0.08

to implement the mapping $\delta\mathbf{E}^s \rightarrow \mathbf{F}^{\delta\mathbf{E}^s}$, the number of parameters of the modified NeuralBIM is larger than that of VBIM-Net.

C. Synthetic Data Inversion: Within-Dataset Test

In this subsection, we first visually display the output of each VBIM-Net layer, and then test the model's performance on the MNIST and cylinder datasets. Finally, we conduct an ablation experiment to verify the role of layer-wise constraint in the loss function.

1) *Updated Contrast Reconstructions of VBIM-Net*: Fig. 6 illustrates the updated contrast reconstructions of VBIM-Net for the cylinder and MNIST dataset examples. The initial value of contrast is obtained by BPS, and it is gradually improved by the update layers of VBIM-Net. Due to the layer-wise constraint in the loss function, the output $\chi_{(k)}$ of each layer of VBIM-Net is a reasonable contrast image, which also provides reasonable residuals of incident field $\delta\mathbf{E}_{(k+1)}^i$ and scattered field $\delta\mathbf{E}_{(k+1)}^s$ for the next layer. It guarantees the variables in VBIM-Net to have expected physical meanings, ensuring the reliability of the model.

2) *Within-Dataset Samples Reconstruction*: Fig. 7 shows several reconstruction results on the cylinder and MNIST test sets of these three algorithms when the noise level is 10%, and the corresponding performance metrics are summarized in Table II. Reconstruction results indicate that VBIM-Net outperforms SOM and NeuralBIM. Although both VBIM-Net and NeuralBIM are designed based on the field-type

iterative method, the reconstruction quality of VBIM-Net is significantly better. This is mainly attributed to the analytical calculation of the approximate contrast variation $\delta\tilde{\chi}$ that converts the scattered field residual $\delta\mathbf{E}^s$ into the contrast domain, which is more conducive to the subsequent CNN for image-to-image translation. Moreover, the U-Net used by VBIM-Net is more effective in extracting the multi-level features in contrast images than the ResNet in NeuralBIM, which also helps to improve the model performance.

Fig. 8 displays the histograms and cumulative distribution functions (CDFs) of the NMSE of reconstructed contrast images obtained by NeuralBIM and VBIM-Net. The noise level is 10%. In Fig. 8, the histograms are drawn for MNIST and cylinder scatterers separately to reflect the differences between the two datasets. In contrast, the CDF curves are drawn based on the entire test set to compare the overall performance of these two DL methods. Judging from the distribution of NMSE, VBIM-Net has more minor errors on test sets and a more concentrated error distribution, which means it performs better than NeuralBIM. Besides, it can be found that there is a significant difference in the performance of the two models on the MNIST and cylinder datasets. Therefore, mixing them in the training stage can enhance the data richness.

3) *Ablation Experiments for the Layer-Wise Constraint*: In order to further verify the efficacy of the layer-wise constraint, we perform the following ablation experiment: set $c = 0$ in Eq. (29) to only supervise the output of the last layer of VBIM-Net (where $0^0 = 1$ is defined), while keeping other settings

unchanged. Fig. 9 shows the contrast MSE on the test set during training with/without the layer-wise constraint. When using the layer-wise constraint, the reconstruction quality gradually improves with the stacking of update blocks. With the same number of subnetwork layers, the model with the layer-wise constraint can converge to a better performance. Fig. 10 illustrates the reconstruction results without the layer-wise constraint, where the scatter is the same as in Fig. 6a. It can be seen that removing the layer-wise constraint can result in an ambiguous physical interpretation of the output from intermediate layers, as well as a deterioration in the final reconstruction quality. This proves that the layer-wise constraint is necessary for VBIM-Net, which also validates the effectiveness of incorporating the physical constraint of iterative algorithms in network design.

D. Synthetic Data Inversion: Cross-Dataset Test

To verify the generalization ability and robustness of VBIM-Net, we test VBIM-Net on more challenging cross-dataset examples, evaluate the model’s performance under various noise levels, contrast values, and measurement dimensions, and extend the model to lossy scatterers.

1) *Cross-Dataset Samples Reconstruction*: Fig. 11 shows the reconstruction results of Test#11-Test#20 with 10% Gaussian noise, and the reconstruction quality metrics are listed in Table III. It can be seen that VBIM-Net shows superior performance in cases where scatterers have complex shapes and high contrast. In the reconstruction of Test#17, divergence occurred in SOM, whereas VBIM-Net still achieves successful reconstruction. Test#19 tests the splicing of two scatterers with different contrasts, and Test#20 tests three dispersed scatterers with various shapes and contrasts. In terms of reconstruction quality of these test samples, VBIM-Net not only outperforms the iterative method SOM but also surpasses the modified NeuralBIM even with fewer learnable parameters. These results fully demonstrate the cross-dataset generalization ability of VBIM-Net, which is attributed to the physical information introduced in the network design and the training process.

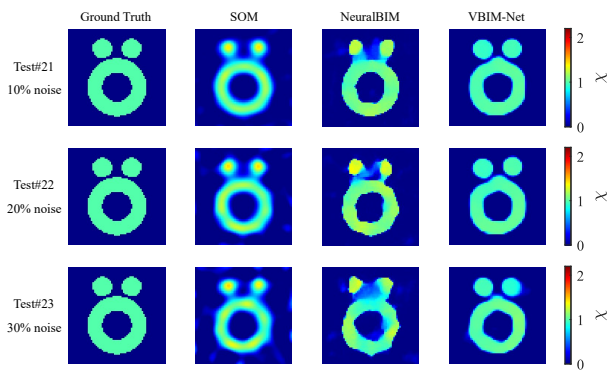


Fig. 12. Reconstruction results of the “Austria” profile with contrast $\chi = 1.0$ under different noise levels.

2) *Test under Different Noise Levels*: We test the performance of VBIM-Net under different noise levels. We choose the “Austria” profile [43] with contrast $\chi = 1.0$ as the target scatterer and test the reconstruction performance when adding

TABLE IV: Performance Metrics of Reconstruction Results for Test#21-Test#23

Method	Test#21		Test#22		Test#23	
	SSIM	NMSE	SSIM	NMSE	SSIM	NMSE
SOM	0.69	0.11	0.66	0.12	0.65	0.13
NeuralBIM	0.73	0.14	0.70	0.14	0.67	0.19
VBIM-Net	0.91	0.05	0.90	0.06	0.88	0.07

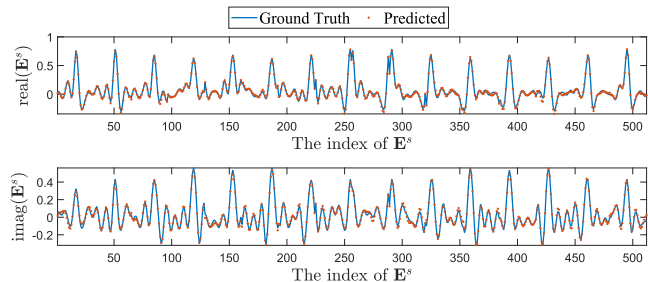


Fig. 13. The predicted scattered field measurements $\hat{\mathbf{E}}^s$ of Test#23 with a noise level of 30%.

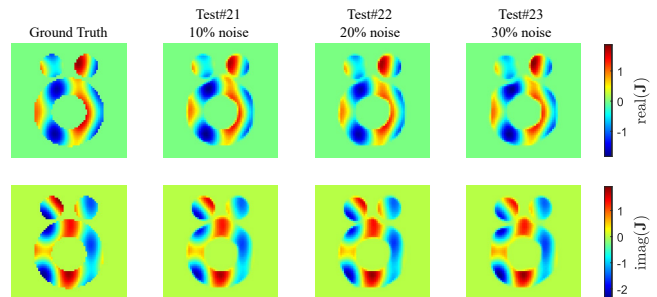


Fig. 14. The predicted contrast source $\hat{\mathbf{J}}_p$ of Test#21-Test#23. The incident wave direction is 0° ($p = 1$).

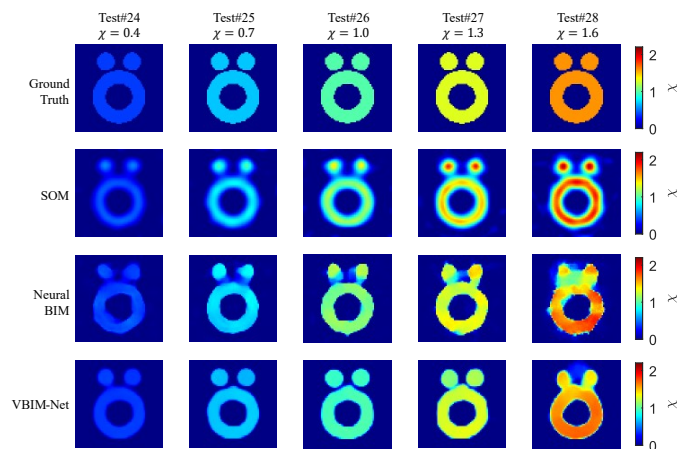


Fig. 15. Reconstruction results of the “Austria” profile under 10% noise level. The contrast is equal to 0.4, 0.7, 1.0, 1.3, and 1.6, respectively.

10% (SNR=20dB), 20% (SNR=14dB), and 30% (SNR=10dB) Gaussian noise. The reconstruction results of Test#21-Test#23 under different noise levels are shown in Fig. 12, and their corresponding performance metrics are listed in Table IV. Experimental results show that VBIM-Net can achieve better reconstruction quality than other two methods under various noise levels. This is mainly due to VBIM-Net’s physics-inspired iterative framework and the training scheme with extra

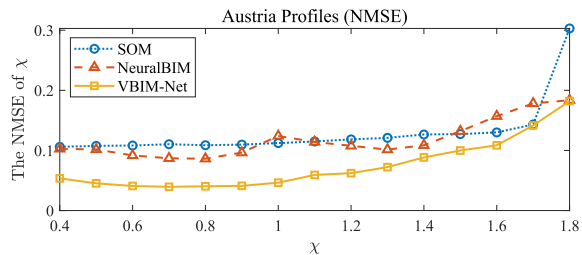
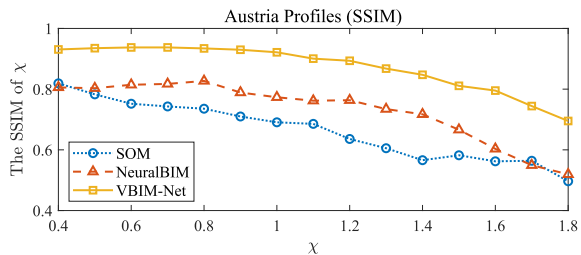


Fig. 16. Reconstruction performance of the “Austria” profile with different contrast by SOM, NeuralBIM, and VBIM-Net. The noise level is 10%.

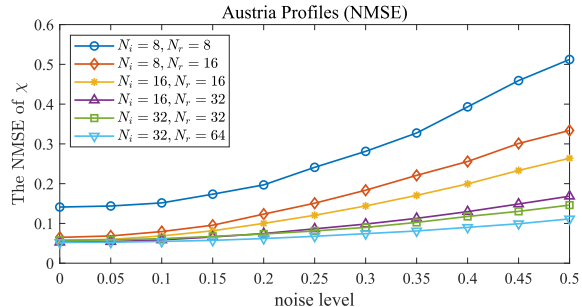
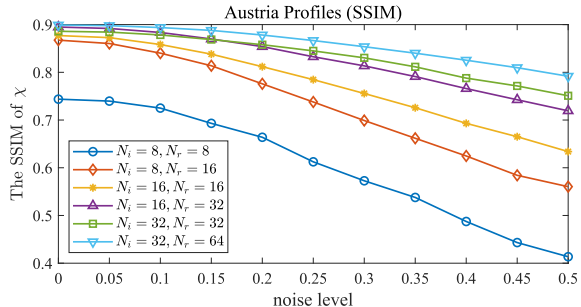


Fig. 17. Reconstruction performance of the “Austria” profile under different scattered field measurement dimensions and different noise levels by VBIM-Net. The scatterer is the “Austria” profile with contrast $\chi = 1.0$.

noise, which enhance the network’s robustness.

From the reconstructed contrast $\hat{\chi}$ and total field $\hat{\mathbf{E}}^t$, we can derive the predicted scattered field measurements,

$$\hat{\mathbf{E}}^s = \mathbf{G}_S \text{diag}(\hat{\chi}) \hat{\mathbf{E}}^t. \quad (36)$$

Fig. 13 shows the predicted $\hat{\mathbf{E}}^s$ of VBIM-Net when the noise level is 30%. It can be seen that VBIM-Net can accurately predict scattered field measurements under high noise levels, which further proves VBIM-Net’s robustness against noise. Fig. 14 shows the predicted contrast source for the “Austria” profile under various noise levels when the incidence direction is 0° . The predicted contrast source $\hat{\mathbf{J}}_p$ for the p th incidence is depicted as

$$\hat{\mathbf{J}}_p = \text{diag}(\hat{\chi}) \hat{\mathbf{E}}_p^t. \quad (37)$$

It can be seen that VBIM-Net can maintain the consistency of various physical quantities that are not supervised during training, such as contrast current and scattered field, with their actual values while reconstructing contrast images, which indicates the physical interpretability of VBIM-Net.

3) *Test with Different Contrast:* Furthermore, we investigate the influence of scatterer contrast on the inversion performance of VBIM-Net. Fig. 15 illustrates the reconstruction results for the “Austria” profile with 10% Gaussian noise when the contrast is 0.4, 0.7, 1.0, 1.3, and 1.6. Fig. 16 illustrates the inversion performance of SOM, the modified NeuralBIM, and the proposed VBIM-Net for the “Austria” profile with contrast from 0.4 to 1.8. We find that VBIM-Net exhibits competitive inversion performance for scatterers with various contrast. However, as the contrast increases, the performance of these three methods will deteriorate significantly. Even though we have included high-contrast cases in the training set, the inversion for high-contrast scatterers is still a challenge for VBIM-Net because it is extended from the Born iteration framework, which can only operate well in low-contrast situations.

4) *Test with Different Measurement Dimensions:* Fig. 17 evaluates the reconstruction performance of VBIM-Net across various noise levels and measurement dimensions, where the scatterer is fixed as the “Austria” profile with contrast $\chi = 1.0$. Despite VBIM-Net being trained within a noise range of 5%-35%, it exhibits acceptable performance even under higher noise levels during testing. This resilience can be attributed to the loss weighting strategy, which is proportional to SNR, enabling the model to adapt its reconstruction approach under variational noise levels. According to the chart, the performance degradation from the case $N_i = 8, N_r = 16$ to the case $N_i = 8, N_r = 8$ is apparent. This is because the sparse receiving antennas is difficult to precisely characterize the complete scattered field with measurement data, thus intensifying the ill-posedness of the ISP. Meanwhile, collecting more scattered field measurement data not only improves the upper bound of reconstruction performance but also significantly enhances the model’s robustness against noise.

5) *Test with Lossy Scatterers:* Finally, we test VBIM-Net’s reconstruction ability for lossy scatterers. We use the same MNIST-cylinder hybrid synthetic training dataset configuration as the lossless case. The only difference is that all scatterers have an imaginary part between 0 and 1.0. For the VBIM-Net model, we only need to modify the input and output channel number of contrast variation update network $\mathcal{F}_k^{\delta\chi}$, keeping other model parameters and hyperparameters unchanged. The real and imaginary parts of the reconstructed contrast for Test#29-Test#35 are shown in Fig. 18, and their corresponding quality metrics are summarized in Tables V and VI. It demonstrates that VBIM-Net can perform high-quality reconstruction of diverse lossy scatterers. Compared with the lossless situation, VBIM-Net exhibits more remarkable performance advantages than traditional iterative algorithms such as SOM. These experimental results further verify the

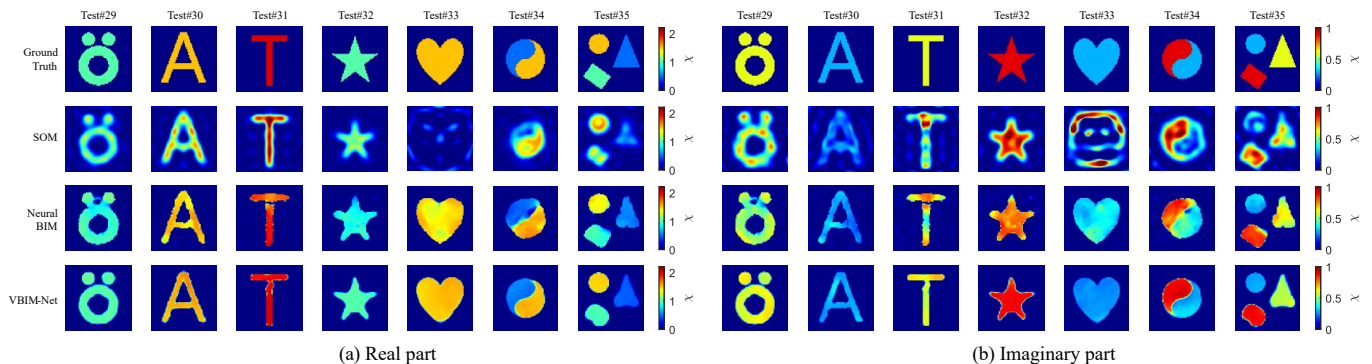


Fig. 18. Reconstruction results of lossy scatterers Test#29-Test#35 with 10% Gaussian noise. The real parts of the contrast of these scatterers are 0.5, 1.0, 1.5, 2.0 and the imaginary parts are 0.3, 0.6, 0.9.

TABLE V: Performance Metrics of the Real Part of the Reconstruction Results for Test#29-Test#35

Method	Test#29		Test#30		Test#31		Test#32		Test#33		Test#34		Test#35	
	SSIM	NMSE	SSIM	NMSE	SSIM	NMSE	SSIM	NMSE	SSIM	NMSE	SSIM	NMSE	SSIM	NMSE
SOM	0.38	0.15	0.31	0.19	0.33	0.16	0.49	0.16	-	-	0.31	0.11	0.37	0.14
NeuralBIM	0.82	0.10	0.81	0.12	0.82	0.15	0.78	0.16	0.81	0.05	0.82	0.08	0.77	0.09
VBIM-Net	0.93	0.04	0.93	0.06	0.96	0.05	0.90	0.08	0.93	0.02	0.96	0.02	0.87	0.06

TABLE VI: Performance Metrics of the Imaginary Part of the Reconstruction Results for Test#29-Test#35

Method	Test#29		Test#30		Test#31		Test#32		Test#33		Test#34		Test#35	
	SSIM	NMSE	SSIM	NMSE	SSIM	NMSE	SSIM	NMSE	SSIM	NMSE	SSIM	NMSE	SSIM	NMSE
SOM	0.27	0.20	0.16	0.57	0.15	0.56	0.26	0.18	-	-	0.16	0.19	0.21	0.20
NeuralBIM	0.69	0.10	0.69	0.15	0.62	0.21	0.51	0.16	0.76	0.14	0.61	0.13	0.66	0.12
VBIM-Net	0.93	0.04	0.94	0.06	0.96	0.06	0.88	0.08	0.94	0.04	0.95	0.02	0.84	0.10

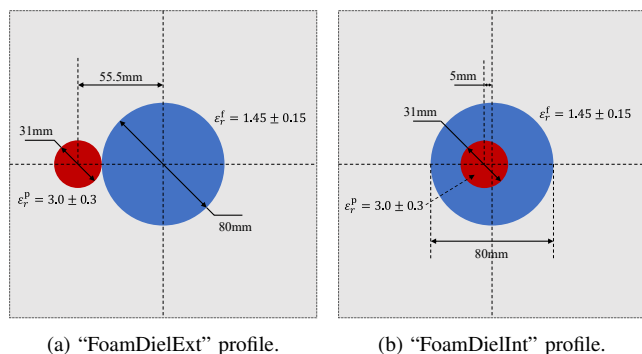


Fig. 19. “FoamDielExt” and “FoamDielInt” profiles from the Fresnel experimental data.

effectiveness of VBIM-Net in addressing ISPs.

E. Experimental Data Inversion

In this section, we test VBIM-Net on experimental data from the Fresnel Institute [44]. We considered the “FoamDielExt” profile and the “FoamDielInt” profile, as shown in Fig. 19. They consist of a foam cylinder with a diameter of 80mm and a relative permittivity $\epsilon_r^f = 1.45 \pm 0.15$, and a plastic cylinder with a diameter of 31mm and a relative permittivity $\epsilon_r^p = 3.0 \pm 0.3$. Different from the previous configuration of synthetic data, there are 8 TXs and 241 RXs located on a circle with a radius of 1.67m, and the RXs are evenly distributed in the angular range of 60° - 300° relative to each TX. We select the measurement data with operating frequencies of 3 GHz

and 4 GHz, keeping the DOI size at $0.2\text{m} \times 0.2\text{m}$ and the inversion grid resolution at 64×64 . Although the experimental scene only contains cylindrical scatterers, we still synthesize the training dataset by mixing MNIST and cylinder scatterers, with the purpose of reducing the reliance on the dataset prior and avoiding the loss of generalization ability of the model. The hyperparameter c in the layer-wise constraint is adjusted to 0.7, while the rest of the training configuration remains unchanged.

Fig. 20 shows the reconstruction results of “FoamDielExt” and “FoamDielInt” profiles at 3 GHz and 4 GHz, and the corresponding quality metrics are summarized in Table VII. Fig. 21 shows the predicted scattered field of VBIM-Net for the “FoamDielExt” profile. The results based on experimental data demonstrate that VBIM-Net achieves preferable contrast reconstructions and accurate scattering field predictions at different frequencies, which further verify the effectiveness of the proposed VBIM-Net.

V. CONCLUSION

In this paper, VBIM-Net is proposed to solve full-wave ISPs. VBIM-Net emulates the iterative process of VBIM by multiple layers of subnetworks. In the contrast update step, we convert the scattered field residual into an approximate contrast variation based on VBIM and then enhance it by a U-Net, which avoids the requirement for matched measurement dimension and grid resolution in NeuralBIM. To guarantee the consistency between predicted physical quantities and their actual value in each subnetwork, we introduce a layer-wise

TABLE VII: Performance Metrics of the Reconstruction Results of “FoamDielExt” and “FoamDielInt” Profiles at 3 GHz and 4 GHz

Profile	FoamDielExt				FoamDielInt			
	3.0		4.0		3.0		4.0	
f/GHz	SSIM	NMSE	SSIM	NMSE	SSIM	NMSE	SSIM	NMSE
SOM	0.81	0.16	0.80	0.21	0.74	0.16	0.73	0.17
NeuralBIM	0.89	0.07	0.87	0.17	0.74	0.32	0.86	0.20
VBIM-Net	0.98	0.04	0.98	0.05	0.94	0.07	0.90	0.16

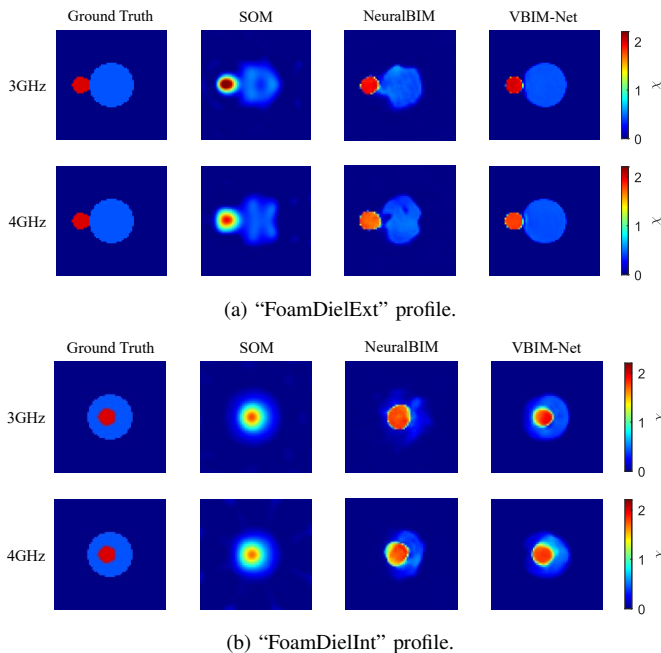


Fig. 20. Reconstruction Results of “FoamDielExt” and “FoamDielInt” profiles at 3 GHz and 4 GHz.

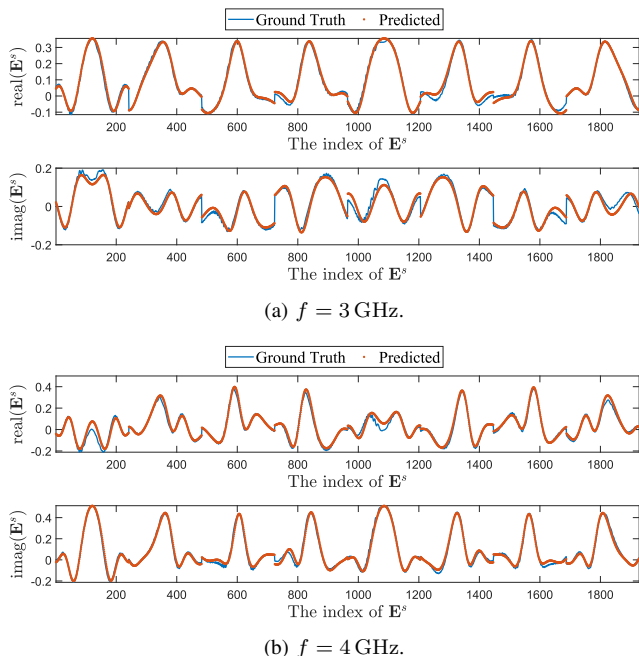


Fig. 21. The prediction of the scattered field measurements of the “FoamDielExt” profile at 3 GHz and 4 GHz.

constraint in the loss function, which makes the data flow of VBIM-Net comply with an iterative process, thereby ensuring

the model’s reliability. In the training stage, we enhance the model’s generalization ability by mixing the cylinder and MNIST datasets, and design a noisy training scheme to improve the model’s robustness. Test results on synthetic and experimental data verify the superior performance of VBIM-Net compared to SOM and NeuralBIM. Overall, VBIM-Net has high reconstruction quality, strong generalization ability, and good physical interpretability. It will provide new ideas for the design of field-type DL schemes.

Despite the improvement achieved, the proposed VBIM-Net still needs to be further investigated in some aspects, such as semi-supervised and unsupervised learning schemes and decoupling the model from the measurement settings.

REFERENCES

- [1] X. Chen, *Computational methods for electromagnetic inverse scattering*. Wiley Online Library, 2018, vol. 244.
- [2] R. Persico, *Introduction to ground penetrating radar: inverse scattering and data processing*. John Wiley & Sons, 2014.
- [3] A. R. Mangel, D. Linneman, P. Sprinkle, P. Jaysaval, J. Thomle, and C. Strickland, “Multifrequency electromagnetic geophysical tools for evaluating the hydrologic conditions and performance of evapotranspiration barriers,” *Journal of Environmental Management*, vol. 303, p. 114123, 2022.
- [4] H. Kagiwada, R. Kalaba, S. Timko, and S. Ueno, “Associate memories for system identification: Inverse problems in remote sensing,” *Mathematical and Computer Modelling*, vol. 14, pp. 200–202, 1990.
- [5] X. Tong, Z. Zhang, Y. Zhang, Z. Yang, C. Huang, K.-K. Wong, and M. Debbah, “Environment sensing considering the occlusion effect: A multi-view approach,” *IEEE Transactions on Signal Processing*, vol. 70, pp. 3598–3615, 2022.
- [6] X. Zhuge and A. G. Yarovoy, “A sparse aperture MIMO-SAR-based UWB imaging system for concealed weapon detection,” *IEEE Transactions on Geoscience and Remote Sensing*, vol. 49, no. 1, pp. 509–518, 2010.
- [7] K. Tan, X. Chen, S. Wu, and G. Fang, “Efficient frequency scaling algorithm for short-range 3-d holographic imaging based on a scanning mimo array,” *IEEE Transactions on Microwave Theory and Techniques*, vol. 68, no. 9, pp. 3885–3897, 2020.
- [8] A. Abubakar, P. M. Van den Berg, and J. J. Mallorqui, “Imaging of biomedical data using a multiplicative regularized contrast source inversion method,” *IEEE Transactions on Microwave Theory and Techniques*, vol. 50, no. 7, pp. 1761–1771, 2002.
- [9] R. Chandra, H. Zhou, I. Balasingham, and R. M. Narayanan, “On the opportunities and challenges in microwave medical sensing and imaging,” *IEEE transactions on biomedical engineering*, vol. 62, no. 7, pp. 1667–1682, 2015.
- [10] X. Tong, Z. Zhang, J. Wang, C. Huang, and M. Debbah, “Joint multi-user communication and sensing exploiting both signal and environment sparsity,” *IEEE Journal of Selected Topics in Signal Processing*, vol. 15, no. 6, pp. 1409–1422, 2021.
- [11] X. Tong, Z. Zhang, and Z. Yang, “Multi-view sensing for wireless communications: Architectures, designs, and opportunities,” *IEEE Communications Magazine*, 2023.
- [12] M. Slaney, A. C. Kak, and L. E. Larsen, “Limitations of imaging with first-order diffraction tomography,” *IEEE transactions on microwave theory and techniques*, vol. 32, no. 8, pp. 860–874, 1984.
- [13] A. Devaney, “Inverse-scattering theory within the Rytov approximation,” *Optics letters*, vol. 6, no. 8, pp. 374–376, 1981.
- [14] K. Belkebir, P. C. Chaumet, and A. Sentenac, “Superresolution in total internal reflection tomography,” *JOSA A*, vol. 22, no. 9, pp. 1889–1897, 2005.

- [15] T. Yin, Z. Wei, and X. Chen, "Non-iterative methods based on singular value decomposition for inverse scattering problems," *IEEE Transactions on Antennas and Propagation*, vol. 68, no. 6, pp. 4764–4773, 2020.
- [16] Y. Wang and W. C. Chew, "An iterative solution of the two-dimensional electromagnetic inverse scattering problem," *International Journal of Imaging Systems and Technology*, vol. 1, no. 1, pp. 100–108, 1989.
- [17] W. C. Chew and Y.-M. Wang, "Reconstruction of two-dimensional permittivity distribution using the distorted born iterative method," *IEEE transactions on medical imaging*, vol. 9, no. 2, pp. 218–225, 1990.
- [18] N. Zaiping, Y. Feng, Z. Yanwen, and Z. Yerong, "Variational born iteration method and its applications to hybrid inversion," *IEEE transactions on geoscience and remote sensing*, vol. 38, no. 4, pp. 1709–1715, 2000.
- [19] P. M. Van Den Berg and R. E. Kleinman, "A contrast source inversion method," *Inverse problems*, vol. 13, no. 6, p. 1607, 1997.
- [20] X. Chen, "Subspace-based optimization method for solving inverse-scattering problems," *IEEE Transactions on Geoscience and Remote Sensing*, vol. 48, no. 1, pp. 42–49, 2009.
- [21] X. Ye and X. Chen, "Subspace-based distorted-Born iterative method for solving inverse scattering problems," *IEEE Transactions on Antennas and Propagation*, vol. 65, no. 12, pp. 7224–7232, 2017.
- [22] Z. Liu and Z. Nie, "Subspace-based variational Born iterative method for solving inverse scattering problems," *IEEE Geoscience and Remote Sensing Letters*, vol. 16, no. 7, pp. 1017–1020, 2019.
- [23] M. Vauhkonen, D. Vadász, P. A. Karjalainen, E. Somersalo, and J. P. Kaipio, "Tikhonov regularization and prior information in electrical impedance tomography," *IEEE transactions on medical imaging*, vol. 17, no. 2, pp. 285–293, 1998.
- [24] P. Van den Berg and R. E. Kleinman, "A total variation enhanced modified gradient algorithm for profile reconstruction," *Inverse Problems*, vol. 11, no. 3, p. L5, 1995.
- [25] J. D. Shea, B. D. Van Veen, and S. C. Hagness, "A TSVD analysis of microwave inverse scattering for breast imaging," *IEEE Transactions on Biomedical Engineering*, vol. 59, no. 4, pp. 936–945, 2011.
- [26] O. Ronneberger, "U-net: Convolutional networks for biomedical image segmentation," in *Medical Image Computing and Computer-Assisted Intervention*, vol. 9351, 2015, p. 234.
- [27] I. Goodfellow, J. Pouget-Abadie, M. Mirza, B. Xu, D. Warde-Farley, S. Ozair, A. Courville, and Y. Bengio, "Generative adversarial nets," *Advances in neural information processing systems*, vol. 27, 2014.
- [28] Z. Wei and X. Chen, "Deep-learning schemes for full-wave nonlinear inverse scattering problems," *IEEE Transactions on Geoscience and Remote Sensing*, vol. 57, no. 4, pp. 1849–1860, 2018.
- [29] R. Song, Y. Huang, K. Xu, X. Ye, C. Li, and X. Chen, "Electromagnetic inverse scattering with perceptual generative adversarial networks," *IEEE Transactions on Computational Imaging*, vol. 7, pp. 689–699, 2021.
- [30] Z. Wei and X. Chen, "Physics-inspired convolutional neural network for solving full-wave inverse scattering problems," *IEEE Transactions on Antennas and Propagation*, vol. 67, no. 9, pp. 6138–6148, 2019.
- [31] Y. Wang, Z. Zong, S. He, and Z. Wei, "Multiple-space deep learning schemes for inverse scattering problems," *IEEE Transactions on Geoscience and Remote Sensing*, vol. 61, pp. 1–11, 2023.
- [32] Y. Sanghvi, Y. Kalepu, and U. K. Khankhoje, "Embedding deep learning in inverse scattering problems," *IEEE Transactions on Computational Imaging*, vol. 6, pp. 46–56, 2019.
- [33] Y. Zhong and X. Chen, "Twofold subspace-based optimization method for solving inverse scattering problems," *Inverse Problems*, vol. 25, no. 8, p. 085003, 2009.
- [34] J. Liu, H. Zhou, T. Ouyang, Q. Liu, and Y. Wang, "Physical model-inspired deep unrolling network for solving nonlinear inverse scattering problems," *IEEE transactions on antennas and propagation*, vol. 70, no. 2, pp. 1236–1249, 2021.
- [35] Y. Zhang, M. Lambert, A. Fraysse, and D. Lesselier, "Unrolled convolutional neural network for full-wave inverse scattering," *IEEE Transactions on Antennas and Propagation*, vol. 71, no. 1, pp. 947–956, 2022.
- [36] Y. Liu, H. Zhao, R. Song, X. Chen, C. Li, and X. Chen, "SOM-Net: Unrolling the subspace-based optimization for solving full-wave inverse scattering problems," *IEEE Transactions on Geoscience and Remote Sensing*, vol. 60, pp. 1–15, 2022.
- [37] H. S. Beerappa, M. Erramshetty, and A. Magdum, "Deep learning assisted distorted Born iterative method for solving electromagnetic inverse scattering problems," *Progress In Electromagnetics Research C*, vol. 133, pp. 65–79, 2023.
- [38] T. Shan, Z. Lin, X. Song, M. Li, F. Yang, and S. Xu, "Neural Born iterative method for solving inverse scattering problems: 2D cases," *IEEE Transactions on Antennas and Propagation*, vol. 71, no. 1, pp. 818–829, 2022.
- [39] T. Shan, J. Zeng, X. Song, R. Guo, M. Li, F. Yang, and S. Xu, "Physics-informed supervised residual learning for electromagnetic modeling," *IEEE Transactions on Antennas and Propagation*, vol. 71, no. 4, pp. 3393–3407, 2023.
- [40] Y. Wang, Z. Zong, S. He, R. Song, and Z. Wei, "Push the generalization limitation of learning approaches by multi-domain weight-sharing for full-wave inverse scattering," *IEEE Transactions on Geoscience and Remote Sensing*, 2023.
- [41] Z. Wang, A. C. Bovik, H. R. Sheikh, and E. P. Simoncelli, "Image quality assessment: from error visibility to structural similarity," *IEEE Transactions on Image Processing*, vol. 13, no. 4, pp. 600–612, 2004.
- [42] Y. LeCun, L. Bottou, Y. Bengio, and P. Haffner, "Gradient-based learning applied to document recognition," *Proceedings of the IEEE*, vol. 86, no. 11, pp. 2278–2324, 1998.
- [43] K. Belkebir and A. Tjihuis, "Using multiple frequency information in the iterative solution of a two-dimensional nonlinear inverse problem," in *Proceedings Progress in Electromagnetics Research Symposium, PIERS 1996, 8 July 1996, Innsbruck, Germany*. Universität Innsbruck, 1996, p. 353.
- [44] J.-M. Geffrin, P. Sabouroux, and C. Eyraud, "Free space experimental scattering database continuation: experimental set-up and measurement precision," *Inverse Problems*, vol. 21, no. 6, p. S117, nov 2005.