

Minimum Energy Routing in Wireless Networks in the Presence of Jamming

Azadeh Sheikholeslami, *Student Member, IEEE*, Majid Ghaderi, *Member, IEEE*, Hossein Pishro-Nik, *Member, IEEE*, Dennis Goeckel, *Fellow, IEEE*

Abstract—The effectiveness and simple implementation of physical layer jammers make them an essential threat for wireless networks. In a multihop wireless network, where jammers can interfere with the transmission of user messages at intermediate nodes along the path, one can employ jamming oblivious routing and then employ physical-layer techniques (e.g. spread spectrum) to suppress jamming. However, whereas these approaches can provide significant gains, the residual jamming can still severely limit system performance. This motivates the consideration of routing approaches that account for the differences in the jamming environment between different paths. First, we take a straightforward approach where an equal outage probability is allocated to each link along a path and develop a minimum energy routing solution. Next, we demonstrate the shortcomings of this approach and then consider the joint problem of optimal outage allocation and routing by employing an approximation to the link outage probability. This yields an efficient and effective routing algorithm that only requires knowledge of the measured jamming at each node. Numerical results demonstrate that the amount of energy saved by the proposed methods with respect to a standard minimum energy routing algorithm, especially for parameters appropriate for terrestrial wireless networks, is substantial.

Index Terms—Wireless communication, energy-aware systems, routing protocols.

I. INTRODUCTION

Due to their broadcast nature, wireless networks are susceptible to many security attacks. Among them, denial-of-service (DoS) attacks can severely disrupt network performance, and thus are of interest here. In particular, jamming the physical layer is one of the simplest and most effective attacks, as any cheap radio device can broadcast electromagnetic radiation to block the communication channel [2].

A straightforward approach to combat adversaries that jam transmissions in the network, particularly in a system with transmitters and receivers capable of operating over a large bandwidth, is to employ physical-layer mitigation techniques. Prominent among these approaches are direct-sequence and frequency-hopped spread spectrum, each of which employs a significantly larger bandwidth than that required for message transmission in order to allow for interference suppression [3], [4]. These techniques allow a significant reduction in the impact of the interference, often on the order of the ratio of the system bandwidth to the data rate. However, the interference can still limit the performance of the system, or, stated differently, spread-spectrum might simply increase the

cost of the jamming for the adversary, whom may still be willing to pay such a cost.

This motivates the consideration of routing approaches to avoid adversarial jammers if it can be justified from the perspective of minimizing total cost to the network. In this work, we consider wireless communication between a source and a destination in a multi-hop fashion in the presence of multiple physical layer jammers that are spread over the network area at arbitrary locations by the adversary. We define that cost to be the aggregate energy expended by the system nodes to reliably transmit a message from the source to the destination, with reliability measured by an outage constraint. The general routing problem has been studied extensively in the literature [5], [6], [7], [8]. Specifically, in [9] and [10], routing algorithms in the presence of multiple jammers are investigated, but the energy consumption of the network nodes is not considered. Excessive energy consumption quickly depletes battery-powered nodes, and causes increased interference, resulting in a lower network throughput; thus, it is essential to seek methods to reduce energy consumption of the network nodes [11]. There has been some study of energy-aware routing protocols in the literature [12], [13], [14], [15], [16], but only a few works considered minimum energy routing with security considerations [17], [18]. These works studied energy-aware routing in the presence of passive eavesdroppers; however, minimum energy routing in the presence of active adversaries (i.e. jammers) has not been considered.

In this paper, we formulate the minimum energy routing problem with an end-to-end outage probability constraint in a wireless multi-hop network with malicious jammers. For exposition purposes and the simulation environment, the jammers are assumed to be equipped with omni-directional antennas and to be able to propagate radio signals over the entire frequency band utilized by the nodes in the network. However, it will become apparent that the proposed algorithms apply in a more general environment, relying only on the measured jamming at each of the nodes in the network and being agnostic of the manner in which that jamming was generated and the geographical locations of the jammers (i.e. the solution easily addresses jammers with directional antennas, etc.). We will consider both static jammers, which transmit the jamming signal continuously, and simple dynamic jammers that switch randomly between transmitting the jamming signal and sleeping mode.

A difficulty in solving this problem is deciding the local outage of the links that form a path from source to destination so that the path satisfies an end-to-end outage requirement.

This work was supported by the National Science Foundation under grants CNS-1018464, CNS-0905349 and CIF-1249275. A preliminary version of this work appeared in IEEE ICC 2014 [1].

We begin our exploration of the multi-hop minimum energy routing problem in the presence of malicious jammers by considering a straightforward approach that allocates equal outage probability to each link along each potential path from source to destination, in such a way that the resulting end-to-end outage probability satisfies a pre-specified threshold. In this scenario, the search for the optimal path is complicated by a lack of knowledge of the number of hops in the optimal path a priori. After developing an algorithm to find the optimal path under this approach, we then analyze the potential weaknesses of the solution. In particular, if certain links along a path are subject to significant jamming relative to other links along that path, it may be more energy efficient to allow larger outage probabilities on those links subject to significant jamming. This motivates a more general approach to the problem where the end-to-end outage constraint is allocated optimally to the links along each path during the process of path selection. Unfortunately, the presence of jammers in combination with the end-to-end outage probability constraint makes it difficult to find an optimal path with minimum energy cost. Hence, we use a reasonable approximation to the outage probability on a given link, which allows us to greatly simplify the optimization problem. In particular, we are able to readily derive a fast and efficient algorithm that, importantly, does not rely on the detailed jammer characteristics (locations, jamming powers) but rather only the observed (and thus measurable) long-term average aggregate interference at each system node. Numerical results are then presented to compare in detail the performance of the various algorithms in terms of energy expended for a given network simulation scenario and end-to-end outage constraint for both single-flow and multiple-flow scenarios. Finally, we discuss how the proposed algorithm can be implemented in a distributed manner.

The rest of the paper is organized as follows. Section II describes the system model. The algorithm for minimum energy routing with equal outage per link is considered in Section III. The minimum energy routing with optimal outage per link in the presence of static and dynamic jammers is presented in Section IV. In Section V, the results of numerical examples for various realizations of the system are provided, and the comparison of the proposed methods to a benchmark shortest path algorithm is presented. Conclusions and ideas for future work are discussed in Section VI.

II. SYSTEM MODEL

A. System Model

We consider a wireless network where the system nodes are located arbitrarily. Let $G = (\mathcal{N}, \mathcal{L})$ denote the graph of the network where \mathcal{N} denotes the set of network nodes and \mathcal{L} denotes the set of links between them (a link can be potentially formed between any pair of nodes in the network). In addition, malicious jammers are present in the network at arbitrary locations, and these jammers try to interfere with the transmission of the system nodes by transmitting random signals. We assume that each jammer utilizes an omnidirectional antenna and can transmit over the entire frequency band; thus, spread spectrum or frequency hopping strategies

improve performance via the processing gain, but are not completely effective in interference suppression.

One of the system nodes (source) chooses relays, with which it conveys its message to the destination in a (possibly) multi-hop fashion. Suppose the relays that the source selects construct a K -hop route between the source and the destination. A K -hop route Π is determined by a set of K links $\Pi = \langle l_1, \dots, l_K \rangle$ and $K + 1$ nodes (including source and destination) such that link l_k connects the k^{th} link transmitter S_k to the k^{th} link receiver D_k .

We denote the set of jammers by \mathcal{J} and consider both static jammers and dynamic jammers. In the case of static jammers, each jammer transmits white Gaussian noise with a fixed power. Since the jammers are active, we assume initially that the transmit power and the location of jammers are known to the system nodes; however, we will see that for our proposed method, *the knowledge of the transmit powers and locations of jammers is not necessary*; in fact, the system nodes can measure the average received jamming (averaged over the multipath fading) and use this estimate of jamming interference for efficient routing. In the case of dynamic jammers, each jammer switches between an ‘‘ON’’ state, when it transmits the jamming signal, and an ‘‘OFF’’ state or sleeping mode randomly and independently from the other jammers. These dynamic jammers are especially useful when the battery life of the jammers is limited and the adversary tries to cover a larger area, as the jammers in sleep mode can save significant energy.

B. Channel Model

We assume frequency non-selective Rayleigh fading between any pair of nodes. For instance, for link k between nodes S_k and D_k , let h_k denote the fading, and $\{h_{j,k}\}_{j \in \mathcal{J}}$ denote the respective fading coefficients between jammers and D_k . It follows that the channel fading power is exponentially distributed. Without loss of generality, we assume $E[|h_k|^2] = 1$, $\forall k$, and $E[|h_{j,k}|^2] = 1$, $\forall j, k$, and then work path-loss explicitly into (1) below. Also, each receiver experiences additive white Gaussian noise with power N_0 . Hence, the signal received by node D_k from node S_k is

$$y^{(k)} = \frac{h_k \sqrt{P_k}}{d_k^{\alpha/2}} x^{(k)} + \sum_{j \in \mathcal{J}} \frac{h_{j,k} \sqrt{P_j}}{d_{j,k}^{\alpha/2}} x^{(j)} + n^{(k)}, \quad (1)$$

where P_k is the transmit power of node S_k , P_j is the transmit power of the j^{th} jammer, d_k is the distance between S_k and D_k , $d_{j,k}$ is the distance between j -th jammer and D_k , and α is the path-loss exponent. Also, $x^{(k)}$ and $x^{(j)}$ are the unit power signals transmitted by S_k and j -th jammer. If spread spectrum were employed, the model would obviously change to include the processing gain and further averaging of the fading, but the design process would be similar.

C. Path Outage Probability

Our goal is to find a minimum energy route between an arbitrary pair of nodes in the network such that the desired average end-to-end probability of outage is guaranteed. Hence,

π	Desired end-to-end outage probability
p_{out}^{SD}	The average source-destination (i.e., end-to-end) outage probability
p_{out}^k	The average outage probability of k^{th} link
h_k	Fading coefficient of k^{th} link
$h_{j,k}$	Fading coefficient between j^{th} jammer and the receiver node of link k
d_k	The distance between the transmitter and receiver of link k
$d_{j,k}$	The distance between j^{th} jammer and k^{th} receiver node
P_k	Transmit power of the transmitter on k^{th} link
P_j	Transmit power of j^{th} jammer
J_k	Expected value of the total received power at the receiver of link k from jammers
\mathcal{J}	Set of jammers in the network
\mathcal{N}	Set of network nodes
\mathcal{L}	Set of links of the network
$\mathcal{C}(\cdot)$	Cost of establishing the argument (link or path)
α	Path-loss exponent
γ	The required signal-to-interference ratio at each receiver
N_0	Thermal noise power

TABLE I
TABLE OF NOTATIONS

we need to find the set of relay nodes (links) with minimum aggregate power such that the end-to-end probability of outage $p_{out}^{SD} \leq \pi$, where π is a predetermined threshold for the average outage probability. Let p_{out}^k denote the average outage probability of link $l_k = \langle S_k, D_k \rangle$; the source-destination outage probability in terms of the outage probability of each link is,

$$p_{out}^{SD} = 1 - \prod_{1 \leq k \leq K} (1 - p_{out}^k). \quad (2)$$

Implicit in our formulation is the end-to-end throughput of the path between the source and destination. Let ρ denote the required end-to-end throughput. Since the throughput of a path is determined by the throughput of its bottleneck link, to minimize transmission energy of the path, it is necessary to achieve an equal throughput over each link of the path. Thus, in our formulation of minimum energy routing, the cost of each link is computed with respect to the required throughput ρ , as described in the following subsection.

D. Analysis of Link Outage Probability

Consider the outage probability of a link in the presence of the set of jammers \mathcal{J} . The outage probability of link l_k given its fading gain $|h_k|^2$ and the fading gains between the jammers and the receiver of the link, i.e., $\{|h_{j,k}|^2\}_{j \in \mathcal{J}}$ is,

$$p_{out}^k = \mathbb{P} \left\{ \frac{P_k |h_k|^2 / d_k^\alpha}{N_0 + \sum_{j \in \mathcal{J}} P_j |h_{j,k}|^2 / d_{j,k}^\alpha} < \gamma \right\}, \quad (3)$$

where γ is the required signal-to-interference ratio at the receiver. The value of γ determines the link throughput.

Specifically, for a desired throughput of ρ , by applying the Shannon capacity formula, the threshold γ is given by:

$$\gamma = 2^\rho - 1.$$

Since the fading gain $|h_k|^2$ is distributed exponentially, conditioned on $\{|h_{j,k}|^2\}_{j \in \mathcal{J}}$, we obtain that,

$$p_{out}^k(\{|h_{j,k}|^2\}_{j \in \mathcal{J}}) = 1 - \exp \left(\frac{-\gamma (N_0 + \sum_{j \in \mathcal{J}} P_j |h_{j,k}|^2 / d_{j,k}^\alpha)}{P_k / d_k^\alpha} \right). \quad (4)$$

Taking the expectation over the fading gains of the jammers yields:

$$\begin{aligned} p_{out}^k &= E \left[1 - \exp \left(\frac{-\gamma (N_0 + \sum_{j \in \mathcal{J}} P_j |h_{j,k}|^2 / d_{j,k}^\alpha)}{P_k / d_k^\alpha} \right) \right] \\ &= 1 - e^{-\frac{\gamma N_0 d_k^\alpha}{P_k}} \prod_{j \in \mathcal{J}} E \left[\exp \left(\frac{-\gamma P_j |h_{j,k}|^2 / d_{j,k}^\alpha}{P_k / d_k^\alpha} \right) \right] \\ &= 1 - \frac{e^{-\frac{\gamma N_0 d_k^\alpha}{P_k}}}{\prod_{j \in \mathcal{J}} \left(1 + \frac{\gamma P_j / d_{j,k}^\alpha}{P_k / d_k^\alpha} \right)}, \end{aligned} \quad (5)$$

which is the expected outage probability for a link in the network.

E. Minimum Energy Routing: the Optimization Problem

Our goal is to find the optimum path that connects the source and destination with minimum energy consumption for the communication subject to an end-to-end outage probability constraint. The minimum energy routing problem is to find the optimal path Π^* so that:

$$\Pi^* = \arg \min_{\Pi \in \text{Set of all paths}} \mathcal{C}(\Pi) \quad (6)$$

where $\mathcal{C}(\Pi)$ is the minimum cost to establish path Π , which is given by the following optimization problem:

$$\mathcal{C}(\Pi) = \min_{k=1, P_k > 0, K, l_k \in \Pi} \sum P_k, \quad \text{s.t.}, \quad p_{out}^{SD}(\Pi) \leq \pi. \quad (7)$$

By substituting (5) in (2), the constraint of this optimization problem is,

$$p_{out}^{SD}(\Pi) = 1 - \prod_{l_k \in \Pi} \frac{e^{-\frac{\gamma N_0 d_k^\alpha}{P_k}}}{\prod_{j \in \mathcal{J}} \left(1 + \frac{\gamma P_j / d_{j,k}^\alpha}{P_k / d_k^\alpha} \right)} \leq \pi. \quad (8)$$

In order to find the minimum energy path, we need to find a closed-form for the cost of establishing the k -th link, that is P_k , for all $1 \leq k \leq K$. However, because of the presence of the jammers, (8) is an intricate function of P_k , making it difficult to find a closed-form expression for the optimal path-cost. In this case, the naive way to find the optimal source-destination path is to do a brute force search, which generally has exponential complexity as it needs to check all paths in the network.

In order to find the minimum energy route described in this section, we take the following approaches.

- 1) As a reasonable algorithm to help motivate our main approach, we first simplify the problem and consider

equal outage probabilities per-link such that the end-to-end outage probability over the path is π , which is described in the next section. However, we show that this approach could lead to severe inefficiencies.

- 2) Thus, we use an approximation to tackle the complexity of the optimization problem defined in (6), (7), and (8). Using the approximation, we develop an algorithm to find the optimal route.

III. MER-EQ: MINIMUM ENERGY ROUTING WITH EQUAL OUTAGE PER LINK

As explained earlier, in this approach, we simplify the problem and consider equal outage probabilities per links of the optimum path such that the desired end-to-end outage probability π is guaranteed. If the optimum path has h hops, assuming equal outage per link, the per-hop outage probability is,

$$\varepsilon(h) = 1 - \sqrt[h]{1 - \pi}. \quad (9)$$

Let $\mathcal{C}(u, v)$ denote the cost of the link between nodes u and v . The cost of establishing one link is a function of the outage probability of that link, which in turn is dependent on the path length h . We use the notation $P_{u,v}(\varepsilon(h))$ to denote the transmission power required for link $\ell_{u,v}$ when the link is part of a path of length h . However, a difficulty of this approach is that the number of links of the optimum path is not known a priori, and thus the per link outage probability $\varepsilon(h)$ is not known. This means that, in order to compute the cost of each link, we need to have the optimal path, but in order to find the optimal path, we need to compute the cost of each link. Because of the interdependency of link costs and optimal path, traditional routing algorithms such as Dijkstra's algorithm cannot be applied to this problem. We need to design an algorithm where the cost of a link depends on the length of the path.

To this end, we develop a two-step algorithm as follows. In the first step, we assume the number of hops is h , and then we calculate the per-hop outage probability by applying (9). Using this per-hop outage probability, we calculate the cost of establishing each link assuming the link is on a path of length h from source to destination. However, even with these link costs calculated, it is not trivial to perform shortest path routing under the constraint that the route found must have h hops, since standard shortest path algorithms (such as Dijkstra) do not enforce such a constraint. Hence, we do the network expansion described in the next section before running a standard shortest path algorithm to complete the first step of MER-EQ. We repeat the first step for each possible number of hops $h = 1, 2, \dots, N-1$. The second step produces the output of MER-EQ by selecting the route with minimum energy among the $N-1$ paths, one for each $h = 1, 2, \dots, N-1$, obtained in the first step.

A. Selection of a Minimum Cost Path of Length h Hops

To enforce the selection of a route with h hops as required in the first step of MER-EQ, we pre-process the network to create an expanded network as described in Algorithm 1. In

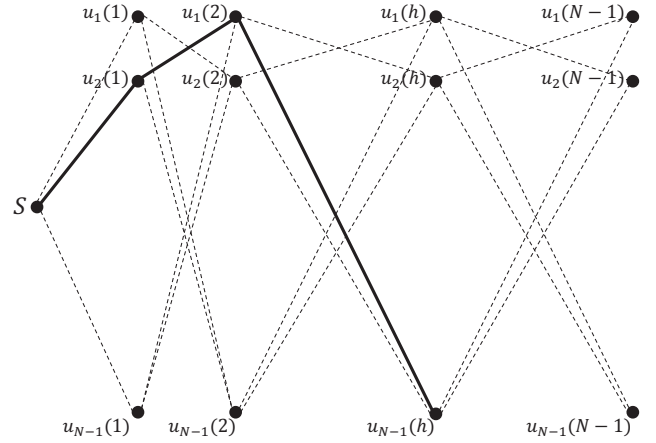


Fig. 1. Network expansion: add $N-1$ replicas for each node u_i , $i = 1, \dots, N-1$ to the expanded network. Then links (shown by dashed lines) are added to the expanded network such that a path from S to $u_i(h)$ will have exactly h hops. Hence, every path from S to $D(h)$ has exactly h hops. A sample path from the source to $u_{N-1}(h)$ is shown by bold solid lines.

Algorithm 1 Network Expansion($G = (\mathcal{N}, \mathcal{L})$)

- 1: $\mathcal{N}' = \{S\}$
 - 2: $\mathcal{L}' = \{\}$
 - 3: /* replicate every node of the original graph to $N-1$ nodes (except source) */
 - 4: **for all** $u \neq s \in \mathcal{N}$ **do**
 - 5: $\mathcal{N}' = \mathcal{N}' + \{u(1), u(2), \dots, u(N-1)\}$
 - 6: **end for**
 - 7: /* connect source node S to every $u(1)$ node */
 - 8: **for all** $\ell_{S,u} \in \mathcal{L}$ **do**
 - 9: $\mathcal{L}' = \mathcal{L}' + \ell_{S,u(1)}$
 - 10: **end for**
 - 11: /* connect every $u(h)$ to every $v(h+1)$ node ($u \neq v$) */
 - 12: **for all** $\ell_{u,v} \in \mathcal{L}$ **do**
 - 13: **for** $h = 1$ **to** $N-2$ **do**
 - 14: $\mathcal{L}' = \mathcal{L}' + \ell_{u(h),v(h+1)}$
 - 15: **end for**
 - 16: **end for**
 - 17: **return** $G' = (\mathcal{N}', \mathcal{L}')$
-

this algorithm, S and D denote the source and destination nodes. The algorithm works by first adding S to the expanded network. Next, since the longest path in a network of N nodes will have at most $N-1$ hops, it adds $N-1$ replicas for each node u_i , $i = 1, \dots, N-1$ to the expanded network. Let us denote the h^{th} replica of node u_i by $u_i(h)$. Then links are added to the expanded network such that a path from S to $u_i(h)$ will have exactly h hops (Figure 1).

The following lemma establishes the relation between the shortest paths in the original network and the shortest paths in the expanded network.

Lemma 1. Every path from source S to node $D(h)$ in the expanded network has precisely h hops.

Proof: The proof follows from the fact that the i -th hop

on a path from s to $D(h)$ has to go from some node $u(i-1)$ to some node $v(i)$. ■

B. Routing Algorithm

The routing algorithm is described in Algorithm 2. To compute the minimum cost path, first we find the shortest path for every number of hops, $h = 1, \dots, N-1$ in the expanded network by repeatedly employing Dijkstra's algorithm (line 9). Then, the algorithm chooses the path with minimum cost from source to destination and returns the optimum path and its cost (lines 15 and 16). This path is computed by finding the least cost path among the paths that have $h = 1, 2, \dots, N-1$ hops. Let $\Pi(h)$ denote the minimum cost path of length h between the source and destination. Then, the optimal path is computed as follows:

$$\Pi^* = \arg \min_h C(\Pi(h)).$$

C. Discussion

The algorithm described in this section is not optimal, since we force all links to have the same outage probability. This limitation can increase the cost of communication unnecessarily. For example, consider a network in the presence of one jammer in Fig. 2. Suppose that the end-to-end outage probability $p_{out}^{SD} = 0.1$, path-loss exponent $\alpha = 2$, jamming power $P_j = 1$, $N_0 = 1$, and $\gamma = 1$. By using the MER-EQ routing algorithm, the minimum-energy path from the source to the destination is a two-hop path. In this case, in order to obtain $p_{out} = 0.1$, the outage probability of each link $p_{out}^1 = p_{out}^2 = 0.051$. Hence, from (5) the transmit power of the source node is $P_1 = 34.5$, and the transmit power of node 2 is $P_2 = 1868.2$, and thus the total power is $P = 1902.7$. The reason that P_2 is so high is the interference from the near jammer. However, if we change the outage probability allocation between the two links, and allow the transmission between node 2 and the destination to have a larger outage probability, we expect that the aggregate power consumption decreases. For instance, suppose the outage probability of link l_1 is $p_{out}^1 = 0.01$ and the outage probability of link l_2 is $p_{out}^2 = 0.0909$. In this case, from (5), the transmit power of the source node is $P_1 = 181.5$ and the transmit power of node 2 is $P_2 = 1011.1$, and thus the total power is $P = 1192.6$. We see that by relaxing the restriction on the allocation of the outage probability between different links, the cost of communication decreases significantly.

Moreover, in order to find the optimal path we basically need to apply the shortest path algorithm $N-1$ times, which makes this approach inefficient in term of running time in large networks. Each application of the Dijkstra's algorithm in the expanded network requires a running time of $O(N^2 \log N)$, and thus the algorithm MER-EQ takes $O(N^3 \log N)$ time to run.

In the remainder of the paper, we present a minimum energy routing algorithm with optimal outage per link and demonstrate how using an estimate of the end-to-end outage probability leads to a fast and efficient algorithm that improves the energy efficiency of the network significantly.

Algorithm 2 MER-EQ($G' = (\mathcal{N}', \mathcal{L}')$)

```

1: for  $h = 1$  to  $N - 1$  do
2:   /* for each link, set the link cost to the transmit power
   required to maintain the outage probability  $\varepsilon(h)$  on the
   link */
3:   for all  $\ell_{u,v} \in \mathcal{L}'$  do
4:      $C(u,v) = P_{u,v}(\varepsilon(h))$ 
5:   end for
6:   /* compute the shortest  $h$ -hop path */
7:    $[\Pi(h), C(h)] = \text{Dijkstra}(G', s, d(h))$ 
8:   /* store the path and its cost in  $\Pi(h)$  and  $C(h)$  */
9: end for
10: /* choose the best path for reaching the destination */
11:  $h^* = \arg \min C(h)$ 
12: return  $[\Pi(h^*), C(h^*)]$ 

```

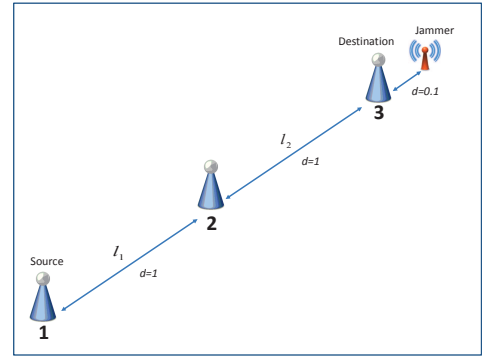


Fig. 2. A wireless network in the presence of one jammer is shown here. In this network, by allocating unequal outage probability to different links, the cost of communication decreases significantly.

IV. MER-OP: MINIMUM ENERGY ROUTING WITH OPTIMAL OUTAGE PER LINK

In this section, we present our minimum energy routing algorithm with optimal outage per link by considering the end-to-end outage constraint. From (5), the per-hop outage probability p_{out}^k is,

$$\begin{aligned}
p_{out}^k &= 1 - \frac{e^{-\frac{\gamma N_0 d_k^\alpha}{P_k}}}{\prod_{j \in \mathcal{J}} \left(1 + \frac{\gamma P_j / d_{j,k}^\alpha}{P_k / d_k^\alpha}\right)} \\
&\leq 1 - \frac{e^{-\frac{\gamma N_0 d_k^\alpha}{P_k}}}{\prod_{j \in \mathcal{J}} e^{\frac{\gamma P_j / d_{j,k}^\alpha}{P_k / d_k^\alpha}}} \\
&= 1 - \frac{e^{-\frac{\gamma N_0 d_k^\alpha}{P_k}}}{e^{\sum_{j \in \mathcal{J}} \frac{\gamma P_j / d_{j,k}^\alpha}{P_k / d_k^\alpha}}}, \tag{10}
\end{aligned}$$

where the inequality is from the fact that $e^x \geq 1+x$ for $x \geq 0$.

While this is a conservative estimate of the end-to-end outage probability, our simulation results show that it results in an effective solution that results in significant energy savings. From (10) we have,

$$p_{out}^k \leq 1 - e^{-\frac{\gamma d_k^\alpha}{P_k} (N_0 + J_k)}, \tag{11}$$

where J_k is the expected value of the total received power at node D_k from all jammers, i.e. $J_k = \sum_{j \in \mathcal{J}} P_j / d_{j,k}^\alpha$. Importantly, this approximation not only enables the development of an efficient routing algorithm, but also simplifies the implementation of the algorithm in real networks. While the exact outage probability as given in (5) requires the knowledge of jammer powers and their locations, the approximation in (11) requires only the knowledge of the ‘‘average’’ jamming power received at a node, which can be readily measured.

A. Optimal Cost of a Given Path

Our objective is to find the optimum path and the minimum transmission power required to establish the path to satisfy the outage probability π . First, we find the optimal power allocation for a given path Π , and then use this result to design a routing algorithm to find the optimal path. To this end, the optimal power allocation problem for a given path $\Pi = \langle l_1, \dots, l_K \rangle$ is described by the following optimization problem:

$$\min_{k=1, \dots, K, P_k > 0} \sum_{l_k \in \Pi} P_k,$$

subject to:

$$p_{out}^{SD} = 1 - \prod_{l_k \in \Pi} (1 - p_{out}^k) \leq \pi.$$

From (11) the equivalent constraint is,

$$\sum_{l_k \in \Pi} d_k^\alpha \left(\frac{N_0 + J_k}{P_k} \right) \leq \epsilon = \frac{-\ln(1 - \pi)}{\gamma}. \quad (12)$$

Since the left side of (12) is a decreasing function of P_k and our goal is to find the route with minimum cost, the inequality constraint can be substituted by the following equality constraint,

$$\sum_{l_k \in \Pi} d_k^\alpha \left(\frac{N_0 + J_k}{P_k} \right) = \epsilon. \quad (13)$$

To find the optimal link costs, we use the Lagrange multipliers technique. Thus, we need to solve (13) and the following K equations simultaneously,

$$\frac{\partial}{\partial P_i} \left\{ \sum_{l_k \in \Pi} P_k + \lambda \left(\sum_{l_k \in \Pi} d_k^\alpha \left(\frac{N_0 + J_k}{P_k} \right) - \epsilon \right) \right\} = 0, \\ i = 1, \dots, K.$$

Taking the derivative, we obtain that,

$$1 - \lambda d_i^\alpha \frac{(N_0 + J_i)}{P_i^2} = 0, \quad i = 1, \dots, K, \quad (14)$$

and thus,

$$P_i = \sqrt{\lambda d_i^\alpha (N_0 + J_i)}. \quad (15)$$

On substituting P_i from (15) into (13), we have,

$$\lambda = \frac{1}{\epsilon^2} \left(\sum_{l_k \in \Pi} \sqrt{d_k^\alpha (N_0 + J_k)} \right)^2. \quad (16)$$

Hence, by substituting λ from (16) into (15), the optimal cost of each link is given by,

$$P_i = \frac{1}{\epsilon} \sqrt{d_i^\alpha (N_0 + J_i)} \sum_{l_k \in \Pi} \sqrt{d_k^\alpha (N_0 + J_k)}, \quad (17)$$

and the optimal cost of path Π is given by,

$$\mathcal{C}(\Pi) = \frac{1}{\epsilon} \left(\sum_{l_k \in \Pi} \sqrt{d_k^\alpha (N_0 + J_k)} \right)^2. \quad (18)$$

B. Routing Algorithm

The optimal path cost structure in (18) allows us to find the minimum energy route from source to destination as follows. First assign the link weight $\mathcal{C}(l_k) = \sqrt{d_k^\alpha (N_0 + J_k)}$ to each potential link l_k in the network. Now apply any classic shortest-path algorithm such as the Dijkstra’s algorithm. This path minimizes the end-to-end weight $\sum_{l_k \in \Pi} \sqrt{d_k^\alpha (N_0 + J_k)}$ and thus it will also minimize the source-destination path cost $\mathcal{C}(\Pi)$ in (18). We note that the running time of this algorithm, referred to as MER-OP, is in $O(N \log N)$ as it essentially invokes the Dijkstra’s algorithm once.

Now, each node in route Π transmits the message to the next node until it reaches the destination. The transmit power of each node is determined by (17) and the actual outage probability of each link can be obtained from (11).

C. Heuristic Adjustment of Transmit Powers

Consider the optimum route Π that is found by applying the MER-OP algorithm. Suppose that route Π consists of H hops, and its achieved end-to-end outage probability is p_{out}^{SD} . Since we consider an upper bound for the end-to-end outage probability in developing MER-OP, the achieved end-to-end outage probability p_{out}^{SD} might be less than the allowed outage probability π ,

$$p_{out}^{SD} \leq \pi, \quad (19)$$

Consequently, MER-OP with the P_i ’s set as in (17) can be too conservative in some instances. In order to address this, we apply the following heuristic. Let δ be the ratio of the actual end-to-end success probability $1 - p_{out}^{SD}$ to the desired success probability $1 - \pi$. From (19),

$$\delta = \frac{1 - \pi}{1 - p_{out}^{SD}} \leq 1.$$

Now suppose that we set a new success probability for each link in the optimal route by multiplying the success probability of each link by a factor $\sqrt[H]{\delta}$. Hence, the new success probability of each link in the optimal route is $\sqrt[H]{\delta}(1 - p_{out}^k)$, which is less than the old success probability of that link since $\sqrt[H]{\delta} \leq 1$. By using this approach, we reduce the required success probability of each link, and thus from (5), the cost of establishing each link decreases, which results in less energy consumption of the algorithm MER-OP. In this case, the new

end-to-end success probability can be calculated as,

$$\begin{aligned} & \prod_{k=1, \dots, H} \sqrt[H]{\delta} (1 - p_{out}^k) \\ &= \delta \prod_{k=1, \dots, H} (1 - p_{out}^k) \\ &= \delta (1 - p_{out}^{SD}) = 1 - \pi, \end{aligned}$$

which is equal to the desired source-destination success probability. Hence, by applying this heuristic, the resultant end-to-end outage probability will be equal to the allowed outage probability while the aggregate cost of communication on the path selected by MER-OP will be less than when we do not apply this heuristic.

D. Routing in the Presence of Dynamic Jammers

In this section, we consider the case of dynamic jammers, where each jammer alternates between the jamming mode and the sleeping mode. We model the probabilistic behavior of jammers by i.i.d. Bernoulli random variables $\beta_j, j \in \mathcal{J}$, such that $p(\beta_j = 1) = 1 - p(\beta_j = 0) = q$. Using (3), the average outage probability of link l_k is:

$$\begin{aligned} p_{out}^k &= E \left[1 - \exp \left(\frac{-\gamma (N_0 + \sum_{j \in \mathcal{J}} P_j \beta_j |h_{j,k}|^2 / d_{j,k}^\alpha)}{P_k / d_k^\alpha} \right) \right] \\ &= 1 - e^{-\frac{\gamma N_0 d_k^\alpha}{P_k}} \prod_{j \in \mathcal{J}} E \left[\exp \left(\frac{-\gamma P_j \beta_j |h_{j,k}|^2 / d_{j,k}^\alpha}{P_k / d_k^\alpha} \right) \right] \\ &= 1 - e^{-\frac{\gamma N_0 d_k^\alpha}{P_k}} \prod_{j \in \mathcal{J}} \left\{ q E \left[\exp \left(\frac{-\gamma P_j |h_{j,k}|^2 / d_{j,k}^\alpha}{P_k / d_k^\alpha} \right) \right] + (1 - q) \right\} \\ &= 1 - e^{-\frac{\gamma N_0 d_k^\alpha}{P_k}} \prod_{j \in \mathcal{J}} \left\{ \frac{q}{\left(1 + \frac{\gamma P_j / d_{j,k}^\alpha}{P_k / d_k^\alpha} \right)} + 1 - q \right\} \\ &\leq 1 - e^{-\frac{\gamma N_0 d_k^\alpha}{P_k}} \prod_{j \in \mathcal{J}} e^{-\frac{\gamma q P_j / d_{j,k}^\alpha}{P_k / d_k^\alpha}}, \end{aligned} \quad (20)$$

where the expectations are computed over $\{\beta_j\}_{j \in \mathcal{J}}$ and $\{|h_{j,k}|^2\}_{j \in \mathcal{J}}$, respectively. The inequality is from the fact that for $q \leq 1$ and $x \geq 0$, $e^{-qx} \leq \frac{q}{1+x} + 1 - q$, which is tight for $x \ll 1$.

Thus, the average probability of outage for each link is given by,

$$p_{out}^k \leq 1 - e^{-\frac{\gamma d_k^\alpha}{P_k} (N_0 + J_k)}, \quad (21)$$

where $J_k = q \sum_{j \in \mathcal{J}} P_j / d_{j,k}^\alpha$. The cost of an optimum path Π in this case can be found by a similar derivation as in Section IV-A,

$$\mathcal{C}(\Pi) = \frac{1}{\epsilon} \left(\sum_{l_k \in \Pi} \sqrt{d_k^\alpha (N_0 + J_k)} \right)^2, \quad (22)$$

where $\epsilon = \frac{-\ln(1-\pi)}{\gamma}$. Hence, by employing an estimate of the average jamming power obtained from recent channel measurements, assigning the link cost $\mathcal{C}(l_k) = \sqrt{d_k^\alpha (N_0 + J_k)}$ to each potential link l_k in the network, and applying the routing algorithm discussed in the previous section, the optimal route can be found.

V. SIMULATION RESULTS

We consider a wireless network in which n system nodes and n_j jammers are placed uniformly at random on a $d \times d$ square. We assume that the closest system node to point $(0, 0)$ is the source and the closest system node to the point (d, d) is the destination.

Our goal is to find a minimum energy route between the source and the destination. We assume that the threshold $\gamma = 1$ (corresponding to throughput $\rho = 1$), noise power $N_0 = 1$, and the maximum transmit power of the system nodes is such that the network is always connected. To analyze the effect of propagation attenuation on the proposed algorithms, we consider $\alpha = 2$ for free space, and $\alpha = 3$ and $\alpha = 4$ for terrestrial wireless environments. For the benchmark routing

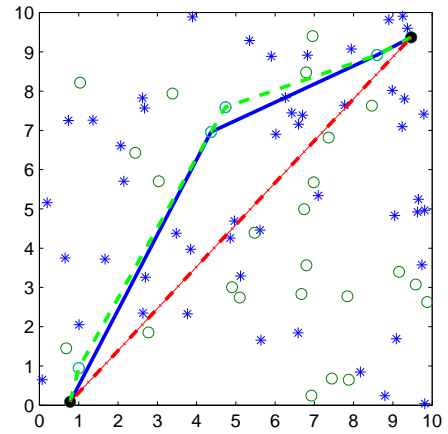


Fig. 3. A snapshot of the network when $n = 30$ system nodes (shown by circles) and $n_j = 50$ jammers (shown by *) are placed uniformly at random. The transmit power of each jammer $P_j = 1$, the target end-to-end outage probability $\pi = 0.1$, and the path-loss exponent $\alpha = 2$. The optimum route for MER-OP is shown by the dashed line (green), the optimum route for MER-EQ is shown by the solid line (blue), and the MER route is shown by the dash-dotted line (red). The energy saved in this network for MER-OP is 63.57% and for MER-EQ is 54.47% .

algorithm, we consider a minimum energy routing (MER) algorithm from the source to the destination with end-to-end target outage probability π . The MER algorithm is described in the following subsection.

A. MER: Minimum Energy Routing

Consider a wireless network with a source, a destination, and some other nodes that can be used as relays (without jammers). The goal is to convey the message with minimum aggregate power such that an end-to-end outage probability is guaranteed. The outage probability of link l_k is given by,

$$p_{out}^k = 1 - \exp \left(\frac{-\gamma N_0 d_k^\alpha}{P_k} \right). \quad (23)$$

Using the technique presented in Section IV, the optimal cost of path Π is given by:

$$\mathcal{C}(\Pi) = \frac{1}{\epsilon} \left(\sum_{l_k \in \Pi} \sqrt{d_k^\alpha} \right)^2.$$

Hence, we assign the link cost $\mathcal{C}(l_k) = \sqrt{d_k^\alpha}$ to each potential link l_k in the network and apply Dijkstra's algorithm to find the optimum route.

By using the MER algorithm, the minimum energy route, the outage probability of each link, and the transmit power of the source and each intermediate relay on this route can be found. Now suppose an adversary spreads a number of jammers in the network. In this case, we do not change the source-destination route and the outage probabilities that are allocated to the links that belong to this route. However, because of the interference due to the jammers at each receiver, the transmitters need to increase their transmit power to have the same per link outage probability as when the jammers were not present. Since the channel gains between jammers and system nodes are exponentially distributed, the average outage probability at each receiver of route Π is given by (see the derivation presented in Section II for the link outage probability):

$$p_{out}^k = 1 - \frac{e^{-\frac{\gamma N_0 d_k^\alpha}{P_k}}}{\prod_{j \in \mathcal{J}} \left(1 + \frac{\gamma P_j / d_{j,k}^\alpha}{P_k / d_k^\alpha}\right)}. \quad (24)$$

This equation can be solved numerically to find the required power of each link $\{P_k\}_{l_k \in \Pi}$ in the presence of jammers. As in the other approaches described earlier, the aggregate transmit power of the MER algorithm in the presence of jammers is considered as the cost of the scheme.

B. Performance Metric

Our performance metric is the *energy saved* due to the use of each algorithm. The energy saved is defined as the reduction in the energy consumption of the system nodes when each algorithm is applied with respect to the energy consumption when system nodes use the benchmark algorithm (i.e. MER).

A snapshot of the network when $n = 30$, $n_j = 50$, $P_j = 1$, $\pi = 0.1$, and $\alpha = 2$ is shown in Fig. 3. The MER-OP path, MER-EQ path, and MER path are plotted in this figure. The percentage of energy saved in this example for MER-OP is 63.57% and for MER-EQ is 54.47%. As can be seen, using the MER-OP algorithm is more energy efficient than MER-EQ.

The MER-EQ, MER-OP, and MER paths for the same placement of the system nodes and jammers as in the networks of Fig. 3 for a higher path-loss exponent ($\alpha = 4$) are shown in Fig. 4. In this case, the energy saved for MER-OP is 93.54% and for MER-EQ is 88.21%. Note that although in this case the MER-OP algorithm and the MER-EQ algorithm both choose the same route, the percentage of energy saved using the latter approach is smaller, because we force all links in the path to have the same outage probability. This shows the superiority of MER-OP algorithm over MER-EQ algorithm, as is also discussed in Section III-C.

In the sequel, we average our results over randomly generated networks. The performance metric is the *average energy saved*, where the averaging is over 100 random realizations of the network. We consider the effect of various parameters of the network on the average energy saved by using the MER-OP and MER-EQ algorithms.

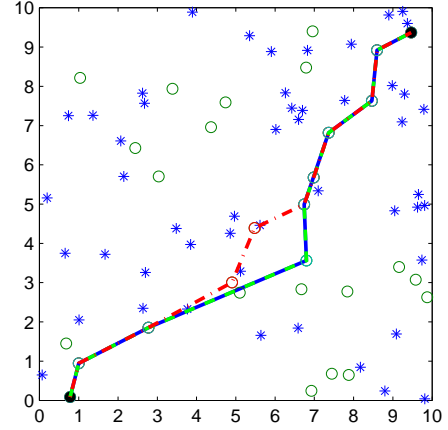


Fig. 4. A snapshot of the network with the same system node and jammer placement as in Fig. 3. Transmit power of each jammer $P_j = 1$, target outage probability $\pi = 0.1$, and transmission in a lossy environment is considered ($\alpha = 4$). The MER-OP path is shown by the dashed line (green), the MER-EQ path is shown by the solid line (blue), and the MER path is shown by the dash-dotted line (red). The energy saved in this network for MER-OP is 93.54% and for MER-EQ is 88.21%.

C. Number of Jammers

The effect of the number of jammers on the average energy saved for different values of the path-loss exponent is shown in Fig. 5. It can be seen that the performance of MER-OP algorithm is always superior to the performance of MER-EQ algorithm, which is because of the constraint on the outage probability of each hop of MER-EQ. For both algorithms the average energy saved is not sensitive to the number of jammers. The fluctuations in this figure are due to the random generation of the network. On the other hand, the effect of the path-loss exponent on the average energy saved is dramatic. For terrestrial wireless environments ($\alpha = 3$ and $\alpha = 4$), the average energy saved by both algorithms is substantially higher than for free space wireless environments ($\alpha = 2$). The reason is that in the environment with a higher path-loss exponent, the effect of the jamming signal is local and thus the jamming aware routes can take detours to avoid the jammers and obtain much higher energy efficiency.

D. Jamming Power

The effect of jamming power on the average energy saved is shown in Fig. 6. Again the energy efficiency of MER-OP algorithm is higher than that of MER-EQ algorithm due to optimal allocation of the per-link outage probabilities. As the jamming power increases, the percentage of the energy saved by using both algorithms increases. Clearly, when the jamming power is higher, the impact of jamming on communication is greater, and thus bypassing the jammers can lead to more energy efficiency of the routing algorithm.

E. Size of Network

The average energy saved versus the size of the network is shown in Fig. 7, where the area of the network changes

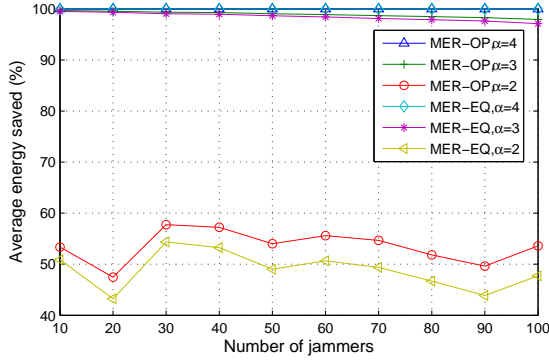


Fig. 5. Average energy saved vs. number of static jammers for different values of the path-loss exponent. The transmit power of each jammer $P_j = 1$, the end-to-end target probability of outage $\pi = 0.1$, and $n = 20$ system nodes are considered. The system nodes and the jammers are placed uniformly at random over a 10×10 square.

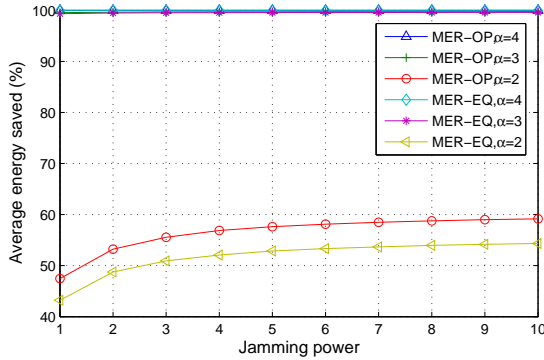


Fig. 6. Average energy saved vs. jamming power of each malicious jammer for different values of the path-loss exponent. $n_j = 20$ number of jammers, $n = 20$ system nodes, and end-to-end target probability of outage $\pi = 0.1$ are considered. The system nodes and the jammers are placed uniformly at random over a 10×10 square.

from a 1×1 square to a 10×10 square. The average energy saved for terrestrial wireless environments for both algorithms is nearly 100%. When free space parameters are used ($\alpha = 2$), MER-OP algorithm always has a better performance than MER-EQ algorithm. Also, it can be seen that the percentage of the energy saved of using both algorithms is higher for smaller network areas. The reason is that in a smaller network, the effect of jamming on the communication is higher and thus taking a route that bypasses the jammers helps more to improve the energy efficiency.

F. Outage Probability

In Fig. 8, the percentage of average energy saved versus the outage probability is shown. For $\alpha = 3$, and $\alpha = 4$, the average energy saved is always very close to 100%. For $\alpha = 2$, as the outage probability increases, more outages in the communication are acceptable, and thus lower power is needed to mitigate the effect of a jammer close to the communication link. Hence, when the outage probability is greater, the percentage of energy saved by using a better path is less than when the outage probability is smaller.

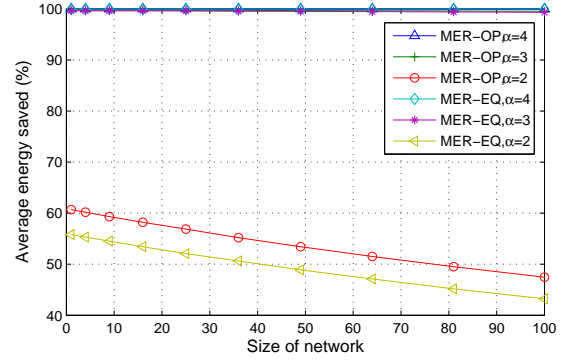


Fig. 7. Average energy saved vs. area of the network for different values of the path-loss exponent. The transmit power of each jammer $P_j = 1$, $n_j = 20$ number of jammers, $n = 20$ system nodes, and end-to-end target probability of outage $\pi = 0.1$ are considered.

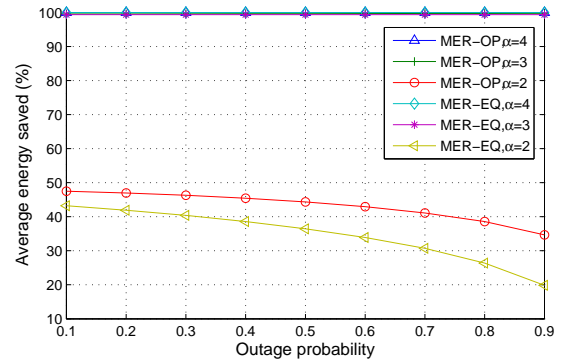


Fig. 8. Average energy saved vs. end-to-end outage probability (π) for different values of the path-loss exponent. The transmit power of each jammer $P_j = 1$, and $n_j = 20$ jammers and $n = 20$ system nodes are considered. The system nodes and the jammers are placed uniformly at random over a 10×10 square.

G. Power Histogram

To further investigate the enormous gains in average energy for higher values of α , the histograms of the number of network realizations versus the total cost of transmission (aggregate power) for (a) MER algorithm, (b) MER-OP algorithm, and (c) MER-EQ algorithm for 10^3 realizations of the network are shown in Fig. 9. In this figure $\alpha = 4$, $\pi = 0.1$, $n = 20$, and $n_j = 30$. For the MER, it can be seen that the values of the total cost are scattered, and the average energy is dominated by a few bad realizations. On the other hand, when MER-OP and MER-EQ are used, the values of the total cost are concentrated around a central value (here 10^4). This explains the large gains in average energy shown in previous sections, and also indicates that the MER-OP and MER-EQ are robust against changes in the system node and jammer placements.

H. Network Throughput

When MER-OP is used, we expect the network can achieve a higher throughput, since the transmit powers of the nodes in the optimal path are smaller, and thus more nodes can transmit their messages simultaneously. To study network throughput,

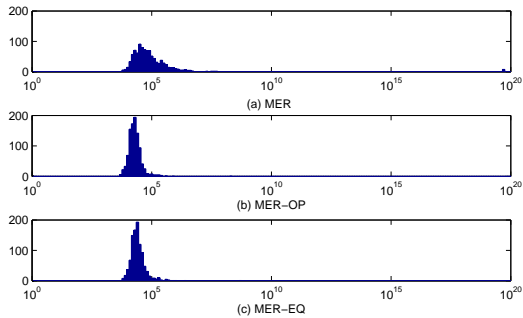


Fig. 9. The histograms of the number of network realizations versus cost of transmission (aggregate power) for (a) MER, (b) MER-OP, and (c) MER-EQ are shown. The system nodes and the jammers are placed uniformly at random over a 10×10 square, where $\alpha = 3$, $\pi = 0.1$, $n = 20$, and $n_j = 50$. For the benchmark, the values of the total cost are scattered, and the average energy is dominated by a few bad realizations, while for (b) and (c), the values of the total cost are concentrated around a central value (here 10^4).

in this section, we simulate multiple concurrent flows in the network and implement scheduling in addition to routing. The maximum throughput for a given number of concurrent flows can be obtained as follows.

Scheduling problem. Consider a subset $S \subseteq \mathcal{L}$ of the links. We call S a “transmission set” if all links in S can be scheduled concurrently. Moreover, S is a “maximal” transmission set if it cannot be grown further. Let $\mathcal{S} = \{S_1, \dots, S_M\}$ denote the set of all maximal transmission sets of the network. A schedule is specified by a set of weights $\alpha = \{\alpha_1, \dots, \alpha_M\}$, where each weight $0 \leq \alpha_i \leq 1$ specifies the fraction of time for which the maximal transmission set S_i is scheduled¹. It follows that $\sum_{i=1}^M \alpha_i = 1$ for a feasible schedule. In general, there is an exponential number of maximal transmission sets in a network and finding them is an NP-hard problem [19].

Maximal transmission sets. To obtain a practical approximation, we can use only a subset of all maximal transmission sets. As we increase the number of maximal transmission sets, the accuracy of the approximation increases. Algorithm 3 is used repeatedly to obtain a subset of all maximal transmission sets.

Algorithm 3 Maximal Transmission Sets

```

1:  $S \leftarrow \{\}$ 
2: while  $\mathcal{L} \neq \{\}$  do
3:   Choose  $l_i \in \mathcal{L}$  at random
4:    $\mathcal{L} \leftarrow \mathcal{L} \setminus \{l_i\}$ 
5:   if  $l_i$  is schedulable with  $S$  then
6:      $S \leftarrow S \cup \{l_i\}$ 
7:   end if
8: end while
9: return  $S$ 

```

Throughput. Suppose there are L flows in the network denoted by $\mathcal{F} = \{f_1, \dots, f_L\}$. Let x_i denote the rate of flow f_i

¹We assume a time slotted system where each time slot is of unit length. The weights α_i specify the fraction of time each set S_i is scheduled in a time slot using a TDMA scheduler.

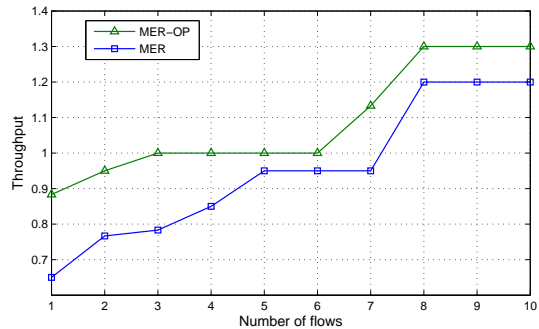


Fig. 10. Throughput versus the number of concurrent flows for the MER-OP algorithm and for MER, when the end-to-end outage probability is $\pi = 0.2$, and $n = 10$ system nodes and $n_j = 20$ jammers are present.

and $\mathcal{X} = \{x_1, \dots, x_L\}$. The optimal path computed for flow f_i is denoted by Π_i . Our goal is to compute the maximum flow rate in the network. Let λ denote the capacity of link l_k , which is a constant for every link in the network (this is ensured by our power allocation algorithm).

- The total flow rate that passes through link l_k is given by,

$$\sum_{\forall f_i \in \mathcal{F}: l_k \in \Pi_i} x_i$$

- The total capacity of link l_k adjusted for scheduling is given by,

$$\lambda \cdot \sum_{\forall S_i \in \mathcal{S}: l_k \in S_i} \alpha_i$$

To compute the maximum throughput, one has to solve the following optimization problem:

$$\max \sum_{f_i \in \mathcal{F}} x_i \quad (25)$$

subject to:

$$\sum_{\forall f_i \in \mathcal{F}: l_k \in \Pi_i} x_i \leq \lambda \cdot \sum_{\forall S_i \in \mathcal{S}: l_k \in S_i} \alpha_i \quad (26)$$

$$\sum_{\alpha_i \in \alpha} \alpha_i = 1 \quad (27)$$

$$\alpha_i \geq 0 \quad (28)$$

Since the constraints as well as the objective function are linear, the above problem is a convex optimization problem if the routes Π_i and maximal transmission sets S_i are known. We used Matlab to solve this optimization problem and compute the total throughput. The throughputs versus the number of concurrent flows for MER-OP and for MER are shown in Fig. 10. The end-to-end outage probability is $\pi = 0.2$, where $n = 10$ system nodes and $n_j = 20$ jammers are present. As expected, the MER-OP can achieve higher throughput than the MER algorithm.

Energy per bit. In order to compare the amount of energy each algorithm needs to obtain the throughput shown in Fig. 10, the energies per bit versus the outage probability for MER-OP and MER are shown in Fig. 11. Energy per bit is obtained by dividing the total power consumed by the system nodes

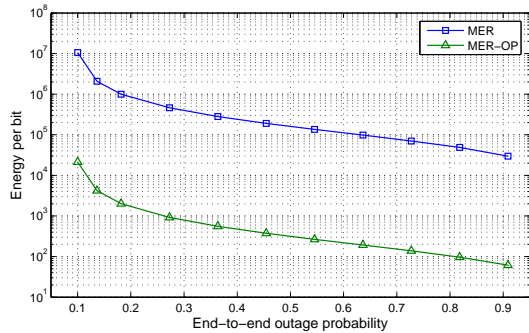


Fig. 11. Energy per bit versus the end-to-end outage probability for MER-OP and MER. The throughput is measured for five concurrent flows, where $n = 10$ system nodes and $n_j = 20$ jammers are present in the system. The amount of energy per bit MER-OP uses is about two orders of magnitude less than MER.

divided by the maximum throughput of the network for a given number of flows. In this figure, the maximum throughput when five concurrent flows exists in the network, where $n = 10$ system nodes and $n_j = 20$ jammers are present, is plotted. As expected, in both algorithms for higher outage probabilities less energy per bit is required. Also, the amount of energy per bit MER-OP uses is about two orders of magnitude less than the amount of energy per bit MER consumes.

I. Dynamic Jammers

In this section, we investigate the effect of the number of dynamic jammers on the average energy saved when employing MER-OP. The average energy saved versus number of jammers for probability of a jammer being “ON”, $q = 0.3$ and $q = 0.7$, and for various values of the path-loss exponent, $\alpha = 2, 3, 4$, are considered in Fig. 12. The simulations are done over 100 random realizations of the network. As can be seen, the average energy saved is again insensitive to the number of jammers (the fluctuations in this figure are due to the randomness of the network realizations). For $\alpha = 2$, the percentage of energy saved is higher when q is greater, since the effect of jammers on the network is greater and thus, by using MER-OP algorithm and bypassing the jammers, a higher energy efficiency can be gained. For terrestrial wireless environments, i.e. for $\alpha = 3$ and $\alpha = 4$, the average energy saved by using MER-OP is always substantial and close to 100%.

J. Distributed Implementation

It is useful to mention that distributed implementation of the algorithms presented in this paper is straightforward. The link costs introduced in previous sections can be calculated locally by using the average of the total jamming signal at each node, and this information can be passed to neighboring nodes. Then, any distributed distance vector routing technique such as the Bellman-Ford algorithm can be used to find the minimum energy path.

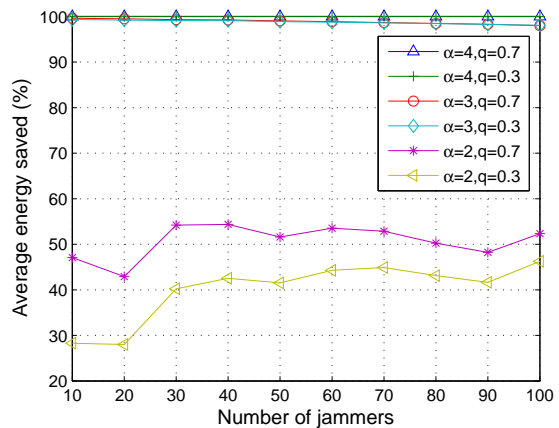


Fig. 12. Average energy saved vs. number of dynamic jammers for different values of the path-loss exponent and probability q of a jammer being in “ON” state. The transmit power of each jammer $P_j = 1$, the target end-to-end outage probability $\pi = 0.1$, and $n = 20$ system nodes are considered. The system nodes and the jammers are placed uniformly at random over a 10×10 square.

VI. RELATED WORK

Spread Spectrum and Beamforming. Traditional methods to combat jamming attacks include spread spectrum and beamforming [3], [4], [20], [21], [22]; however, these approaches are only a partial solution in the case of broadband jammers, jammers with directional antennas, or multiple jammers, and, as discussed in the Introduction, these methods often simply increase the cost of jamming. Nevertheless, our routing algorithms can be used in conjunction with these techniques to increase the robustness of the system against jamming attacks.

Other Jamming Evasion Techniques. When the system nodes are able to move, they can simply leave the jammed area to a safe place. This is the basis of the spatial retreat technique, in which the system nodes move away from a stationary jammer [23], [24]. Another jamming evasion technique is channel surfing, where the system nodes basically change their communication frequency to an interference-free frequency band when necessary [25]. These approaches, however, are orthogonal to the problem considered here which deals with static nodes.

One-Hop Communication in the Presence of Jamming. Several works consider one-hop energy aware communication in the presence of one jammer [26], [27], [28], [29]. It is usually treated as a game between a jammer and two system nodes. The objective of the jammer is to increase the cost (energy) of communication for the system nodes, whereas the objective of the system nodes is increasing the cost of jamming for the jammer and conveying their message with a minimum use of energy. Unlike these approaches, in this work we consider multi-hop communication in the presence of many jammers.

Energy Aware Routing. In order to minimize energy consumption in wireless networks, numerous energy-efficient routing algorithms have been studied [12], [13], [14], [15], [16], [30]. For instance, in [30] minimum energy routing with a minimum end-to-end probability of error is considered;

however, their physical layer model is significantly different than that considered here, and they also did not consider jammers. Instead of the total energy usage of the network nodes, some works consider the battery usage of each node, or balanced energy dissipation in the network as their criteria [31], [32], [33]. For example, in [31], instead of choosing one source-destination path, the algorithm chooses several paths and uses them alternatively to avoid quick energy depletion of each path. While minimum energy routing has been studied extensively, a few works (e.g. see [17], [18]) considered security-aware routing. However, unlike our work, they considered routing in the presence of passive eavesdroppers, which is different from the problem considered in this work with active jammers.

VII. CONCLUSION AND FUTURE WORK

In this paper, we considered minimum energy routing in a quasi-static multi-path fading environment and in the presence of multiple static and dynamic malicious jammers. The outage probability equation considering the jammers is intricate; thus, we established an approximation for the outage probability, based on which we developed an algorithm to obtain a minimum energy path between a single source and a single destination with an end-to-end outage probability constraint. The algorithm requires only the knowledge of the total average power received from the jammers at each system node over a long time period.

By performing simulations using various network parameters, we compared the energy cost of our algorithms to that of a jamming oblivious minimum energy routing algorithm, and showed that our algorithms achieve significantly better energy efficiency. In particular, it is shown that the energy saved by using our algorithms compared to the jamming oblivious scheme, especially in the case of terrestrial wireless networks with path-loss exponent $\alpha > 2$, is substantial. The consideration of more sophisticated dynamic jammers with or without eavesdropping capabilities is a topic for further research.

REFERENCES

- [1] A. Sheikholeslami, M. Ghaderi, H. Pishro-Nik, and D. Goeckel, "Jamming-aware minimum energy routing in wireless networks," in *Proc. IEEE ICC*, pp. 2313–2318, 2014.
- [2] K. Pelechris, M. Iliofotou, and S. V. Krishnamurthy, "Denial of service attacks in wireless networks: The case of jammers," *IEEE Communications Surveys & Tutorials*, vol. 13, no. 2, pp. 245–257, 2011.
- [3] J. G. Proakis, *Digital communications, 4th edition*. McGraw-Hill, 2000.
- [4] R. L. Peterson, R. E. Ziemer, and D. E. Borth, *Introduction to spread-spectrum communications*, vol. 995. Prentice Hall New Jersey, 1995.
- [5] J. Broch, D. A. Maltz, D. B. Johnson, Y.-C. Hu, and J. Jetcheva, "A performance comparison of multi-hop wireless ad hoc network routing protocols," in *Proc. ACM MobiCom*, pp. 85–97, 1998.
- [6] E. M. Royer and C.-K. Toh, "A review of current routing protocols for ad hoc mobile wireless networks," *IEEE Personal Communications*, vol. 6, no. 2, pp. 46–55, 1999.
- [7] R. Draves, J. Padhye, and B. Zill, "Routing in multi-radio, multi-hop wireless mesh networks," in *Proc. ACM MobiCom*, pp. 114–128, 2004.
- [8] C. E. Perkins, *Ad hoc networking*. Addison-Wesley Professional, 2008.
- [9] E. Altman, K. Avrachenkov, and A. Garnaev, "Jamming in wireless networks: The case of several jammers," in *Proc. IEEE GameNets*, pp. 585–592, 2009.
- [10] P. Tague, S. Nabar, J. Ritcey, and R. Poovendran, "Jamming-aware traffic allocation for multiple-path routing using portfolio selection," *IEEE/ACM Transactions on Networking*, vol. 19, no. 1, pp. 184–194, 2011.
- [11] L. M. Feeney and M. Nilsson, "Investigating the energy consumption of a wireless network interface in an ad hoc networking environment," in *Proc. IEEE INFOCOM*, pp. 1548–1557, 2001.
- [12] S. Singh, M. Woo, and C. S. Raghavendra, "Power-aware routing in mobile ad hoc networks," in *Proc. ACM MobiCom*, pp. 181–190, 1998.
- [13] V. Rodoplu and T. H. Meng, "Minimum energy mobile wireless networks," *IEEE Journal on Selected Areas in Communications*, vol. 17, no. 8, pp. 1333–1344, 1999.
- [14] J.-H. Chang and L. Tassiulas, "Energy conserving routing in wireless ad-hoc networks," in *Proc. IEEE INFOCOM*, pp. 22–31, 2000.
- [15] S. Kwon and N. B. Shroff, "Energy-efficient interference-based routing for multi-hop wireless networks," in *Proc. IEEE INFOCOM*, 2006.
- [16] M. Dehghan, M. Ghaderi, and D. Goeckel, "Minimum-energy cooperative routing in wireless networks with channel variations," *IEEE Transactions on Wireless Communications*, vol. 10, no. 11, pp. 3813–3823, 2011.
- [17] M. Ghaderi, D. Goeckel, A. Orda, and M. Dehghan, "Efficient wireless security through jamming, coding and routing," in *Proc. IEEE SECON*, pp. 505–513, 2013.
- [18] M. Ghaderi, D. Goeckel, A. Orda, and M. Dehghan, "Minimum energy routing and jamming to thwart wireless network eavesdroppers," *IEEE Transactions on Mobile Computing*, 2014.
- [19] E. L. Lawler, J. K. Lenstra, and A. Rinnooy Kan, "Generating all maximal independent sets: Np-hardness and polynomial-time algorithms," *SIAM Journal on Computing*, vol. 9, no. 3, pp. 558–565, 1980.
- [20] R. A. Scholtz, "The origins of spread-spectrum communications," *IEEE Transactions on Communications*, vol. 30, pp. 822–854, 1982.
- [21] Y. Liu, P. Ning, H. Dai, and A. Liu, "Randomized differential dsss: Jamming-resistant wireless broadcast communication," in *Proc. IEEE INFOCOM*, pp. 1–9, 2010.
- [22] S. Zhou, G. B. Giannakis, and A. Swami, "Digital multi-carrier spread spectrum versus direct sequence spread spectrum for resistance to jamming and multipath," *IEEE Transactions on Communications*, vol. 50, no. 4, pp. 643–655, 2002.
- [23] W. Xu, T. Wood, W. Trappe, and Y. Zhang, "Channel surfing and spatial retreats: defenses against wireless denial of service," in *Proc. ACM WiSec*, pp. 80–89, 2004.
- [24] W. Xu, K. Ma, W. Trappe, and Y. Zhang, "Jamming sensor networks: attack and defense strategies," *IEEE Network*, vol. 20, no. 3, pp. 41–47, 2006.
- [25] W. Xu, W. Trappe, and Y. Zhang, "Channel surfing: defending wireless sensor networks from interference," in *Proc. ACM IPSN*, pp. 499–508, 2007.
- [26] R. K. Mallik, R. A. Scholtz, and G. P. Papavasilopoulos, "Analysis of an on-off jamming situation as a dynamic game," *IEEE Transactions on Communications*, vol. 48, no. 8, pp. 1360–1373, 2000.
- [27] M. Li, I. Koutsopoulos, and R. Poovendran, "Optimal jamming attacks and network defense policies in wireless sensor networks," in *Proc. IEEE INFOCOM*, pp. 1307–1315, 2007.
- [28] Q. Zhu, H. Li, Z. Han, and T. Basar, "A stochastic game model for jamming in multi-channel cognitive radio systems," in *Proc. IEEE ICC*, pp. 1–6, 2010.
- [29] A. Khanafer, S. Bhattacharya, and T. Bascar, "Adaptive resource allocation in jamming teams using game theory," in *Proc. IEEE WiOpt*, pp. 395–400, 2011.
- [30] R. Manohar and A. Scaglione, "Power optimal routing in wireless networks," in *Proc. IEEE ICC*, pp. 2979–2984, 2003.
- [31] R. C. Shah and J. M. Rabaey, "Energy aware routing for low energy ad hoc sensor networks," in *Proc. IEEE WCNC*, pp. 350–355, 2002.
- [32] D. Ganesan, R. Govindan, S. Shenker, and D. Estrin, "Highly-resilient, energy-efficient multipath routing in wireless sensor networks," *ACM SIGMOBILE Mobile Computing and Communications Review*, vol. 5, no. 4, pp. 11–25, 2001.
- [33] J.-H. Chang and L. Tassiulas, "Maximum lifetime routing in wireless sensor networks," *IEEE/ACM Transactions on Networking*, vol. 12, pp. 609–619, 2004.