
DECENTRALIZED RUNTIME VERIFICATION FOR LTL PROPERTIES USING GLOBAL CLOCK

M. ALI DOROSTY, FATHIYEH FAGHIH, AND EHSAN KHAMESPANAH

College of Engineering, Department of Electrical and Computer Engineering, University of Tehran,
Iran

e-mail address: ma.dorosty@ut.ac.ir

College of Engineering, Department of Electrical and Computer Engineering, University of Tehran,
Iran

e-mail address: f.faghih@ut.ac.ir

College of Engineering, Department of Electrical and Computer Engineering, University of Tehran,
Iran; Computer Science Department, Reykjavik University, Iceland

e-mail address: e.khamespanah@ut.ac.ir; ehsahk@ru.is

ABSTRACT. Runtime verification is the process of verifying critical behavioral properties in big complex systems, where formal verification is not possible due to state space explosion. There have been several attempts to design efficient algorithms for runtime verification. Most of these algorithms have a formally defined correctness property as a reference and check whether the system consistently meets the demands of the property or it fails to satisfy the property at some point in runtime. LTL is a commonly used language for defining these kinds of properties and is also the language of focus in this paper. One of the main target systems for runtime verification are distributed systems, where the system consists of a number of processes connecting to each other using asynchronous message passing. There are two approaches for runtime verification in distributed systems. The first one consists of centralized algorithms, where all processes send their events to a specific decision-making process, which keeps track of all the events to evaluate the specified property. The second approach consists of distributed algorithms, where processes check the specified property collaboratively. Centralized algorithms are simple, but usually involve sending a large number of messages to the decision-making process. They also suffer from the problem of single point of failure, as well as high traffic loads towards one process. Distributed algorithms, on the other hand, are usually more complicated, but once implemented, offer more efficiency. In this paper, we focus on a class of asynchronous distributed systems, where each process can change its own local state at any arbitrary time and completely independent of others, while all processes share a global clock. We propose a sound and complete algorithm for decentralized runtime verification of LTL properties in these systems.

Key words and phrases: Runtime verification and Asynchronous distributed systems and Global clock and LTL and Monitoring and Automaton.

1. INTRODUCTION

Reliability is one of the main characteristics of new complex software used in safety-critical systems. Many algorithms and solutions have been proposed in order to ensure this requirement. A popular category of system analysis methods, known as *model checking* [1] involve offline observation of the system’s model and checking for possibilities of violation of the desired property. These methods are often expensive and suffer from the well-known state space explosion problem due to the exponential growth nature of the state space in these kinds of methods. Also, we don’t always have access to the underlying system’s model. *Runtime verification* [2, 3] is another category of system analysis methods, where instead of detecting the possibility of property satisfactions/violations beforehand, they are detected them at runtime. These methods are especially useful when formal verification methods are not able to analyze all the possible executions of the system. Shortly speaking, runtime verification is applicable when the goal is to analyze a complex system for which model checking is not possible due to the state space explosion, but the property is relatively small, and can be checked using lightweight methods at runtime.

Most of these methods take a formally defined property, describing the correct behaviour of the system, as input in order to monitor the system at runtime with respect to the given property. The goal is to determine whether the system’s behavior would satisfy or violate the property. A commonly used language for defining these kinds of properties is LTL [4], which is the language we focus on in this paper. Our algorithm is designed for a class of systems known as *distributed systems*[5], which usually consist of a set of processes using message passing as their primary communication mechanism. The popularity of these types of systems has led to demand for various algorithms defined in a distributed context, including runtime verification algorithms. Runtime verification algorithms typically take a property ϕ as input, which is the property to be checked. In distributed systems, a common approach to solving this problem is the *centralized* approach, where all processes send their data to a pre-selected process (also known as the *central monitor*) that is responsible for deciding about satisfaction or violation of the property ϕ . In order to reach this decision, other processes need to inform the decision-making process about all of their local events that may result in the satisfaction or violation of ϕ . This needs a high number of messages to be sent to one process, which results in congestion in that process’s incoming channels, as well as making that process a single-point-of-failure. In the other approach, known as *distributed algorithms*, processes work collaboratively towards a common goal; until one of them deduces and broadcasts the final result of the algorithm.

A number of algorithms have been proposed for distributed runtime verification. Some of them are centralized or semi-centralized algorithms [6, 7], and hence, suffer from all the previously stated problems. Some define their own property definition languages [8, 9] (which are less expressive than LTL), and some require the system to be synchronous [10, 11, 12]. Falcone et al. in [13] proposed a decentralized runtime verification algorithm that utilizes the global clock, similar to our proposed algorithm. However, our algorithm is much more efficient and needs significantly fewer messages compared to their approach.

In this paper, we propose a decentralized algorithm for runtime verification of LTL properties. In order to utilize our method, each process must be augmented with the same exact monitoring algorithm, the details of which will be discussed in Sect. 4. This algorithm, which we will refer to as the *monitor* from now on, constantly runs in parallel with the process’s main task until it detects the satisfaction or violation of the property. It is expected

that a process’s monitor can access its entire local state atomically. All monitors take the same LTL property as input, at the systems initialization time, and start running at the same time as their corresponding processes. Each monitor listens for when its process experiences a change in its local state in a way that may result in the satisfaction/violation of the given LTL property. Monitors are expected to be able to send and receive messages to each other. Furthermore, all monitors share a global clock, meaning that messages can be timestamped, and the concept of “time t ” has a common meaning among different monitors. Our algorithm is *sound* and *complete*, meaning that if one monitor reports the satisfaction/violation of ϕ at time t , then ϕ is actually satisfied/violated at t , and vice versa. In some cases multiple monitors may arrive at the same verdict and report it together.

The rest of the paper is organized as follows: In Sect. 2 some preliminary definitions will be given, along with some examples to provide a sense of how we approach runtime verification. We then present our algorithm, first expressing the problem in Sect. 3, and then describing the runtime verification algorithm in full detail in Sect. 4, followed by a proof of its soundness and completeness in Sect. 5. We then demonstrate our algorithm’s usefulness by showing some experimental results in Sect. 6. In Sect. 7 we review some previous work in distributed runtime verification, and discuss the advantages and disadvantages of each approach. Finally, we conclude by talking about the achievements of our work and discussing future work that can be possible in Sect. 8.

2. PRELIMINARIES

In this section, we give a brief introduction to the concepts we use in our algorithm. We will use a running example throughout the paper to clarify these concepts and the algorithm details.

Example 1 . *Say we have 3 autonomous flying drones that communicate via asynchronous message passing named “drone A”, “drone B” and “drone C”. The mission of all drones is getting to a specified destination. Drone A is the leader and drones B and C are the followers. We want to verify property ϕ at runtime which is defined as:*

$\phi \equiv$ *At some point, the leader arrives at the destination. It then stays there until both followers have also arrived.*

In this paper, we focus on a type of distributed systems, where processes communicate via asynchronous message passing; if a process wants to send data to another process, it sends that data via one or many messages to the other process. Messages can be received arbitrarily later than the time they were sent and in an order different from the one they were sent. Also, we rely on the existence of a *global clock* that can be accessed by all the monitors. This can be done by either reading the clock value from one physical clock, or synchronizing local clocks of processes periodically, such that their drift at any arbitrary time is negligible. More formally, we define a distributed system as follows:

Definition 1 Distributed System. *A distributed system S consists of a set of processes p_1, p_2, \dots, p_n that are connected via asynchronous message passing channels.*

Example 2 . *In our running example, the distributed system can be defined as $\{p_1, p_2, p_3\}$, where p_1 is drone A, and p_2 and p_3 are drone B and drone C, respectively.*

Atomic propositions are propositional statements intrinsic to the system and are used to specify the desired properties. The system designer who comes up with the LTL property, has to first define a set of atomic propositions AP in the system that are relevant to the desired property.

Let $AP_i \subset AP$ be the subset of AP containing atomic propositions belonging to p_i . These subsets of AP are mutually disjoint: $i \neq j \Rightarrow AP_i \cap AP_j = \emptyset$

Example 3 . In Example 1, we could define the following atomic propositions:

$a \equiv$ Drone A (the leader) is currently at the destination.

$b \equiv$ Drone B is currently at the destination.

$c \equiv$ Drone C is currently at the destination.

Definition 2 State. A state σ is a valuation of all atomic propositions in the system (AP). Each state is depicted with a subset of AP , indicating the atomic propositions that are true in that state. Any atomic proposition that is not a member of the set is false at that state. The set of all possible states of the system is denoted by $\Sigma = 2^{AP}$ (also known as the systems alphabet). A local state of a process p_i is a valuation of the atomic propositions of p_i (AP_i).

Note: We use the terms *state* and *global state* interchangeably throughout the paper.

Next we move on to defining our property. LTL properties are defined on *infinite computations*, which are defined as follows:

Definition 3 Finite/Infinite Computation. A finite/infinite sequence on the system's alphabet is called a finite/infinite computation (execution) of the system. For example, $\omega = \{\sigma_0, \sigma_1, \sigma_2, \dots\}$ is an infinite computation, and $\omega' = \{\sigma'_0, \sigma'_1, \sigma'_2, \dots, \sigma'_k\}$ is a finite computation, where for all i , $\sigma_i \in \Sigma$. The set of all finite computations of a system is represented by Σ^* and the set of all infinite computations of a system is represented by Σ^ω .

Example 4 . Some examples of finite computations in Example 1 are as follows:

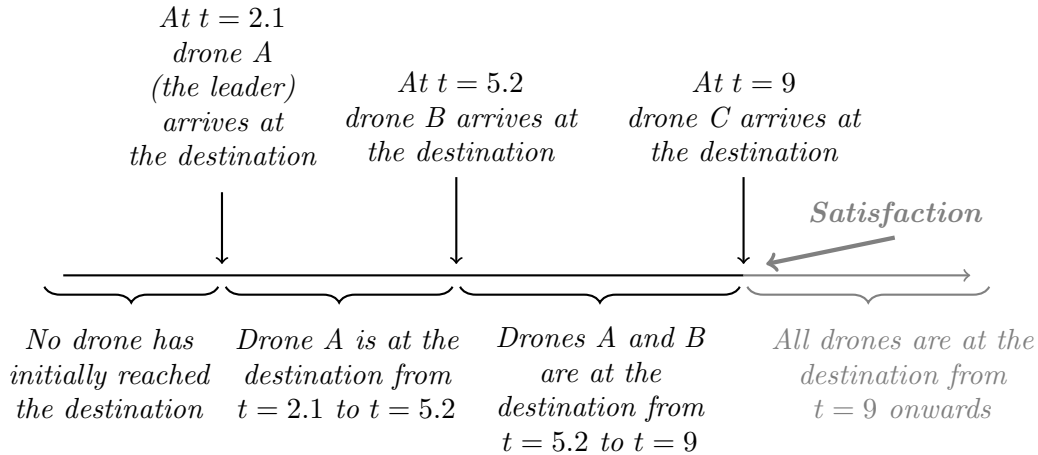


Figure 1: A sample execution scenario resulting in the satisfaction of ϕ

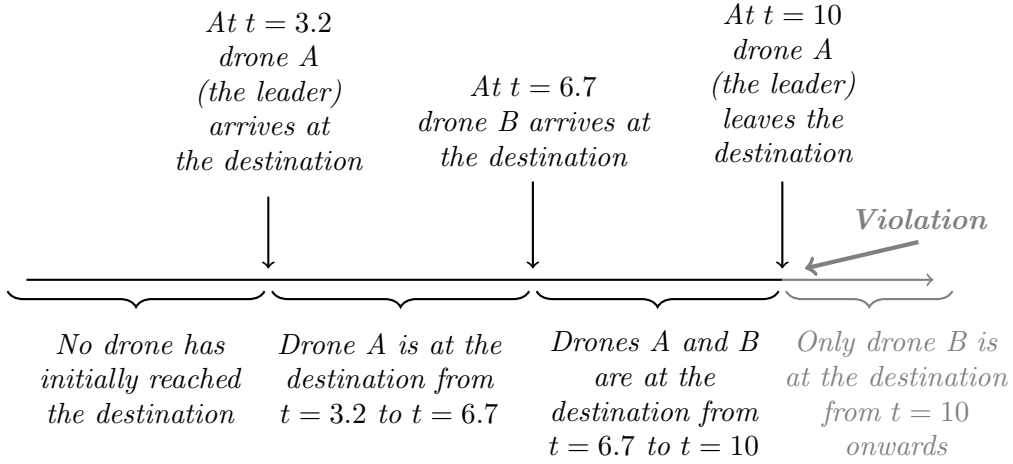


Figure 2: A sample execution scenario resulting in the violation of ϕ

Note that in this example, a can only be checked by drone A, and similarly, b and c can only be checked by drone B and drone C, respectively.

Example 5 . Using states (sets of atomic propositions), the scenarios in Example 4 can be shown as:

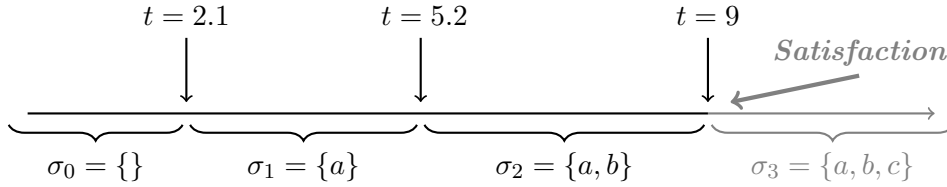


Figure 3: A sample computation ($\sigma = \{\{\}, \{a\}, \{a, b\}, \{a, b, c\}\}$) resulting in the satisfaction of ϕ

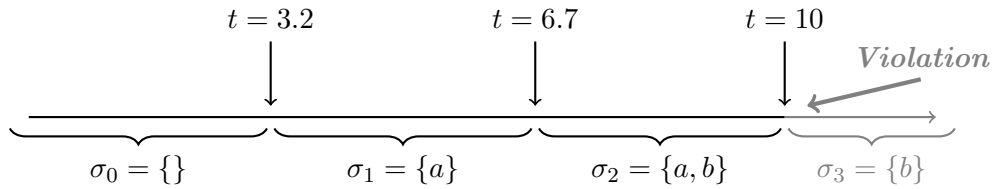


Figure 4: A sample computation ($\sigma = \{\{\}, \{a\}, \{a, b\}, \{b\}\}$) resulting in the violation of ϕ

Definition 4 Linear Temporal Logic (LTL). LTL is a popular property specification language, used to define correctness properties with the following syntax:

$$\phi ::= p \mid \neg\phi \mid \phi \vee \phi \mid \bigcirc \phi \mid \phi \cup \phi$$

, where p is an atomic proposition ($p \in AP$). The semantics of LTL is based on infinite computations of the system, and is defined as follows. Considering $\omega = \{\sigma_0, \sigma_1, \sigma_2, \dots\} \in \Sigma^\omega$, the satisfaction relation (denoted with \models) is defined as follows:

$$\omega \models \phi \quad \text{iff} \quad \omega, \sigma_0 \models \phi$$

$$\omega, \sigma_i \models p \quad \text{iff} \quad p \in \sigma_i$$

$$\omega, \sigma_i \models \neg\phi \quad \text{iff} \quad \omega \not\models \phi$$

$$\omega, \sigma_i \models \phi \vee \psi \quad \text{iff} \quad (\omega, \sigma_i \models \phi) \vee (\omega, \sigma_i \models \psi)$$

$$\omega, \sigma_i \models \bigcirc\phi \quad \text{iff} \quad \sigma_{i+1} \models \phi$$

$$\omega, \sigma_i \models \phi \cup \psi \quad \text{iff} \quad \exists k \geq i . (\omega, \sigma_k \models \psi) \wedge \forall i \leq j \leq k . (\omega, \sigma_j \models \phi)$$

Temporal operators \square and \diamond can also be defined as follows:

$$\diamond\phi = \top \cup \phi$$

$$\square\phi = \neg(\diamond\neg\phi)$$

The semantics of LTL is defined based on infinite computations and cannot be used in the context of runtime verification, as in that case, we are dealing with finite computations. Therefore a finite variant of this language has been proposed, called LTL_3 [14], the semantics of which is defined on finite computations. The syntax of LTL_3 is exactly the same as LTL, but its semantics is different.

Definition 5 LTL_3 (3-valued LTL). *LTL_3 , also known as 3-valued LTL is very similar to LTL, with slightly different semantics. The evaluation of an LTL_3 property ϕ on a finite computation $\eta \in \Sigma^*$ is defined below. Note that the dot operator implies concatenation, and \models used in this definition is already defined in Definition 4.*

$$[\eta \models \phi] \equiv \begin{cases} \top & \text{iff } \forall \omega \in \Sigma^\omega : (\eta.\omega \models \phi) \\ \perp & \text{iff } \forall \omega \in \Sigma^\omega : (\eta.\omega \not\models \phi) \\ ? & \text{otherwise} \end{cases}$$

In other words, a finite computation satisfies (violates) an LTL_3 property, iff for all extensions of that computation to an infinite one, the corresponding LTL property is satisfied (violated). Otherwise the property is evaluated to unknown (denoted by $?$). Simply speaking, LTL is intended for offline verification of the system and results in a value in $\{\top, \perp\}$ where \top means true/satisfied and \perp means false/violated. LTL_3 , on the other hand, is intended to be evaluated at runtime on finite computations and may be evaluated to unknown as well.

Example 6 . In Example 1, ϕ can be defined as: $\phi = \neg a \cup (a \cup (b \wedge c))$ as an LTL_3 formula.

Some properties like “Drone B arrives at the destination and leaves it infinitely often” cannot be checked using runtime verification. These properties are also referred to as *non-monitorable properties*. Their counterparts, also referred to as *monitorable properties*, are the types of properties that can benefit from our algorithm.

Definition 6 Good/Bad Prefix. *For a computation $\omega = \{\sigma_0, \sigma_1, \sigma_2, \dots\}$, and a given property ϕ , the prefix $\omega' = \{\sigma_0, \sigma_1, \dots, \sigma_k\}$ is a good/bad prefix if it results in the satisfaction/violation of ϕ .*

(Non-)Monitorable properties are formally defined as follows:

Definition 7 (Non-)Monitorable property. *An LTL property ϕ is monitorable/non-monitorable iff there exists/doesn't exist a computation ω containing a good or bad prefix of ϕ .*

Monitorable properties are convertible to a specific DFA (deterministic finite automaton), which can be used in runtime verification. How to convert an LTL property to its corresponding automaton is described in detail in [14, 15]. In the following examples, we show how this automaton is useful.

Definition 8 Monitor Automaton. *For a monitorable LTL property ϕ , the monitor automaton $M_\phi = \{Q, Q_0, R, L\}$ is a unique deterministic finite automaton (DFA), where:*

- Q is a set of locations,
- $Q_0 \subseteq Q$ is a set of initial locations,
- $R \subseteq Q \times 2^\Sigma \times Q$ is a transition relation on the set of locations, and
- $L : Q \mapsto \{\top, \perp, ?\}$ is a labeling function that shows whether the location is accepting (\top), rejecting (\perp), or unknown (?).

For every finite computation η that satisfies/violates ϕ , the run of M_ϕ on η terminates in a location labeled \top/\perp , and for every computation η that neither satisfies nor violates ϕ , the run terminates in a location that is labeled ? by the L function. For simplicity, the label of each transition is depicted by a predicate in propositional logic, which represents a subset of Σ , containing elements that can each enable the transition.

Example 7 . *The monitor automaton for the LTL property $\phi = \neg a \cup (a \cup (b \wedge c))$ is depicted in Fig. 5 (\top and \perp mean true and false respectively and are used to show satisfying/violating states):*

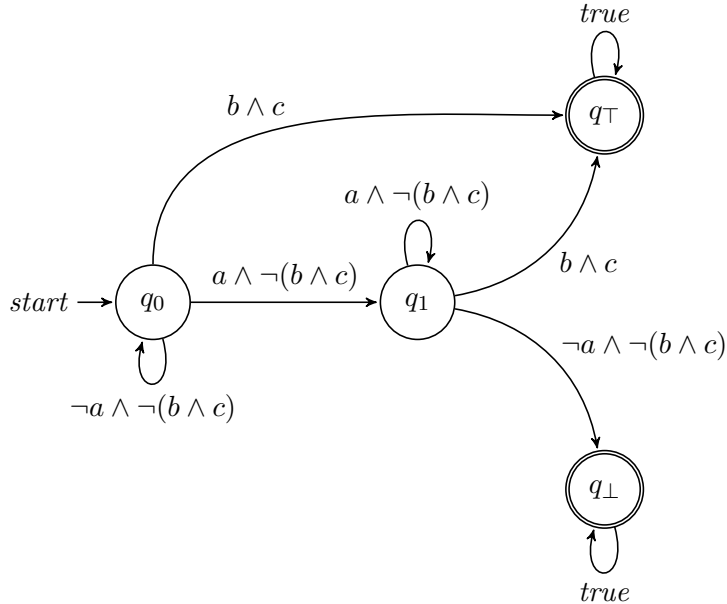


Figure 5: The monitor automaton for the LTL property $\phi = \neg a \cup (a \cup (b \wedge c))$

A monitor automaton is deterministic, which means that for any location $q \in Q$ and any $\sigma \in \Sigma$, there exists $q' \in Q$ such that $(q, \sigma, q') \in R$ and $\forall q'' \in Q : (q, \sigma, q'') \in R \Rightarrow q'' = q'$.

Simply speaking, at each point in time, one and exactly one transition is enabled (including self-loops).

Example 8 . *Following Examples 4 and 5, we can show the changes in the locations of the corresponding monitor automation (Fig. 5) in Figs. 6 and 7, where the bottom braces show the current location of the automaton. Starting at state q_0 , each time a transition is enabled based on the system's global state, the current location changes to the succeeding location accordingly.*

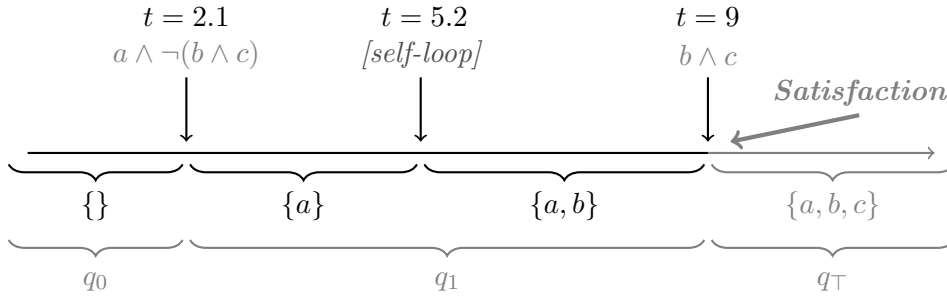


Figure 6: A sample execution scenario resulting in the satisfaction of ϕ

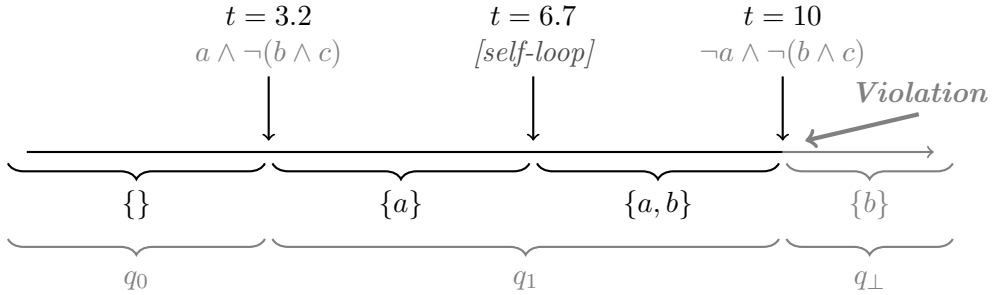


Figure 7: A sample execution scenario resulting in the violation of ϕ

Essentially, we need to present a decentralized algorithm that detects the location changes in the monitor automaton by monitoring changes in the system's global state. For simplicity, we modify the automaton by first removing self-loops and then replacing the transition predicates with their corresponding Disjunctive Normal Form (DNF).

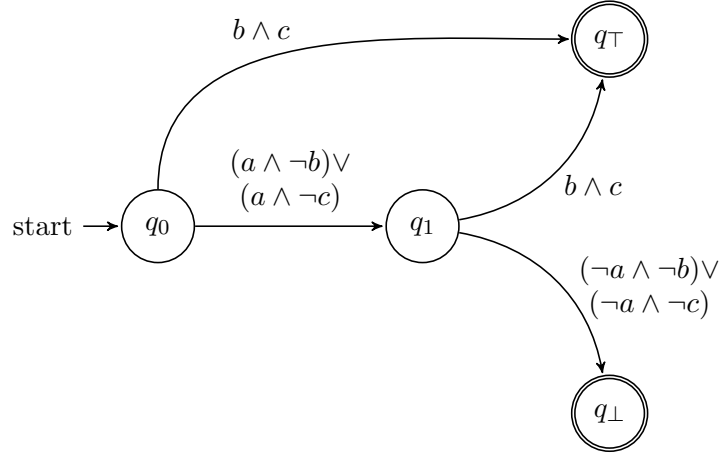


Figure 8: The modified monitor automaton for the LTL property $\phi = \neg a \cup (a \cup (b \wedge c))$

We further modify the automaton by breaking transitions into multiple transitions, each containing one conjunct from the DNF form of the transition predicate. We also label each transition by Tr_i .

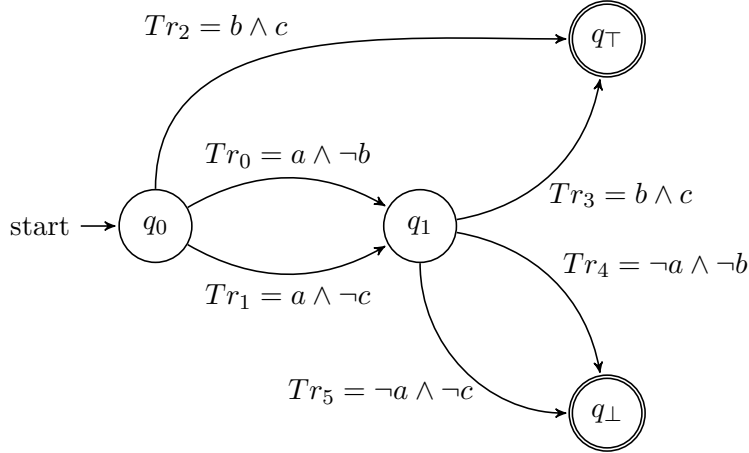


Figure 9: The final monitor automaton for the LTL property $\phi = \neg a \cup (a \cup (b \wedge c))$

The automaton depicted in Fig. 9 is what we would be using throughout our monitoring algorithm; at each point in time, the whole system is at one of the automaton locations $\{q_0, q_1, q_{\top}, q_{\perp}\}$. Note that in a scenario where our monitor automaton location is q_0 , and the system's global state is $\{a\}$, then both Tr_0 and Tr_1 would be enabled. A similar scenario could be shown for Tr_4 and Tr_5 where the monitor automaton location is q_1 , and the system's global state is $\{\}$, however in all these cases, because of the automaton's deterministic nature, all the transitions arrive at the same succeeding location, and hence, it doesn't matter whether for example, Tr_0 gets enabled before Tr_1 , or vice versa.

3. PROBLEM STATEMENT

We take as input:

- (1) a distributed system S , consisting of n processes, $\{p_1, p_2, p_3, \dots, p_n\}$ sharing a global clock and connecting via asynchronous message passing, and
- (2) an LTL property ϕ .

We propose an algorithm for a local monitor m_i for each process p_i to monitor ϕ on S , such that its violation or satisfaction is detected by at least one process. The same exact algorithm would be run as each process's monitor. The only differentiating factors between m_i 's is the set of local variables that they can read, which belongs to the process p_i . We assume that there is a message channel between each pair of processes, and if a message is sent, it will be received by its intended receiver in finite time and not get dropped, corrupted or tampered with.

4. DECENTRALIZED ALGORITHM

In this section, we will present our decentralized algorithm for runtime verification in detail. The algorithm takes an LTL property as input. The property's monitor automaton is initially constructed offline, having states $\{q_0, q_1, q_2, \dots\}$, and transitions $\{Tr_1, Tr_2, Tr_3, \dots\}$, each having an expression as its predicate, which is a propositional conjunction of atomic propositions. Each process keeps a copy of this automaton.

Note: From this point in the paper, when will use processes and their monitors interchangeably.

The general goal of the monitoring algorithm is to trace the locations of the monitor automaton based on the changes in the global state of the system, and detect reaching \top or \perp locations. For instance, in our running example, for the computation $\eta = \{\{\}, \{b\}, \{a, b\}, \{a\}, \{\}\}$, the corresponding automaton locations of the system are q_0 for the first two letters (global states), q_1 for the next ($\{a, b\}$), and q_\perp for the last one ($\{\}$).

At each step, we want to detect the change from one automaton location to the other. In other words, among all the outgoing transitions from the current automaton location, we want to detect the one that gets enabled the earliest.

4.1. Detecting enabling time of transitions. Each process stores the current automaton location ($q_{current}$, or q_c for short). Initially, this location is the initial automaton location (q_0). Each time a process detects the location change, it updates its own q_c and moves on to the next step. The last location change time is also stored by each process in its $t_{last_location_change}$ (or t_{lc} for short) value, which is initially zero. Note that location changes may be detected with a slight delay, for example, if at $t = 7$ the system arrives at a new automaton location, this fact may remain undetected for 2 seconds until at $t = 9$ one of the processes realizes that at $t = 7$ a transition was enabled (and it was the earliest among the others) resulting in an automaton location change. That process then lets the others know about this location change.

In order to detect a transitions enabling time, the truthfulness of its predicate must be monitored. Each process may have one or more **literals** in a predicate. If, for example, a transition's predicate is $(\neg a_1 \wedge a_2 \wedge \neg b)$, and a_1 and a_2 are only accessible by process p_1 , and b is only accessible by process p_2 , then $\neg a_1$ and a_2 are the literals of process p_1 , and $\neg b$ is the literal of process p_2 . Given that assumption, if $a_1 = true$ and $a_2 = false$, we say

p_1 's literals are satisfied, and also if $b = false$, we say p_2 's literals are satisfied. Therefore, a transition becomes enabled when for each process associated with the transition's predicate, all the process's literals get satisfied.

At each step, for each outgoing transition of q_c , all processes associated with the transition's predicate are responsible for detecting if and when it becomes enabled. Each of these processes records a history of when its literals were satisfied from t_{uc} until now. This history is stored as a set of positive intervals and we call it the *satisfaction_range* of that process for that transition, or sr for short. For example, $sr = [3, 4] \cup [5, 6]$ indicates that at all times between $t = 3$ and $t = 4$, and also at all times between $t = 5$ and $t = 6$, all the process's literals were satisfied for the transition. Each process keeps its sr up to date for all transitions whose predicates it is associated with.

As stated previously, in order for a transition to become enabled, the literals for all the processes associated with its predicate must be satisfied, and hence, a process can not make this decision on its own. Therefore, each process must keep the values of sr for all the other processes associated with the transition's predicate. To this end, for each outgoing transition of q_c , if a process is associated with the transition's predicate, it stores the set $\{sr_1, sr_2, sr_3, \dots, sr_k\}$, containing the values of sr for all the k processes associated with the transition's predicate, including itself. However, we know that a process doesn't have access to the value of other process's sr ; so, processes must somehow send their sr values to each other. If a process realizes that $global_satisfaction_range = sr_1 \cap sr_2 \cap sr_3 \cap \dots \cap sr_k$ is not empty, then it can conclude that the transition was enabled at the smallest time in $global_satisfaction_range$, or gsr for short. In other words, if $gsr \neq \emptyset$ then $min(gsr)$ is the transition's enabling time.

In order for the values of sr to be shared among the processes associated with all transitions' predicates, each transition has a **coordinator** process. At the beginning of each step, for each outgoing transition of q_c a process is chosen to be its coordinator. The values of sr for all processes are also set to zero at the beginning of a step. Whenever the coordinator realizes that one or more of its own literals are not satisfied in the transition at some points in time, it can conclude that the transition was definitely not enabled in those times, due to the transition's predicate being a conjunction of literals. However, when all of the coordinator's literals are satisfied, other processes must be consulted in the decision making, so the coordinator sends a **Delegate** message to another process associated with the transition's predicate. This message is structured as follows:

$$\langle Delegate, t_{uc}, Tr, \{sr_1, sr_2, sr_3, \dots, sr_k\} \rangle$$

Tr in this message is the transition whose satisfaction is being determined, and the value of each sr_i is the last value of sr for p_i that the coordinator knows of. The value of t_{uc} is included in every message of any kind. It acts as a timestamp to allow us to distinguish between messages belonging to different steps; if a process receives a message with a smaller t_{uc} than its own, it concludes that the message belongs to a previous step and is of no value, and hence, it is dropped by the process. If the message's t_{uc} is greater than of the process, it means that the process is lagging behind other processes, and hence, it resets itself, updates its t_{uc} , processes the message, and from then after, waits for messages with the new value of t_{uc} .

Upon receiving a Delegate message, the receiving process becomes the new coordinator of the transition and the previous coordinator that sent the message no longer considers itself the coordinator of that transition. After receiving the message, the new coordinator

updates its values of sr belonging to other processes, to the corresponding values provided in the message. It then checks if an enabling time can be detected for the transition, just like the previous coordinator used to do. Hence, the coordination role keeps getting delegated between processes. The processes keep sharing their values of sr with each other until one of them detects the transition's enabling time (if it ever becomes enabled). After detecting a transition's enabling time, the transition's coordinator will not send a Delegate message to the other processes in that transition, until the end of that step. Note that if a process is associated with the predicate of multiple outgoing transitions of q_c , it may become the coordinator of multiple transitions; so a process may be the coordinator of more than one transition at each point in time.

If a process detects that, for example, transition Tr_i was enabled at a certain time, that does not mean that Tr_i was the earliest transition to become enabled; another transition Tr_j may exist with a smaller enabling time than Tr_i . Therefore, processes must check all outgoing transitions and determine which of them gets enabled at the earliest time. To this end, each process keeps a list called *transitions_checked*, or TrC for short, containing outgoing transitions it has checked so far. At the beginning of each step, this list is empty for all processes, and each time a process detects the enabling time of a transition, it adds that transition to its TrC list. Each process also keeps track of the earliest transition that it has detected so far; the first time that a process detects a transition becoming enabled, it keeps that transition in its $Tr_{earliest}$ value (Tr_e for short), and it keeps the transition's enabling time in its t_{Tr_e} value. From then after, whenever the process detects the enabling time of another transition, it adds that transition to TrC and compares its enabling time to t_{Tr_e} ; if the enabling time was smaller, the process updates its values of Tr_e and t_{Tr_e} .

A transition may become enabled a long time after others (or not become enabled at all). For these transitions, it suffices for processes to detect that they won't be enabled earlier than their Tr_e ; if the lower bound of a transition's enabling time is greater than a process's t_{Tr_e} , that process can be certain that the transition will never replace its Tr_e . To have a lower bound for a transition's enabling time, we introduce a transition's *last update time*, denoted by $t_{last_updated_by_p_i}$, or t_{lu_i} for short. Each process keeps the last time it has received a Delegate message from each process p_i as its t_{lu_i} value. The minimum of all t_{lu_i} s is the lower bound of the transitions enabling time, since all the processes associated with the transition's predicate have updated the sr value before that time, and if the transition was enabled before then, it would have been noticed. The set of all of a process's t_{lu} values is sent with each Delegate message; so the structure of a Delegate message is as follows:

$$\langle Delegate, t_{lc}, Tr, \{sr_1, sr_2, sr_3, \dots, sr_k\}, \{t_{lu_1}, t_{lu_2}, t_{lu_3}, \dots, t_{lu_k}\} \rangle$$

Upon receiving a Delegate message, the next coordinator updates its own t_{lu} values to the ones in the message. If after updating all its sr and t_{lu} values, it still can't detect the Tr 's enabling time, it checks if $\min(\{t_{lu_1}, t_{lu_2}, t_{lu_3}, \dots, t_{lu_k}\}) < t_{Tr_e}$; if so, it means that Tr was not enabled before Tr_e , therefore the process adds Tr to its TrC and no longer sends a Delegate message for Tr . Essentially, TrC is the list of all transitions that have been checked and were not enabled earlier than t_{Tr_e} .

The values of t_{lu} can also be used to determine the next coordinator process. More accurately, the process p_j with the smallest value for t_{lu_j} is selected, as it has sent its Delegate message before the others and is the least up-to-date one. t_{lu} values can also be used in a way that we no longer need to store an sr value for each process. We can keep a *global_potential_satisfaction_range* value, or $gpsr$ for short, containing times when the

transition **could have been** enabled. This value has the following relationship with sr and t_{lu} values:

$$gpsr = (sr_1 \cup (t_{lu_1}, \infty)) \cap (sr_2 \cup (t_{lu_2}, \infty)) \cap (sr_3 \cup (t_{lu_3}, \infty)) \cap \dots \cap (sr_k \cup (t_{lu_k}, \infty))$$

So $gpsr$ is similar to sr , except that we make the optimistic assumption that the literals of each other process are satisfied from that process's t_{lu} (the last time we know about that processes literals) onward. At the start of each step the value of $gpsr$ is $[0, \infty)$ in each process for each transition. The coordinator keeps the value of $gpsr$ up-to-date by removing the times when one or more of their literals were not satisfied from $gpsr$. At each point in time, if $gpsr$ is not empty and $\min(gpsr)$ is smaller than all the t_{lu} values, then $t = \min(gpsr)$ is the enabling time of the transition; this can be proven as follows:

$$\begin{aligned} gsr &= \bigcap_{i=1}^k (sr_i) = \bigcap_{i=1}^k ((sr_1 \cup (t_{lu_1}, \infty)) \cap [0, t_{lu_1}]) = gpsr \cap \bigcap_{i=1}^k [0, t_{lu_i}] \\ &\Rightarrow gsr = gpsr \cap [0, \min(\{t_{lu_1}, t_{lu_2}, t_{lu_3}, \dots, t_{lu_k}\})] \end{aligned}$$

The enabling time for the transition is the minimum of gsr values, which based on the equation above, is also the minimum of $gpsr$ values, given that this minimum is smaller than all values of t_{lu} . If $t = \min(gpsr)$ was greater than one or more t_{lu} values, it means that the transition may have become enabled but we lack data from the corresponding processes of those t_{lu} values. Therefore, the coordinator sends a Delegate message to the next coordinator which has the smallest t_{lu} , which is among those ambiguous processes.

Having the values $gpsr$ and t_{lu} of all the processes associated with the transition, we do not need to send sr values with Delegate messages, so the final form of Delegate messages, which is used in the algorithm is structured as below:

$$\langle Delegate, t_{lc}, Tr, gpsr, \{t_{lu_1}, t_{lu_2}, t_{lu_3}, \dots, t_{lu_k}\} \rangle$$

Example 9 . Consider a distributed system including processes $\{p_1, p_2, p_3, p_4\}$ with $AP_1 = \{a\}$, $AP_2 = \{b\}$, $AP_3 = \{c\}$, and $AP_4 = \{d\}$. Assume that we want to detect the enabling time of a transition Tr with predicate $a \wedge b \wedge c \wedge d$.

Fig. 10 shows a hypothetical timeline where the horizontal highlighted boxes indicate the intervals when each atomic proposition gets true and vertical striped areas represent time ranges where $a \wedge b \wedge c \wedge d = true$: $[16, 18)$ and $[19, 20)$. We only care about the first time point in these ranges, as it is the enabling time of the transition.

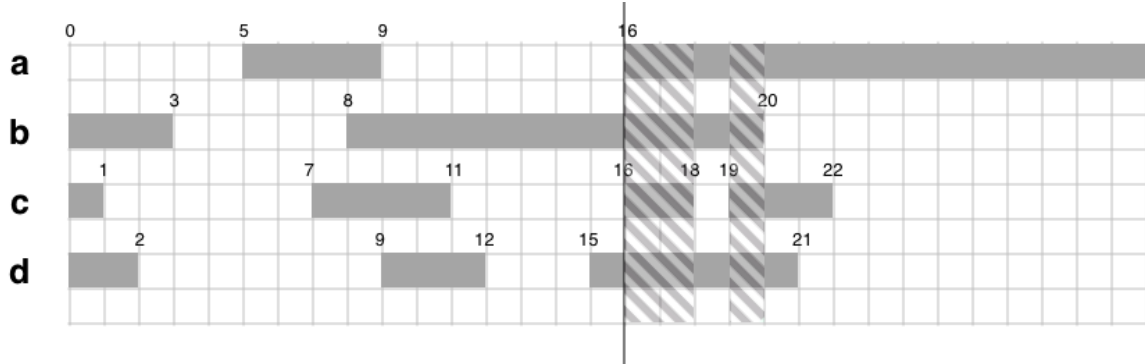


Figure 10: An example of a timeline showing the intervals that each atomic proposition gets true

A sample execution of the transition monitoring part of our algorithm is depicted below:

- Initially, the values of a , b , c and d are false, and p_1 is the coordinator of the transition.
- At $t = 5$, a becomes true in process p_1 . As a result, p_1 sends a Delegate message to p_2 with $gpsr = \{5\}$ and $t_{lu_1} = 5$.
- At $t = 6$, p_2 receives the Delegate message and updates its $gpsr$ to $\{\}$ (since b is false at $t = 5$). It also updates its t_{lu_1} to 5, and its t_{lu_2} to 6.
- At $t = 8$, b becomes true and p_2 sends a Delegate message to p_3 with $gpsr = \{8\}$, $t_{lu_1} = 5$, and $t_{lu_2} = 8$.
- At $t = 9$, p_3 receives the message and sets its $gpsr$ to $[8, 9]$, its t_{lu_1} to 5, its t_{lu_2} to 8, and its t_{lu_3} to 9. It then sends a Delegate message containing these values to p_4 .
- At $t = 10$, p_4 receives the message, sets its $gpsr$ to $[9, 10]$, its t_{lu_1} to 5, its t_{lu_2} to 8, its t_{lu_3} to 9, and its t_{lu_4} to 10. It then sends a Delegate message containing these values to p_1 .
- At $t = 11$, p_1 receives the message, sets its $gpsr$ to $\{\}$, its t_{lu_1} to 11, its t_{lu_2} to 8, its t_{lu_3} to 9, and its t_{lu_4} to 10.
- At $t = 16$, a becomes true, so p_1 updates its t_{lu_1} to 16, and its $gpsr$ to $\{16\}$. It then sends a Delegate message to p_2 .
- At $t = 16$, p_2 receives the message, sets its $gpsr$ to $[16, 19]$, its t_{lu_1} to 16, its t_{lu_2} to 19, its t_{lu_3} to 9, and its t_{lu_4} to 10. It then sends a Delegate message to p_3 .
- At $t = 20$, p_3 receives the message, sets its $gpsr$ to $[16, 18] \cup [19, 20]$, its t_{lu_1} to 16, its t_{lu_2} to 19, its t_{lu_3} to 20, and its t_{lu_4} to 10. It then sends a Delegate message to p_4 .
- At $t = 22$, p_4 receives the message, sets its $gpsr$ to $[16, 18] \cup [19, 21]$, its t_{lu_1} to 16, its t_{lu_2} to 19, its t_{lu_3} to 20, and its t_{lu_4} to 22. It then announces $t = 16$ as the transition's enabling time.

□

4.2. Issues Regarding Completeness. As stated previously, processes detect the enabling times of transitions by sending Delegate messages to each other. They then add these transitions, along with other transitions that have been proven not to become enabled before others, to their TrC list. Whenever a process arrives at a state where its TrC contains all outgoing transitions of q_c , then its Tr_e is the earliest transition and that transition's target location is the next automaton location. The process informs the other processes of this

location change and the next step starts. One problem is that some transitions may never get added to a process's TrC using the previously described methods. These transitions are present in one of the following scenarios:

- (1) Consider the outgoing transitions of q_c to be Tr_1 with predicate $a \wedge b$, and Tr_2 with predicate $c \wedge d$, where a , b , c , and d are literals belonging to four different processes. The two processes that own a and b only communicate with each other about Tr_1 , since they are not associated with Tr_2 's predicate, therefore by only sending and receiving Delegate messages, they will never be able to add Tr_2 to their TrC lists. The same is true for the two processes that own c and d , and transition Tr_1 .
- (2) Consider the outgoing transitions of q_c to be Tr_1 with predicate $a \wedge b$, and Tr_2 with predicate $a \wedge c$, where a , b and c are literals belonging to p_1 , p_2 , and p_3 , respectively. Assume $t = 5$ is detected as Tr_1 's enabling time by p_1 . If p_3 is currently the coordinator of Tr_2 , and if c never gets satisfied (c is always equal to *false*), p_3 never sends a Delegate message to p_1 , since its $gpsr = \emptyset$. This is while p_1 only needs to know that Tr_2 never gets enabled before $t = 5$ in order to add it to its TrC and come to the conclusion that Tr_1 is the earliest transition.

In order to fix the aforementioned problem, we introduce a new kind of message called **Aggregate**. Whenever a process p_i 's TrC list gets updated, it sends an Aggregate message, containing its TrC , Tr_e and t_{Tr_e} , to processes that need information about transitions that have been checked. These receiving processes are defined in the next paragraph. Intuitively speaking, the receiving processes pass the list of checked transitions to other processes via Aggregate messages, until all the processes that need to know about the transitions checked so far are notified.

Having TrC' be the list of q_c 's outgoing transitions that are not members of p_i 's TrC , p_i sends this message to processes with at least one of the following conditions:

- (1) Are associated with a transition in TrC' , the predicate of which p_i is not associated with,
- (2) Are associated with a transition in TrC' , the predicate of which p_i is associated with, and their t_{lu} in p_i is smaller than p_i 's t_{Tr_e} .

Aggregate message have the following structure:

$$\langle \text{Aggregate}, t_{lu}, TrC, Tr_e, t_{Tr_e} \rangle$$

When a process receives an Aggregate message, it compares the message's t_{Tr_e} to its own t_{Tr_e} , and if the message's t_{Tr_e} is smaller than its own t_{Tr_e} , then it updates its Tr_e and t_{Tr_e} to the ones of the received Aggregate message. It also adds the transitions in the received message's TrC to its own TrC list. If, as a result, its TrC list changes, and its new TrC still does not contain all outgoing transitions of q_c , it sends an Aggregate message to other processes that have one of the previously mentioned conditions. Otherwise, it announces an automaton location change.

4.3. Automaton Location Change. When a process realizes a location change in an automaton, it notifies the coordinators of the outgoing transitions of the next automaton location. The initial coordinator of each transition is the process with the smallest index; for example, for a transition with a predicate involving p_1 , p_2 and p_3 in it, process p_1 is chosen as the coordinator. This criteria can be changed arbitrarily, but the important point is that all processes should have the same criteria for this choice, so that if more than one process

notices this change at the same time, different coordinators are not notified for the same transition. Upon receiving the notification, the next chosen coordinator processes reset all their values and then next step of the algorithm starts.

A concurrency issue may occur, where more than one process realizes the location change, and they all send messages to the next coordinators. In this case, a coordinator may receive the notification message, delegate its role to another process, and receive another notification again from another process. This can trivially be fixed if the receiving coordinator process ignores the second notification message with the same t_{llc} value as the previous one.

4.4. Algorithm Overview. A general overview of the algorithm is provided as pseudo-code in Algorithm 1 and Algorithm 2 (where i is the index of the process that the algorithm is running on).

Algorithm 1 shows the routines that are run whenever a message is received by another monitor, and whenever p_i 's local state changes. Lines 2-3 drop the message if it belongs to a previous step. In lines 5-15, the monitor is reset, if it discovers from the value of t_{llc} that a new step has begun. In lines 17-21, the process's $gpsr$ and t_{lu} values are updated in the case of receiving a Delegate message, and in lines 23-28, TrC , Tr_e and t_{Tr_e} are updated in the case of receiving an Aggregate message. In line 30, the `UpdateMonitorState()` function is called, which is responsible for updating the monitors' local state and sending messages if necessary. This function is all that needs to happen when p_i 's local state changes (line 34).

Algorithm 1 Message Reception and State Change Handlers for Each Process p_i

```

1: procedure ONRECEIVEMESSAGE( $m$ )
2:   if  $m.t_{llc} < t_{llc}$  then
3:     // drop message (do nothing)
4:   else
5:     if  $m.t_{llc} > t_{llc}$  then
6:       // reset the process's monitoring state for the new location
7:        $t_{llc} \leftarrow m.t_{llc}$ 
8:        $TrC \leftarrow \{\}$ 
9:        $Tr_e \leftarrow \perp$ 
10:       $t_{Tr_e} \leftarrow 0$ 
11:      for all  $Tr \in q_c.outgoing\_transitions$  s.t.  $p_i \in Tr$  do
12:         $isCoordinatorOf[Tr] \leftarrow false$ 
13:         $Transitions.add(Tr, gpsr = 0, t_{lu} = [ t_{llc} \text{ for all processes } ])$ 
14:      end for
15:    end if
16:     $TrC\_has\_changed \leftarrow false$ 
17:    if  $m.type = Delegate$  then
18:       $Tr \leftarrow m.Tr$ 
19:       $Tr.gpsr \leftarrow m.gpsr$ 
20:       $Tr.lu \leftarrow m.lu$ 
21:       $isCoordinatorOf[Tr] \leftarrow true$ 
22:    else
23:       $TrC \leftarrow TrC \cup m.TrC$ 
24:       $TrC\_has\_changed \leftarrow true$ 
25:      if  $m.t_{Tr_e} < t_{Tr_e}$  then
26:         $Tr_e \leftarrow m.Tr$ 
27:         $t_{Tr_e} \leftarrow m.t_{Tr_e}$ 
28:      end if
29:    end if
30:     $UpdateMonitorState()$ 
31:  end if
32: end procedure
33: procedure ONLOCALSTATECHANGE()
34:    $UpdateMonitorState()$ 
35: end procedure

```

Algorithm 2 shows the `UpdateMonitorState()` function. In lines 3-4, the values of the process's t_{lu} and $gpsr$ are updated for each outgoing transition, along with adding the transitions, the enabling times of which have been detected, to TrC in line 7 (the `RemoveUnsatisfactoryIntervals` helper function removes times were at least one if p_i 's literals are not satisfied, from the given $gpsr$). Lines 9-12 update the earliest outgoing transition (Tr_e) detected so far. Lines 17-20 add the transitions that can't be enabled before Tr_e to TrC . Lines 21-26 send Delegate messages for the transitions which p_i is the coordinator of, and also may be enabled up until now.

If TrC is updated to contain all transitions, the algorithm will announce the monitor location change at line 30. Lines 33-48 send Aggregate messages (in the case of TrC being

changed) to processes associated with transitions that don't exist in TrC and have the first (lines 36-38) or the second (lines 40-42) conditions described previously.


Algorithm 2 The UpdateMonitorState function

```

1: procedure UPDATEMONITORSTATE()
2:   for all  $Tr \in q_c.outgoing\_transitions$  s.t.  $p_i \in Tr$  do
3:     RemoveUnsatisfactoryIntervals( $Tr.gpsr$ )
4:      $Tr.lu_i = now$ 
5:     if  $min(Tr.gpsr) < now$  then
6:       if  $\forall j : (Tr.lu_j > min(Tr.gpsr))$  then
7:         Trc.add( $Tr$ )
8:          $TrC\_has\_changed \leftarrow false$ 
9:         if  $min(Tr.gpsr) < t_{Tr_e}$  then
10:           $Tr_e \leftarrow Tr$ 
11:           $t_{Tr_e} \leftarrow min(Tr.gpsr)$ 
12:        end if
13:      end if
14:    end if
15:  end for
16:  for all  $Tr \in q_c.outgoing\_transitions$  s.t.  $p_i \in Tr$  do
17:    if  $Tr.gpsr \cap [0, t_{Tr_e}] = \emptyset \vee \forall j : (Tr.lu_j > t_{Tr_e})$  then
18:      Trc.add( $Tr$ )
19:       $TrC\_has\_changed \leftarrow false$ 
20:    end if
21:    if  $Tr \notin TrC \wedge min(Tr.gpsr) < now$  then
22:      if isCoordinatorOf[ $Tr$ ] = true then
23:        send  $\langle Delegate, t_{uc}, r.gpsr, Tr.lu \rangle$  to  $p_j$  with smallest  $Tr.lu_j$ 
24:        isCoordinatorOf[ $Tr$ ]  $\leftarrow false$ 
25:      end if
26:    end if
27:  end for
28:  if  $TrC\_has\_changed = true$  then
29:    if  $\forall Tr \in q_c.outgoing\_transitions : Tr \in TrC$  then
30:      Announce  $Tr_e$  as the earliest enabling transition
31:    else
32:      process_list  $\leftarrow \{\}$ 
33:      for all  $Tr \in q_c.outgoing\_transitions$  do
34:        if  $Tr \notin TrC$  then
35:          if  $p_i \notin Tr$  then
36:            for all  $p_j \in Tr$  do
37:              process_list.add( $p_j$ )
38:            end for
39:          else
40:            for all  $p_j \in Tr$  s.t.  $lu_j < t_{Tr_e}$  do
41:              process_list.add( $p_j$ )
42:            end for
43:          end if
44:        end if
45:      end for
46:      for all  $p_j \in process\_list$  do
47:        send  $\langle Aggregate, t_{uc}, TrC, Tr_e, t_{Tr_e} \rangle$  to  $p_j$ 
48:      end for
49:    end if
50:  end if
51: end procedure

```

We now give an example of the entire algorithm in practice:

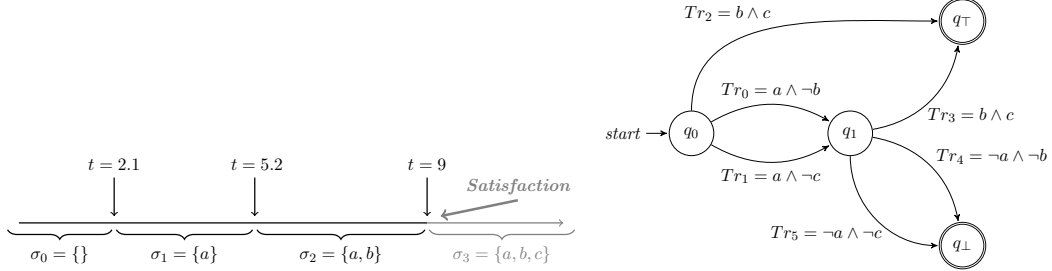

Example 10 . Following the first scenario in Example 4, and using the automaton in Fig. 9, at the beginning, all processes assume that the current automaton location is q_0 . Say initially p_1 is the coordinator of Tr_0 and p_3 is the coordinator of Tr_1

At $t = 2.1$, a becomes true, and process p_1 which has access to a , realizes that Tr_0 can become enabled, but it doesn't know about b yet since only p_2 has access to b , and hence, p_1 sends a Delegate message to p_2 . The same happens for p_3 and Tr_1 , resulting in p_3 sending a Delegate message to p_1 . Upon receiving the message, p_2 realizes that Tr_0 was indeed enabled at $t = 2.1$, so it sends an Aggregate message to p_3 . p_1 also realizes that Tr_1 was enabled at $t = 2.1$ after receiving p_3 's Delegate message, so it sends an Aggregate message to p_2 . Since both Tr_0 and Tr_1 were enabled at the same time, whichever of p_2 or p_3 receives their Aggregate message first detects the automaton location change from q_0 to q_1 at $t = 2.1$. Say after detection, it picks p_3 , p_2 and p_1 as the coordinators of Tr_3 , Tr_4 and Tr_5 , respectively. After getting chosen as Tr_4 's coordinator, p_2 immediately sends a Delegate message to p_1 , because $\neg b$ is true at $t = 2.1$. Now p_1 is the coordinator for both Tr_4 and Tr_5 .

At $t = 5.2$, b becomes true, but since p_2 , which has access to b is not a coordinator, it doesn't do anything and no message is sent in the system.

At $t = 9$, c becomes true, and hence, p_3 detects that there is a possibility for Tr_3 to become enabled at $t = 9$. Therefore, it sends a Delegate message to p_2 . Upon reception, p_2 detects that Tr_3 was indeed enabled at $t = 9$, so it sends an Aggregate message to p_1 . After receiving the message, p_1 being the coordinator of both Tr_4 and Tr_5 comes to the conclusion that neither can be enabled before $t = 9$. Hence, it updates its automaton location to q_\top and announces the satisfaction of the LTL property.

□

Note: The algorithm can be slightly optimized by concatenating messages with the same destination in one message packet. For example, if p_i is the coordinator of three transitions, and at time t , its literals become unsatisfied in the first two transitions' predicates, and if the next coordinator of both transitions is p_j , and also if at time t , process p_i realizes that the third transition is enabled at a certain time, as a result, a single message can be sent to p_j , containing the Delegate messages for the first two transitions and the Aggregate message resulting from the third transitions being added to p_i 's TrC .

5. ALGORITHM PROOF

This section provides the proof of the soundness and correctness of our algorithm.

- Our algorithm is **sound**, meaning that if it announces the satisfaction/violation of the LTL property at time t , the property has actually been satisfied/violated at time t .
- Our algorithm is **complete**, meaning that if the LTL property gets satisfied/violated at time t , the algorithm will announce the property's satisfaction/violation at time t (after a finite delay time from then).

5.1. **Soundness.** Assume, for the sake of contradiction, that: *the algorithm announces the satisfaction/violation of the LTL property at time t while in reality this claim isn't true.* Based on this assumption, at one of the steps during the algorithm's execution, a wrong transition is taken, or the right transition is taken at the wrong time.

- (1) In the case of the right transition being taken at the wrong time, if we assume $t_{detected}$ to be the time that the algorithm has detected the transition, and t_{actual} to be the actual time that the transition should have been taken:

$$t_{detected} \neq t_{actual} \Rightarrow (t_{detected} > t_{actual}) \vee (t_{detected} < t_{actual})$$

- In the case of $t_{detected} > t_{actual}$, given the fact that $t_{detected} = \min(gpsr)$:

$$t_{actual} < \min(gpsr) \Rightarrow t_{actual} \notin \min(gpsr)$$

As stated in the algorithm description, the initial value of $gpsr$ is $[t_{llc}, \infty)$ at the beginning of each step, and the only time it changes is when a process realizes that one or more of its literals are not satisfied at particular times, which are then removed from $gpsr$. Given that t_{actual} is in the time range of the current step, and assuming this is the first step of error, it is obvious that $t_{actual} \in [t_{llc}, \infty)$. That means that at some point, a coordinator process removed t_{actual} from $gpsr$, because one or more of its literals were not satisfied at that time, which contradicts the fact that the transition was actually enabled at t_{actual} .

- In the case of $t_{detected} < t_{actual}$, since t_{actual} is the earliest time the transition becomes enabled, therefore, the transition was disabled at $t_{detected}$. Hence, one or more literals of a process p_i were not satisfied at $t_{detected}$. We know that $t_{lu_i} \geq t_{detected}$, so since p_i was the coordinator at t_{lu_i} , and $t_{llc} \leq t_{detected} \leq t_{lu_i}$, then p_i must have removed $t_{detected}$ from $gpsr$, which contradicts $t_{detected}$ being picked by the algorithm as the transition's enabling time.
- (2) In the case of a wrong transition being taken, in reality another transition (which we name Tr_{actual}) must have been enabled earlier than the transition that the algorithm has detected (which we name $Tr_{detected}$). The process that detected $Tr_{detected}$ as the earliest enabling transition, must have had $Tr_{detected}$ as its Tr_e at that time, and its TrC must have contained all the outgoing transitions of q_c . If both Tr_{actual} and $Tr_{detected}$ were added to its TrC by an Aggregate message, we observe the sender of the Aggregate message; eventually we find a process that had one of the two transitions in its TrC at some point in time, and later on, the other got added to its TrC . We previously proved that transitions' enabling time are never incorrectly detected, and given that whenever a transition gets added to TrC , its enabling time is compared to the process's t_{Tr_e} . Since Tr_{actual} is enabled earlier than $Tr_{detected}$, it is impossible for Tr_e to be $Tr_{detected}$ after the second transition is added to TrC . So this case also contradicts our initial assumption.

5.2. Completeness. In the proof of soundness, we came to the conclusion that the earliest transitions and their enabling time never get detected incorrectly, and the automaton location changes detected by the algorithm are corresponding to what happens in reality. The only case left that could violate the algorithm's completeness, is that at some step, the algorithm halts and doesn't detect a location change, where in reality a transition (which we call Tr_{taken}) must have been enabled and taken at a particular time (which we call t_{taken}). We will proceed to analyze this step.

Note that transitions only get added to processes' TrC values and no TrC ever has a transition removed from it. Therefore, for the algorithm to halt, there should exist a time (which we call t_{halt}), when the TrC of all processes stop changing. We define $TrCH_i$ to be the value of process p_i 's TrC at t_{halt} .

We assume $TS = \{Tr_{\alpha_1}, Tr_{\alpha_2}, Tr_{\alpha_3}, \dots, Tr_{\alpha_k}\}$ to be the list of the k outgoing transitions of q_c sorted by their enabling time in increasing order. Therefore, $Tr_{\alpha_1} = Tr_{taken}$, and the transitions that never get enabled are placed at the end of the list. We now prove by induction, that at t_{halt} , there exists a process with all the transitions of TS in its TrC list, and hence, it can conclude the automaton location change. We define the induction hypothesis $P(m)$ as follows:

$P(m)$ = At t_{halt} , there exists a process containing all transitions $Tr_{\alpha_1}, Tr_{\alpha_2}, Tr_{\alpha_3}, \dots, Tr_{\alpha_m}$ in its TrC .

$\Rightarrow P(m) = \exists i \text{ s.t. } \{Tr_{\alpha_1}, Tr_{\alpha_2}, Tr_{\alpha_3}, \dots, Tr_{\alpha_m}\} \subseteq TrCH_i$

Base Case: $P(1)$ holds

$$\exists i \text{ s.t. } Tr_{\alpha_1} \in TrCH_i$$

This is obvious, since $Tr_1 = Tr_{taken}$, and Tr_{taken} eventually gets enabled, based on the proof of soundness, its enabling time will be detected by its coordinator and it will be added to the coordinator's TrC .

Induction Step: If $P(m)$ holds, then $P(m+1)$ also holds

$$\begin{aligned} & \exists i \text{ s.t. } \{Tr_{\alpha_1}, Tr_{\alpha_2}, Tr_{\alpha_3}, \dots, Tr_{\alpha_m}\} \subseteq TrCH_i \\ \Rightarrow & \exists j \text{ s.t. } \{Tr_{\alpha_1}, Tr_{\alpha_2}, Tr_{\alpha_3}, \dots, Tr_{\alpha_{m+1}}\} \subseteq TrCH_j \end{aligned}$$

If p_i is not associated with $Tr_{\alpha_{m+1}}$'s predicate, the last time its TrC value changes, it sends an Aggregate message containing $TrCH_i$ in its TrC , and with Tr_{taken} as its Tr_e , to all processes associated with $Tr_{\alpha_{m+1}}$'s predicate. One of those processes is $Tr_{\alpha_{m+1}}$'s coordinator, which upon receiving the Aggregate message, realizes that $Tr_{\alpha_{m+1}}$ was not enabled before Tr_e which is Tr_{taken} . It then adds $Tr_{\alpha_{m+1}}$ to its TrC list, which previously contained transitions Tr_{α_1} through Tr_{α_m} from the received Aggregate message. \square

If p_i is associated with $Tr_{\alpha_{m+1}}$'s predicate, the last time its TrC value changes, it sends an Aggregate message containing $TrCH_i$ in its TrC , and with Tr_{taken} as its Tr_e , to all processes associated with $Tr_{\alpha_{m+1}}$'s predicate with a smaller t_{lu} than Tr_{taken} . If one of those processes is $Tr_{\alpha_{m+1}}$'s coordinator, similar to the previous case, the coordinator will end up with all transitions Tr_{α_1} through $Tr_{\alpha_{m+1}}$ in its TrC . \square

If none of those processes are $Tr_{\alpha_{m+1}}$'s coordinator, that means they have passed Delegate messages along, until the coordinator became one of the processes that didn't previously receive the Aggregate message. That process's t_{lu} is bigger than Tr_{taken} 's enabling time. That means the previous coordinator (which received the Aggregate message) now has all of its t_{lu} values to be greater than Tr_{taken} 's enabling time, so upon receiving the Aggregate message, it can conclude that $Tr_{\alpha_{m+1}}$ was not enabled before Tr_{taken} . It then adds $Tr_{\alpha_{m+1}}$ to its TrC list, resulting in it containing transitions Tr_{α_1} through $Tr_{\alpha_{m+1}}$. \square

Conclusion: $P(k)$ holds; At t_{halt} , there exists a process with all outgoing transitions of q_c in its TrC list, proving the algorithm's completeness.

6. EXPERIMENTAL RESULTS

We have fully implemented our algorithm, and ran it in a simulated distributed environment. To evaluate our method, we have also implemented a centralized runtime verification algorithm, where each process sends any update in its local state to a central monitor. The following properties are checked in our experiments:

- ϕ_1 is an extended version of our main example throughout the paper: “At some point, the leader arrives at the destination. It then stays there until all k followers have also arrived”. $\phi_1 = \neg a \cup (a \cup (b_1 \wedge b_2 \wedge \dots \wedge b_k))$
- $\phi_2 =$ “The leader is at the destination and stays there until all k followers have also arrived” = $a \cup (b_1 \wedge b_2 \wedge \dots \wedge b_k)$
- $\phi_3 =$ “Eventually, the leader and all the k followers arrive at the destination” = $\diamond(a \wedge b_1 \wedge b_2 \wedge \dots \wedge b_k)$
- And finally, the property used as the main example in [16]: $\phi_4 = \square(a \Rightarrow (b \cup c))$

The monitor automaton for the first three properties is depicted below in Figs 11, 12 and 13:

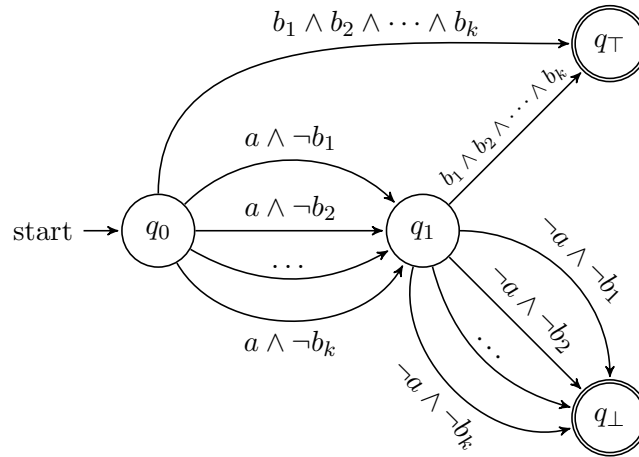


Figure 11: The monitor automaton for the LTL property $\phi_1 = \neg a \cup (a \cup (b_1 \wedge b_2 \wedge \dots \wedge b_k))$

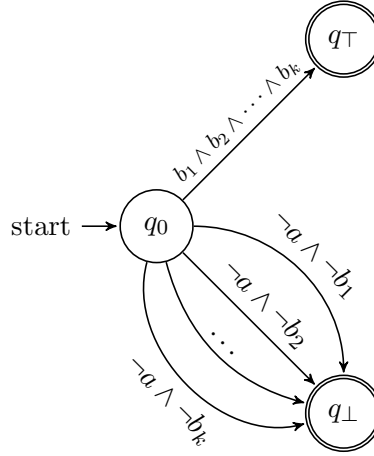


Figure 12: The monitor automaton for the LTL property $\phi_2 = a \cup (b_1 \wedge b_2 \wedge \dots \wedge b_k)$




Figure 13: The monitor automaton for the LTL property $\phi_3 = \diamond(a \wedge b_1 \wedge b_2 \wedge \dots \wedge b_k)$

ϕ_1 , ϕ_2 and ϕ_3 are tested for $k = 2, k = 3, k = 4, \dots, k = 10$ (where k is the number of followers). All properties may result in satisfaction or violation of the property, except for ϕ_3 , which can never be violated, and ϕ_4 , which can never be satisfied. We ran an experiment for each possible outcome in $\{\top, \perp, ?\}$. So, we had a total of 27 experiments involving ϕ_1 (9 for $\phi_1 \models \top$ for different values of $k \in \{2, 3, 4, \dots, 10\}$, 9 for $\phi_1 \models \perp$, and 9 for $\phi_1 \models ?$), 27 experiments for ϕ_2 , 18 experiments for ϕ_3 , and 2 experiments for ϕ_4 , resulting in a total of 74 experiments. 600 randomized traces were generated for each of the 74 experiments. The traces were generated following a Poisson distribution over a range of 100 time units, 200 of the random traces were generated with the distribution's $\mu = 10$, 200 with $\mu = 100$, and 200 with $\mu = 1000$. Message delays were assigned a random value in $[0, 2)$. We checked the value α , defined as the ratio of messages sent if a centralized algorithm had verified the property, to the number of messages sent by our algorithm. This value is the *improvement ratio* of our algorithm in terms of message efficiency.

Based on our experiments, the value of α was independent from μ , or the properties truthfulness value, it only depended on the input itself. As observable in table 1, properties of the first type have the least average improvement, since multiple transitions ($-a \wedge -b_1, -a \wedge -b_2, \dots$), all with a high chance of getting enabled, exit from the same automaton location, resulting in multiple Delegate messages being sent for each. This is while properties of the third type show the highest average improvement ratio, and in some cases, up to 60 fold fewer messages transferred, since only one transition has to be checked: $a \wedge b_1 \wedge b_2 \wedge \dots \wedge b_k$.

7. RELATED WORK

A number of algorithms have been proposed for runtime verification in distributed systems. The authors in [6] and [7] provide runtime verification algorithms for *MTL* properties, and its

Property	Min. α	Avg. α	Max. α
$\neg a \cup (a \cup (b_1 \wedge b_2 \wedge \dots \wedge b_{10}))$	0.479	2.236	16.831
$\neg a \cup (a \cup (b_1 \wedge b_2 \wedge \dots \wedge b_9))$	0.585	2.412	10.905
$\neg a \cup (a \cup (b_1 \wedge b_2 \wedge \dots \wedge b_8))$	0.668	2.651	13.028
$\neg a \cup (a \cup (b_1 \wedge b_2 \wedge \dots \wedge b_7))$	0.896	2.959	11.318
$\neg a \cup (a \cup (b_1 \wedge b_2 \wedge \dots \wedge b_6))$	1.132	3.312	15.331
$\neg a \cup (a \cup (b_1 \wedge b_2 \wedge \dots \wedge b_5))$	1.549	3.761	14.638
$\neg a \cup (a \cup (b_1 \wedge b_2 \wedge b_3 \wedge b_4))$	2.085	4.310	14.644
$\Box(a \Rightarrow (b \cup c))$	2.059	4.685	6.138
$\neg a \cup (a \cup (b_1 \wedge b_2 \wedge b_3))$	2.961	4.983	12.879
$\neg a \cup (a \cup (b_1 \wedge b_2))$	4.753	6.272	12.514
$a \cup (b_1 \wedge b_2)$	8.024	11.393	15.639
$a \cup (b_1 \wedge b_2 \wedge b_3)$	7.120	12.464	19.659
$\Diamond(a \wedge b_1 \wedge b_2)$	7.883	13.377	20.423
$a \cup (b_1 \wedge b_2 \wedge b_3 \wedge b_4)$	5.685	13.551	24.625
$a \cup (b_1 \wedge b_2 \wedge \dots \wedge b_5)$	4.326	14.481	29.266
$\Diamond(a \wedge b_1 \wedge b_2 \wedge b_3)$	8.048	15.321	25.511
$a \cup (b_1 \wedge b_2 \wedge \dots \wedge b_6)$	3.092	15.422	33.645
$a \cup (b_1 \wedge b_2 \wedge \dots \wedge b_7)$	2.248	16.490	39.651
$\Diamond(a \wedge b_1 \wedge b_2 \wedge b_3 \wedge b_4)$	8.483	17.367	28.722
$a \cup (b_1 \wedge b_2 \wedge \dots \wedge b_8)$	1.641	17.554	44.043
$a \cup (b_1 \wedge b_2 \wedge \dots \wedge b_9)$	1.221	18.619	49.408
$\Diamond(a \wedge b_1 \wedge b_2 \wedge \dots \wedge b_5)$	8.385	19.479	35.186
$a \cup (b_1 \wedge b_2 \wedge \dots \wedge b_{10})$	0.928	19.903	55.395
$\Diamond(a \wedge b_1 \wedge b_2 \wedge \dots \wedge b_6)$	8.186	21.738	40.159
$\Diamond(a \wedge b_1 \wedge b_2 \wedge \dots \wedge b_7)$	8.689	23.983	46.116
$\Diamond(a \wedge b_1 \wedge b_2 \wedge \dots \wedge b_8)$	8.153	26.456	52.295
$\Diamond(a \wedge b_1 \wedge b_2 \wedge \dots \wedge b_9)$	8.801	28.900	55.640
$\Diamond(a \wedge b_1 \wedge b_2 \wedge \dots \wedge b_{10})$	8.373	31.495	60.571

Table 1: Improvement in message efficiency for our different input properties

extension with *freeze quantifiers*. These algorithms are both centralized, where all processes send their updates via messages to one or more central monitors that are responsible for checking the final verdict. Our work focuses on a distributed solution, which can decrease the number of required messages.

The algorithms introduced in [10, 11, 12] focus on runtime verification of LTL properties in *synchronous systems*, where all the processes in the system experience local state updates at pre-defined fixed time points. These time points are also referred to as *synchronous rounds*. The synchrony allows processes to communicate based on *the i 'th global state* in the system. We focus on asynchronous systems, where we cannot have any assumptions on synchrony of updates in different processes.

Mostafa et al. in [16] propose a distributed runtime verification algorithm for LTL properties in asynchronous systems. In the absence of a global clock, their algorithm cannot determine the total order of events, and hence, it can only provide us with *possibilities* of satisfaction/violation of properties, based on the different permutations of the total order of

events. In this paper, we use the assumption of having a global clock, which is utilized to identify the order of events, and deterministically identify the satisfaction/violation of the monitored properties.

Some approaches define their own property definition languages, with syntaxes defined specifically for runtime verification. As an example, [8] defines a language called *pt-DTL*, and [9] defines the extended version of that, called *DTL*. Both of these languages are introduced for distributed systems, and their specifications involve processes' *views of the system*, namely what each process knows about other processes. These languages, while intuitive, are not as expressive as *LTL*.

Part of our algorithm for detecting the satisfaction of a predicate is inspired from the methodology used in [17]. We added timing to that algorithm, and used it as a basis for our Delegate messages, which are used to detect the satisfaction of transitions' predicates. The closest algorithm to our proposed approach is introduced by Falcone et al. in [13]. They propose a decentralized runtime verification algorithm for automata using global clocks. The algorithm enhances the given automaton with more states and transitions, and for each automaton location change, it requires passing a message between all processes in a circular fashion. Obviously, their algorithm needs significantly more messages compared to our approach. Based on their reported results, their algorithm is often less than 1.5 times more efficient than a purely centralized algorithm, in terms of the number of messages passed. As mentioned in Section 6, we have achieved up to 60 times less messages compared to a centralized solution.

8. CONCLUSION

In this paper, we introduced a decentralized algorithm for runtime verification of *LTL* properties (or any property describable by a DFA), with significant efficiency in terms of the number of messages passed in the system. Each process has a monitor that communicates with other monitors to identify the location changes in the given DFA. The main goal of monitors is to detect among the outgoing transitions of the current DFA location, the one with the earliest triggering predicate. We prove that our algorithm is both sound and complete. We have implemented our algorithm, along with the centralized solution, and our experiments show that our decentralized solution can achieve up to 60 times fewer messages compared to the centralized one.

As for the future work, we plan to introduce time in the property specification, resulting in a timed automaton with clocks in its transition's predicates. We also plan to propose an efficient runtime verification algorithm for these properties in a real-time distributed system.

REFERENCES

- [1] E. Clarke, *Model checking*, 2nd ed. Cambridge: The MIT Press, 2018.
- [2] M. Leucker and C. Schallhart, "A brief account of runtime verification", *The Journal of Logic and Algebraic Programming*, vol. 78, no. 5, pp. 293-303, 2009.
- [3] S. Colin and L. Mariani, "18 Run-Time Verification", *Model-Based Testing of Reactive Systems*, pp. 525-555, 2005.
- [4] A. Pnueli, "The temporal logic of programs", *18th Annual Symposium on Foundations of Computer Science (sfcs 1977)*, 1977.
- [5] M. Özsu and P. Valduriez, *Principles of distributed database systems*, 3rd ed. New York: Springer, 2011.

- [6] D. Basin, F. Klaedtke, and E. Zalinescu, “Failure-aware Runtime Verification of Distributed Systems”, *Leibniz International Proceedings in Informatics*, Vol. 45, pp. 1603, 2015.
- [7] D. Basin, F. Klaedtke and E. Zlinescu, “Runtime Verification of Temporal Properties over Out-of-Order Data Streams”, *Computer Aided Verification*, pp. 356-376, 2017.
- [8] K. Sen, A. Vardhan, G. Agha and G. Rosu, “Efficient decentralized monitoring of safety in distributed systems”, *Proceedings. 26th International Conference on Software Engineering*.
- [9] T. Scheffel and M. Schmitz, “Three-valued asynchronous distributed runtime verification”, *2014 Twelfth ACM/IEEE Conference on Formal Methods and Models for Codesign (MEMOCODE)*, 2014.
- [10] A. Bauer and Y. Falcone, “Decentralized LTL Monitoring”, *FM 2012: Formal Methods*, pp. 85-100, 2012.
- [11] C. Colombo and Y. Falcone, “Organising LTL monitors over distributed systems with a global clock”, *Formal Methods in System Design*, vol. 49, no. 1-2, pp. 109-158, 2016.
- [12] S. Kazemlou and B. Bonakdarpour, “Crash-Resilient Decentralized Synchronous Runtime Verification”, *2018 IEEE 37th Symposium on Reliable Distributed Systems (SRDS)*, 2018.
- [13] Y. Falcone, T. Cornebize and J. Fernandez, “Efficient and Generalized Decentralized Monitoring of Regular Languages”, *Formal Techniques for Distributed Objects, Components, and Systems*, pp. 66-83, 2014.
- [14] A. Bauer, M. Leucker and C. Schallhart, “Monitoring of Real-Time Properties”, *FSTTCS 2006: Foundations of Software Technology and Theoretical Computer Science*, pp. 260-272, 2006.
- [15] A. Bauer, M. Leucker and C. Schallhart, “Runtime Verification for LTL and TLTL”, *ACM Transactions on Software Engineering and Methodology*, vol. 20, no. 4, pp. 1-64, 2011.
- [16] M. Mostafa and B. Bonakdarpour, “decentralized Runtime Verification of LTL Specifications in Distributed Systems”, *2015 IEEE International Parallel and Distributed Processing Symposium*, 2015.
- [17] H. Chauhan, V. Garg, A. Natarajan and N. Mittal, “A Distributed Abstraction Algorithm for Online Predicate Detection”, *2013 IEEE 32nd International Symposium on Reliable Distributed Systems*, 2013.