

Capacity Bounds for Broadcast Channels with Bidirectional Conferencing Decoders

Reza K. Farsani and Wei Yu

Abstract

The two-user broadcast channel (BC) with receivers connected by cooperative links of given capacities, known as conferencing decoders, is considered. A novel outer bound on the capacity region is established. This outer bound is derived using multiple applications of the Csiszár-Körner identity. New achievable rate regions are also presented. A first achievable rate region is derived by applying Marton's coding as the transmission scheme, and quantize-bin-and-forward at one receiver first and then a combination of decode-and-forward and quantize-bin-and-forward at the other receiver as cooperative strategy. A second achievable rate region is given by applying a combination of decode-and-forward and quantize-bin-and-forward at one receiver first and then quantize-bin-and-forward at the other receiver as cooperation scheme. It is proved that the outer bound coincides with the first achievable rate region for a class of semi-deterministic BCs with degraded message sets. This is the first capacity result for the two-user BC with *bidirectional* conferencing decoders. This result demonstrates that a one-round cooperation scheme is sufficient to achieve capacity. A capacity result is also derived for a new class of more capable semi-deterministic BCs with both common and private messages and one-sided conferencing. For the Gaussian BC with conferencing decoders, if the noises at the decoders are fully correlated (i.e., the correlation is either 1 or -1), the new outer bound yields exact capacity region for two cases: i) BC with degraded message sets; ii) BC with one-sided conferencing from the weaker receiver to the stronger receiver. For these two cases, it is also shown that the outer bound is within half bits of the capacity region for arbitrary noise correlation. Lastly, it is proved that for the Gaussian BC, a one-sided cooperative scheme based on decode-and-forward from the stronger to the weaker receiver can achieve the capacity region to within $\frac{1}{2} \log\left(\frac{2}{1-|\lambda|}\right)$ bits where λ is the correlation coefficient of

Manuscript submitted to *IEEE Transactions on Information Theory* on June 28, 2024. This work is supported by the Natural Sciences and Engineering Research Council (NSERC) of Canada via a Discovery Grant. The materials in this paper has been presented in part at the IEEE Information Theory Workshop (ITW), Saint Malo, France, April 2023 [1] and in part at the IEEE International Symposium on Information Theory (ISIT), Taiwan, June 2023 [2]. The authors are with The Edward S. Rogers Sr. Department of Electrical and Computer Engineering, University of Toronto, 10 King's College Road, Toronto, Ontario M5S3G4, Canada. E-mails: {rkfarsani, weiyu}@ece.utoronto.ca.

the noises. An interesting consequence of these results is that for a Gaussian BC with fully negatively correlated noises and conferencing decoders of fixed cooperation link capacities, it is possible to achieve a positive rate bounded away from zero using only infinitesimal amount of transmit power.

Index Terms

Broadcast channel, bidirectional cooperation, conferencing decoders, capacity region, semi-deterministic channel, Gaussian broadcast channel

I. INTRODUCTION

In practical communication systems, it is sometimes feasible for receivers at distinct locations to exchange messages and to cooperate. This is known to be able to improve the performance of a communication system. This paper considers a channel model in which cooperation takes place via dedicated digital links of finite capacities—termed *conferencing links*. We investigate the impact of user cooperation on the capacity region of a two-user broadcast channel (BC) with conferencing decoders, with both common and private messages.

A. Motivation

To motivate the communication scenario under consideration, consider a Gaussian channel model as shown in Fig. 1. As well known, the capacity of a single-user Gaussian channel is $C = \frac{1}{2} \log \left(1 + \frac{P}{N} \right)$, where P is the transmit power and N is the receiver noise power. Thus at a fixed positive noise power level N , if the transmit power $P \rightarrow 0$, then obviously $C \rightarrow 0$.

Now consider the scenario of transmitting a common message through two-user Gaussian broadcast channel with conferencing decoders. If the two receivers have the same noise power and the noises are *uncorrelated*, then full receiver cooperation can potentially increase the signal-to-noise ratio (SNR) by 3dB, resulting in up to 1 bit increase in the common message capacity of the BC.

The situation is completely different if the receiver noises are *correlated*. Specifically, if the receiver noises are fully *positively* correlated, then cooperation would gain nothing, because $Y_1 = Y_2$ in this case. As each receiver already knows what the other receiver knows, exchanging information does not help. However, if the receiver noises are fully *negatively* correlated, then cooperation can help significantly. Consider the case where $Y_1 = X + Z$ and $Y_2 = X - Z$, and the conferencing links have infinite capacities $C_{12} = C_{21} = \infty$. Then, the BC with conferencing

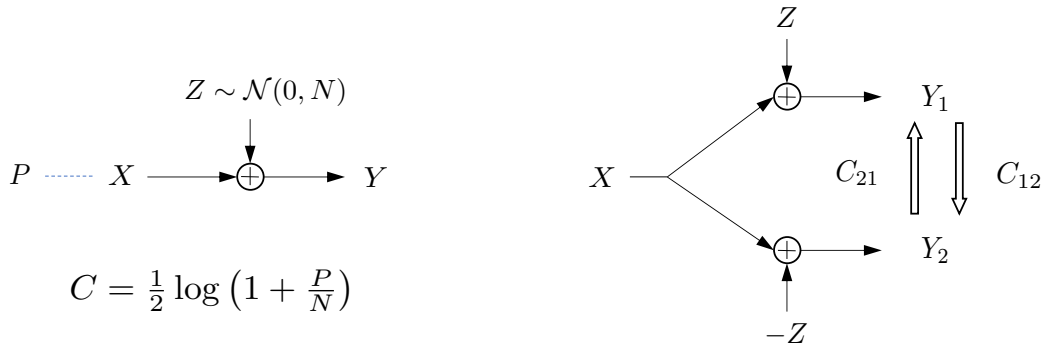


Figure 1. The capacity of a Gaussian channel goes to zero if the transmit power goes to zero (assuming fixed noise power). In a Gaussian BC with fully negatively correlated noises at the receiver, conferencing links at the receivers can allow a strictly positive rate to be achieved even at an infinitesimally small transmit power.

receivers would have *infinite* capacity at any positive transmit power P , because having access to both Y_1 and Y_2 allows the noises to be cancelled completely.

What happens if the noises are fully negatively correlated, but the conferencing links have *finite* capacity, e.g., $C_{12} = C_{21} = 1$ bit? The analysis becomes more delicate and this is one of the main topics of this paper. It turns out that an interesting phenomenon emerges—it is possible to achieve a strictly positive rate (i.e., 1 bit in the example above), even with an infinitesimally small transmit power. In other words, in contrast to the single-user Gaussian channel where $P \rightarrow 0$ implies $C \rightarrow 0$, in this Gaussian BC with fully negatively correlated noises and conferencing decoders of fixed cooperative link capacities, we can have $P \rightarrow 0$ while $C \rightarrow 1$!

The above example motivates us to study the BC with conferencing decoders with a specific focus on the Gaussian channel with correlated noises. We remark that correlated noises often occur in practical communication scenarios when the noises are due to outside interference. A common interference source affecting both receivers would result in correlation in the noises.

B. Prior Literature

Cooperation via conferencing links has been studied for many different communication networks in information theory literature [3]–[18]. Further, the papers [19]–[26] specifically consider the two-user BC with conferencing decoders. In [19], the authors develop communication strategies for the interactive decoding of a common message broadcast to cooperative users. In [20], the capacity region of physically degraded channel is derived and also an achievable rate region

is given for the general case. In [21], an achievable rate region is presented based on coding strategies for the partially cooperative relay broadcast channels and also a converse result is proved. In [22], the problems of communication over physically degraded, state-dependent BCs with one-sided conferencing decoders are investigated. In [23], the capacity region of the semi-deterministic BC with one-sided decoder cooperation is derived and its duality with a source coding problem is addressed. The authors in [24] consider the BC with one-sided cooperating users under the strong secrecy constraints and present capacity results for semi-deterministic and physically degraded cases. In [25], the BC with (one-sided) unreliable cooperating decoders is studied. In a recent work [26], the BC with degraded message sets and one-sided cooperation link that may be absent is considered and its capacity region is given.

C. Main Contributions

The existing capacity results for the BC with conferencing decoders are all for the case of one-sided cooperation, i.e., only one of the users is connected to the other by a cooperating link. This is due to the lack of useful outer bounds (beyond the cut-set bound) for the two-sided cooperation case. In this paper, we first establish a novel outer bound on the capacity region of the two-user BC with bidirectional conferencing decoders. The new outer bound, which is derived using multiple applications of the Csiszár-Körner identity [27] [28, Lemma 7], is strictly tighter than the previous ones including that of [20, Proposition 1] which is essentially the cut-set bound.

We then propose achievability strategies for the BC with conferencing decoders. In [20, Theorem 2] an achievable region is derived for the BC with bidirectional cooperation by applying Marton's coding at the transmitter and compress-and-forward cooperative scheme at both receivers. Another achievable region is given in [21] based on coding strategies for the partially cooperative relay broadcast channels. A third achievable region is given in [23, Appendix B] for the BC with one-sided cooperation between receivers, which is derived by applying Marton's coding at the transmitter and decode-and-forward as cooperative protocol. All of these achievable schemes are however in general insufficient to either derive new capacity results or approximate capacity results for the Gaussian channel. This paper presents two achievability schemes for the two-user BC with both common and private messages and bidirectional conferencing receivers. In the first scheme, we apply Marton's coding as the transmission scheme, and quantize-bin-and-forward at one receiver first and then a combination of decode-and-forward and quantize-

bin-and-forward at the other receiver as cooperative strategy. In the second scheme, we apply a combination of decode-and-forward and quantize-bin-and-forward at one receiver first and then quantize-bin-and-forward at the other receiver as cooperation scheme. For each achievability scheme, at the receiver that applies a combination of decode-and-forward and quantize-bin-and-forward, the optimal proportion of the capacity of the cooperative link that should be devoted to each strategy is determined.

We prove that the novel outer bound coincides with the first achievable rate region for a class of semi-deterministic BCs with degraded message sets. This capacity result is important from two viewpoints. First, it is the first capacity result for the two-user BC with two-sided conferencing receivers (all previously known capacity results are regarding the channel with one-sided cooperation). Second, it is among the rare cases in network information theory for which quantize-bin-and-forward is optimal. These results also demonstrate that a one-round cooperation protocol is sufficient to achieve capacity and multi-round strategies similar to those devised in [19] are not needed. Moreover, we derive a capacity result for a new class of more capable semi-deterministic BCs with both common and private messages and one-sided cooperation.

Furthermore, we evaluate the derived outer bound for the Gaussian channel with correlated noises. Using this bound, we prove several interesting results. For the channel with fully correlated noises (when correlation of noises is either 1 or -1), the new outer bound yields exact capacity region for two cases: i) BCs with degraded message sets; ii) BCs with one-sided conferencing between decoders. For these two cases, we also show that the outer bound is to within half bits of the capacity region for arbitrary noises correlation. Lastly, we prove that for the Gaussian BC, a one-sided cooperative scheme from the stronger receiver to the weaker receiver based on the decode-and-forward technique is already sufficient to achieve the capacity region to within $\frac{1}{2} \log\left(\frac{2}{1-|\lambda|}\right)$ bits where λ is the correlation coefficient of channel noises. Therefore, such a strategy is approximately optimal when the noise correlation is small.

D. Organization of the Paper and Notations

The rest of the paper is organized as follows. We begin with defining the channel model in Section II. The main converse and achievability results for the discrete memoryless model are presented in Section III. Section IV treats the Gaussian broadcast channel with conferencing receiver. We conclude the paper in Section V. The appendices contains most of the proofs.

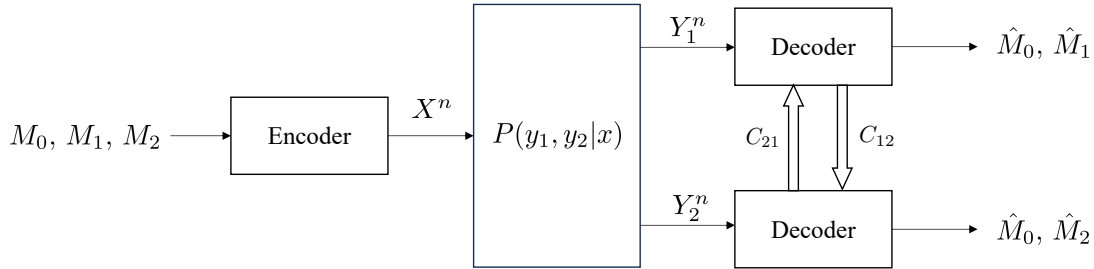


Figure 2. Two-user BC with conferencing decoders

In this paper, we use the following notations. A random variable is given by upper case letter (e.g. X) and its realization is shown by lower case letter (e.g. x). We use X^n to denote a sequence of random variables (X_1, \dots, X_n) and use the notation $X_t^n = (X_t, X_{t+1}, \dots, X_n)$.

The probability distribution function (PDF) of a random variable X is denoted by $P_X(x)$ and the conditional PDF of X given Y is denoted by $P_{X|Y}(x|y)$, where the subscripts are omitted occasionally for brevity. The operator $\{a\}^+$ is defined as: $\{a\}^+ = \max\{0, a\}$. The set of non-negative real numbers is given by \mathbb{R}_+ . Lastly, for $\epsilon > 0$, the set of all jointly ϵ -letter typical n -sequences x^n with respect to the PDF $P_X(x)$ is denoted by $\mathcal{T}_\epsilon^n(P_X)$; (see [29] for definition). Finally, we use the shorthand $\psi(x) = \frac{1}{2} \log(1 + x)$.

II. CHANNEL MODEL

The two-user BC with conferencing decoders is a communication scenario in which a transmitter sends a common message and two private messages to two users, and the two receivers are able to exchange information via communication links of finite capacities (called conferencing links). Fig. 2 illustrates the channel model. The channel is given by $(\mathcal{X}, \mathcal{Y}_1, \mathcal{Y}_2, P(y_1, y_2|x), C_{12}, C_{21})$ where \mathcal{X} denote input alphabet, \mathcal{Y}_1 and \mathcal{Y}_2 denote output alphabets, $P(y_1, y_2|x)$ is the channel transition probability function, and C_{12} , and C_{21} are capacities of the conferencing links.

For the BC with conferencing decoders, a length- n code with Γ conferencing rounds is described as follows. The transmitter encodes independent messages M_0 , M_1 , and M_2 , which are uniformly distributed over the sets $[1 : 2^{nR_0}]$, $[1 : 2^{nR_1}]$, and $[1 : 2^{nR_2}]$, respectively, into a codeword and sends over the channel according to the following:

$$\Delta : [1 : 2^{nR_0}] \times [1 : 2^{nR_1}] \times [1 : 2^{nR_2}] \mapsto \mathcal{X}^n$$

$$X^n = \Delta(M_0, M_1, M_2).$$

The receiver Y_i , $i = 1, 2$, receives a sequence $Y_i^n \in \mathcal{Y}_i^n$. The code consists of two sets of conferencing functions $\{\Xi_{12,\gamma}\}_{\gamma=1}^\Gamma$ and $\{\Xi_{21,\gamma}\}_{\gamma=1}^\Gamma$ with the corresponding output alphabets $\{\mathcal{J}_{12,\gamma}\}_{\gamma=1}^\Gamma$ and $\{\mathcal{J}_{21,\gamma}\}_{\gamma=1}^\Gamma$, respectively, which are described as follows:

$$\Xi_{12,\gamma} : \mathcal{Y}_1^n \times \mathcal{J}_{21,1} \times \dots \times \mathcal{J}_{21,\gamma-1} \mapsto \mathcal{J}_{12,\gamma}$$

$$J_{12,\gamma} = \Xi_{12,\gamma}(Y_1^n, J_{21}^{\gamma-1})$$

$$\Xi_{21,\gamma} : \mathcal{Y}_2^n \times \mathcal{J}_{12,1} \times \dots \times \mathcal{J}_{12,\gamma-1} \mapsto \mathcal{J}_{21,\gamma}$$

$$J_{21,\gamma} = \Xi_{21,\gamma}(Y_2^n, J_{12}^{\gamma-1}).$$

A sequence of conferencing rounds is said to be (C_{12}, C_{21}) -permissible if

$$\sum_{\gamma=1}^\Gamma \log \|\mathcal{J}_{12,\gamma}\| \leq nC_{12}, \quad \sum_{\gamma=1}^\Gamma \log \|\mathcal{J}_{21,\gamma}\| \leq nC_{21}.$$

Before decoding, the receivers exchange information by holding a (C_{12}, C_{21}) -permissible conference. Thus, the first receiver obtains the sequence $J_{21}^\Gamma = (J_{21,1}, J_{21,2}, \dots, J_{21,\Gamma})$ and the second one obtains the sequence $J_{12}^\Gamma = (J_{12,1}, J_{12,2}, \dots, J_{12,\Gamma})$. The receivers then decode their respective messages based on the following decoding functions:

$$\nabla_1 : \mathcal{Y}_1^n \times \mathcal{J}_{21}^\Gamma \mapsto [1 : 2^{nR_0}] \times [1 : 2^{nR_1}]$$

$$(\hat{M}_0, \hat{M}_1) = \nabla_1(Y_1^n \times J_{21}^\Gamma)$$

$$\nabla_2 : \mathcal{Y}_2^n \times \mathcal{J}_{12}^\Gamma \mapsto [1 : 2^{nR_0}] \times [1 : 2^{nR_2}]$$

$$(\hat{M}_0, \hat{M}_2) = \nabla_2(Y_2^n \times J_{12}^\Gamma).$$

The capacity region for the channel is defined as usual [29]. Here, we omit the details for brevity.

III. DISCRETE MEMORYLESS BC WITH CONFERENCING DECODERS

A. Converse

Theorem 1. Consider the two-user BC with conferencing decoders shown in Fig. 2. Let \mathcal{R}_o denote the set of all rate triples (R_0, R_1, R_2) such that

$$R_0 + R_1 \leq I(U; Y_1) + C_{21} \tag{1}$$

$$R_1 \leq I(X; Y_1 | Y_2, V) + I(X; Y_2) \tag{2}$$

$$R_1 \leq I(X; Y_2 | Y_1, V) + I(X; Y_1) \quad (3)$$

$$R_0 + R_2 \leq I(V; Y_2) + C_{12} \quad (4)$$

$$R_2 \leq I(X; Y_2 | Y_1, U) + I(X; Y_1) \quad (5)$$

$$R_2 \leq I(X; Y_1 | Y_2, U) + I(X; Y_2) \quad (6)$$

$$R_0 + R_1 + R_2 \leq I(X; Y_1 | V) + I(V; Y_2) + C_{12} + C_{21} \quad (7)$$

$$R_0 + R_1 + R_2 \leq I(X; Y_2 | U) + I(U; Y_1) + C_{12} + C_{21} \quad (8)$$

$$R_0 + R_1 + R_2 \leq I(X; Y_1 | Y_2, V) + I(X; Y_2) + C_{12} \quad (9)$$

$$R_0 + R_1 + R_2 \leq I(X; Y_2 | Y_1, U) + I(X; Y_1) + C_{21} \quad (10)$$

$$R_0 + R_1 + R_2 \leq I(X; Y_1, Y_2) \quad (11)$$

for some joint PDFs $P(u, v, x)$ where $U, V \rightarrow X \rightarrow Y_1, Y_2$ forms a Markov chain. The set \mathcal{R}_o constitutes an outer bound on the capacity region.

Proof: The proof is given in Appendix A. ■

This novel outer bound on the capacity region of the channel is derived based on multiple applications of the Csiszár-Körner identity [27] [28, Lemma 7]. The Csiszár-Körner identity is used to derive the constraints (7), (8), (9), and (10) based on appropriate definitions of auxiliary random variables U and V . Specifically, careful manipulation of multi-letter mutual information expressions allow us to establish novel structures in the constraints (2), (3), (5), (6), (9) and (10) in terms of the same auxiliary variables. The definitions of U and V are carefully chosen so that the outer bound has a compact representation in term of only two auxiliary random variables. As we demonstrate later, this novel structure of the outer bound is crucial for deriving new capacity results (and also approximate capacity results for the Gaussian channel). The constraint (11) is due to the cut-set bound.

This outer bound \mathcal{R}_o is clearly tighter than that of [20, Proposition 1] which is essentially the cut-set bound.

B. Achievability

We now present novel achievability schemes for the two-user BC with both common and private messages and bidirectional conferencing receivers. The achievability schemes consist of

judicious combination of Marton's coding together with decode-and-forward and quantize-bin-and-forward cooperation strategies. The results are given in the following theorems.

Theorem 2. Consider the two-user BC with conferencing decoders shown in Fig. 2. Let $\mathcal{R}_i^{(1)}$ denote the set of all rate triples $(R_0, R_1, R_2) \in \mathbb{R}_+^3$ such that

$$R_0 + R_1 \leq \min \left\{ I(U, W; Y_1) + \zeta_2, I(U, W; Y_1, \hat{Y}_2) \right\} \quad (12)$$

$$R_0 + R_2 \leq \min \left\{ I(V, W; Y_2) + \zeta_1 + \bar{\alpha}_1 C_{12}, I(V, W; \hat{Y}_1, Y_2) + \bar{\alpha}_1 C_{12} \right\} \quad (13)$$

$$\begin{aligned} R_0 + R_1 + R_2 \leq & \min \left\{ I(U; Y_1|W) + \zeta_2, I(U; Y_1, \hat{Y}_2|W) \right\} \\ & + \min \left\{ I(V, W; Y_2) + \zeta_1 + \bar{\alpha}_1 C_{12}, I(V, W; \hat{Y}_1, Y_2) + \bar{\alpha}_1 C_{12} \right\} - I(U; V|W) \end{aligned} \quad (14)$$

$$\begin{aligned} R_0 + R_1 + R_2 \leq & \min \left\{ I(U, W; Y_1) + \zeta_2, I(U, W; Y_1, \hat{Y}_2) \right\} \\ & + \min \left\{ I(V; Y_2|W) + \zeta_1, I(V; \hat{Y}_1, Y_2|W) \right\} - I(U; V|W) \end{aligned} \quad (15)$$

$$\begin{aligned} 2R_0 + R_1 + R_2 \leq & \min \left\{ I(U, W; Y_1) + \zeta_2, I(U, W; Y_1, \hat{Y}_2) \right\} \\ & + \min \left\{ I(V, W; Y_2) + \zeta_1 + \bar{\alpha}_1 C_{12}, I(V, W; \hat{Y}_1, Y_2) + \bar{\alpha}_1 C_{12} \right\} - I(U; V|W) \end{aligned} \quad (16)$$

$$\zeta_1 = \{\alpha_1 C_{12} - I(\hat{Y}_1; U, Y_1|V, W, Y_2)\}^+ \quad (17)$$

$$\zeta_2 = \{C_{21} - I(\hat{Y}_2; Y_2|U, W, Y_1)\}^+ \quad (18)$$

for some joint PDFs $P(u, v, w, x)P(\hat{y}_1|u, w, y_1)P(\hat{y}_2|y_2)$ and $\alpha_1 \in [0, 1]$. The convex closure of the set $\mathcal{R}_i^{(1)}$ is achievable.

Proof: The cooperation strategy to derive the rate region $\mathcal{R}_i^{(1)}$ involves using Marton's coding scheme for the BC together with quantize-bin-and-forward at the receiver Y_2 first and then a combination of decode-and-forward and quantize-bin-and-forward at the receiver Y_1 . At the receiver Y_1 , the capacity of the conferencing link C_{12} is divided into two parts. A fraction $\bar{\alpha}_1 C_{12}$ is devoted for decode-and-forward and the remaining $\alpha_1 C_{12}$ for quantize-bin-and-forward scheme. A detailed proof of Theorem 2 is given in Appendix B. \blacksquare

Remark 1. In the characterization of the rate region $\mathcal{R}_i^{(1)}$ given in Theorem 2, one can replace ζ_1 and ζ_2 with $\tilde{\zeta}_1$ and $\tilde{\zeta}_2$, respectively, as given below:

$$\tilde{\zeta}_1 = \alpha_1 C_{12} - I(\hat{Y}_1; U, Y_1|V, W, Y_2) \quad (19)$$

$$\tilde{\zeta}_2 = C_{21} - I(\hat{Y}_2; Y_2|U, W, Y_1). \quad (20)$$

To see why this is the case, it is sufficient to note that the case of $\alpha_1 C_{12} < I(\hat{Y}_1; U, Y_1|V, W, Y_2)$ in the characterization of the rate region $\mathcal{R}_i^{(1)}$ is equivalent to the case where we set \hat{Y}_1 equal to \emptyset . Similarly, the case of $C_{21} < I(\hat{Y}_2; Y_2|U, W, Y_1)$ is equivalent to the case where we set \hat{Y}_2 equal to \emptyset .

Remark 2. It is clear that an alternative achievable rate region can be derived by exchanging the cooperative protocol at the receivers in the achievability scheme of Theorem 2, i.e., to apply quantize-bin-and-forward at the receiver Y_2 first and then a combination of decode-and-forward and quantize-bin-and-forward at the receiver Y_1 .

As discussed before, the parameter α_1 in the achievable rate region $\mathcal{R}_i^{(1)}$ reflects a balance between the rates associated with the decode-and-forward and the quantize-bin-and-forward schemes at the user that applies both of them (i.e., Y_1). An interesting result of this paper is that the optimal value for the parameter α_1 can be exactly determined. This result is given in the following theorem.

Theorem 3. The optimal value of the parameter α_1 in the achievable rate region $\mathcal{R}_i^{(1)}$, denoted by α_1^* , is given as follows:

$$\alpha_1^* = \min \left\{ \frac{I(\hat{Y}_1; U, Y_1|W, Y_2)}{C_{12}}, 1 \right\}. \quad (21)$$

Moreover, $\mathcal{R}_i^{(1)}$ is equivalent to the following simplified region:

$$R_0 + R_1 \leq \min \left\{ I(U, W; Y_1) + C_{21} - I(\hat{Y}_2; Y_2|U, W, Y_1), I(U, W; Y_1, \hat{Y}_2) \right\} \quad (22)$$

$$R_0 + R_2 \leq I(V, W; Y_2) + C_{12} - I(\hat{Y}_1; U, Y_1|V, W, Y_2) \quad (23)$$

$$R_0 + R_1 + R_2 \leq \min \left\{ I(U; Y_1|W) + C_{21} - I(\hat{Y}_2; Y_2|U, W, Y_1), I(U; Y_1, \hat{Y}_2|W) \right\} \\ + I(V, W; Y_2) + C_{12} - I(\hat{Y}_1; U, Y_1|V, W, Y_2) - I(U; V|W) \quad (24)$$

$$R_0 + R_1 + R_2 \leq \min \left\{ I(U, W; Y_1) + C_{21} - I(\hat{Y}_2; Y_2|U, W, Y_1), I(U, W; Y_1, \hat{Y}_2) \right\} \\ + \min \left\{ \begin{array}{l} I(V; Y_2|W) + C_{12} - I(\hat{Y}_1; U, Y_1|V, W, Y_2), \\ I(V; \hat{Y}_1, Y_2|W) \end{array} \right\} - I(U; V|W) \quad (25)$$

$$2R_0 + R_1 + R_2 \leq \min \left\{ I(U, W; Y_1) + C_{21} - I(\hat{Y}_2; Y_2|U, W, Y_1), I(U, W; Y_1, \hat{Y}_2) \right\}$$

$$+ I(V, W; Y_2) + C_{12} - I(\hat{Y}_1; U, Y_1|V, W, Y_2) - I(U; V|W) \quad (26)$$

for some joint PDFs $P(u, v, w, x)P(\hat{y}_1|u, w, y_1)P(\hat{y}_2|y_2)$.

Proof: First of all, ζ_1 and ζ_2 in the characterization of $\mathcal{R}_i^{(1)}$ can be respectively replaced by $\tilde{\zeta}_1$ and $\tilde{\zeta}_2$ given in (19)-(20). Now, by setting $\alpha_1 = \alpha_1^*$ in (21), one can easily derive the characterization (22)-(26). To see that this choice is in fact optimal, it is sufficient to note that

$$\begin{aligned} \min \left\{ I(V, W; Y_2) + \alpha_1 C_{12} - I(\hat{Y}_1; U, Y_1|V, W, Y_2) + \bar{\alpha}_1 C_{12}, I(V, W; \hat{Y}_1, Y_2) + \bar{\alpha}_1 C_{12} \right\} \\ \leq I(V, W; Y_2) + C_{12} - I(\hat{Y}_1; U, Y_1|V, W, Y_2) \end{aligned} \quad (27)$$

and

$$\begin{aligned} \min \left\{ I(V; Y_2|W) + \alpha_1 C_{12} - I(\hat{Y}_1; U, Y_1|V, W, Y_2), I(V; \hat{Y}_1, Y_2|W) \right\} \\ \leq \min \left\{ \begin{array}{l} I(V; Y_2|W) + C_{12} - I(\hat{Y}_1; U, Y_1|V, W, Y_2), \\ I(V; \hat{Y}_1, Y_2|W) \end{array} \right\}. \end{aligned} \quad (28)$$

■

Remark 3. The achievable rate region $\mathcal{R}_i^{(1)}$ given in Theorems 2 and 3 clearly includes both of the regions previously given in [20, Theorem 2] and [23, Appendix B] as a subset. Moreover, after some algebraic computations, one can show that $\mathcal{R}_i^{(1)}$ restricted over the distributions of the form $P(u, v, w, x)P(\hat{y}_1|w, y_1)P(\hat{y}_2|y_2)$ includes the achievable rate region of [21, Theorem 3] as a subset. We omit the computations here.

Let us specialize the achievable rate region $\mathcal{R}_i^{(1)}$ for a primitive relay channel [30]. The primitive relay channel is a communication scenario wherein a transmitter sends a message to a receiver using the help of a relay node which is connected to the receiver via a digital link of given capacity. This scenario is a special case of the two-user BC with conferencing decoders by setting $M_0 = M_1 = \emptyset$ and $C_{21} = 0$ in Fig. 2. Now, by setting $U \equiv \emptyset$ and $V \equiv X$ in $\mathcal{R}_i^{(1)}$, we obtain the following achievable rate for the primitive relay channel:

$$\max_{P(w,x)P(\hat{y}_1|w,y_1)} \min \left\{ \begin{array}{l} I(X; Y_2) + C_{12} - I(\hat{Y}_1; Y_1|X, W, Y_2), \\ I(W; Y_1) + I(X; \hat{Y}_1, Y_2|W), \\ I(W; Y_1) + I(X; Y_2|W) + C_{12} - I(\hat{Y}_1; Y_1|X, W, Y_2) \end{array} \right\}. \quad (29)$$

This is in fact the best known achievable rate for the primitive relay channel as discussed in [31].

In the next theorem, we present a second achievable rate region for the two-user BC with bidirectional cooperation based on a combination of decode-and-forward and quantize-bin-and-forward at one receiver first and then quantize-bin-and-forward at the other receiver as cooperation strategy.

Theorem 4. Consider the two-user BC with conferencing decoders shown in Fig. 2. Let $\mathcal{R}_i^{(2)}$ denote the set of all rate triples $(R_0, R_1, R_2) \in \mathbb{R}_+^3$ such that

$$R_0 + R_1 \leq \min \left\{ I(U, W; Y_1) + \eta_2 + \bar{\alpha}_2 C_{21}, I(U, W; Y_1, \hat{Y}_2) + \bar{\alpha}_2 C_{21} \right\} \quad (30)$$

$$R_0 + R_2 \leq I(V, W; Y_2) \quad (31)$$

$$R_0 + R_1 + R_2 \leq \min \left\{ I(U; Y_1|W) + \eta_2, I(U; Y_1, \hat{Y}_2|W) \right\} + I(V, W; Y_2) - I(U; V|W) \quad (32)$$

$$R_0 + R_1 + R_2 \leq \min \left\{ I(U, W; Y_1) + \eta_2 + \bar{\alpha}_2 C_{21}, I(U, W; Y_1, \hat{Y}_2) + \bar{\alpha}_2 C_{21} \right\} \\ + \min \left\{ I(V; Y_2|W) + \eta_1, I(V; \hat{Y}_1, Y_2|W) \right\} - I(U; V|W) \quad (33)$$

$$2R_0 + R_1 + R_2 \leq \min \left\{ I(U, W; Y_1) + \eta_2 + \bar{\alpha}_2 C_{21}, I(U, W; Y_1, \hat{Y}_2) + \bar{\alpha}_2 C_{21} \right\} \\ + I(V, W; Y_2) - I(U; V|W) \quad (34)$$

$$\eta_1 = \{C_{12} - I(\hat{Y}_1; U, Y_1|V, W, Y_2)\}^+ \quad (35)$$

$$\eta_2 = \{\alpha_2 C_{21} - I(\hat{Y}_2; Y_2|U, W, Y_1)\}^+ \quad (36)$$

for some joint PDFs $P(u, v, w, x)P(\hat{y}_1|u, w, y_1)P(\hat{y}_2|w, y_2)$ and $\alpha_2 \in [0, 1]$. The convex closure of the set $\mathcal{R}_i^{(2)}$ is achievable.

Proof: The cooperation strategy to achieve the rate region $\mathcal{R}_i^{(2)}$ is to apply Marton's coding with a combination of decode-and-forward and quantize-bin-and-forward at the receiver Y_2 first and then quantize-bin-and-forward at the receiver Y_1 . At the receiver Y_2 , the capacity of the conferencing link C_{21} is divided into two parts. A fraction $\bar{\alpha}_2 C_{21}$ is devoted for decode-and-forward and the remaining $\alpha_2 C_{21}$ is devoted for quantize-bin-and-forward scheme. A complete proof of Theorem 4 can be found in Appendix C. ■

Remark 4. In the characterization of the rate region (30)-(36), one can replace η_1 and η_2 with $\tilde{\eta}_1$ and $\tilde{\eta}_2$, respectively, which are given as follows:

$$\tilde{\eta}_1 = C_{12} - I(\hat{Y}_1; U, Y_1|V, W, Y_2) \quad (37)$$

$$\tilde{\eta}_2 = \alpha_2 C_{21} - I(\hat{Y}_2; Y_2|U, W, Y_1). \quad (38)$$

To see why this is the case, it is sufficient to note that the case of $C_{12} < I(\hat{Y}_1; U, Y_1 | V, W, Y_2)$ in the characterization of the rate region $\mathcal{R}_i^{(2)}$ is equivalent to the case where we set \hat{Y}_1 equal to \emptyset . Similarly, the case of $\alpha_2 C_{21} - I(\hat{Y}_2; Y_2 | U, W, Y_1)$ is equivalent to the case where we set \hat{Y}_2 equal to \emptyset .

Remark 5. One can obtain an alternative achievable rate region by exchanging the cooperative protocol at the receivers in the achievability scheme of Theorem 4, i.e., to apply a combination of decode-and-forward and quantize-bin-and-forward at the receiver Y_1 first and then quantize-bin-and-forward at the receiver Y_2 .

Similar to the region $\mathcal{R}_i^{(1)}$, we can derive the optimal value of the parameter α_2 for the region $\mathcal{R}_i^{(2)}$ as given in the following.

Theorem 5. The optimal value of the parameter α_2 in the achievable rate region $\mathcal{R}_i^{(2)}$, denoted by α_2^* , is given as follows:

$$\alpha_2^* = \min \left\{ \frac{I(\hat{Y}_2; U, Y_2 | W, Y_1)}{C_{21}}, 1 \right\}. \quad (39)$$

Moreover, $\mathcal{R}_i^{(2)}$ is equivalent to the following simplified region:

$$R_0 + R_1 \leq I(U, W; Y_1) + C_{21} - I(\hat{Y}_2; Y_2 | U, W, Y_1) \quad (40)$$

$$R_0 + R_2 \leq I(V, W; Y_2) \quad (41)$$

$$R_0 + R_1 + R_2 \leq \min \left\{ \begin{array}{l} I(U; Y_1 | W) + C_{21} - I(\hat{Y}_2; Y_2 | U, W, Y_1), \\ I(U; Y_1, \hat{Y}_2 | W) \end{array} \right\} + I(V, W; Y_2) - I(U; V | W) \quad (42)$$

$$\begin{aligned} R_0 + R_1 + R_2 \leq & I(U, W; Y_1) + C_{21} - I(\hat{Y}_2; Y_2 | U, W, Y_1) \\ & + \min \left\{ \begin{array}{l} I(V; Y_2 | W) + C_{12} - I(\hat{Y}_1; U, Y_1 | V, W, Y_2), \\ I(V; \hat{Y}_1, Y_2 | W) \end{array} \right\} - I(U; V | W) \end{aligned} \quad (43)$$

$$2R_0 + R_1 + R_2 \leq I(U, W; Y_1) + C_{21} - I(\hat{Y}_2; Y_2 | U, W, Y_1) + I(V, W; Y_2) - I(U; V | W) \quad (44)$$

for some joint PDFs $P(u, v, w, x)P(\hat{y}_1 | u, w, y_1)P(\hat{y}_2 | w, y_2)$.

Proof: First of all, η_1 and η_2 in the characterization (30)-(36) are respectively replaced by $\tilde{\eta}_1$ and $\tilde{\eta}_2$ given in (37). Now, by setting $\alpha_2 = \alpha_2^*$ in (39), we easily obtain the characterization

(40)-(44). To prove that this choice is in fact optimal, it is sufficient to consider the following inequalities:

$$\begin{aligned} \min \left\{ I(U, W; Y_1) + \alpha_2 C_{21} - I(\hat{Y}_2; Y_2 | U, W, Y_1) + \bar{\alpha}_2 C_{21}, I(U, W; Y_1, \hat{Y}_2) + \bar{\alpha}_2 C_{21} \right\} \\ \leq I(U, W; Y_1) + C_{21} - I(\hat{Y}_2; Y_2 | U, W, Y_1) \end{aligned} \quad (45)$$

and

$$\begin{aligned} \min \left\{ I(U; Y_1 | W) + \alpha_2 C_{21} - I(\hat{Y}_2; Y_2 | U, W, Y_1), I(U; Y_1, \hat{Y}_2 | W) \right\} \\ \leq \min \left\{ \begin{array}{l} I(U; Y_1 | W) + C_{21} - I(\hat{Y}_2; Y_2 | U, W, Y_1), \\ I(U; Y_1, \hat{Y}_2 | W) \end{array} \right\} \end{aligned} \quad (46)$$

■

In general, it is not easy to compare the two regions $\mathcal{R}_i^{(1)}$ and $\mathcal{R}_i^{(2)}$ numerically. The main advantage of the region $\mathcal{R}_i^{(2)}$ over the region $\mathcal{R}_i^{(1)}$ is that its feasible set of distributions is a larger set. We further note that by allowing a fourth auxiliary random variable, it is possible to design an achievability scheme that includes both of $\mathcal{R}_i^{(1)}$ and $\mathcal{R}_i^{(2)}$ as special cases. However, evaluating the resulting rate region would be very complex.

C. Capacity Regions for Specific Channels

The achievability results in the previous section may be further improved, e.g., by applying multiple rounds of cooperation at the users. However, in what follows, we demonstrate that the rate region $\mathcal{R}_i^{(1)}$ is already sufficient to prove new capacity results for several particular two-user BCs with conferencing decoders (as well as approximate capacity results for the Gaussian channel as seen in the next section). Our first capacity result is a class of semi-deterministic BCs with degraded message set.

Theorem 6. *Consider the two-user BC with degraded message sets, with a common message for both users and a private message for the first user, and bidirectional conferencing receivers. For the semi-deterministic channel where $Y_2 = f(X, Y_1)$, the capacity region is given by the closure of convex hull of all (R_0, R_1) satisfying*

$$R_0 \leq I(V; Y_2) + C_{12} \quad (47)$$

$$R_0 + R_1 \leq I(X; Y_1) + C_{21} \quad (48)$$

$$R_0 + R_1 \leq I(X; Y_1|V) + I(V; Y_2) + C_{12} + C_{21} \quad (49)$$

$$R_0 + R_1 \leq I(X; Y_1, Y_2|V) + I(V; Y_2) + C_{12} \quad (50)$$

$$R_0 + R_1 \leq I(X; Y_1, Y_2) \quad (51)$$

for some joint PDFs $P(v, x)$.

Proof: The achievability is derived by setting $U \equiv X$, $W \equiv V$, and $\hat{Y}_2 \equiv Y_2$ in $\mathcal{R}_i^{(1)}$. The converse proof is readily given by \mathcal{R}_o . ■

Note that both Y_1 and Y_2 appear in the mutual information bound (50). Thus, the capacity region of this particular BC depends on the joint distribution $p(y_1, y_2|x)$ and not just the marginals, unlike the case of BC without conferencing decoders. This is a first example of capacity region for a BC that depends on the joint transitional probability distribution function of the channel.

Remark 6. By setting $R_0 = 0$ and $C_{12} = 0$, the result of Theorem 6 is reduced to the capacity of semi-deterministic primitive relay channel derived in [32]. In this case, the capacity is given by $\max_{P(x)} \min\{I(X; Y_1) + C_{21}, I(X; Y_1, Y_2)\}$. Note that for the case of $R_0 = 0$ and $C_{12} = 0$, it is optimal to set $V \equiv \emptyset$. In fact, the cut-set bound is achievable. This capacity is achieved by quantize-bin-and-forward as the relay strategy.

We now present two interesting examples of the semi-deterministic BC with degraded message set.

Example 1. Consider the following binary channel,

$$\begin{cases} Y_1 = X \oplus Z \\ Y_2 = Z \end{cases} \quad (52)$$

where Z is a binary noise and \oplus is the XOR operator. For this channel, we have $Y_2 = X \oplus Y_1$, so the channel is semi-deterministic. The capacity region of this channel with degraded message set is given by all (R_0, R_1) satisfying

$$R_0 \leq C_{12} \quad (53)$$

$$R_0 + R_1 \leq I(X; Y_1) + C_{21} \quad (54)$$

$$R_0 + R_1 \leq H(X) \quad (55)$$

for some $P(x)$.

In this example, the user Y_2 does not receive information from the transmitter directly. Instead, it observes the noise Z and relays the noise to the user Y_1 by sending a compressed version of it through the digital link C_{21} . The user Y_1 then decodes both messages and forwards the common message to the user Y_2 through the digital link C_{12} . Therefore, the user Y_2 can still receive information at a positive rate.

Example 2. Consider the following binary channel,

$$\begin{cases} Y_1 = Z \\ Y_2 = X \oplus Z \end{cases} \quad (56)$$

where again Z is a binary noise. For this channel, the capacity region with degraded message set is the closure of convex hull of all (R_0, R_1) satisfying

$$R_0 \leq I(V; Y_2) + C_{12} \quad (57)$$

$$R_0 + R_1 \leq C_{21} \quad (58)$$

$$R_0 + R_1 \leq H(X|V) + I(V; Y_2) + C_{12} \quad (59)$$

$$R_0 + R_1 \leq H(X) \quad (60)$$

for some $P(v, x)$. As shown, unlike the previous case, the capacity region is characterized based on some auxiliary variable V . The optimal choice for this variable depends on the values of C_{12} and C_{21} .

For this channel, the optimal coding strategy is as follows. Note that the user Y_1 (which is supposed to detect both common and private messages) does not receive any information from the transmitter directly. The optimal cooperation strategy is that the user Y_2 first sends a compressed version of its received signal to the user Y_1 through the digital link C_{21} . Next, the user Y_1 decodes both messages using the information received (and its own signal which is in fact the channel noise) and then forwards part of the common message (using the variable V) to the user Y_2 through the link C_{12} . Lastly, the user Y_2 decodes the common message using its received signal.

It is worthwhile to make the following observation. For Example 2, as the user Y_1 observes the channel noise only, one might think that a cooperative scheme in which Y_1 applies compress-and-forward and Y_2 applies decode-and-forward is the right strategy. However, it turns out that such a scheme is not optimal when the message to Y_2 is a degraded version of the message

to Y_1 . This is in contrast to Example 1, in which the message set degrades in the opposite direction and performing compress-and-forward at the receiver that observes the noise only is the capacity-achieving strategy.

Note that the capacity region of Example 1 coincides with the cut-set bound. But the capacity region of Example 2 is strictly below the cut-set bound.

As far as we know, the above results are the first cases where a combination of compress-and-forward and decode-and-forward strategies yields an *optimal bidirectional cooperation protocol*. There is no previously known capacity result in the literature for channels with bidirectional cooperation between users. Moreover, our results demonstrate that a one-round cooperation scheme is sufficient for achieving capacity for this class of channels.

We also prove a capacity result for a new class of more capable semi-deterministic BCs with both common and private messages and one-sided conferencing.

Theorem 7. *Consider the two-user semi-deterministic BC with both common and private messages and $Y_2 = f(X, Y_1)$. Moreover, assume that the channel is more-capable, i.e., $I(X; Y_2) \leq I(X; Y_1)$ for every input distribution $P(x)$. For the channel with one-sided conferencing where only Y_2 is connected to Y_1 by a digital link of capacity C_{21} , the capacity region is given by the closure of convex hull of all (R_0, R_1, R_2) satisfying*

$$R_0 + R_2 \leq I(V; Y_2) \tag{61}$$

$$R_0 + R_1 + R_2 \leq I(X; Y_1) + C_{21} \tag{62}$$

$$R_0 + R_1 + R_2 \leq I(X; Y_1|V) + I(V; Y_2) + C_{21} \tag{63}$$

$$R_0 + R_1 + R_2 \leq I(X; Y_1, Y_2|V) + I(V; Y_2) \tag{64}$$

$$R_0 + R_1 + R_2 \leq I(X; Y_1, Y_2) \tag{65}$$

for some joint PDFs $P(v, x)$.

Proof. The achievability is derived by setting $U \equiv X$, $W \equiv V$, and $\hat{Y}_2 \equiv Y_2$ in $\mathcal{R}_i^{(1)}$. The converse is given by \mathcal{R}_o . \square

Note that the structure of the novel outer bound \mathcal{R}_o given in Theorem 1, in particular, the constraints (9) and (10), is crucial for deriving the capacity results in Theorems 6 and 7. In the next section, we show that the bounds can also be used to derive capacity results for the Gaussian BC.

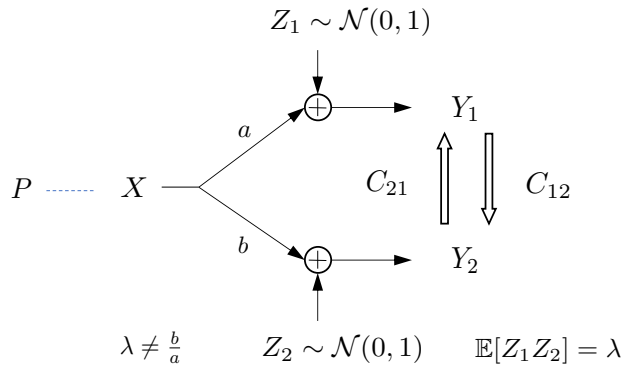


Figure 3. Two-user Gaussian BC with conferencing links and with correlated noises

IV. GAUSSIAN BC WITH CONFERENCING DECODERS

We now study the Gaussian BC with conferencing decoders and with correlated noises as shown in Fig. 3. The channel model is defined as follows:

$$\begin{cases} Y_1 = aX + Z_1 \\ Y_2 = bX + Z_2 \end{cases} \quad (66)$$

where Z_1 and Z_2 are correlated Gaussian noises with zero mean and unit variances and correlation coefficient λ , i.e., $\mathbb{E}[Z_1 Z_2] = \lambda$, X is the input signal with $\mathbb{E}[X^2] \leq P$, and a , and b are the real-valued channel gains. We show that the bounds derived in earlier part of the paper are useful to derive capacity and approximate capacity results for various types of Gaussian BC.

A. Converse

We begin with the outer bound. By considering the input power constraint $\mathbb{E}[X^2] \leq P$, we can optimize the outer bound in Theorem 1 over its auxiliary variables U and V for the Gaussian channel and derive an explicit characterization of the mutual information terms in the outer bound as below.

Theorem 8. *Consider the Gaussian BC (66) with conferencing decoders. Assume that $|a| \geq |b|$. Let \mathcal{R}_o^G denote the set of all rate triples (R_0, R_1, R_2) such that for some $\alpha, \beta \in [0, 1]$*

$$R_0 + R_1 \leq \psi \left(\frac{(1 - \alpha)a^2 P}{\alpha a^2 P + 1} \right) + C_{21} \quad (67)$$

$$R_1 \leq \Psi_2 + \psi \left(\frac{(1 - \beta)b^2 P}{\beta b^2 P + 1} \right) \quad (68)$$

$$R_0 + R_2 \leq \psi \left(\frac{(1 - \beta)b^2P}{\beta b^2P + 1} \right) + C_{12} \quad (69)$$

$$R_2 \leq \Psi_1 + \psi \left(\frac{(1 - \alpha)b^2P}{\alpha b^2P + 1} \right) \quad (70)$$

$$R_0 + R_1 + R_2 \leq \psi(\beta a^2P) + \psi \left(\frac{(1 - \beta)b^2P}{\beta b^2P + 1} \right) + C_{12} + C_{21} \quad (71)$$

$$R_0 + R_1 + R_2 \leq \Psi_2 + \psi \left(\frac{(1 - \beta)b^2P}{\beta b^2P + 1} \right) + C_{12} \quad (72)$$

$$R_0 + R_1 + R_2 \leq \Psi_1 + \psi \left(\frac{(1 - \alpha)a^2P}{\alpha a^2P + 1} \right) + C_{21} \quad (73)$$

$$R_0 + R_1 + R_2 \leq \psi \left(\left(\frac{a^2 + b^2 - 2\lambda ab}{1 - \lambda^2} \right) P \right), \quad (74)$$

where

$$\Psi_1 = \psi \left(\alpha \left(\frac{a^2 + b^2 - 2\lambda ab}{1 - \lambda^2} \right) P \right) \quad (75)$$

$$\Psi_2 = \psi \left(\beta \left(\frac{a^2 + b^2 - 2\lambda ab}{1 - \lambda^2} \right) P \right). \quad (76)$$

The set \mathcal{R}_o^G constitutes an outer bound on the capacity region.

Proof: The outer bound is based on applying entropy power inequality on the outer bound derived in Theorem 1. The details are given in Appendix D. ■

Remark 7. For the Gaussian BC (66) if $\lambda = \frac{b}{a}$, the channel is degraded and we have

$$\frac{a^2 + b^2 - 2\lambda ab}{1 - \lambda^2} = a^2 + \frac{(\lambda a - b)^2}{1 - \lambda^2} = a^2. \quad (77)$$

In this case, the outer bound \mathcal{R}_o^G can be shown to be achievable, and it yields the capacity region (see Remark 11).

Thus, for the rest of the paper, we assume that $\lambda \neq \frac{b}{a}$.

B. Capacity Regions for Specific Channels

Theorem 9. Consider the two-user Gaussian BC (66) with degraded message sets (i.e., a common message for both receivers at rate R_0 and a private message for the first receiver at rate R_1) and bidirectional conferencing receivers. Assume $\lambda \neq \frac{b}{a}$. For the channel with fully correlated noises where $|\lambda| = 1$, the capacity region is given by the closure of convex hull of all (R_0, R_1) satisfying

$$R_0 \leq \psi \left(\frac{(1 - \beta)b^2P}{\beta b^2P + 1} \right) + C_{12} \quad (78)$$

$$R_0 + R_1 \leq \psi(a^2 P) + C_{21} \quad (79)$$

$$R_0 + R_1 \leq \psi(\beta a^2 P) + \psi\left(\frac{(1-\beta)b^2 P}{\beta b^2 P + 1}\right) + C_{12} + C_{21} \quad (80)$$

for some $\beta \in [0, 1]$.

Proof: The achievability is derived from $\mathcal{R}_i^{(1)}$ given in Theorem 2 by setting $X \equiv U \equiv W + \bar{W}$ and $V \equiv \emptyset$, and $\hat{Y}_2 \equiv Y_2 + \hat{Z}_2$, where W and \bar{W} are two independent Gaussian variables with zero means and variances $(1-\beta)P$ and βP , respectively, and \hat{Z}_2 is a Gaussian variable (independent of all other variables) with zero mean and variance $\hat{\sigma}^2$. Note that by this choice of variables, when $|\lambda| = 1$, we have

$$I(\hat{Y}_2; Y_2 | W, U, Y_1) = \frac{1}{2} \psi\left(\frac{1-\lambda^2}{\hat{\sigma}^2}\right) = 0$$

Moreover,

$$\begin{aligned} I(X; Y_1, \hat{Y}_2) &= \frac{1}{2} \psi\left(\left(\frac{a^2 + b^2 - 2\lambda ab + \hat{\sigma}^2 a^2}{1 - \lambda^2 + \hat{\sigma}^2}\right) P\right) \\ &= \frac{1}{2} \psi\left(\left(\frac{a^2 + b^2 - 2\lambda ab + \hat{\sigma}^2 a^2}{\hat{\sigma}^2}\right) P\right) \end{aligned}$$

and

$$\begin{aligned} I(X; Y_1, \hat{Y}_2 | W) &= \frac{1}{2} \psi\left(\beta \left(\frac{a^2 + b^2 - 2\lambda ab + \hat{\sigma}^2 a^2}{1 - \lambda^2 + \hat{\sigma}^2}\right) P\right) \\ &= \frac{1}{2} \psi\left(\beta \left(\frac{a^2 + b^2 - 2\lambda ab + \hat{\sigma}^2 a^2}{\hat{\sigma}^2}\right) P\right). \end{aligned}$$

Therefore, by letting $\hat{\sigma}^2 \rightarrow 0$, one can make the above two mutual information terms arbitrarily large and thus they would not be in effect in the characterization of the achievable rate region. For the case of $|a| \geq |b|$, the converse proof is readily given by \mathcal{R}_o^G in Theorem 8. For the case of $|a| < |b|$, the rate region (78)-(80) (which is achievable by the proposed scheme) is optimal for $\beta = 0$ and it coincides with the cut-set bound. ■

As mentioned earlier, the capacity result in Theorem 9 is interesting because it is among the rare cases in network information theory for which the quantize-bin-and-forward strategy contributes to achieving capacity.

Example 3. A special case of the Gaussian BC with $|\lambda| = 1$ is the following scenario:

$$\begin{cases} Y_1 = X + Z \\ Y_2 = X - Z \end{cases} \quad (81)$$

where Z is a zero mean unit variance Gaussian noise. In this scenario, the two receivers see exactly the same noise but with a different sign. For this channel, the capacity result of Theorem 9 reduces to the following:

$$R_0 \leq \psi(P) + C_{12} \quad (82)$$

$$R_0 + R_1 \leq \psi(P) + C_{21}. \quad (83)$$

In fact for this channel, the cut-set bound is achievable. To achieve this capacity, the second receiver applies quantize-bin-and-forward and the first receiver applies decode-and-forward as the cooperation protocol.

Observe that in the case of common message only, even as $P \rightarrow 0$, it is possible to achieve a strictly positive rate of $R_0 = \min\{C_{12}, C_{21}\}$. This makes concrete the statement made in the introduction, namely, that it is possible to use infinitesimally small amount of power to transmit a strictly positive rate bounded away from zero. Note that the argument presented in the proof of Theorem 9 is only valid for strictly positive values of input power P . We summarize this observation in the following remark.

Remark 8. *The capacity characterization given in Theorem 9 gives the following interesting observation. Even with a very small (yet positive) amount of input power P , one can transmit information over the channel at a rate as high as the capacities of the conferencing links, if the noises are fully correlated, i.e., $|\lambda| = 1$, (assuming $\lambda \neq \frac{b}{a}$). In fact, as $P \rightarrow 0$, the capacity region of the Gaussian BC with degraded message set is as follows:*

$$R_0 \leq \epsilon_1(P) + C_{12} \quad (84)$$

$$R_0 + R_1 \leq \epsilon_2(P) + C_{21}$$

for some $\epsilon_1(P)$ and $\epsilon_2(P)$, which go to zero as $P \rightarrow 0$.

Next, we draw a connection between the BC with conferencing decoders and the relay channel.

Remark 9. *For the special case of primitive relay channel with fully correlated noise, where Y_2 acts as a relay for Y_1 , $C_{12} = 0$ and there is only a private message for the first receiver, the capacity result given in Theorem 9 is reduced to $R_1 \leq \psi(a^2P) + C_{21}$. In this case, using the quantize-bin-and-forward strategy, one can achieve the cut-set bound. Interestingly, the capacity does not depend on b at all.*

This result is an example of a semi-deterministic primitive relay channel, because the relay observation $Y_2 = bX + Z_2$ is a deterministic function of input X and the receiver observation $Y_1 = aX + Z_1$ when Z_1 and Z_2 are fully correlated and $\lambda \neq \frac{b}{a}$. In this case, the cut-set bound is achievable [32].

The following two examples further illustrate Theorem 9.

Example 4. Consider the following Gaussian channel:

$$\begin{cases} Y_1 = X + Z \\ Y_2 = Z \end{cases} \quad (85)$$

where Z is a zero mean unit variance Gaussian noise. In this case, the user Y_2 does not receive any information from the transmitter and only observes the additive noise of the user Y_1 . For this channel, the capacity region can be derived by setting $a = 1$ and $b = 0$ in (78)-(80) and is given by

$$R_0 \leq C_{12} \quad (86)$$

$$R_0 + R_1 \leq \psi(P) + C_{21}. \quad (87)$$

This is the Gaussian counterpart of Example 1. To achieve this capacity, first the user Y_2 sends a compressed version of the observed noise Z to the user Y_1 through the digital link C_{21} . Next, the user Y_1 decodes both common and private messages based on the message from Y_2 , then forwards the common message to Y_2 through the digital link C_{12} .

Example 5. Consider the following Gaussian channel:

$$\begin{cases} Y_1 = Z \\ Y_2 = X + Z. \end{cases} \quad (88)$$

In this case, the capacity region is given by

$$R_0 \leq \psi(P) + C_{12} \quad (89)$$

$$R_0 + R_1 \leq C_{21}. \quad (90)$$

This is the Gaussian counterpart of Example 2. Similar to Example 2, the user Y_1 (which is supposed to detect both common and private messages) does not receive any information from the transmitter directly. The capacity achieving cooperation protocol is that the user Y_2 first sends

a compressed version of its received signal to the user Y_1 through the digital link C_{21} . Next, the user Y_1 decodes both messages using the information received (and its own signal, which is in fact the channel noise) then forwards part of the common message to the user Y_2 through the link C_{12} . Lastly, the user Y_2 decodes the common message using its received signal.

Note that in Example 5, as the user Y_1 observes the channel noise only, one might think that a cooperative scheme in which Y_1 applies compress-and-forward and Y_2 applies decode-and-forward should be used. However, such a scheme is not optimal in this particular BC with degraded message for Y_2 .

Theorem 9 is a capacity result for the Gaussian BC with degraded message sets and fully correlated noises. In the next theorem, for the Gaussian BC with one-sided cooperation and fully correlated noises, we establish the capacity region of the channel with both common and private messages.

Theorem 10. *Consider the two-user Gaussian BC (66) with both common and private messages where $|a| \geq |b|$ and only the weaker receiver is connected to the stronger one by a conferencing link, i.e., $C_{12} = 0$. Assume $\lambda \neq \frac{b}{a}$. For the channel with fully correlated noises where $|\lambda| = 1$, the capacity region is given by the closure of convex hull of all (R_0, R_1, R_2) satisfying*

$$R_0 + R_2 \leq \psi \left(\frac{(1 - \beta)b^2P}{\beta b^2P + 1} \right) \quad (91)$$

$$R_0 + R_1 + R_2 \leq \psi(\beta a^2P) + \psi \left(\frac{(1 - \beta)b^2P}{\beta b^2P + 1} \right) + C_{21} \quad (92)$$

for some $\beta \in [0, 1]$.

The proof of Theorem 10 is similar to that of Theorem 9 and therefore is omitted here.

For the Gaussian BC in which the noises are not fully correlated, the inner and outer bounds of this paper yield approximate capacity results which are presented in the following theorems. The first approximate capacity result is on Gaussian BC with degraded message set.

Theorem 11. *Consider the two-user Gaussian BC (66) with degraded message sets (i.e., a common message for both receivers and a private message for the first receiver) and bidirectional conferencing receivers. Assume that $|a| \geq |b|$ and $\lambda \neq \frac{b}{a}$. For all channel parameters a, b, C_{12}, C_{21} , and λ with $|\lambda| < 1$, the following achievable rate region is within half bits to the capacity region:*

$$R_0 \leq \psi \left(\frac{(1 - \beta)b^2P}{\beta b^2P + 1} \right) + C_{12} \quad (93)$$

$$R_0 + R_1 \leq \psi(a^2 P) + \{C_{21} - 1/2\}^+ \quad (94)$$

$$R_0 + R_1 \leq \psi\left(\left(\frac{a^2 + b^2 - 2\lambda ab + (1 - \lambda^2)a^2}{2(1 - \lambda^2)}\right) P\right) \quad (95)$$

$$R_0 + R_1 \leq \psi(\beta a^2 P) + \psi\left(\frac{(1 - \beta)b^2 P}{\beta b^2 P + 1}\right) + \{C_{21} - 1/2\}^+ + C_{12} \quad (96)$$

$$R_0 + R_1 \leq \psi\left(\beta\left(\frac{a^2 + b^2 - 2\lambda ab + (1 - \lambda^2)a^2}{2(1 - \lambda^2)}\right) P\right) + \psi\left(\frac{(1 - \beta)b^2 P}{\beta b^2 P + 1}\right) + C_{12} \quad (97)$$

for some $\beta \in [0, 1]$.

Proof: The above achievable rate region is derived from $\mathcal{R}_i^{(1)}$ given in Theorem 2 by setting $X \equiv U \equiv W + \bar{W}$ and $V \equiv \emptyset$, and $\hat{Y}_2 \equiv Y_2 + \hat{Z}_2$, where W and \bar{W} are two independent Gaussian variables with zero means and variances $(1 - \beta)P$ and βP , respectively, and \hat{Z}_2 is a Gaussian variable (independent of all other variables) with zero mean and variance $\hat{\sigma}^2 = 1 - \lambda^2$.

By a simple comparison, one can see that the right-hand sides of the constraints (93), (94), (95), (96) and (97) are within half bits of (69), (67), (74), (71), and (72), respectively. ■

Next, we present an approximate capacity result for the Gaussian BC with one-way conferencing.

Theorem 12. *Consider the two-user Gaussian BC (66) with both common and private messages, where $|a| \geq |b|$ and only the weaker receiver has a conferencing link to the stronger receiver, i.e., $C_{12} = 0$. For all channel parameters a , b , C_{21} , and λ with $|\lambda| < 1$ and with $\lambda \neq \frac{b}{a}$, the following achievable rate region is within half bits to the capacity region:*

$$R_0 + R_2 \leq \psi\left(\frac{(1 - \beta)b^2 P}{\beta b^2 P + 1}\right) \quad (98)$$

$$R_0 + R_1 + R_2 \leq \psi\left(\left(\frac{a^2 + b^2 - 2\lambda ab + (1 - \lambda^2)a^2}{2(1 - \lambda^2)}\right) P\right) \quad (99)$$

$$R_0 + R_1 + R_2 \leq \psi(\beta a^2 P) + \psi\left(\frac{(1 - \beta)b^2 P}{\beta b^2 P + 1}\right) + \{C_{21} - 1/2\}^+ \quad (100)$$

$$R_0 + R_1 + R_2 \leq \psi\left(\beta\left(\frac{a^2 + b^2 - 2\lambda ab + (1 - \lambda^2)a^2}{2(1 - \lambda^2)}\right) P\right) + \psi\left(\frac{(1 - \beta)b^2 P}{\beta b^2 P + 1}\right) \quad (101)$$

for some $\beta \in [0, 1]$.

Proof: Similar to Theorem 11, the above achievable rate region is derived from $\mathcal{R}_i^{(1)}$ given in Theorem 2 by setting $X \equiv U \equiv W + \bar{W}$ and $V \equiv \emptyset$, and $\hat{Y}_2 \equiv Y_2 + \hat{Z}_2$, where W and \bar{W} are two independent Gaussian variables with zero means and variances $(1 - \beta)P$ and βP , respectively, and \hat{Z}_2 is a Gaussian variable (independent of all other variables) with zero mean and variance $\hat{\sigma}^2 = 1 - \lambda^2$.

By a simple comparison, one can see that the right-hand sides of the constraints (98), (99), (100) and (101) are within half bits of (69), (74), (71), and (72), respectively. ■

Finally, we derive an approximate capacity result for the two-user Gaussian BC (66) with both common and private messages and with bidirectional cooperative receivers. First, we present an achievable region for the channel using only one-way conferencing with decode-and-forward. The other conferencing link is not used, so the resulting achievable rate region is a sub-region of $\mathcal{R}_i^{(1)}$ (12)-(18). It turns out that this region is already approximately optimal when the noise correlation is small.

Proposition 1. *Let \mathcal{R}_i^{DF-G} denote the set of all rate triples (R_0, R_1, R_2) such that*

$$R_0 + R_2 \leq \psi \left(\frac{(1 - \beta)b^2P}{\beta b^2P + 1} \right) + C_{12} \quad (102)$$

$$R_0 + R_1 + R_2 \leq \psi(a^2P) \quad (103)$$

$$R_0 + R_1 + R_2 \leq \psi(\beta a^2P) + \psi \left(\frac{(1 - \beta)b^2P}{\beta b^2P + 1} \right) + C_{12} \quad (104)$$

for some $\beta \in [0, 1]$. The set \mathcal{R}_i^{DF-G} constitutes an inner bound on the capacity region of the Gaussian BC (66) with conferencing decoders.

Proof: The bound \mathcal{R}_i^{DF-G} is derived from $\mathcal{R}_i^{(1)}$ given in Theorem 2 by setting $X \equiv U \equiv W + \bar{W}$ and $V \equiv \hat{Y}_2 \equiv \emptyset$, where W and \bar{W} are two independent Gaussian variables with zero means and variances βP and $(1 - \beta)P$, respectively. Note that this inner bound is in fact derived for the channel with one-sided cooperation (i.e., it does not make use of the conferencing link C_{21}) using the decode-and-forward strategy alone. Nevertheless, it is a valid inner bound for the channel with bidirectional cooperation. ■

Theorem 13. *Consider the two-user Gaussian BC (66) with both common and private messages and with bidirectional conferencing decoders. Assume that $|a| \geq |b|$. For all channel parameters a, b, C_{12}, C_{21} , and λ , the inner bound \mathcal{R}_i^{DF-G} is within $\frac{1}{2} \log\left(\frac{2}{1-|\lambda|}\right)$ bits of the capacity region.*

Proof: The constraint (102) is identical to (69). Moreover, by simple algebraic computations, one can show that the right-hand sides of the constraints (103) and (104) are within $\frac{1}{2} \log(\frac{2}{1-|\lambda|})$ bits of (74) and (72), respectively. ■

Remark 10. For the Gaussian BC with $\lambda ab \geq 0$, a better approximate capacity bound of $\frac{1}{2} \log(\frac{2}{1-\lambda^2})$ bits is possible for the region \mathcal{R}_i^{DF-G} given in Proposition 1.

Theorem 13 states that if we do not use the quantize-bin-and-forward part of the conferencing protocol and rely solely on decode-and-forward, the gap to capacity would depend on the noise correlation. This is because decode-and-forward cannot exploit the noise correlation, so while it achieves within constant gap to the capacity region when the noises are uncorrelated, it cannot do so when the noises are highly correlated. Nevertheless, there is one special case for which decode-and-forward is optimal.

Remark 11. For the Gaussian BC (66) with $\lambda = \frac{b}{a}$, considering (77), one can verify that the decode-and-forward achievable region \mathcal{R}_i^{DF-G} of Proposition 1 coincides with the outer bound \mathcal{R}_o^G given in Theorem 8. Thus, it yields the capacity region.

As concluding remark for this section, the novel structure of the outer bound given in Theorem 8, in particular, the constraint (72), is crucial for deriving the exact capacity results in Theorems 9 and 10, and also the approximate capacity results in Theorems 11, 12, and 13.

V. CONCLUSIONS

Receiver cooperation can significantly improve the capacity of a broadcast channel. In this paper, we establish novel outer bounds, which are tighter than the cut-set bound, for the BC with bidirectional conferencing receiver using the Csiszár-Körner identity. Together with the achievability results based on Marton's coding and judicious combination of quantize-bin-and-forward and decode-and-forward, we derive capacity results for specific classes of semi-deterministic BCs with degraded message set and more capable semi-deterministic BCs with one-sided conferencing. Furthermore, for the Gaussian BC, we illustrate the importance of noise correlation when the receivers can cooperate using the conferencing links. For the Gaussian BC with fully correlated noises, one only need infinitesimal amount of power to transmit at a rate as high as the capacity of the conferencing links.

APPENDIX A
PROOF OF THEOREM 1

We only derive the constraints that include the auxiliary variable U , i.e., (1), (5), (6), (8), and (10). The constraints that include V are derived symmetrically. The last constraint is due to the cut-set bound. Consider a length- n code with vanishing average error probability. Define new auxiliaries as follows.

$$U_t = (M_0, M_1, Y_2^{t-1}, Y_{1,t+1}^n) \quad t = 1, \dots, n \quad (105)$$

By Fano's inequality, we have

$$\begin{aligned} n(R_0 + R_1) &\leq I(M_0, M_1; Y_1^n, J_{21}^\Gamma) + n\epsilon_n^1 \end{aligned} \quad (106)$$

$$= I(M_0, M_1; Y_1^n) + I(M_0, M_1; J_{21}^\Gamma | Y_1^n) + n\epsilon_n^1 \quad (107)$$

$$\leq \sum_{t=1}^n I(M_0, M_1; Y_{1,t} | Y_{1,t+1}^n) + H(J_{21}^\Gamma) + n\epsilon_n^1 \quad (108)$$

$$\leq \sum_{t=1}^n I(M_0, M_1, Y_{1,t+1}^n, Y_2^{t-1}; Y_{1,t}) + H(J_{21}^\Gamma) + n\epsilon_n^1 \quad (109)$$

$$\leq \sum_{t=1}^n I(U_t; Y_{1,t}) + nC_{21} + n\epsilon_n^1 \quad (110)$$

where inequality (109) holds because conditioning does not increase the entropy. This corresponds to (1). Next, we derive the constraints on R_2 . By Fano's inequality,

$$nR_2 \leq I(M_2; Y_2^n, J_{12}^\Gamma) + n\epsilon_n^2 \quad (111)$$

$$\leq I(M_2; Y_1^n, Y_2^n, J_{12}^\Gamma) + n\epsilon_n^2 \quad (112)$$

$$= I(M_2; Y_1^n, Y_2^n) + n\epsilon_n^2 \quad (113)$$

$$\leq I(M_2; Y_1^n, Y_2^n | M_0, M_1) + n\epsilon_n^2 \quad (114)$$

where (113) holds because J_{12}^Γ is given by a deterministic function of (Y_1^n, Y_2^n) . Now consider the following:

$$\begin{aligned} I(M_2; Y_1^n, Y_2^n | M_0, M_1) &= I(M_2; Y_2^n | M_0, M_1) + I(M_2; Y_1^n | Y_2^n, M_0, M_1) \end{aligned} \quad (115)$$

$$\leq I(M_0, M_1, M_2; Y_2^n) + I(M_2; Y_1^n | Y_2^n, M_0, M_1) \quad (116)$$

$$\leq \sum_{t=1}^n I(X_t; Y_{2,t}) + \sum_{t=1}^n I(X_t; Y_{1,t} | Y_{2,t}, M_0, M_1, Y_2^{t-1}, Y_{2,t+1}^n, Y_{1,t+1}^n) \quad (117)$$

$$= \sum_{t=1}^n I(X_t; Y_{2,t}) + \sum_{t=1}^n I(X_t; Y_{1,t} | Y_{2,t}, U_t, Y_{2,t+1}^n) \quad (118)$$

$$\leq \sum_{t=1}^n I(X_t; Y_{2,t}) + \sum_{t=1}^n I(X_t; Y_{1,t} | Y_{2,t}, U_t), \quad (119)$$

where (117) holds because X_t is a deterministic function of (M_0, M_1, M_2) and the channel is memoryless, and (119) holds because conditioning does not increase entropy and also given the input signal X_t , the outputs $Y_{1,t}, Y_{2,t}$ are independent of other variables. In the same way, one can also derive

$$\begin{aligned} & I(M_2; Y_1^n, Y_2^n | M_0, M_1) \\ &= I(M_2; Y_1^n | M_0, M_1) + I(M_2; Y_2^n | Y_1^n, M_0, M_1) \end{aligned} \quad (120)$$

$$\leq \sum_{t=1}^n I(X_t; Y_{1,t}) + \sum_{t=1}^n I(X_t; Y_{2,t} | Y_{1,t}, U_t). \quad (121)$$

By substituting (119) and (121) into (114), we obtain the desired bounds on R_2 (5) and (6).

Next, we derive the constraints on the sum rate. We have

$$\begin{aligned} & n(R_0 + R_1 + R_2) \\ & \leq I(M_0, M_1; Y_1^n, J_{21}^\Gamma) + I(M_2; Y_2^n, J_{12}^\Gamma) + n(\epsilon_n^1 + \epsilon_n^2) \end{aligned} \quad (122)$$

$$\begin{aligned} & \leq I(M_0, M_1; Y_1^n) + I(M_2; Y_2^n) + I(M_0, M_1; J_{21}^\Gamma | Y_1^n) \\ & \quad + I(M_2; J_{12}^\Gamma | Y_2^n) + n(\epsilon_n^1 + \epsilon_n^2) \end{aligned} \quad (123)$$

$$\begin{aligned} & \leq I(M_0, M_1; Y_1^n) + I(M_2; Y_2^n | M_0, M_1) \\ & \quad + H(J_{21}^\Gamma) + H(J_{12}^\Gamma) + n(\epsilon_n^1 + \epsilon_n^2) \end{aligned} \quad (124)$$

$$\begin{aligned} & \leq I(M_0, M_1; Y_1^n) + I(M_2; Y_2^n | M_0, M_1) \\ & \quad + n(C_{12} + C_{21}) + n(\epsilon_n^1 + \epsilon_n^2). \end{aligned} \quad (125)$$

Now consider the following:

$$\begin{aligned} & I(M_0, M_1; Y_1^n) + I(M_2; Y_2^n | M_0, M_1) \\ &= \sum_{t=1}^n I(M_0, M_1; Y_{1,t} | Y_{1,t+1}^n) \end{aligned}$$

$$+ \sum_{t=1}^n I(M_2; Y_{2,t} | M_0, M_1, Y_2^{t-1}) \quad (126)$$

$$\begin{aligned} &\leq \sum_{t=1}^n I(Y_2^{t-1}, M_0, M_1; Y_{1,t} | Y_{1,t+1}^n) \\ &\quad - \sum_{t=1}^n I(Y_2^{t-1}; Y_{1,t} | M_0, M_1, Y_{1,t+1}^n) \\ &\quad + \sum_{t=1}^n I(Y_{1,t+1}^n, M_2; Y_{2,t} | M_0, M_1, Y_2^{t-1}) \end{aligned} \quad (127)$$

$$\begin{aligned} &\leq \sum_{t=1}^n I(Y_2^{t-1}, M_0, M_1; Y_{1,t} | Y_{1,t+1}^n) \\ &\quad - \sum_{t=1}^n I(Y_2^{t-1}; Y_{1,t} | M_0, M_1, Y_{1,t+1}^n) \\ &\quad + \sum_{t=1}^n I(Y_{1,t+1}^n; Y_{2,t} | M_0, M_1, Y_2^{t-1}) \\ &\quad + \sum_{t=1}^n I(M_2; Y_{2,t} | M_0, M_1, Y_2^{t-1}, Y_{1,t+1}^n) \end{aligned} \quad (128)$$

$$\begin{aligned} &\leq \sum_{t=1}^n I(Y_2^{t-1}, M_0, M_1; Y_{1,t} | Y_{1,t+1}^n) \\ &\quad + \sum_{t=1}^n I(M_2; Y_{2,t} | M_0, M_1, Y_2^{t-1}, Y_{1,t+1}^n) \end{aligned} \quad (129)$$

$$\begin{aligned} &\leq \sum_{t=1}^n I(Y_2^{t-1}, Y_{1,t+1}^n, M_0, M_1; Y_{1,t}) \\ &\quad + \sum_{t=1}^n I(M_2; Y_{2,t} | M_0, M_1, Y_2^{t-1}, Y_{1,t+1}^n) \end{aligned} \quad (130)$$

$$\leq \sum_{t=1}^n I(U_t; Y_{1,t}) + \sum_{t=1}^n I(X_t; Y_{2,t} | U_t) \quad (131)$$

where (129) is due to the Csiszár-Körner identity [27] [28, Lemma 7]. The Csiszár-Körner identity states that given two arbitrary random vectors A_1^n and B_1^n and an arbitrary random variable C , the following is true:

$$\sum_{t=1}^n I(A_{t+1}^n; B_t | B_1^{t-1}, C) = \sum_{t=1}^n I(B_1^{t-1}; A_t | A_{t+1}^n, C). \quad (132)$$

By substituting (131) in (125), we obtain the bound (8) on the sum rate. Finally, we can write

$$n(R_0 + R_1 + R_2)$$

$$\leq I(M_0, M_1; Y_1^n, J_{21}^\Gamma) + I(M_2; Y_2^n, J_{12}^\Gamma) + n(\epsilon_n^1 + \epsilon_n^2) \quad (133)$$

$$\begin{aligned} &\leq I(M_0, M_1; Y_1^n) + I(M_2; Y_1^n, Y_2^n, J_{12}^\Gamma) \\ &\quad + I(M_0, M_1; J_{21}^\Gamma | Y_1^n) + n(\epsilon_n^1 + \epsilon_n^2) \end{aligned} \quad (134)$$

$$\leq I(M_0, M_1; Y_1^n) + I(M_2; Y_1^n, Y_2^n) + H(J_{21}^\Gamma) + n(\epsilon_n^1 + \epsilon_n^2) \quad (135)$$

$$\begin{aligned} &\leq I(M_0, M_1; Y_1^n) + I(M_2; Y_1^n, Y_2^n | M_0, M_1) \\ &\quad + nC_{21} + n(\epsilon_n^1 + \epsilon_n^2) \end{aligned} \quad (136)$$

$$\begin{aligned} &\leq I(M_0, M_1; Y_1^n) + I(M_2; Y_2^n | M_0, M_1) \\ &\quad + I(M_2; Y_1^n | Y_2^n, M_0, M_1) \end{aligned} \quad (137)$$

$$\begin{aligned} &\leq \sum_{t=1}^n I(U_t; Y_{1,t}) + \sum_{t=1}^n I(X_t; Y_{2,t} | U_t) \\ &\quad + \sum_{t=1}^n I(X_t; Y_{1,t} | Y_{2,t}, U_t) + nC_{21} + n(\epsilon_n^1 + \epsilon_n^2) \end{aligned} \quad (138)$$

$$\begin{aligned} &= \sum_{t=1}^n I(U_t; Y_{1,t}) + \sum_{t=1}^n I(X_t; Y_{1,t}, Y_{2,t} | U_t) \\ &\quad + nC_{21} + n(\epsilon_n^1 + \epsilon_n^2) \end{aligned} \quad (139)$$

$$\begin{aligned} &= \sum_{t=1}^n I(U_t; Y_{1,t}) + \sum_{t=1}^n I(X_t; Y_{1,t} | U_t) \\ &\quad + \sum_{t=1}^n I(X_t; Y_{2,t} | Y_{1,t}, U_t) + nC_{21} + n(\epsilon_n^1 + \epsilon_n^2) \end{aligned} \quad (140)$$

$$\begin{aligned} &= \sum_{t=1}^n I(X_t; Y_{1,t}) + \sum_{t=1}^n I(X_t; Y_{2,t} | Y_{1,t}, U_t) \\ &\quad + nC_{21} + n(\epsilon_n^1 + \epsilon_n^2) \end{aligned} \quad (141)$$

where inequality (138) is derived by following the same line of argument as in (131) using the Csiszár-Körner identity. This corresponds to the desired constraint (10).

Finally, (11) is just the cut-set bound. By applying a standard time-sharing argument, the proof is thus complete.

APPENDIX B
PROOF OF THEOREM 2

We prove the achievability of $\mathcal{R}_i^{(1)}$ using Marton's coding for the BC together with quantize-bin-and-forward at Y_2 , then a combination of decode-and-forward and quantize-bin-and-forward at Y_1 . Fix a joint distribution $P(u, v, w, x)P(\hat{y}_1|u, w, y_1)P(\hat{y}_2|y_2)$ and let α_1 be any arbitrary real number in $[0, 1]$. We consider a random codebook consisting of length- n codewords to transmit the independent messages M_0 , M_1 , and M_2 , uniformly distributed over the sets $[1 : 2^{nR_0}]$, $[1 : 2^{nR_1}]$, and $[1 : 2^{nR_2}]$, respectively.

First of all, each of the private messages M_1 and M_2 is split into two parts as follows:

$$\begin{aligned} M_1 &\longmapsto (M_{10}, M_{11}) & M_{10} \in [1 : 2^{nR_{10}}], \quad M_{11} \in [1 : 2^{nR_{11}}] \\ M_2 &\longmapsto (M_{20}, M_{22}) & M_{20} \in [1 : 2^{nR_{20}}], \quad M_{22} \in [1 : 2^{nR_{22}}]. \end{aligned} \quad (142)$$

Therefore,

$$R_1 = R_{10} + R_{11}, \quad (143)$$

$$R_2 = R_{20} + R_{22}. \quad (144)$$

The sub-messages M_{10} and M_{20} are decoded at both receivers, i.e., the triple (M_0, M_{10}, M_{20}) is considered as the common message with rate

$$R_{00} = R_0 + R_{10} + R_{20}. \quad (145)$$

Moreover, let $B_1, B_2, \hat{R}_1, \hat{R}_2$ be non-negative real numbers. Also, define:

$$\hat{C}_{12}^d = \min\{\bar{\alpha}_1 C_{12}, R_{00}\} \quad (146)$$

$$\hat{C}_{12}^q = \min\{\alpha_1 C_{12}, \hat{R}_1\} \quad (147)$$

$$\hat{C}_{21} = \min\{C_{21}, \hat{R}_2\}. \quad (148)$$

A. Encoding at the Transmitter

- 1) Generate at random $2^{nR_{00}}$ independent codewords W^n according to $P(w^n) = \prod_{t=1}^n P(w_t)$. Label these codewords $W^n(m_{00})$ where $m_{00} \in [1 : 2^{nR_{00}}]$.
- 2) For each codeword $W^n(m_{00})$, generate at random $2^{n(R_{11}+B_1)}$ independent codewords U^n according to $\prod_{t=1}^n P(u_t|w_t(m_{00}))$. Label these codewords $U^n(m_{00}, m_{11}, b_1)$ where $m_{11} \in [1 : 2^{nR_{11}}]$ and $b_1 \in [1 : 2^{nB_1}]$.

- 3) For each codeword $W^n(m_{00})$, generate at random $2^{n(R_{22}+B_2)}$ independent codewords V^n according to $\prod_{t=1}^n P(v_t|w_t(m_{00}))$. Label these codewords $V^n(m_{00}, m_{22}, b_2)$ where $m_{22} \in [1 : 2^{nR_{22}}]$ and $b_2 \in [1 : 2^{nB_2}]$.
- 4) Given a triple (m_{00}, m_{11}, m_{22}) to be transmitted, let (b_1^T, b_2^T) be a pair that satisfies the following:

$$(W^n(m_{00}), U^n(m_{00}, m_{11}, b_1^T), V^n(m_{00}, m_{22}, b_2^T)) \in \mathcal{T}_\epsilon^n(P_{WUV}) \quad (149)$$

If there are multiple pairs of (b_1, b_2) which satisfy (149), then let (b_1^T, b_2^T) be the one with minimum $b_1 + b_2$. If there is no such a pair, declare encoding error. Based on the mutual covering lemma [29], one can easily see that for sufficiently large n and small ϵ , the probability of encoding error tends to zero provided that

$$B_1 + B_2 \geq I(U; V|W) \quad (150)$$

The transmitter then generates a codeword X^n according to

$$\prod_{t=1}^n P(x_t|w_t(m_{00}), u_t(m_{00}, m_{11}, b_1^T), v_t(m_{00}, m_{22}, b_2^T))$$

and sends it over the channel.

B. Encoding and Decoding at the Receivers

- 1) Generate at random $2^{n\hat{R}_2}$ independent codewords \hat{Y}_2^n according to the distribution $\prod_{t=1}^n P(\hat{y}_{2,t})$. Label these codewords $\hat{Y}_2^n(\hat{m}_2)$ where $\hat{m}_2 \in [1 : 2^{n\hat{R}_2}]$.
- 2) Partition the set $[1 : 2^{n\hat{R}_2}]$ into $2^{n\hat{C}_{21}}$ cells each containing $2^{n(\hat{R}_2 - \hat{C}_{21})}$ elements. For a given $\hat{m}_2 \in [1 : 2^{n\hat{R}_2}]$, let $\mathfrak{C}_{21}(\hat{m}_2)$ denotes the index of the cell that \hat{m}_2 belongs to.
- 3) Given that the second receiver has received the output sequence Y_2^n , let \hat{m}_2^T be the smallest point of $[1 : 2^{n\hat{R}_2}]$ that satisfies the following:

$$(Y_2^n, \hat{Y}_2^n(\hat{m}_2^T)) \in \mathcal{T}_\epsilon^n(P_{Y_2\hat{Y}_2}). \quad (151)$$

If there is no point in $[1 : 2^{n\hat{R}_2}]$ to satisfy (151), then declare an error. The probability of this error tends to zero provided that

$$\hat{R}_2 \geq I(Y_2; \hat{Y}_2). \quad (152)$$

The receiver Y_2 then sends $\mathfrak{C}_{21}(\hat{m}_2^T)$ to the receiver Y_1 through the digital link.

- 4) Given that the first receiver has received Y_1^n and $\kappa \in [1 : 2^{n\hat{C}_{21}}]$, it seeks for a unique triple $(m_{00}^*, m_{11}^*, b_1^*)$ for which there exists some \hat{Y}_2^n that satisfies the following

$$(W^n(m_{00}^*), U^n(m_{00}^*, m_{11}^*, b_1^*), Y_1^n, \hat{Y}_2^n) \in \mathcal{T}_\epsilon^n(P_{WUY_1\hat{Y}_2}) \quad (153)$$

and

$$\mathfrak{C}_{21}(\hat{Y}_2^n) = \kappa \quad (154)$$

If there is such a unique triple, it detects its intended messages as m_{00}^* and m_{11}^* . Otherwise, it declares an error. The probability that the truly transmitted messages do not satisfy (153)-(154) is negligible for sufficiently large n . Consider the error event that there are some messages other than the truly transmitted ones and some \hat{Y}_2^n which satisfy (153)-(154). This event comprises two cases. First, this \hat{Y}_2^n is not the one that has been actually selected from the quantization codebook, i.e., $\hat{Y}_2^n(\hat{m}_2^T)$. Second, this \hat{Y}_2^n is exactly $\hat{Y}_2^n(\hat{m}_2^T)$. Using multivariate packing lemma, one can show that the probability of the first event tends to zero provided that

$$\hat{R}_2 - \hat{C}_{21} + R_{11} + B_1 \leq I(U; Y_1|W) + I(W, U, Y_1; \hat{Y}_2) \quad (155)$$

$$\hat{R}_2 - \hat{C}_{21} + R_{00} + R_{11} + B_1 \leq I(W, U; Y_1) + I(W, U, Y_1; \hat{Y}_2) \quad (156)$$

and the probability of the second event tends to zero provided that

$$R_{11} + B_1 \leq I(U; Y_1, \hat{Y}_2|W) \quad (157)$$

$$R_{00} + R_{11} + B_1 \leq I(W, U; Y_1, \hat{Y}_2). \quad (158)$$

- 5) Generate at random $2^{n\hat{R}_1}$ independent codewords \hat{Y}_1^n according to the distribution $\prod_{t=1}^n P(\hat{y}_{1,t})$. Label these codewords $\hat{Y}_1^n(\hat{m}_1)$ where $\hat{m}_1 \in [1 : 2^{n\hat{R}_1}]$.
- 6) Partition the set $[1 : 2^{n\hat{R}_1}]$ into $2^{n\hat{C}_{12}^q}$ cells each containing $2^{n(\hat{R}_1 - \hat{C}_{12}^q)}$ elements. For a given $\hat{m}_1 \in [1 : 2^{n\hat{R}_1}]$, let $\mathfrak{C}_{12}^q(\hat{m}_1)$ denotes the index of the cell that \hat{m}_1 belongs to.
- 7) Given that the first receiver has received the output sequence Y_1^n , let \hat{m}_1^T be the smallest point of $[1 : 2^{n\hat{R}_1}]$ that satisfies the following:

$$(W^n(m_{00}^*), U^n(m_{00}^*, m_{11}^*, b_1^*), Y_1^n, \hat{Y}_1^n(\hat{m}_1^T)) \in \mathcal{T}_\epsilon^n(P_{WUY_1\hat{Y}_1}). \quad (159)$$

Note that $(m_{00}^*, m_{11}^*, b_1^*)$ is the unique triple decoded in Step 4 according to (153)-(154). If there is no point in $[1 : 2^{n\hat{R}_1}]$ to satisfy (159), then declare an error. The probability of this error event tends to zero provided that

$$\hat{R}_1 \geq I(W, U, Y_1; \hat{Y}_1). \quad (160)$$

- 8) Partition the set $[1 : 2^{nR_{00}}]$ into $2^{n\hat{C}_{12}^d}$ cells each containing $2^{n(R_{00}-\hat{C}_{12}^d)}$ elements. For a given $m_{00} \in [1 : 2^{nR_{00}}]$, let $\mathfrak{C}_{12}^d(m_{00})$ denotes the index of the cell that m_{00} belongs to.
- 9) The receiver Y_1 then sends the pair $(\mathfrak{C}_{12}^d(m_{00}^*), \mathfrak{C}_{12}^q(\hat{m}_1^T))$ to the receiver Y_2 through the digital link (note that m_{00}^* is the decoded message in Step 4 at the receiver Y_1).
- 10) Given that the second receiver has received Y_2^n and $(\theta_1, \theta_2) \in [1 : 2^{n\hat{C}_{12}^d}] \times [1 : 2^{n\hat{C}_{12}^q}]$, it seeks for a unique triple $(m_{00}^\bullet, m_{22}^\bullet, b_2^\bullet)$ for which there exists some \hat{Y}_1^n that satisfies the following:

$$(W^n(m_{00}^\bullet), V^n(m_{00}^\bullet, m_{22}^\bullet, b_2^\bullet), \hat{Y}_1^n, Y_2^n) \in \mathcal{T}_\epsilon^n(P_{WV\hat{Y}_1Y_2}) \quad (161)$$

and

$$\mathfrak{C}_{12}^d(m_{00}^\bullet) = \theta_1, \quad (162)$$

$$\mathfrak{C}_{12}^q(\hat{Y}_1^n) = \theta_2. \quad (163)$$

If there is such a unique triple, the receiver detects its intended messages as m_{00}^\bullet and m_{22}^\bullet . Otherwise, it declares an error. The probability that the truly transmitted messages do not satisfy (161)-(163) is negligible for sufficiently large n . Consider the error event that there are some messages other than the truly transmitted ones and some \hat{Y}_1^n which satisfy (161)-(163). This event comprises two cases. First, this \hat{Y}_1^n is not the one that has been actually selected from the quantization codebook, i.e., $\hat{Y}_1^n(\hat{m}_1^T)$. Second, this \hat{Y}_1^n is exactly $\hat{Y}_1^n(\hat{m}_1^T)$. Using multivariate packing lemma, one can show that the probability of the first event tends to zero provided that

$$\hat{R}_1 - \hat{C}_{12}^q + R_{22} + B_2 \leq I(V; Y_2|W) + I(W, V, Y_2; \hat{Y}_1) \quad (164)$$

$$\hat{R}_1 - \hat{C}_{12}^q + R_{00} - \hat{C}_{12}^d + R_{22} + B_2 \leq I(W, V; Y_2) + I(W, V, Y_2; \hat{Y}_1), \quad (165)$$

and the probability of the second event tends to zero provided that

$$R_{22} + B_2 \leq I(V; \hat{Y}_1, Y_2|W) \quad (166)$$

$$R_{00} - \hat{C}_{12}^d + R_{22} + B_2 \leq I(W, V; \hat{Y}_1, Y_2). \quad (167)$$

C. Final Analysis

By simple algebraic computations, one can see that (148),(152),(155)-(156), and (157)-(158) are equivalent to the following:

$$R_{11} + B_1 \leq I(U; Y_1|W) + I(W, U, Y_1; \hat{Y}_2) + C_{21} - I(Y_2; \hat{Y}_2) \quad (168)$$

$$R_{00} + R_{11} + B_1 \leq I(W, U; Y_1) + I(W, U, Y_1; \hat{Y}_2) + C_{21} - I(Y_2; \hat{Y}_2) \quad (169)$$

$$R_{11} + B_1 \leq I(U; Y_1, \hat{Y}_2|W) \quad (170)$$

$$R_{00} + R_{11} + B_1 \leq I(W, U; Y_1, \hat{Y}_2). \quad (171)$$

Moreover, note that the given probability distribution implies the following equality

$$I(W, U, Y_1; \hat{Y}_2) + C_{21} - I(Y_2; \hat{Y}_2) = C_{21} - I(\hat{Y}_2; Y_2|U, W, Y_1). \quad (172)$$

One can easily see that if $C_{21} < I(\hat{Y}_2; Y_2|U, W, Y_1)$, then the optimal solution for \hat{Y}_2 is to set it equal to \emptyset . Thus, (168)-(171) are equivalent to the following:

$$R_{11} + B_1 \leq \min \left\{ I(U; Y_1|W) + \{C_{21} - I(\hat{Y}_2; Y_2|U, W, Y_1)\}^+, I(U; Y_1, \hat{Y}_2|W) \right\} \quad (173)$$

$$R_{00} + R_{11} + B_1 \leq \min \left\{ I(W, U; Y_1) + \{C_{21} - I(\hat{Y}_2; Y_2|U, W, Y_1)\}^+, I(W, U; Y_1, \hat{Y}_2) \right\}. \quad (174)$$

Similarly, by simple computations one can see that (146)-(147), (160),(164)-(165), and (166)-(167) are equivalent to the following:

$$R_{22} + B_2 \leq I(V; Y_2|W) + I(W, V, Y_2; \hat{Y}_1) + \alpha_1 C_{12} - I(W, U, Y_1; \hat{Y}_1) \quad (175)$$

$$R_{00} + R_{22} + B_2 \leq I(W, V; Y_2) + I(W, V, Y_2; \hat{Y}_1) + \alpha_1 C_{12} - I(W, U, Y_1; \hat{Y}_1) + \bar{\alpha}_1 C_{12} \quad (176)$$

$$R_{22} + B_2 \leq I(V; \hat{Y}_1, Y_2|W) \quad (177)$$

$$R_{00} + R_{22} + B_2 \leq I(W, V; \hat{Y}_1, Y_2) + \bar{\alpha}_1 C_{12}. \quad (178)$$

In addition, the given probability distribution implies:

$$I(W, V, Y_2; \hat{Y}_1) + \alpha_1 C_{12} - I(W, U, Y_1; \hat{Y}_1) = \alpha_1 C_{12} - I(\hat{Y}_1; U, Y_1|V, W, Y_2). \quad (179)$$

If $\alpha_1 C_{12} < I(\hat{Y}_1; U, Y_1|V, W, Y_2)$, then one can easily show that the optimal solution for \hat{Y}_1 is to set it equal to \emptyset . Therefore, (175)-(178) can be given in the following equivalent form:

$$R_{22} + B_2 \leq \min \left\{ I(V; Y_2|W) + \{\alpha_1 C_{12} - I(\hat{Y}_1; U, Y_1|V, W, Y_2)\}^+, \right. \\ \left. I(V; \hat{Y}_1, Y_2|W) \right\} \quad (180)$$

$$R_{00} + R_{22} + B_2 \leq \min \left\{ I(W, V; Y_2) + \{\alpha_1 C_{12} - I(\hat{Y}_1; U, Y_1|V, W, Y_2)\}^+ + \bar{\alpha}_1 C_{12}, \right. \\ \left. I(W, V; \hat{Y}_1, Y_2) + \bar{\alpha}_1 C_{12} \right\} \quad (181)$$

Lastly, by considering the bounds (150), (173)-(174), and (180)-(181) and by applying the Fourier–Motzkin elimination algorithm, one can derive the rate region $\mathcal{R}_i^{(1)}$. The proof is thus complete.

APPENDIX C

PROOF OF THEOREM 4

Fix a joint distribution $P(u, v, w, x)P(\hat{y}_1|u, w, y_1)P(\hat{y}_2|w, y_2)$ and let α_2 be any arbitrary real number in $[0, 1]$. Similar to the proof of Theorem 2, we consider a random codebook of length- n codewords to transmit the independent messages M_0 , M_1 , and M_2 uniformly distributed over the sets $[1 : 2^{nR_0}]$, $[1 : 2^{nR_1}]$, and $[1 : 2^{nR_2}]$, respectively. Each of the private messages M_1 and M_2 is split into two parts as follows:

$$M_1 \mapsto (M_{10}, M_{11}) \quad M_{10} \in [1 : 2^{nR_{10}}], \quad M_{11} \in [1 : 2^{nR_{11}}] \quad (182)$$

$$M_2 \mapsto (M_{20}, M_{22}) \quad M_{20} \in [1 : 2^{nR_{20}}], \quad M_{22} \in [1 : 2^{nR_{22}}]. \quad (183)$$

Therefore,

$$R_1 = R_{10} + R_{11} \quad (184)$$

$$R_2 = R_{20} + R_{22} \quad (185)$$

The sub-messages M_{10} and M_{20} are decoded at both receivers, i.e., the triple (M_0, M_{10}, M_{20}) is considered as a common message with rate

$$R_{00} = R_0 + R_{10} + R_{20} \quad (186)$$

Moreover, let $B_1, B_2, \hat{R}_1, \hat{R}_2$ be non-negative real numbers. Also, define:

$$\hat{C}_{12} = \min\{C_{12}, \hat{R}_1\} \quad (187)$$

$$\hat{C}_{21}^d = \min\{\bar{\alpha}_2 C_{21}, R_{00}\} \quad (188)$$

$$\hat{C}_{21}^q = \min\{\alpha_2 C_{21}, \hat{R}_2\} \quad (189)$$

A. Encoding at the Transmitter

- 1) Generate at random $2^{nR_{00}}$ independent codewords W^n according to $P(w^n) = \prod_{t=1}^n P(w_t)$. Label these codewords $W^n(m_{00})$ where $m_{00} \in [1 : 2^{nR_{00}}]$.
- 2) For each codeword $W^n(m_{00})$, generate at random $2^{n(R_{11}+B_1)}$ independent codewords U^n according to $\prod_{t=1}^n P(u_t|w_t(m_{00}))$. Label these codewords $U^n(m_{00}, m_{11}, b_1)$ where $m_{11} \in [1 : 2^{nR_{11}}]$ and $b_1 \in [1 : 2^{nB_1}]$.
- 3) For each codeword $W^n(m_{00})$, generate at random $2^{n(R_{22}+B_2)}$ independent codewords V^n according to $\prod_{t=1}^n P(v_t|w_t(m_{00}))$. Label these codewords $V^n(m_{00}, m_{22}, b_2)$ where $m_{22} \in [1 : 2^{nR_{22}}]$ and $b_2 \in [1 : 2^{nB_2}]$.

- 4) Given a triple (m_{00}, m_{11}, m_{22}) to be transmitted, let (b_1^T, b_2^T) be a pair that satisfies the following:

$$(W^n(m_{00}), U^n(m_{00}, m_{11}, b_1^T), V^n(m_{00}, m_{22}, b_2^T)) \in \mathcal{T}_\epsilon^n(P_{WUV}) \quad (190)$$

If there are multiple pairs of (b_1, b_2) which satisfy (190), then let (b_1^T, b_2^T) be the one with minimum $b_1 + b_2$. If there is no such a pair, declare encoding error. Based on the mutual covering lemma, one can easily see that for sufficiently large n and small ϵ , the probability of encoding error tends to zero provided that

$$B_1 + B_2 \geq I(U; V|W) \quad (191)$$

The transmitter then generates a codeword X^n according to

$$\prod_{t=1}^n P(x_t | w_t(m_{00}), u_t(m_{00}, m_{11}, b_1^T), v_t(m_{00}, m_{22}, b_2^T))$$

and sends it over the channel.

B. Encoding and Decoding at the Receivers

- 1) Partition the set $[1 : 2^{nR_{00}}]$ into $2^{n\hat{C}_{21}^d}$ cells each containing $2^{n(R_{00} - \hat{C}_{21}^d)}$ elements. For a given $m_{00} \in [1 : 2^{nR_{00}}]$, let $\mathfrak{C}_{21}^d(m_{00})$ denotes the index of the cell that m_{00} belongs to.
- 2) Generate at random $2^{n\hat{R}_2}$ independent codewords \hat{Y}_2^n according to the distribution $\prod_{t=1}^n P(\hat{y}_{2,t})$. Label these codewords $\hat{Y}_2^n(\hat{m}_2)$ where $\hat{m}_2 \in [1 : 2^{n\hat{R}_2}]$.
- 3) Partition the set $[1 : 2^{n\hat{R}_2}]$ into $2^{n\hat{C}_{21}^q}$ cells each containing $2^{n(\hat{R}_2 - \hat{C}_{21}^q)}$ elements. For a given $\hat{m}_2 \in [1 : 2^{n\hat{R}_2}]$, let $\mathfrak{C}_{21}^q(\hat{m}_2)$ denotes the index of the cell that \hat{m}_2 belongs to.
- 4) Given that the second receiver has received the output sequence Y_2^n , it seeks for a unique m_{00}^\bullet for which there exists some (m_{22}, b_2) that satisfies the following:

$$(W^n(m_{00}^\bullet), V^n(m_{00}^\bullet, m_{22}, b_2), Y_2^n) \in \mathcal{T}_\epsilon^n(P_{WVY_2}) \quad (192)$$

If there is no such a unique m_{00}^\bullet or there are multiple ones, declare an error. The probability of this error event tends to zero provided that

$$R_{00} + R_{22} + B_2 \leq I(W, V; Y_2) \quad (193)$$

- 5) Let \hat{m}_2^T be the smallest point of $[1 : 2^{n\hat{R}_2}]$ that satisfies the following:

$$(W^n(m_{00}^\bullet), Y_2^n, \hat{Y}_2^n(\hat{m}_2^T)) \in \mathcal{T}_\epsilon^n(P_{WY_2\hat{Y}_2}) \quad (194)$$

If there is no point in $[1 : 2^{n\hat{R}_2}]$ to satisfy (194), then declare an error. The probability of this error tends to zero provided that

$$\hat{R}_2 \geq I(W, Y_2; \hat{Y}_2) \quad (195)$$

The receiver Y_2 then sends the pair $(\mathfrak{C}_{21}^d(m_{00}^*), \mathfrak{C}_{21}^q(\hat{m}_2^T))$ to the receiver Y_1 through the digital link.

- 6) Given that the first receiver has received Y_1^n and $(\theta_1, \theta_2) \in [1 : 2^{n\hat{C}_{21}^d}] \times [1 : 2^{n\hat{C}_{21}^q}]$, it seeks for a unique triple $(m_{00}^*, m_{11}^*, b_1^*)$ for which there exists some \hat{Y}_2^n that satisfies the following:

$$(W^n(m_{00}^*), U^n(m_{00}^*, m_{11}^*, b_1^*), Y_1^n, \hat{Y}_2^n) \in \mathcal{T}_\epsilon^n(P_{WUY_1\hat{Y}_2}) \quad (196)$$

and

$$\mathfrak{C}_{21}^d(m_{00}^*) = \theta_1, \quad (197)$$

$$\mathfrak{C}_{21}^q(\hat{Y}_2^n) = \theta_2. \quad (198)$$

If there is such a unique triple, the receiver detects its intended messages as m_{00}^* and m_{11}^* . Otherwise, it declares an error. The probability that the truly transmitted messages do not satisfy (196)-(198) is negligible for sufficiently large n . Consider the error event that there are some messages other than the truly transmitted ones and some \hat{Y}_2^n which satisfy (196)-(198). This event comprises two cases. First, this \hat{Y}_2^n is not the one that has been actually selected from the quantization codebook, i.e., $\hat{Y}_2^n(\hat{m}_2^T)$. Second, this \hat{Y}_2^n is exactly $\hat{Y}_2^n(\hat{m}_2^T)$. Using multivariate packing lemma, one can see that the probability of the first event tends to zero provided that

$$\hat{R}_2 - \hat{C}_{21}^q + R_{11} + B_1 \leq I(U; Y_1|W) + I(W, U, Y_1; \hat{Y}_2) \quad (199)$$

$$\hat{R}_2 - \hat{C}_{21}^q + R_{00} - \hat{C}_{21}^d + R_{11} + B_1 \leq I(W, U; Y_1) + I(W, U, Y_1; \hat{Y}_2) \quad (200)$$

and the probability of the second event tends to zero provided that

$$R_{11} + B_1 \leq I(U; Y_1, \hat{Y}_2|W) \quad (201)$$

$$R_{00} - \hat{C}_{21}^d + R_{11} + B_1 \leq I(W, U; Y_1, \hat{Y}_2). \quad (202)$$

- 7) Generate at random $2^{n\hat{R}_1}$ independent codewords \hat{Y}_1^n according to the distribution $\prod_{t=1}^n P(\hat{y}_{1,t})$. Label these codewords $\hat{Y}_1^n(\hat{m}_1)$ where $\hat{m}_1 \in [1 : 2^{n\hat{R}_1}]$.
- 8) Partition the set $[1 : 2^{n\hat{R}_1}]$ into $2^{n\hat{C}_{12}}$ cells each containing $2^{n(\hat{R}_1 - \hat{C}_{12})}$ elements. For a given $\hat{m}_1 \in [1 : 2^{n\hat{R}_1}]$, let $\mathfrak{C}_{12}(\hat{m}_1)$ denotes the index of the cell that \hat{m}_1 belongs to.

- 9) Given that the first receiver has received the output sequence Y_1^n , let \hat{m}_1^T be the smallest point of $[1 : 2^{n\hat{R}_1}]$ that satisfies the following:

$$(W^n(m_{00}^*), U^n(m_{00}^*, m_{11}^*, b_1^*), Y_1^n, \hat{Y}_1^n(\hat{m}_1^T)) \in \mathcal{T}_\epsilon^n(P_{WUY_1\hat{Y}_1}) \quad (203)$$

where $(m_{00}^*, m_{11}^*, b_1^*)$ is the unique triple decoded in Step 6 according to (196)-(198). If there is no point in $[1 : 2^{n\hat{R}_1}]$ to satisfy (203), then declare an error. The probability of this error event tends to zero provided that

$$\hat{R}_1 \geq I(W, U, Y_1; \hat{Y}_1) \quad (204)$$

The receiver Y_1 then sends $\mathfrak{C}_{12}(\hat{m}_1^T)$ to the receiver Y_2 through the digital link.

- 10) Given that the second receiver has received Y_2^n and $\kappa \in [1 : 2^{n\hat{C}_{12}}]$, it seeks for a unique pair $(m_{22}^\bullet, b_2^\bullet)$ for which there exists some \hat{Y}_1^n that satisfies the following:

$$(W^n(m_{00}^\bullet), V^n(m_{00}^\bullet, m_{22}^\bullet, b_2^\bullet), \hat{Y}_1^n, Y_2^n) \in \mathcal{T}_\epsilon^n(P_{WV\hat{Y}_1Y_2}) \quad (205)$$

and

$$\mathfrak{C}_{12}(\hat{Y}_1^n) = \kappa. \quad (206)$$

Note that m_{00}^\bullet has been already decoded in Step 4. If there is such a unique pair, the receiver detects its intended (private) message as m_{22}^\bullet . Otherwise, it declares an error. The probability that the truly transmitted messages do not satisfy (205)-(206) is negligible for sufficiently large n . Consider the error event that there are some messages other than the truly transmitted ones and some \hat{Y}_1^n which satisfy (205)-(206). This event comprises two cases. First, this \hat{Y}_1^n is not the one that has been actually selected from the quantization codebook, i.e., $\hat{Y}_1^n(\hat{m}_1^T)$. Second, this \hat{Y}_1^n is exactly $\hat{Y}_1^n(\hat{m}_1^T)$. Using multivariate packing lemma, one can show that the probability of the first event tends to zero provided that

$$\hat{R}_1 - \hat{C}_{12} + R_{22} + B_2 \leq I(V; Y_2|W) + I(W, V, Y_2; \hat{Y}_1) \quad (207)$$

and the probability of the second event tends to zero provided that

$$R_{22} + B_2 \leq I(V; \hat{Y}_1, Y_2|W). \quad (208)$$

C. Final Analysis

By simple algebraic computations, one can see that (187)-(189), (195), and (199)-(202) are equivalent to the following:

$$R_{11} + B_1 \leq I(U; Y_1|W) + I(W, U, Y_1; \hat{Y}_2) + \alpha_2 C_{21} - I(W, Y_2; \hat{Y}_2) \quad (209)$$

$$R_{00} + R_{11} + B_1 \leq I(W, U; Y_1) + I(W, U, Y_1; \hat{Y}_2) + \alpha_2 C_{21} - I(W, Y_2; \hat{Y}_2) + \bar{\alpha}_2 C_{21} \quad (210)$$

$$R_{11} + B_1 \leq I(U; Y_1, \hat{Y}_2|W) \quad (211)$$

$$R_{00} + R_{11} + B_1 \leq I(W, U; Y_1, \hat{Y}_2) + \bar{\alpha}_2 C_{21} \quad (212)$$

Moreover, the given probability distribution implies the following equality:

$$I(W, U, Y_1; \hat{Y}_2) + \alpha_2 C_{21} - I(W, Y_2; \hat{Y}_2) = \alpha_2 C_{21} - I(\hat{Y}_2; Y_2|U, W, Y_1) \quad (213)$$

One can easily see that if $\alpha_2 C_{21} < I(\hat{Y}_2; Y_2|U, W, Y_1)$, then the optimal solution for \hat{Y}_2 is to set it equal to \emptyset . Thus, (209)-(212) are equivalent to the following:

$$R_{11} + B_1 \leq \min \left\{ I(U; Y_1|W) + \{\alpha_2 C_{21} - I(\hat{Y}_2; Y_2|U, W, Y_1)\}^+, I(U; Y_1, \hat{Y}_2|W) \right\} \quad (214)$$

$$R_{00} + R_{11} + B_1 \leq \min \left\{ I(W, U; Y_1) + \{\alpha_2 C_{21} - I(\hat{Y}_2; Y_2|U, W, Y_1)\}^+ + \bar{\alpha}_2 C_{21}, \right. \\ \left. I(W, U; Y_1, \hat{Y}_2) + \bar{\alpha}_2 C_{21} \right\} \quad (215)$$

Similarly, by algebraic computations, one can see that (187)-(189), (204), (207), and (208) can be rewritten in the following equivalent form:

$$R_{22} + B_2 \leq I(V; Y_2|W) + I(W, V, Y_2; \hat{Y}_1) + C_{12} - I(W, U, Y_1; \hat{Y}_1) \quad (216)$$

$$R_{22} + B_2 \leq I(V; \hat{Y}_1, Y_2|W) \quad (217)$$

$$R_{00} + R_{22} + B_2 \leq I(W, V; Y_2) \quad (218)$$

The given probability distribution implies:

$$I(W, V, Y_2; \hat{Y}_1) + C_{12} - I(W, U, Y_1; \hat{Y}_1) = C_{12} - I(\hat{Y}_1; U, Y_1|V, W, Y_2) \quad (219)$$

If $C_{12} < I(\hat{Y}_1; U, Y_1|V, W, Y_2)$, then the optimal solution for \hat{Y}_1 is to set equal to \emptyset . Therefore, (216)-(218) are equivalent to the following:

$$R_{22} + B_2 \leq \min \left\{ I(V; Y_2|W) + \{C_{12} - I(\hat{Y}_1; U, Y_1|V, W, Y_2)\}^+, I(V; \hat{Y}_1, Y_2|W) \right\} \quad (220)$$

$$R_{00} + R_{22} + B_2 \leq I(W, V; Y_2) \quad (221)$$

Finally, by considering the bounds (214)-(215) and (220)-(221) and applying the Fourier–Motzkin elimination algorithm, we obtain the rate region $\mathcal{R}_i^{(2)}$. The proof is thus complete.

APPENDIX D

PROOF OF THEOREM 8

We present the optimization over the auxiliary random variable V . The constraints which include the auxiliary random variable U can be evaluated similarly.

First note that since $|a| \geq |b|$, the user Y_1 is less noisy than the user Y_2 , i.e.,

$$I(V; Y_2) \leq I(V; Y_1). \quad (222)$$

Therefore, we have

$$\begin{aligned} I(X; Y_1|Y_2, V) + I(X; Y_2) \\ = I(X; Y_1|Y_2, V) + I(X; Y_2|V) + I(V; Y_2) \end{aligned} \quad (223)$$

$$= I(X; Y_1, Y_2|V) + I(V; Y_2) \quad (224)$$

$$\leq I(X; Y_1, Y_2|V) + I(V; Y_1) \quad (225)$$

$$= I(X; Y_2|Y_1, V) + I(X; Y_1|V) + I(V; Y_1) \quad (226)$$

$$= I(X; Y_2|Y_1, V) + I(X; Y_1). \quad (227)$$

In other words, the constraint (3) is inactive. Considering (2), (4), (7), (9), and (11), we require to optimize (maximize) the following terms simultaneously:

$$I_1 \doteq I(X; Y_1, Y_2|V) + I(V; Y_2) \quad (228)$$

$$I_2 \doteq I(V; Y_2) \quad (229)$$

$$I_3 \doteq I(X; Y_1|V) + I(V; Y_2) \quad (230)$$

$$I_4 \doteq I(X; Y_1, Y_2). \quad (231)$$

Now, let us define a new virtual output \hat{Y} as follows:

$$\hat{Y} \doteq (a - \lambda b)Y_1 + (b - \lambda a)Y_2 \quad (232)$$

$$= ((a - \lambda b)a + (b - \lambda a)b)X + \hat{Z} \quad (233)$$

$$= (a^2 + b^2 - 2\lambda ab)X + \hat{Z} \quad (234)$$

where

$$\hat{Z} \doteq (a - \lambda b)Z_1 + (b - \lambda a)Z_2 \quad (235)$$

It is clear that there is a one-to-one mapping between (\hat{Y}, Y_2) and (Y_1, Y_2) . Moreover, we have

$$Y_2 = \frac{b}{a^2 + b^2 - 2\lambda ab} \hat{Y} + \hat{Z}_2, \quad (236)$$

where

$$\hat{Z}_2 \doteq \frac{-b\hat{Z}}{a^2 + b^2 - 2\lambda ab} + Z_2. \quad (237)$$

One can easily see that \hat{Z}_2 is uncorrelated to \hat{Z} , and therefore they are independent (as they are jointly Gaussian). This means that the output Y_2 is in fact a noisy (physically degraded) version of \hat{Y} . Thus, we have

$$I(X; Y_1, Y_2 | V) = I(X; \hat{Y}, Y_2 | V) = I(X; \hat{Y} | V), \quad (238)$$

$$I(X; Y_1, Y_2) = I(X; \hat{Y}, Y_2) = I(X; \hat{Y}). \quad (239)$$

The mutual information function $I(X; \hat{Y})$ can be easily optimized using the fact that Gaussian random variable maximizes the entropy. Considering (228)-(230) and (238), we deduce that the optimization is effectively to maximize $h(\hat{Y}|V)$ and $h(Y_1|V)$ and to minimize $h(Y_2|V)$, simultaneously, where $h(\cdot)$ stands for differential entropy. We complete this step using entropy power inequality.

First note that we have:

$$\begin{aligned} \frac{1}{2} \log(2\pi e) &= h(Z_1) \\ &= h(Y_1 | X, V) \end{aligned} \quad (240)$$

$$\leq h(Y_1 | V) \quad (241)$$

$$\leq h(Y_1 = aX + Z_1) \quad (242)$$

$$\leq \frac{1}{2} \log 2\pi e (a^2 P + 1). \quad (243)$$

By comparing the two sides of (243), we find that there is $\beta \in [0, 1]$ such that

$$h(Y_1 | V) = \frac{1}{2} \log 2\pi e (\beta a^2 P + 1) \quad (244)$$

Now, let \hat{Z}^* be a Gaussian noise independent of all other variables with zero mean and a variance equal to $\frac{(a\lambda-b)^2}{\mu}$ where $\mu \doteq a^2 + b^2 - 2\lambda ab$. We can derive

$$\begin{aligned} h(\hat{Y}|V) &= h(\mu X + \hat{Z}) \\ &= h\left(aX + \frac{a}{\mu}\hat{Z}\right) - \frac{1}{2}\log\left(\frac{a^2}{\mu^2}\right) \end{aligned} \quad (245)$$

$$\begin{aligned} &\stackrel{(a)}{\leq} \frac{1}{2}\log\left(e^{2h(aX + \frac{a}{\mu}\hat{Z} + \hat{Z}^*|V)} - e^{2h(\hat{Z}^*|V)}\right) \\ &\quad - \frac{1}{2}\log\left(\frac{a^2}{\mu^2}\right) \end{aligned} \quad (246)$$

$$\stackrel{(b)}{=} \frac{1}{2}\log\left(e^{2h(aX + Z_1|V)} - e^{2h(\hat{Z}^*)}\right) - \frac{1}{2}\log\left(\frac{a^2}{\mu^2}\right) \quad (247)$$

$$= \frac{1}{2}\log\left(e^{2h(Y_1|V)} - e^{2h(\hat{Z}^*)}\right) - \frac{1}{2}\log\left(\frac{a^2}{\mu^2}\right) \quad (248)$$

$$= \frac{1}{2}\log\left(2\pi e\left(\beta\mu P + 1 - \lambda^2\right)\mu\right) \quad (249)$$

where inequality (246) is due to the entropy power inequality, and equality (247) holds because $\frac{a}{\mu}\hat{Z} + \hat{Z}^*$ is a Gaussian noise with zero mean and unit variance and therefore equivalent to Z_1 , and also \hat{Z}^* is independent of V .

Finally, let Z_2^* be a Gaussian noise independent of all other variables with zero mean and a variance equivalent to $\frac{a^2-b^2}{b^2}$. We have:

$$\begin{aligned} h(Y_2|V) &= h(bX + Z_2|V) \\ &= h\left(aX + \frac{a}{b}Z_2|V\right) - \frac{1}{2}\log\left(\frac{a^2}{b^2}\right) \end{aligned} \quad (250)$$

$$= h(aX + Z_2 + Z_2^*|V) - \frac{1}{2}\log\left(\frac{a^2}{b^2}\right) \quad (251)$$

$$\geq \frac{1}{2}\log\left(e^{2h(aX + Z_2|V)} + e^{2h(Z_2^*|V)}\right) - \frac{1}{2}\log\left(\frac{a^2}{b^2}\right) \quad (252)$$

$$= \frac{1}{2}\log\left(e^{2h(aX + Z_1|V)} + e^{2h(Z_2^*)}\right) - \frac{1}{2}\log\left(\frac{a^2}{b^2}\right) \quad (253)$$

$$= \frac{1}{2}\log\left(e^{2h(Y_1|V)} + e^{2h(Z_2^*)}\right) - \frac{1}{2}\log\left(\frac{a^2}{b^2}\right) \quad (254)$$

$$= \frac{1}{2}\log\left(2\pi e\left(\beta b^2 P + 1\right)\right) \quad (255)$$

where inequality (252) is due to the entropy power inequality, and equality (253) holds because Z_2 is equivalent to Z_1 , and also Z_2^* is independent of V . The proof is thus complete.

REFERENCES

- [1] R. K. Farsani and W. Yu, “Capacity bounds for broadcast channels with bidirectional conferencing decoders,” in *IEEE Inf. Theory Workshop (ITW)*, Apr. 2023, pp. 59–63.
- [2] —, “Gaussian broadcast channels with bidirectional conferencing decoders and correlated noises,” in *IEEE Inter. Symp. Inf. Theory (ISIT)*, Jul. 2023, pp. 1514–1519.
- [3] F. Willems, “The discrete memoryless multiple access channel with partially cooperating encoders,” *IEEE Trans. Inf. Theory*, vol. 29, no. 3, pp. 441–445, May 1983.
- [4] A. Høst-Madsen, “Capacity bounds for cooperative diversity,” *IEEE Trans. Inf. Theory*, vol. 52, no. 4, pp. 1522–1544, Apr. 2006.
- [5] Y. Cao and B. Chen, “An achievable rate region for interference channels with conferencing,” in *IEEE Inter. Symp. Inf. Theory (ISIT)*, Jun. 2007, pp. 1251–1255.
- [6] I. Maric, R. D. Yates, and G. Kramer, “Capacity of interference channels with partial transmitter cooperation,” *IEEE Trans. Inf. Theory*, vol. 53, no. 10, pp. 3536–3548, Oct. 2007.
- [7] O. Simeone, D. Gündüz, H. V. Poor, A. J. Goldsmith, and S. Shamai, “Compound multiple-access channels with partial cooperation,” *IEEE Trans. Inf. Theory*, vol. 55, no. 6, pp. 2425–2441, Jun. 2009.
- [8] H. T. Do, T. J. Oechtering, and M. Skoglund, “An achievable rate region for the Gaussian Z-interference channel with conferencing,” in *Allerton Conf. Commun., Control, Computing*, Sept./Oct. 2009, pp. 75–81.
- [9] —, “The Gaussian Z-interference channel with rate-constrained conferencing decoders,” in *IEEE Inter. Conf. Commun., May 2010*, pp. 1–5.
- [10] A. Haghi, R. Khosravi-Farsani, M. R. Aref, and F. Marvasti, “The capacity region of fading multiple access channels with cooperative encoders and partial csit,” in *IEEE Inter. Symp. Inf. Theory (ISIT)*, Jun. 2010, pp. 485–489.
- [11] I.-H. Wang and D. N. C. Tse, “Interference mitigation through limited transmitter cooperation,” *IEEE Trans. Inf. Theory*, vol. 57, no. 5, pp. 2941–2965, May 2011.
- [12] —, “Interference mitigation through limited receiver cooperation,” *IEEE Trans. Inf. Theory*, vol. 57, no. 5, pp. 2913–2940, May 2011.
- [13] N. Liu, D. Gündüz, and W. Kang, “Capacity results for a class of deterministic Z-interference channels with unidirectional receiver conferencing,” in *6th Inter. ICST Conf. Commun. Netw. China (CHINACOM)*, Aug. 2011, pp. 580–584.
- [14] A. Haghi, R. Khosravi-Farsani, M. R. Aref, and F. Marvasti, “The capacity region of p -transmitter/ q -receiver multiple-access channels with common information,” *IEEE Trans. Inf. Theory*, vol. 57, no. 11, pp. 7359–7376, Nov. 2011.
- [15] L. Zhou and W. Yu, “Gaussian Z-interference channel with a relay link: Achievability region and asymptotic sum capacity,” *IEEE Trans. Inf. Theory*, vol. 58, no. 4, pp. 2413–2426, Apr. 2012.
- [16] H. T. Do, T. J. Oechtering, and M. Skoglund, “On asymmetric interference channels with cooperating receivers,” *IEEE Trans. Inf. Theory*, vol. 61, no. 2, pp. 554–563, Feb. 2013.
- [17] R. K. Farsani and A. K. Khandani, “Novel outer bounds and capacity results for the interference channel with conferencing receivers,” in *IEEE Inter. Symp. Inf. Theory (ISIT)*, Jun. 2017, pp. 649–653.
- [18] —, “Novel outer bounds and capacity results for the interference channel with conferencing receivers,” *IEEE Trans. Inf. Theory*, vol. 66, no. 6, pp. 3327–3341, Jun. 2020.
- [19] S. C. Draper, B. J. Frey, and F. R. Kschischang, “Interactive decoding of a broadcast message,” in *Allerton Conf. Commun., Control, Computing*, Oct. 2003.
- [20] R. Dabora and S. D. Servetto, “Broadcast channels with cooperating decoders,” *IEEE Trans. Inf. Theory*, vol. 52, no. 12, pp. 5438–5454, Dec. 2006.

- [21] S. I. Bross, “On the discrete memoryless partially cooperative relay broadcast channel and the broadcast channel with cooperating decoders,” *IEEE Transactions on Information Theory*, vol. 55, no. 5, pp. 2161–2182, 2009.
- [22] L. Dikstein, H. H. Permuter, and Y. Steinberg, “On state-dependent degraded broadcast channels with cooperation,” *IEEE Trans. Inf. Theory*, vol. 62, no. 5, pp. 2308–2323, May 2016.
- [23] Z. Goldfeld, H. H. Permuter, and G. Kramer, “Duality of a source coding problem and the semi-deterministic broadcast channel with rate-limited cooperation,” *IEEE Trans. Inf. Theory*, vol. 62, no. 5, pp. 2285–2307, May 2016.
- [24] Z. Goldfeld, G. Kramer, H. H. Permuter, and P. Cuff, “Strong secrecy for cooperative broadcast channels,” *IEEE Trans. Inf. Theory*, vol. 63, no. 1, pp. 469–495, Jan. 2017.
- [25] W. Huleihel and Y. Steinberg, “Channels with cooperation links that may be absent,” *IEEE Trans. Inf. Theory*, vol. 63, no. 9, pp. 5886–5906, Sep. 2017.
- [26] D. Itzhak and Y. Steinberg, “The broadcast channel with degraded message sets and unreliable conference,” *IEEE Trans. Inf. Theory*, vol. 67, no. 9, pp. 5623–5650, Sep. 2021.
- [27] J. Körner and K. Marton, “Images of a set via two channels and their role in multi-user communication,” *IEEE Trans. Inf. Theory*, vol. 23, no. 6, pp. 751–761, 1977.
- [28] I. Csiszár and J. Körner, “Broadcast channels with confidential messages,” *IEEE Trans. Inf. Theory*, vol. 24, no. 3, pp. 339–348, May 1978.
- [29] A. El Gamal and Y.-H. Kim, *Network Information Theory*. Cambridge, U.K.: Cambridge Univ. Press, 2011.
- [30] Y.-H. Kim, “Coding techniques for primitive relay channels,” in *Allerton Conf. Commun., Control, Computing*, Sep. 2007.
- [31] A. El Gamal, A. Gohari, and C. Nair, “Achievable rates for the relay channel with orthogonal receiver components,” in *IEEE Inf. Theory Workshop (ITW)*, Oct. 2021, pp. 1–6.
- [32] Y.-H. Kim, “Capacity of a class of deterministic relay channels,” *IEEE Trans. Inf. Theory*, vol. 54, no. 3, pp. 1328–1329, 2008.