

GAMMA: GAMma Multiplicity Filter Array for the selection of angular momentum in heavy ion collision reactions

Deepak Pandit ^a, S. Mukhopadhyay ^a, Srijit Bhattacharya ^b,
Surajit Pal ^a, A. De ^c, S. R. Banerjee ^{a,*}

^a*Variable Energy Cyclotron Centre, 1/AF-Bidhannagar, Kolkata-700064, India*

^b*Department of Physics, Darjeeling Government. College, Darjeeling-734101,
India*

^c*Department of Physics, Raniganj Girls' College, Raniganj - 713347, India*

Abstract

A 50 element BaF₂ gamma-multiplicity filter has been designed, fabricated and installed successfully at the Variable Energy Cyclotron Centre (VECC), Kolkata for angular momentum selection in heavy ion collision reactions. A thorough GEANT3 Monte Carlo simulation was performed to optimize the individual detector shape and geometrical structure of the array. The detectors have been fabricated in-house from bare barium fluoride crystals (each measuring 5 cm in length and having cross-sectional area of 3.5 x 3.5 cm²). The basic detector properties have been studied using the lab standard γ -ray sources. The response function of the filter has been studied using GEANT3 for mapping the fold distribution of the filter onto the angular momentum space. The multiplicity filter has been used successfully to measure the high angular momentum of the compound nuclei populated in the reaction ²⁰Ne (E = 145 & 160 MeV) + ⁹³Nb, ²⁷Al as well as low angular momentum events from the fission fragments of ²⁵²Cf spontaneous fission source. The filter has also been used successfully for correcting non-statistical events involved in the heavy ion fusion reaction.

Key words: Multiplicity filter, BaF₂ scintillator, GEANT3 simulation

PACS: 24.10.Lx; 29.30.Kv; 29.40.Mc

* Corresponding author.

Email address: srb@veccal.ernet.in (S. R. Banerjee).

1 Introduction

Several studies of the γ -decay of the giant dipole resonance in hot and fast rotating nuclei have focused on the various kinds of structure (triaxial, prolate, oblate, spherical) that the nuclear system can assume as it evolves towards the configuration of minimum energy and angular momentum [1,2,3]. Unlike energy, the angular momentum involved in such interactions cannot be directly observed and are inferred only indirectly. Measurement of angular momentum on an event-by-event basis can provide unique information that can increase substantially our understanding of the complex nuclear interactions. The high spin states of hot compound nuclei lose most of the excitation energy via particle and γ emissions above the yrast line. The remainder of the excitation energy and angular momentum is generally removed by the low energy yrast γ emission [1]. A precise measurement of this γ -multiplicity is very important since the number of γ -rays emitted are directly related to the angular momentum populated in the system.

A γ -multiplicity filter detector is a very important equipment for studying nuclear structure. Most of the country around the world have one form or the other [4,5,6,7]. Recently, a 50 - element gamma-multiplicity filter made of BaF_2 have also been designed and developed at VECC. The motivation behind fabricating this multiplicity filter is as follow:-

- (1) To measure the number of low energy discrete γ rays in heavy ion reaction with large geometric efficiency.
- (2) The detector should be very fast so that it can be used as a precise start trigger which will compensate the relatively poor time structure of the cyclotron.
- (3) It should be modular in nature so that different geometrical shape can be formed (castle/radial) as per the requirement.
- (4) It can be used to select the fusion events rejecting the non-fusion one.

In this paper, we report the detailed simulation studies, detector fabrication procedure & their exhaustive testing using lab standard γ ray sources and the complete performance of the filter array from very low to high spin distribution measurement.

2 Simulation

A thorough GEANT3 Monte Carlo [8] simulation was done to select the optimum shape and geometrical structure of the multiplicity filter. The cross sectional area was kept same as the detector array LAMBDA [9] to make

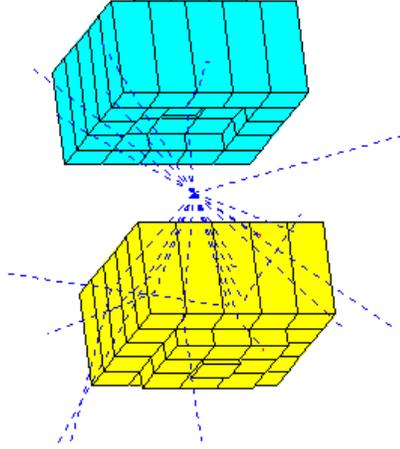


Fig. 1. Schematic view of the multiplicity filter array GAMMA in castle type geometry.

it granular and modular. To optimize the length of individual detector, simulation was performed considering the actual experimental scenario. In the realistic simulation, square shaped (cross-sectional area of $3.5 \times 3.5 \text{ cm}^2$) detectors of different lengths (3, 5, 7 and 10 cm) made of BaF_2 material were used. 50 detectors were arranged in two blocks of 25 elements each and placed at a distance of 7 cm on either side of the source. The central detectors were staggered in order to equalize the solid angle coverage. The schematic view of the setup as used in simulation is shown in Fig.1. Low energy gamma rays were thrown isotropically (Gaussian energy distribution varying from 0.3 to 1.5 MeV with peak at 0.7 MeV and FWHM is 0.5 MeV) with incident multiplicities of 5, 10, 15, 20, 25, 30, 35 and in each case, the peak position of the fold distribution was analyzed. It was found that the length of 5 cm has best possible average fold distribution (Fig.2) since its efficiency is close to 1 for a wide range of incident multiplicities. The fold detection efficiency (ϵ) is defined as

$$\epsilon = \frac{M_{obs}}{M_{inc} * (\Omega/4\pi)} \quad (1)$$

where, M_{inc} being the incident multiplicity in 4π geometry and M_{obs} the observed multiplicity within solid angle subtended by the gamma multiplicity filter. The fold distribution as observed for constant incident multiplicities of 10 and 20 for the detector having length of 5 cm is shown in Fig.3. The detectors of the multiplicity filter can be arranged in either castle or radial shape and simulation has been done for both the geometries. Although, castle type has larger cross talk probability than the radial type but the former has been preferred since in this geometry, detectors can be placed closer to the target and thereby subtending larger solid angle.

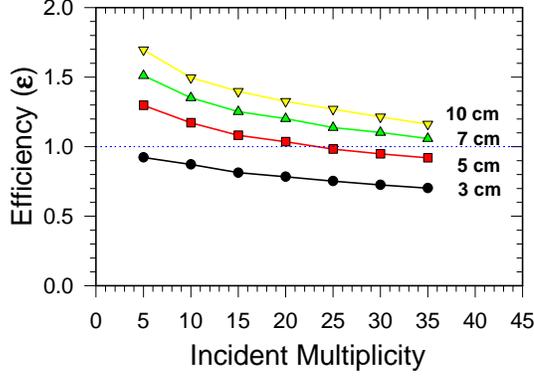


Fig. 2. Multiplicity detection efficiency vs. incident multiplicity plot for various detector lengths.

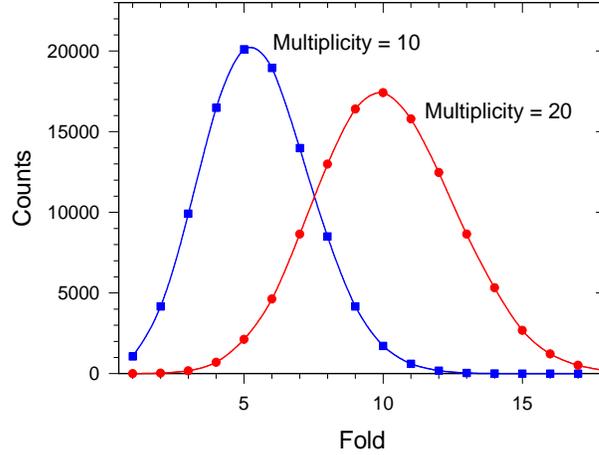


Fig. 3. Observed fold distribution for constant incident gamma multiplicities of 10 and 20.

3 Fabrication

The BaF₂ crystals were procured from Beijing Glass and Research Institute, China. In general, BaF₂ has two scintillation light components; a fast component ($\tau = 0.6\text{ns}$) peaking at $\lambda = 220\text{ nm}$ and a slow component ($\tau = 630\text{ns}$) peaking at $\lambda = 320\text{ nm}$ with intensities 20% and 80%, respectively. Standard procedures were followed for detector fabrication from bare barium fluoride crystals. First, the bare crystals were cleaned thoroughly using pure dehydrated ethyl alcohol. Each crystal was wrapped with 6 layers of $15\ \mu\text{m}$ white teflon tape since the scintillation light components are in the ultra violet (UV) region and teflon (C₂F₂) is high quality reflector of UV light. Next, aluminium foil of $10\ \mu\text{m}$ (3-4 layers) was used to enhance the light collection and to block the surrounding light from entering into the crystal. Fast, UV sensitive photo-multiplier tubes (29mm dia, Phillips XP2978) were coupled with the crystals using a highly viscous UV transmitting optical grease (Basyllone, $\eta \approx 300000$ cstokes). This coupling need to be done very carefully so that no air bubble

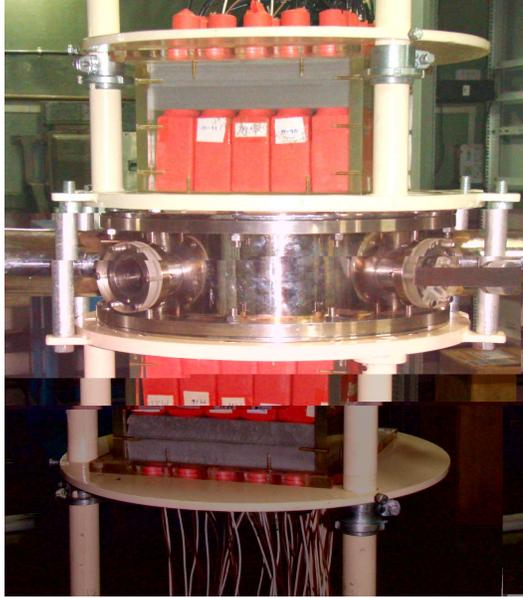


Fig. 4. Complete setup of the multiplicity filter array GAMMA kept on either side of the scattering chamber.

remains in the grease over the crystal surface, because air bubbles provide unwanted reflecting surfaces amounting to a loss of scintillation light which degrades the timing property. Specially designed aluminium collars were also used around the coupling area to provide additional support. A squared shape teflon reflector ($35\text{mm} \times 35\text{mm}$) with a 30 mm hole at the centre was placed at the PMT end of the crystal to reflect back UV light which would otherwise escape from outside the PMT. A PMT voltage divider base was then attached to the PMT for applying the high voltage. After that, the whole assembly was covered with black electrical tape for light-tightness, and finally with heat-shrinkable PVC tube for providing mechanical stability to the detector. A special scattering chamber and a detector stand have been designed, where the complete multiplicity filter array can be kept at 3 cm from the target position covering 71 % of the total 4π solid angle. The complete setup arranged in two blocks of 5×5 array, kept above and below the scattering chamber at a distance of 5 cm from the target position is shown in Fig.4.

4 Energy and Timing properties

The individual detector elements were tested with lab standard gamma ray sources. The energy spectra measured in individual detector is shown in Fig.5. The time resolution between two BaF_2 detectors was measured with the ^{60}Co source. The source was placed in between two identical detectors which were kept 180° apart. The energies and their relative times were measured simultaneously in event by event mode. The energy gated (1.0-1.4 MeV) time spec-

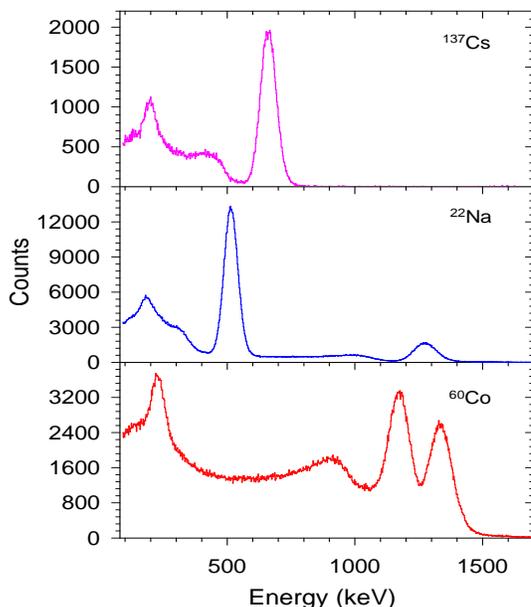


Fig. 5. Energy spectra from a single detector for different lab. standard gamma ray sources.

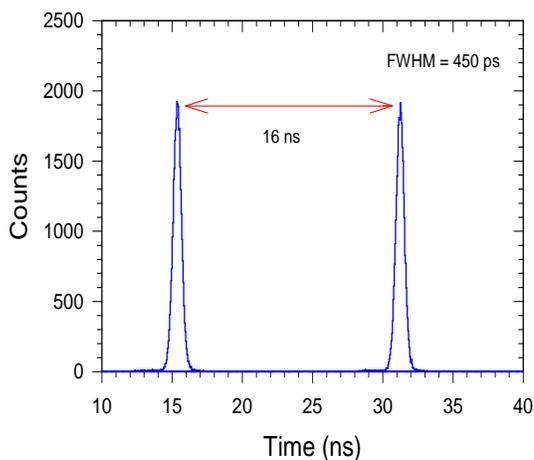


Fig. 6. Time resolution of individual detector using ^{60}Co γ -source.

trum is shown in Fig.6. The value obtained for time resolution is 450 ps. The cross talk probability was measured with ^{137}Cs and ^{60}Co sources. Nine detectors were arranged in a 3×3 matrix. A coincidence between the central detector and the rest of the eight surrounding detectors was made to collect data for different hit patterns by counting in a scalar module. The ratio of the different hit to the single hit gave the cross-talk probability. The overall cross-talk probability of double hit was found to be 2.5% & 15% for ^{137}Cs & ^{60}Co γ -sources respectively while that of triple hit was 0.04% and 0.37% respectively.

5 Method for extraction of Angular Momentum

In actual experiment, multiplicity filter registers folds which means number of low energy discrete gamma rays detected in a single event. From this experimental fold, information about the populated angular momentum distribution of the compound nucleus can be extracted. A method has been developed in which the individual experimental fold is mapped onto the angular momentum space using the known response of the filter array generated by the simulation with GEANT. In this simulation, the experimental conditions are taken into account, including the detector thresholds and the trigger logic. The γ multiplicity (M_γ) of an event is related to the angular momentum (J) as

$$J = 2M_\gamma + C \quad (2)$$

where, C is the correction due to the angular momentum carried off by statistical gamma rays, evaporated particles and the γ -rays below the trigger threshold. The J distribution can be obtained from statistical model code CASCADE [10]. The J and M_γ distributions are triangular in nature with small diffuseness and takes the form

$$P(M_\gamma) = \frac{2M_\gamma + 1}{1 + \exp[(M_\gamma - M_{max})/\delta m]} \quad (3)$$

where, M_{max} is the maximum of this distribution and δm is the diffuseness which are adjusted for best fit between the experimental and the simulated fold distributions.

Low energy γ -rays having multiplicity distribution $P(M_\gamma)$ are made to incident on the filter array from the target centre isotropically and the fold distribution is recorded. A fold distribution obtained for a setup of 50 detectors arranged in a castle type geometry is shown in Fig.7. Two blocks of 25 detectors arranged in 5 x 5 array were kept on either side of the source at a distance of 5 cm. The setup covered 56% of 4π solid angle. The incident multiplicity distribution was taken as in eq. 3, with $M_{max} = 30$ and $\delta m = 2$, typical for 8 MeV/A reaction. The incident γ -energy distribution was taken gaussian with peak at 0.7 MeV and FWHM of 0.5 MeV. This simulated fold distribution is then compared with the experimentally observed fold distribution. The multiplicity distribution for different experimental folds can now be generated from the simulation and also the corresponding angular momentum distribution using eq. 2. The incident multiplicity distribution and the multiplicity distributions for different fold windows are shown in Fig.8, where the filled circle shows the incident multiplicity distribution, the continuous line, dotted and the dashed lines indicate the multiplicity distributions gating on the events with folds 1-7, folds 8-11 and folds > 11 respectively.

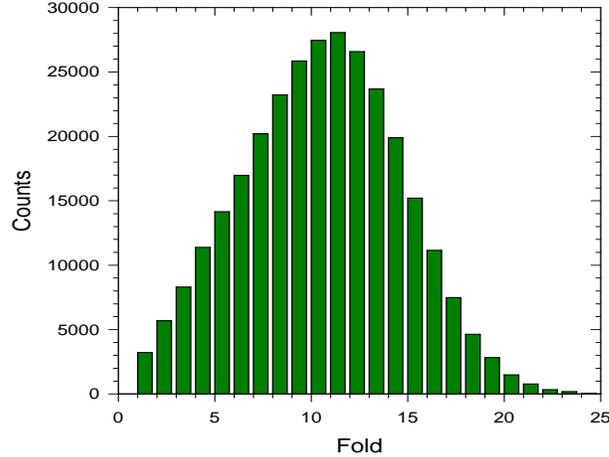


Fig. 7. Simulated fold distribution observed in the multiplicity filter.

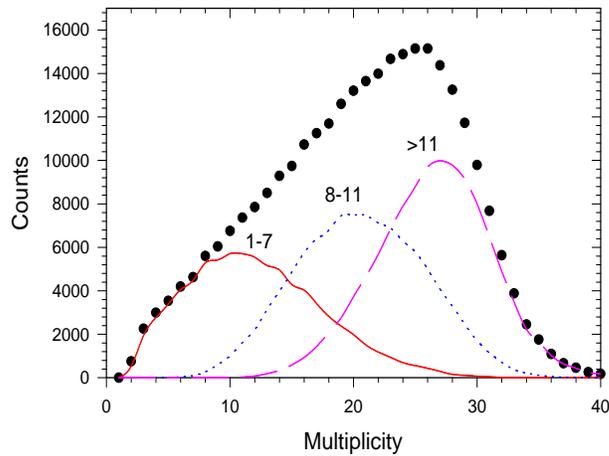


Fig. 8. The sampling of the total angular momentum distribution by gating on different folds observed in the fold distribution of the multiplicity filter.

6 Measurement of fold distributions from ^{252}Cf and in-beam reaction

A part of the GAMMA array has been used earlier for measuring high angular momentum in compound nuclear reactions. The detector array was tested in the experiment $^{20}\text{Ne} + ^{93}\text{Nb}$, at beam energies 145 and 160 MeV from K-130 AVF cyclotron at VECC [11]. The multiplicity filter was configured in a castle geometry in two blocks of 12 detectors each on either side of the target chamber at a distance of 10 cm from the target. The non-fusion events involved in the above fusion reactions were rejected using the observed fold distribution of the multiplicity filter. The multiplicity filter has also been used for studying Jacobi shape transition of ^{47}V populated in the reaction $^{20}\text{Ne} + ^{27}\text{Al}$ at beam energy of 160 MeV. The detailed setup and results of the experiment can be found in [12].

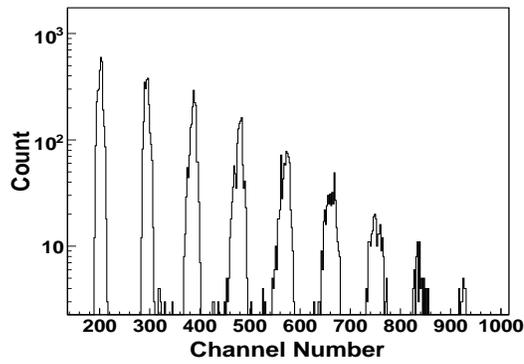


Fig. 10. Experimental fold distribution showing folds ≥ 2 for ^{252}Cf source.

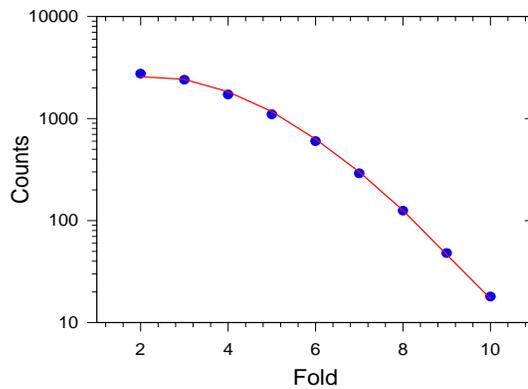


Fig. 11. Experimental fold spectrum (symbols) fitted with GEANT simulation (solid line) for ^{252}Cf source.

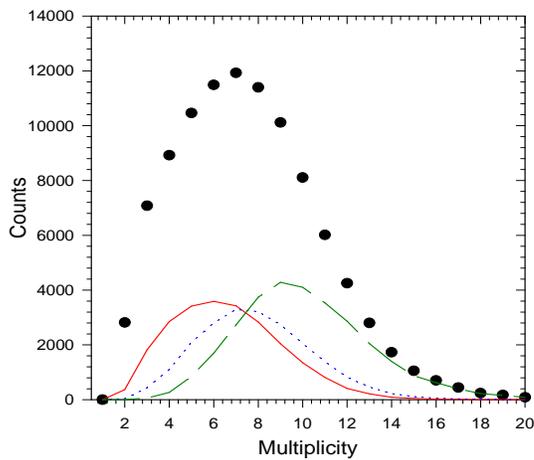


Fig. 12. The incident multiplicity distribution used in simulation (symbols). The multiplicity distributions obtained for different folds are also shown in the figure. The solid line represents fold 2, the dotted line represents fold 3 and the dashed line represents the multiplicity distribution for folds 4 and more.

Table 1

Average angular momentum values corresponding to different folds.

| Fold | $\langle J \rangle$ \hbar | δJ \hbar |
|-----------|--------------------------------|-----------------------|
| 2 | 13.2 | 4.9 |
| 3 | 15.8 | 5.1 |
| 4 or more | 20.4 | 6.6 |

7 Summary

A 50 element BaF₂ gamma-multiplicity filter has been designed, fabricated and installed successfully. The different detector properties have been studied using lab standard γ -ray sources. The filter has been used for the measurement of low energy discrete γ -rays from the reaction $^{20}\text{Ne} + ^{93}\text{Nb}, ^{27}\text{Al}$ at beam energies 145 and 160 MeV as well as the fission fragments from the ^{252}Cf source. The GEANT3 Monte Carlo simulation has been performed considering realistic geometry to study the response function of the filter in order to map the fold distribution of the filter onto the angular momentum space. The filter has also been used for rejecting the non-fusion events involved in the heavy ion fusion reaction.

References

- [1] M. N. Harakeh and A. van der Woude, Giant Resonances, Fundamental High-frequency Modes of Nuclear Excitation, Clarendon Press, Oxford, 2001.
- [2] J.J. Gaardhoje, Ann. Rev. Nucl. Part. Sci. 42 (1992) 483.
- [3] K. Snover, Ann. Rev. Nucl. Part. Sci. 36 (1986) 545.
- [4] M. Mattiuzzi, et al., Nucl. Phys. A 612 (1997) 262.
- [5] M. Jaaskelainen, et al., Nucl. Instr. and Meth. 204 (1983) 385.
- [6] H. El-Samman, J. Gizon and V. Barci Nucl. Instr. and Meth. A240 (1985) 91.
- [7] V. Nanal, et al., DAE-BRNS Symp. on Nucl. Phys. 46B (2003) 472.
- [8] R. Brun, et al., GEANT3, CERN-DD/EE/84-1 (1986).
- [9] S. Mukhopadhyay et al, Nucl. Instr. and Meth. A 582 603 (2007).
- [10] F. Puhlhofer, Nucl. Phys. 280 (1977) 267.
- [11] Srijit Bhattacharya et al., Phys. Rev. C 77 (2008) 024318.

- [12] Deepak Pandit, et al., DAE-BRNS Symp. on Nucl. Phys. 53 (2008) 267.
- [13] Timothy E. Valentine , Annals of Nuclear Energy 28 (2001) 191.