

# Brain-to-Brain Communication Based on Wireless Technologies: Actual and Future Perspectives

Dick Carrillo<sup>1</sup>, Renan Muioli<sup>2</sup>, Pedro Nardelli<sup>1</sup>

<sup>1</sup> School of Energy Systems, LUT University, Finland

<sup>2</sup> Digital Metropolis Institute, Federal University of Rio Grande do Norte, Brazil

**Abstract**—During the last few years, intensive research efforts are being done in the field of brain interfaces to extract neuro-information from the signals representing neuronal activities in the human brain. Recent development of brain-to-computer interfaces support direct communication between animals' brains, enabling direct brain-to-brain communication. Although these results are based on binary communication with relaxed requirements of latency and throughput, the fast development in neuroscience technologies indicates potential new scenarios for wireless communications between brains.

In this paper we highlight technologies that are being used today to enable brain-to-brain communication and propose potential wireless communication architectures and requirements for future scenarios.

**Keywords**—Brain-to brain communication, new wireless technology applications

## I. INTRODUCTION

In brain-to-brain communication (B2BC) the information is obtained by interfaces that combine neurostimulation, neuroimaging, and neuromodulation methods to obtain and deliver information between brains, allowing direct brain-to-brain communication. In very basic terms, information is extracted from the neural signals of a sender brain, digitized, and then delivered to a receiver brain. Importantly, electrical or behavioral feedback improve performance of both subjects. Early interest in B2BC came from the potential for expanding human communication and social interaction capabilities [1]–[4]. However, B2BC is still in its infancy and lack several key features of real-world human communication. For example, subject interactivity has been minimal.

On a parallel front, new advances in B2BC have been designed to support communication for more than two human subjects. One possible scenario is composed by a communication structure that supports two Senders and one Receiver. However, based on authors statement, it can be readily scaled up to include multiple Senders. Additionally, researchers are currently exploring the use of novel techniques as functional magnetic resonance imaging (fMRI) that will increase the bandwidth of data transmitted over brain-to-computer interfaces (BCI) [5], [6].

Nevertheless, the recent B2BC results are still characterized by restricted binary information with extreme low data rates without any latency requirements. In this sense, we would like here to point out potential requirements for future wireless communication scenarios [7] where different nodes (Each node represents a B2BC user) inside a specific wireless coverage

are interchanging reliable information through a variety of communication mechanisms (either half-duplex or full-duplex communication). In this context, new challenges for wireless technologies need to be addressed. Specially, at the initial stages, an important requirement will be related to data security, latency, and reliability. Other further steps will be related to network issues, for example, users density as an additional requirement to support higher data rates and low data rates.

It is important to remark that the aim of this paper is not related to signal processing techniques widely used in brain-to-computer interfaces. Our focus is associated to the communication network used to transmit the neuro-information.

This paper is organized in following sections. In Section II, we provide a summary of actual architectures and wireless technologies used today in B2BC. Future perspectives for new Architectures and requirements for B2BC are described in Section III. Finally, a brief summary is done in Section IV.

## II. WIRELESS COMMUNICATION ACTUALITY IN B2BC

Nowadays, most effort in B2BC is concentrated in the signal processing and techniques that improve brain signals interpretation. So, communication technologies are not a key enabler for actual B2BC development because data transmitted is used with relaxed requirements and most of the cases the communication is reduced to transmit e-mail messages through Internet. However, it is important for practitioners and engineers to get information of actual technologies that support the present development of B2BC. This architecture and technologies are cited in following lines.

### A. Architecture Used Today in B2BC

Most of actual architectures, from the communication point of view, are limited to one way communication [5], [6]. It means that the data information goes only on one way from transmitter and receiver without any feedback or answer of the receiver. For example, in [6] the architecture is composed basically by the following architecture elements: emitter, computer, communication channel, receiver.

1) *Emitter*: The emitter is the one that generates the information extracted from the brain, this information is transmitted to the computer using a wireless serial communication as Bluetooth or in some cases it could be wired universal asynchronous receiver transmitter (UART) communication.

2) *Computer*: The computer is used to process the brain-to-computer and computer-to-brain communication in the emitter and receiver side respectively.

3) *Communication Channel*: The information generated by computer is transmitted through Internet to other computer element using any commercial communication technology (wired or wireless) as ethernet, wifi, long-term evolution (LTE). All these cases without any important requirements because most of the data transmitted are reduced to small packets without any latency and throughput requirement.

4) *Receiver*: In the other side, the information receiver subjects were stimulated with biphasic transcranial magnetic stimulation pulses at a subject-specific occipital cortex site. The intensity of pulses was adjusted for each subject so that a) one particular orientation of the transcranial magnetic stimulation-induced electric field produced phosphenes [6] (representing the active direction and coding the bit value “1”), and b) the orthogonal direction did not produce phosphenes (representing the “silent direction” and coding the bit value “0”). Subjects reported verbally whether or not they perceived phosphenes on stimulation.

A diagram published in [6] is shown in Figure 1. Here the brain-to-computer interface subsystem is shown schematically, including electrodes over the motor cortex and the electroencephalographic amplifier/transmitter wireless box in the cap. Motor imagery of the feet codes the bit value 0, of the hands codes bit value 1. On the right of the same figure, the computer-to-brain interface system is illustrated, highlighting the role of coil orientation for encoding the two bit values. Communication between the brain-to-computer interface and computer-to-brain interface components is mediated by the internet.

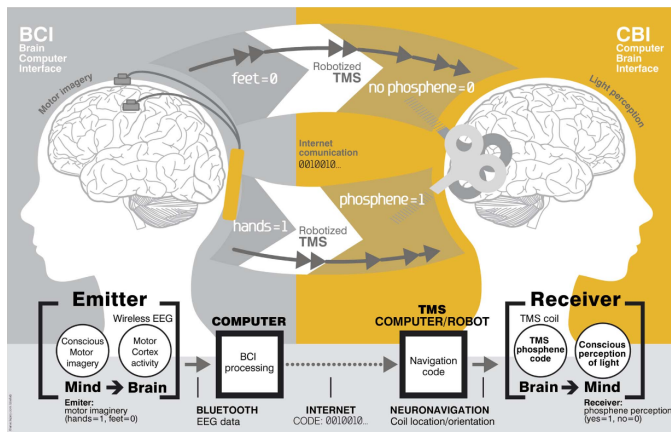


Fig. 1. Brain-to-brain communication architecture proposed in [6].

As it was explained before, the actual architecture is simplified from the communication network point of view. In which most of the effort is concentrated in the signal processing developed to support the emitter and the receiver sides.

### B. Wireless Technologies used in Actuality

From the communication network perspective, ethernet is the most important technology that is being used in actual

projects. this protocol is typically running on wired connectivity and in some cases using wireless. In general, as there is not specific requirements to transmit information from brain-to-brain interfaces, the choice depends of what technology is available. Without paying attention to latency, reliability, throughput. In some cases the QoS (quality of service) for these type of applications could be simplified to full buffer traffic. It means, that data is transmitted over the communication network without any requirement, with the possibility to become the data packet with the worst priority. For illustrative purposes, we list today’s technologies with the most influence and their respective characteristics.

- WiFi, today the most popular technology that operates in unlicensed bands. The latest standard (IEEE 802.11) release considers Orthogonal Frequency Division Multiplexing (OFDM) as modulation technology. The multiple access technology is based on Carrier-sense multiple access with collision avoidance (CSMA-CA), and it also supports multiple-input multiple-output (MIMO). WiFi operates typically on interference conditions, which is a drawback in some applications [8].
- Bluetooth, other popular technology developed to support wireless serial communication in short distances. It is based on IEEE 802.15.1 standard. It could be considered to build personal area networks (PANs). It was originally conceived as a wireless alternative to RS-232 data cables. In the first releases it was based on Gaussian frequency-shift keying (GFSK) modulation. Since the introduction of Bluetooth 2.0+EDR,  $\pi/4$ -DQPSK (differential quadrature phase-shift keying) and 8-DPSK modulation may also be used between compatible devices. Devices functioning with GFSK are said to be operating in basic rate (BR) mode where an instantaneous bit rate of 1 Mbit/s is possible. The term Enhanced Data Rate (EDR) is used to describe  $\pi/4$ -DPSK and 8-DPSK schemes, each giving 2 and 3 Mbit/s respectively. The combination of these (BR and EDR) modes in Bluetooth radio technology is classified as a BR/EDR radio [9].
- LTE, the cellular technology that is widely installed around the world. It is based on the 3GPP Rel 8 and following releases. The waveform and multiplexing scheme is based on orthogonal frequency-division multiple access (OFDMA), it also support MIMO. In contrast of other technologies, LTE is a based on a centralized communication in the base station. This base station manage different network impairments as interference, adaptive modulation, power transmission management, resource allocation, and other features that makes LTE a technology reliable that support different quality of service (QoS) policies [10].
- proprietary RF, the previous technologies are based on any standard. But in some specific cases some technologies are developed to support specific requirements. In some cases they are based on specific modulation schemes that are adapted to specific scenarios. Compa-

TABLE I  
WIRELESS TECHNOLOGIES SHOWING PROS AND CONS

Pros and con of wireless technologies in B2BC		
Technology	Pros	Cons
WiFi	Cheaper, Popular	high interference
Bluetooth	cheaper	small distances
LTE	world wide installed, good coverage	expensive
Proprietary RF	optimized for specific application	expensive

nies developed their own technology to support specific applications, as for example B2BC.

With the intention to contribute with practitioners and engineers, the Table I provides a list of prof and cons of previous technologies explained before.

### III. FUTURE WIRELESS TECHNOLOGIES IN B2BC

It is not difficult to realize the potential applications that B2BC will introduce in the society. For example, the rehabilitation of persons suffering from poor motor conditions is one of the core drivers that motivate research in this field. It is easy to see that not health applications would benefit from the development of B2BC but also industrial application in robotics, automation, entertainment, and social relations may also become scenarios where B2BC could be the next (revolutionary) step after human-computer interfaces based on virtual/augmented reality and social media interactions. In this context, in following lines we provide some insights of network architectures and requirements that potentially will support the future applications of B2BC.

#### A. Potential Network Architecture for B2BC

It is expected that future evolution of B2BC will demand full-duplex and half-duplex communication, as a contrast of what is used today. It also is expected that traditional cellular architectures could be useful in some scenarios (centralized communication in a specific base station). In some scenarios, a mesh topology with few users could be a good option. In all cases, it is expected that B2BC will be realized mostly in high dense user per area coverage. So, potentially mmWave combined with beamforming will be considered to support radio access connectivity with user-centric virtual cell in ultra dense networks [11].

In specific scenarios, for example medical applications, B2BC should be done using uniquely one sender and one receiver. So, in this ideal scenario, many network layers could be avoided in order to optimize latency and throughput. For example, uplink/downlink resource allocation algorithms could be avoided. Other feature that could be avoided is to up scale to Internet Protocol (IP) because Internet will not be an important requirement for these applications.

Both previous mentioned architectures are described in the diagrams of Fig. 3.

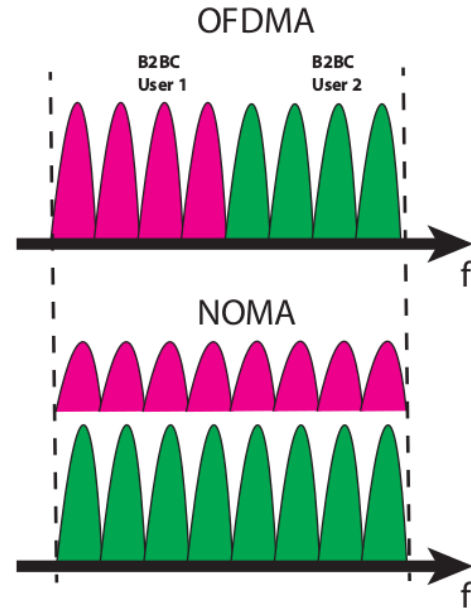


Fig. 2. Comparison of Multiple access technologies with special emphasis in NOMA that is useful in scenarios with strong interference because high user density. In NOMA users can use the same resource block simultaneously.

Independently of network architecture, security issues should be the most important factor that will be considered in B2BC. This new security challenges aims to design efficient secure transmission schemes that exploit propagation properties of radio channels. With careful management and implementation, physical layer security and conventional encryption techniques can formulate a well-integrated security solution together that efficiently safeguards the confidential and privacy communication data [12].

Other important aspect of potential network architecture in B2BC is the utilization of local area data network (LADN) that geographically isolates the operator network resources to provide high data rate, low latency, and service localization for the wireless System Architecture [13].

It is a fact that a variety of architectures should be supported in order to provide flexibility to the radio resource management (optimizing wireless channel resources). Finally, it is expected that many wireless technologies will be capable to support B2BC. It means that co-existing scenarios should be considered, specially to optimize physical layer to full interference scenarios.

#### B. Potential B2BC Technology Enablers

Considering that B2BC will achieve complex scenarios with a diversity of network impairments. We provide some insights of potentially technology enablers of the future B2BC in following lines.

1) *Generalized Frequency Division Multiplexing (GFDM)*: It is a flexible waveform that is a generalization of the popular OFDM [14]. This flexibility enables the possibility to support different data rates and different latency values that is possible

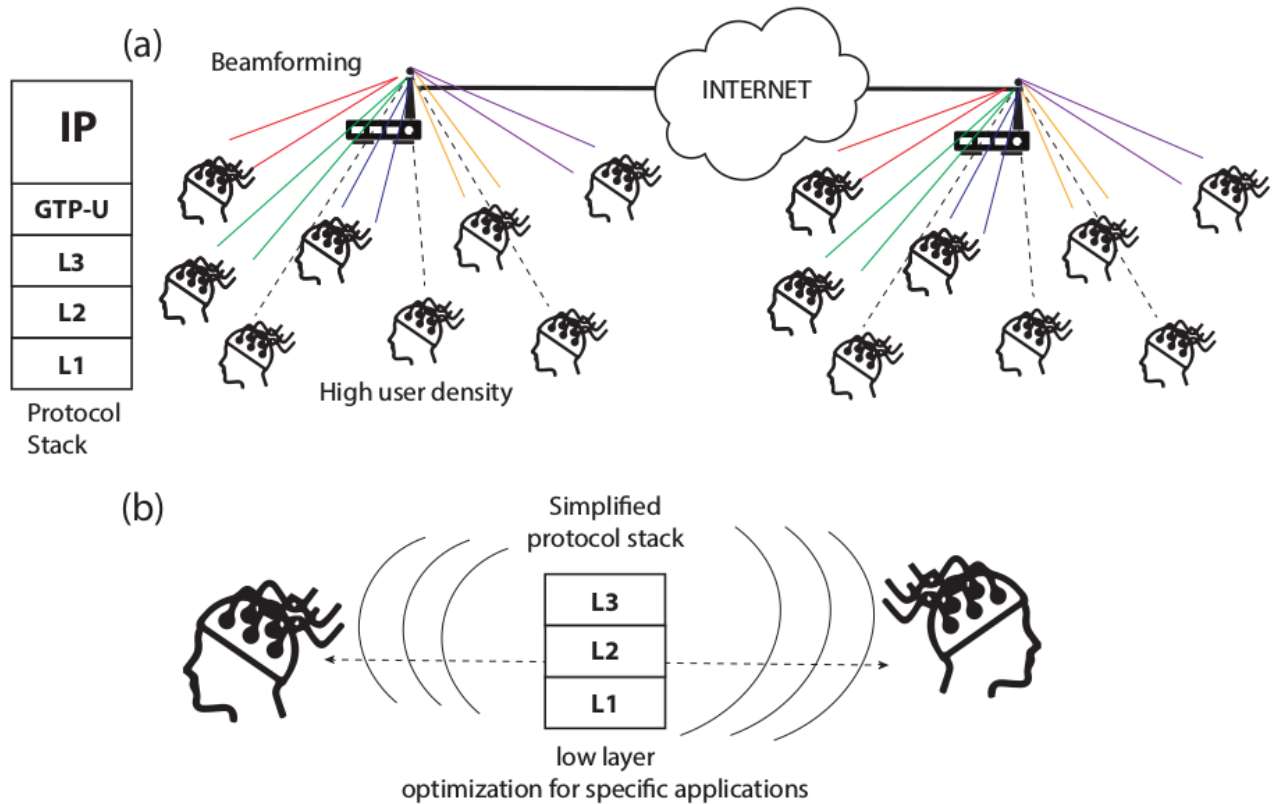


Fig. 3. (a) Architecture point-to-multipoint (cellular architecture) with Internet integration that is possible with the usability of multiple layer communications to support typical network impairments. (b) simplified protocol stack to point-to-point communication.

because GFDM is a generalization of OFDM with many optional configurations of subcarriers and subsymbols. Other important advantage is that in the latest years many research investment was done in this waveform to improve GFDM encoder performance.

2) *Non-Orthogonal Multiple Access*: Scenarios with high user density decrease the performance of the system. However, when NOMA is used, many research results have shown that the capacity network could be improved [15] (See Fig. 2). In the case of beyond fifth generation of mobile network (5G), we expect to apply hybrid solutions using NOMA methodologies to support the various scenarios of B2BC.

3) *Artificial Intelligence*: Digital signal processing is a key tool in most of wireless communication technologies. However, artificial intelligence techniques are gaining popularity, even in detection, channel estimation, radio resource scheduling, and power optimization [16]. So, it is expected that popularity of artificial intelligence will provide a positive impact of B2BC, specially to optimize dynamically the network performance.

4) *Ultra Reliable Low Latency (URLL) in mmWaves*: The cellular generation 5G has two important key technologies to support independently industry requirements, they are URLL and mmWaves (millimeter Waves). However, to support B2BC it will be necessary that both technologies will join features in order to enable high level quality of service requirements.

5) *Local Core Network*: With the improvement of processors and hardware, it will be possible in beyond 5G technologies to run local core networks without the necessity to operate with a backhaul connectivity, as is used today. This feature, will have strong consequences in the business model and application of these future networks [17]. This independence does not imply that features related to network management will be neglected. However, this networks will gain the popularity of WiFi with the advantage to support advanced features.

6) *3D Beamforming with MIMO*: the beamforming of 3D-MIMO can be designed in full 3D space, which can substantially improve the system capacity and alleviate the multi-user interference. The performance of beamforming relies heavily on precise CSI. However, in realistic scenarios, the channel knowledge is generally imperfect. Therefore, CSI uncertainty should be considered in beamforming design so that the system performance is robust to imperfect channels [18].

#### IV. SUMMARY

Nowadays, B2BC is becoming an interesting research topic, with special attention to signal processing used to interpret brain signals. So, communication issues are not yet the most important focus. However, we made a simplified survey of technologies that support actual applications. As today requirements are flexible in terms of latency and throughput, any technology is able to support B2BC.

Considering future development in B2BC, we extrapolated new potential architectures and technologies that probably will support innovative applications based on wireless technologies. Most of these requirements are related to URLLC communication and simultaneously the network considers scenarios with a high user density. A new waveform called GFDM to support physical layer flexibility. Other important potential technology that will enable B2BC is NOMA, specially for scenarios with high interference density.

In summary, B2BC is a prospective technology that will gain important improvements and applications that potentially will change the way people transmit information between humans and with things.

## REFERENCES

- [1] M. Dingemans, *Brain-to-Brain Interfaces and the Role of Language in Distributing Agency*. Oxford University Press, 2017.
- [2] S. Hongladarom, "Brain-brain integration in 2035: metaphysical and ethical implications," *Journal of Information, Communication and Ethics in Society*, vol. 13, no. 3/4, pp. 205–217, 2015. [Online]. Available: <https://doi.org/10.1108/JICES-10-2014-0042>
- [3] M. Pais-Vieira, M. Lebedev, C. Kunicki, J. Wang, and M. A. Nicolelis, "A brain-to-brain interface for real-time sharing of sensorimotor information," *Scientific reports*, vol. 3, p. 1319, 2013.
- [4] M. Pais-Vieira, G. Chiuffa, M. Lebedev, A. Yadav, and M. A. Nicolelis, "Building an organic computing device with multiple interconnected brains," *Scientific reports*, vol. 5, p. 11869, 2015.
- [5] L. Jiang, A. Stocco, D. M. Losey, J. A. Abernethy, C. S. Prat, and R. P. Rao, "BrainNet: a multi-person brain-to-brain interface for direct collaboration between brains," *arXiv preprint arXiv:1809.08632*, 2018.
- [6] C. Grau, R. Ginhoux, A. Riera, T. L. Nguyen, H. Chauvat, M. Berg, J. L. Amengual, A. Pascual-Leone, and G. Ruffini, "Conscious brain-to-brain communication in humans using non-invasive technologies," *PLoS One*, vol. 9, no. 8, p. e105225, 2014.
- [7] C.-T. Lin, Y.-C. Chen, T.-Y. Huang, T.-T. Chiu, L.-W. Ko, S.-F. Liang, H.-Y. Hsieh, S.-H. Hsu, and J.-R. Duann, "Development of wireless brain computer interface with embedded multitask scheduling and its application on real-time driver's drowsiness detection and warning," *IEEE Transactions on Biomedical Engineering*, vol. 55, no. 5, pp. 1582–1591, 2008.
- [8] Y. Xiao and Y. Pan, *Capacity and Rate Adaptation in IEEE 802.11 Wireless LANs*. Wiley, 2009. [Online]. Available: <https://ieeexplore.ieee.org/document/8041413>
- [9] J. C. Haartsen, "The bluetooth radio system," *IEEE personal communications*, vol. 7, no. 1, pp. 28–36, 2000.
- [10] S. Yi, S. Chun, Y. Lee, S. Park, and S. Jung, *Overview of LTE and LTE-Advanced New Features*. Wiley, 2013. [Online]. Available: <https://ieeexplore.ieee.org/document/8043424>
- [11] L. Chen, H. Xia, Z. Zeng, and S. Wu, "Joint merging overlapped virtual cells and designing beamforming in ultra dense network," in *2017 International Symposium on Wireless Communication Systems (ISWCS)*, Aug 2017, pp. 170–174.
- [12] Y. Wu, A. Khisti, C. Xiao, G. Caire, K. Wong, and X. Gao, "A survey of physical layer security techniques for 5g wireless networks and challenges ahead," *IEEE Journal on Selected Areas in Communications*, vol. 36, no. 4, pp. 679–695, April 2018.
- [13] J. Lee, S. Moon, B. Bae, and J. Lee, "Local area data network for 5g system architecture," in *2018 IEEE 5G World Forum (5GWF)*, July 2018, pp. 141–146.
- [14] D. Carrillo, S. Kumar, G. Fraidenraich, and L. L. Mendes, "Bit error probability for MMSE receiver in GFDM systems," *IEEE Communications Letters*, vol. 22, no. 5, pp. 942–945, May 2018.
- [15] Z. Qin, X. Yue, Y. Liu, Z. Ding, and A. Nallanathan, "User association and resource allocation in unified noma enabled heterogeneous ultra dense networks," *IEEE Communications Magazine*, vol. 56, no. 6, pp. 86–92, June 2018.
- [16] H. Ye, G. Y. Li, and B. Juang, "Power of deep learning for channel estimation and signal detection in ofdm systems," *IEEE Wireless Communications Letters*, vol. 7, no. 1, pp. 114–117, Feb 2018.
- [17] I. Ramezanipour, P. Nouri, H. Alves, P. H. J. Nardelli, R. D. Souza, and A. Pouttu, "Finite blocklength communications in smart grids for dynamic spectrum access and locally licensed scenarios," *IEEE Sensors Journal*, vol. 18, no. 13, pp. 5610–5621, July 2018.
- [18] K. Liu, H. Feng, T. Yang, and B. Hu, "Robust beamforming for downlink 3d-mimo systems with l11-norm bounded csi uncertainty," in *2018 10th International Conference on Wireless Communications and Signal Processing (WCSP)*, Oct 2018, pp. 1–5.