

PREPARED FOR SUBMISSION TO JINST

INTERNATIONAL CONFERENCE INSTRUMENTATION FOR COLLIDING BEAM PHYSICS
24-28 FEBRUARY 2020

BUDKER INSTITUTE OF NUCLEAR PHYSICS, NOVOSIBIRSK, RUSSIA

u-RANIA: a neutron detector based on μ -RWELL technology

**I. Balossino,^{a,b,1} G. Bencivenni,^c P. Bielowka,ⁱ G. Cibinetto,^a R. Farinelli,^a G. Felici,^c
I. Garzia,^a M. Gatta,^c P. Giacomelli,^e M. Giovannetti,^c R. Hall Wilton,^g C. Lai,^g
L. Lavezzi,^d F. Messi,^f G. Morello,^c M. Pinamonti,^h M. Poli Lener,^c L. Robinson,^g
M. Scodeggio^a**

^aINFN-Ferrara,
via Saragat 1, 44122 Ferrara, Italy

^bInstitute of High Energy Physics, Chinese Academy of Sciences,
19B Yuquan Road, Shijingshan District, 100049 Beijing, China

^cINFN-National Laboratory of Frascati,
via Enrico Fermi 54, 00044 Frascati (Roma) Italy

^dINFN-Torino,
via P.Giuria 1, 10125 Torino, Italy

^eINFN-Bologna,
viale Bertini Pichat 6/2, 40127 Bologna, Italy

^fLund University,
Box 117, 221 00 Lund, Sweden

^gESS-Linköping
Box 176, SE-221 00 Lund, Sweden

^hELTOS SPA
Strada E 44, San Zeno, 52100 Arezzo, Italy

ⁱTECHTRA S.p.z.o.o.
ul. Dunska 13 54-427 Wroclaw, Polska

E-mail: balossino@fe.infn.it

¹Corresponding author.

ABSTRACT: In the framework of the ATTRACT-uRANIA project, funded by the European Community, we are developing an innovative neutron imaging detector based on micro-Resistive WELL (μ -RWELL) technology. The μ -RWELL, based on the resistive detector concept, ensuring an efficient spark quenching mechanism, is a highly reliable device. It is composed by two main elements: a readout-PCB and a cathode. The amplification stage for this device is embedded in the readout board through a resistive layer realized by means of an industrial process with DLC (Diamond-Like Carbon). A thin layer of ^{10}B on the copper surface of the cathode allows the thermal-neutron detection through the release of ^7Li and α particles in the active volume. The ^{10}B technology has been developed to be an efficient and convenient alternative to the ^3He shortage. The goal of the project is to prove the feasibility of such a novel neutron detector by developing and testing small planar prototypes with readout boards suitably segmented with strip or pad readout, equipped with existing electronics or readout in current mode. Preliminary results from the test with different prototypes, showing a good agreement with the simulation, will be presented together with construction details of the prototypes and the future steps of the project.

KEYWORDS: Gaseous detectors; Gaseous imaging and tracking detectors; Micropattern gaseous detectors; MPGD; Neutron detectors

Contents

1	The Project	1
2	The Beam Test	2
3	The Future	4

1 The Project

The working framework is the ATTRACT project funded by the European Community. In particular, the uRANIA - micro Resistive Advanced Neutron Imaging Apparatus - proposal foresees the development of an innovative detector based on micro-resistive well technology [1] to perform neutron imaging. Such technology, based on resistive detector concept, is highly reliable and ensures an efficient spark quenching mechanism. The goal of this project is to develop, build and test planar prototypes and, therefore, prove its feasibility.

The device is composed by two main elements as shown in figure 1:

Cathode A standard μ -RWELL cathode PCB is composed by a Cu layer on a glass epoxy plate. In this case, it is coated with few μm of ^{10}B deposition. Such deposition is performed by the ESS Coating Workshop in Linköping, Sweden [2]. This ^{10}B layer is the crucial part for the conversion of the thermal-neutron in detectable particles. Such kind of technology is being developed to be as an efficient and convenient alternative to the ^3He shortage. Four prototypes have been produced with different thicknesses of ^{10}B to validate the simulations and to study the optimal value to maximize the performances. The samples thicknesses are 1.5, 2.5, 3.5 and 4.5 μm .

Readout-PCB This part includes the anode together with the amplification stage: a WELL patterned Apical® foil. This is realized by photolithography as a matrix of wells (diameter of 60-70 μm ; pitch of 140 μm) on a 50 μm thick polyimide substrate by the TECHTRA agency, Poland [3]. It is then embedded in the readout board - prepared by the ELTOS S.p.A., Italy [4] - through a resistive layer realized by means of an industrial process with Diamond-Like Carbon (DLC) [5]. The resistivity of this layer, whose typical range is from few tens to hundreds of $\text{M}\Omega/\square$, must be optimized to maximize the detector performances in terms of rate capability, spark amplitude quenching and maximum available gain. The readout boards will be suitably segmented with strip or pad readout, optimized to be equipped with already existing MPGD electronics.

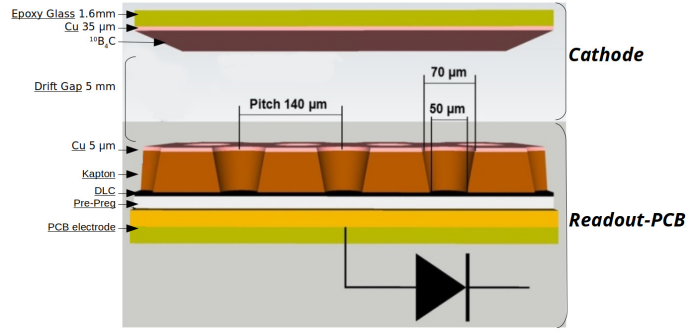


Figure 1. μ -RWELL design

The detection of thermal-neutron (kinetic energy of about 0.025 eV) will be performed thanks to the release of ${}^7\text{Li}$ and α particles inside the active volume. The ${}^{10}\text{B}$ on the copper surface of the cathode is the key of this process. The reactions that take place are:



where cases presented in eq. 1.1a takes places the 94% of the times and the remaining 6% involves eq. 1.1b. In both equations, the particle energies at emission in ${}^{10}\text{B}$ rest frame are reported. The ${}^7\text{Li}/\alpha$ production happens back to back and this allows to have mutually exclusive events. The conversion results have non-negligible cross section with the boron-coated cathode. The four prototypes with different thicknesses of the ${}^{10}\text{B}$ layer are considered to investigate this aspect and to understand which is the best thickness to be sure that the conversion results reach the gas gap.

2 The Beam Test

A preliminary characterization of the prototypes has been performed at the ENEA-HOTNES in Frascati [6]. The detectors have been exposed to a thermal neutron source, operating with the gas mixture $\text{Ar}/\text{CO}_2/\text{CF}_4$ (45/15/40) and read-out in current mode to measure the neutron detection efficiency.

Facility The Frascati facility offers an HOmogeneous Thermal Neutron Source (HOTNES) shown in figure 2. The source is ${}^{241}\text{Am-B}$ and it is placed at the bottom of the cylindrical cavity delimited by polyethylene walls. On top of it, a shadow bar prevents fast neutrons to directly reach the samples under test. Inside the irradiation volume, when the cover is in place, the fluence is almost uniform and it is fully characterized for thermal neutron. At the reference point, in the middle of the volume, the thermal neutron fluence is expected to be $758 \pm 16 \text{ Hz}/\text{cm}^2$ with very low gamma background.

Calibration To extract from the current measurement the neutron detection efficiency, a detailed simulation of the thermal neutron detection process as well as a fine calibration of each detector has been performed.

As preparation for the test, the devices have been calibrated in gain as a function of the applied high voltage, reproducing the beam test conditions by means of an X-ray gun. Testing an high voltage range between 300 and 700 V, the detector gain increases exponentially from 10^2 to 10^4 .

At the facility, a first reference test has been performed with a cathode without the boron coating to check the background inside HOTNESS. An increase of the current drain by the resistive has been reported, but it is negligible with respect to the operating point.

The current drain is also investigated for all the devices as a function of the gain when large ionization occurs ($N_\alpha = 1.1 \cdot 10^4$; $N_{Li} = 1.1 \cdot 10^4$). At low gain, the current absorption is linear but with the raise of the gain some rate effect occurs. It has been decided to proceed for the test in the gain range between 200 and 700.

Another test performed before reaching for the final results, involves the attenuation of the current drawn due to the FR-4 epoxy glass of the support layer used for the cathode. The current drain has been investigated by stacking an increasing number of cathodes together, all without ^{10}B coating. The results confirm the simulations performed with PCB composed by boron that absorbs the 10% of the neutrons and hydrogen that scatters the 9%. Every cathode decreases the current drawn by $(17.7 \pm 0.7)\%$. If the expected nominal flux is $758 \pm 16 \text{ Hz/cm}^2$ such cathode effect brings the effective flux to $624 \pm 28 \text{ Hz/cm}^2$.

Results The detection efficiency of such prototypes has been simulated to be compared with the measured results. The simulation has been performed calculating the sum of ^7Li and α particles that reach the gas over the total number of neutron produced. The measured efficiency is calculated as follows:

$$\epsilon = \frac{I}{e \cdot R \cdot G \cdot \langle N \rangle} \quad (2.1)$$

where:

- I is the measured current drawn from the resistive;

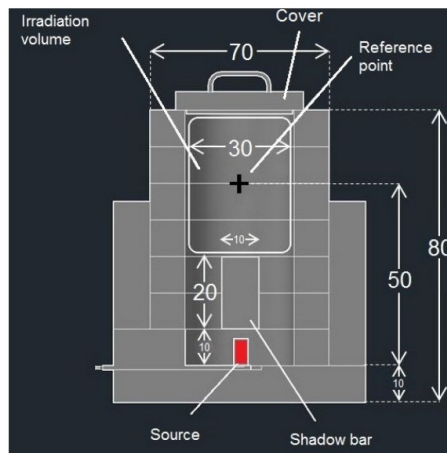


Figure 2. HOTNESS design

- e is the electronic charge;
- R is the thermal neutron fluence irradiating the detector;
- G is the gain of the detector;
- $\langle N \rangle$ is the average ionization generated in the gas gap by the α or ${}^7\text{Li}$ ions coming from the interaction of the thermal neutron with ${}^{10}\text{B}$ atoms, estimated by the simulations.

The results of the efficiency are reported in figure 3 with respect to the thickness of the ${}^{10}\text{B}$ coating on the cathode ranging from $1.5 \div 4.5 \mu\text{m}$. The results reported are the measured data with the nominal flux (red square) and the simulations (black dot). It is possible to see that there is correlation between all the results and an overall neutron detection efficiency ranging between $1.5 \div 2.0 \%$ is found for the nominal flux expected.

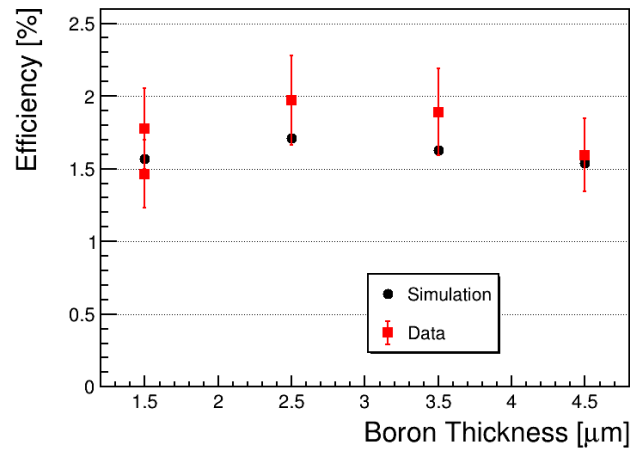


Figure 3. Efficiency wrt ${}^{10}\text{B}$ coating thickness

3 The Future

Some preliminary tests have been performed on four prototypes of an innovative detector build with micro-resistive well technology to perform neutron imaging. Such devices foresee the detection of thermal neutrons through their reaction with a thin layer of ${}^{10}\text{B}$ on the cathode that results in the production of ${}^7\text{Li}$ and α particles. Each prototype has been built with different thicknesses of the ${}^{10}\text{B}$ layer: 1.5, 2.5, 3.5 and 4.5 μm .

In this preliminary beam test, it has been measured that it is possible to reach a neutron detection efficiency ranging between $1.5 \div 2 \%$ within all the four detectors.

Several systematic effects due to the presence of FR-4 glass epoxy structure on the cathode PCB such as the absorption or back scattering of the thermal neutrons have been taken into account both in the measurements and in the simulation.

In order to improve the detection efficiency, it is planned to upgrade the detector with a boron-coated aluminum or copper mesh that will be placed between the cathode and the readout PCB. With this new layout of the detector a second beam test will be performed.

The spatial resolution expected with such a detector is expected to be of the order of 100 microns. Such performance will be possible with a charge and time readout electronics inherited from the BESIII Cylindrical GEM detector [7]. Such readout electronics is able to process charge and time information and, together with the already developed charge centroid and μ TPC clusterization algorithms [8], will be adapted to this new detector to allow the reconstruction of the position of the neutron interaction.

Acknowledgments

This work is supported by the Italian institute of nuclear physics (INFN). The research leading to these results has been performed within the ATTRACT Project, funded by the European Commission.

References

- [1] G. Bencivenni et al., *The micro-Resistive WELL detector: a compact spark-protected single amplification-stage*, JINST (2015), doi:10.1088/1748-0221/10/02/p02008
- [2] ESS Coating Workshop, <https://europeanspallationsource.se/>
- [3] TECHTRA Technology Transfer Agency, <http://techtra.pl/>
- [4] ELTOS S.p.A., Italy, <http://www.eltos.com/>
- [5] Diamond-Like Carbon, DLC, <https://global-sei.com/technology/tr/bn82/pdf/82-09.pdf>
- [6] A. Sperduti, et al., *Results of the first user program on the Homogeneous Thermal Neutron Source HOTNES (ENEA/INFN)*, JINST_12_P12029 (2017)
- [7] R. Farinelli, et al, *Preliminary results from the cosmic data taking of the BESIII cylindrical GEM detectors*, these proceedings
- [8] M. Alexeev et al, *Triple GEM performance in magnetic field*, JINST 14 P08018 (2019), DOI:10.1088/1748-0221/14/08/P08018