

Optimal Power Control for DoS Attack over Fading Channel: A Game-Theoretic Approach

Jie Wang, Jiahu Qin, *Senior Member, IEEE*, Menglin Li, and Yang Shi, *Fellow, IEEE*

Abstract—In this paper, we investigate remote state estimation against an intelligent denial-of-service (DoS) attack over a vulnerable wireless network whose channel undergoes attenuation and distortion caused by fading. We use the sensor to observe system states and transmit its local state estimates to the remote center. Meanwhile, the attacker injects a jamming signal to destroy the packet accepted by the remote center and causes the performance degradation. Most of the existing works are built on a time-invariant channel state information (CSI) model in which the channel fading is stationary. However, the wireless communication channels are more prone to dynamic changes. To capture this time-variant property in the channel quality of the real-world networks, we study the fading channel network whose channel model is characterized by a generalized finite-state Markov chain. With the goals of two players in infinite-time horizon, we describe the conflicting characteristic between the attacker and the sensor with a general-sum stochastic game. Moreover, the Q-learning techniques are applied to obtain an optimal strategy pair at a Nash equilibrium. Also the monotone structure of the optimal stationary strategy is constructed under a sufficient condition. Besides, when channel gain is known *a priori*, except for the full Channel State Information (CSI), we also investigate the partial CSI, where Bayesian games are employed. Based on the player's own channel information and the belief on the channel distribution of other players, the energy strategy at a Nash equilibrium is obtained.

Index Terms—Cyber-physical systems (CPSs), denial-of-service (DoS) attack, remote estimation, fading channel.

I. INTRODUCTION

Cyber-physical systems (CPSs) tightly integrate computation, communication and control with cyber elements and physical processes [1]. With a promising future, CPSs have been applied in a large scope of infrastructures including internet of things, environmental monitoring, self-driving cars, smart grids, mine monitoring, etc [2], [3]. In most of cyber-physical infrastructures, safety is a crucial problem. Whereas, due to the nature of high openness in cyber communication networks, CPSs are vulnerable to the malicious attacks from the outside. As a result, there is an urgent need to address the issues of *cyber-security* [4]–[6].

Researchers mainly investigated cyber-security under two types of attacks on CPS: deception attacks [7] and denial-of-service (DoS) attacks [8]–[12]. The deception attack mainly degenerates the system performance by maliciously modifying the communication data packets, while DoS attack jams the communication channel to compromise the availability of data

packets. In this work, we are committed to remote state estimation against DoS attacks which are common and easy to implement. The adversary deploys a DoS attack which jams the communication channel to diminish the network's capacity to transmit the signals sent by the sensor. In a wireless communication network one has to take some factors into account such as background noise, interference, channel fading, etc [13]. The concept of signal-to-interference-plus-noise ratio (SINR) creates a model to consider these factors [14]–[16]. The existing communication theory reveals that the packet dropout rate is connected with the energy.

Several studies investigating DoS attacks have been implemented with the standpoint of only one side, see [17], [18] for more details and the reference therein. Zhang *et al.* [17] considered how to launch DoS attacks intelligently with the power consumption as little as possible in the standpoint of attacker. The sensor should adopt rational action (by choosing to send different transmission energy level) to avoid DoS attacks, at the same time the attacker would identify sensor's action, and revise its attack method accordingly. If an interaction between the attacker and the sensor is considered, the defensive/offensive strategy designs will be complicated. The game-theoretic framework has been adopted to model the interactive actions between attackers and sensors in [19], [20]. Li *et al.* [20] studied a scenario where a sensor sends signal to the remote center by a wireless transmission channel and a DoS attacker whose target is to deteriorate the system estimation performance obstructs the channel by using as little energy as possible. By proposing a two-player zero-sum game in which sensors and attackers, both have limited power, obtain their optimal solution to maximize their reward functions, [20] showed that the optimal solutions for sensors and attackers form a mixed strategy Nash equilibrium. Liu *et al.* [21] investigated the infinite-time targets of the sensor and attacker with asymmetric information over SINR network and modeled the conflicting nature between them by a Stackelberg game.

However, the existing works are built on a time-invariant channel state information (CSI) scenario in which the channel fading is stationary over the whole time horizon. Unlike wired communications that take place over a relative stable medium, the wireless transmission medium varies strongly over time.

We will examine how the sensor and the attacker use the information about the channel quality (referred to *Channel State Information* (CSI)) to adjust their transmission parameters. However, the consequence of using CSI under self-interested behavior requires sophisticated game-theoretic analysis. In order to represent the channel fading statistics, a large number

J. Wang, J. Qin, and M. Li are with the Department of Automation, University of Science and Technology of China, Hefei 230027, China (e-mail: wj1993@mail.ustc.edu.cn; jhqin@ustc.edu.cn; lml195@mail.ustc.edu.cn).

Yang Shi is with the Department of Mechanical Engineering, University of Victoria, Victoria, BC V8W 3P6, Canada (e-mail: yshi@uvic.ca).

of samples are needed in simulation to obtain the statistically matched channel gain [22], so high computational cost is required. Thus, finite state channel model is adopted [13] so as to reduce the complexity.

Besides, most previous works assume that the knowledge such as the channel state information (CSI) [23] about other devices is available to all devices. However, this is not very possible in a real scenario. In light of this, the original general-sum stochastic game framework is changed into a static Bayesian game. In this scenario, both the sensor and the attacker acquire incomplete information, in other words, the sensor has its own channel gain, but does not acquire the attacker's. Similar things happen to the attacker.

In this work, to capture the influence of the time variation in the channel quality of practical networks and obtain how different channel states affect the estimation performance, a general-sum stochastic game is established to describe the interactive action between the transmitted energy for sensors and the interfering energy for attackers over a time-varying channel state information scenario which embeds the work in [20] as a special case. For the incomplete information scenario, the previous game framework is changed to a static Bayesian game. The main contributions of our work are as follows.

- 1) The interaction between the transmission strategy on sensors and attackers is investigated in the scenario of time-varying fading channel which embeds the previous work investigating the stationary fading channel [20] as a special case. A general-sum stochastic game framework is developed to find an energy-efficient action for the sensor and the attacker simultaneously. The introduction of time varying channel state incurs significant technical challenges as the channel gain changes at the next moment is uncertain and the analysis is considered in a probabilistic sense.
- 2) We present a modified Q-learning method, which is called Nash Q-learning algorithm, to find the optimal solutions. We also provide the convergence analysis of Nash Q-learning algorithm for our stochastic game. And the monotone structure of the stationary Nash equilibrium strategy is constructed under a sufficient condition.
- 3) In the case of known channel fading, in addition to the complete CSI scenario, partial CSI cases or incomplete information games are also considered. In this case, each participant fully acquires his own channel gain, but only knows the statistical channel information of his opponent. In this case, we study Bayesian equilibria, in which the "optimal" energy scheme in each participant relies only on its own channel information.

The rest of paper is organized as follows. We first provide the system dynamic, the method of state estimation and the fading channel model in section II. The problem of interest is then developed. The framework of the sensor-attacker game and the existence of the equilibrium strategy is demonstrated in section III. Section III also provides the practical implementation of obtaining the optimal policy and the convergence analysis of proposed Nash Q-learning algorithm in our game. Besides, the monotone structure of the optimal stationary strategy is

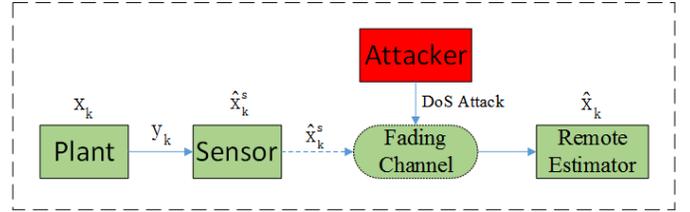


Fig. 1: System architecture: The transmission channel is destroyed by a malicious attacker.

also constructed. In section IV, the framework of incomplete information stochastic Bayesian game is formulated and the type-contingent strategy is obtained. The simulations and conclusions are given in Sections V and VI, respectively.

Notations: Denote by Z the set of non-negative integers. \mathbb{R}^n represents the n -dimensional Euclidean spaces. For a matrix X , X' denotes its transpose. $Tr[\cdot]$ denotes the trace of a matrix. $X \geq Y$ if $X - Y \in S_+^n$. $E[\cdot]$ denotes the expectation of a random variable. δ_{ij} is the Dirac delta function, i.e., $\delta_{ij} = 1$ when $i = j$, and $\delta_{ij} = 0$ if $i \neq j$.

II. PROBLEM SETUP

Consider a general discrete linear time-invariant (LTI) system (see Fig. 1) as follows

$$x_{k+1} = Ax_k + \omega_k, \quad (1)$$

$$y_k = Cx_k + \nu_k, \quad (2)$$

where $k \in \mathbb{N}$, $x_k \in \mathbb{R}^{n_x}$ represents the system state, $\omega_k \in \mathbb{R}^{n_x}$ represents the system noise, $y_k \in \mathbb{R}^{n_y}$ stands for the observation made by the sensor, and $\nu_k \in \mathbb{R}^{n_y}$ is the observation noise. Furthermore, ω_k and ν_k represent zero-mean i.i.d Gaussian noises with $E[\omega_k \omega_j'] = \delta_{kj}Q$ ($Q \geq 0$), $E[\nu_k \nu_j'] = \delta_{kj}R$ ($R > 0$), $E[\omega_k \nu_j'] = 0$, $\forall j, k \in \mathbb{N}$. We assume that the initial state x_0 is a Gaussian random variable with zero mean and covariance $\Pi_0 \geq 0$. Also x_0 is assumed to be uncorrelated with ω_k and ν_k . We assume that (A, C) is observable and (A, \sqrt{Q}) is controllable.

In cyber-physical systems, sensors are assumed to be intelligent [2] to implement some simple calculations. Thus, after making an observation at time k , the Kalman filter is used by the intelligent sensor to calculate the estimation of state x_k locally. Denote \hat{x}_k^s and P_k^s as the local minimum mean-squared error (MMSE) estimate of the state x_k and the corresponding error covariance: $\hat{x}_k^s = \mathbb{E}[x_k | y_1, y_2, \dots, y_k]$, $P_k^s = \mathbb{E}[(x_k - \hat{x}_k^s)(x_k - \hat{x}_k^s)' | y_1, y_2, \dots, y_k]$. These terminologies are computed by the standard Kalman filter and the iteration begins with $\hat{x}_0^s = 0$ and $P_0^s = \Pi_0$. For the sake of simplicity, the Lyapunov and Riccati operators h and \tilde{g} : $S_+^n \rightarrow S_+^n$ as $h(X) \triangleq AXA' + Q$ and $\tilde{g}(X) \triangleq X - XC'[CXC' + R]^{-1}CX$ are defined. Due to the fact that P_k^s converges exponentially fast to a unique fixed point \bar{P} from any initial condition [24], we assume that $P_k^s = \bar{P}$, $k \geq 1$, where \bar{P} is the steady state error covariance given by the unique positive semi-definite solution of $\tilde{g} \circ h(\bar{P}) = \bar{P}$.

A. Communication over Fading Channel

In a typical wireless communication channel the transmitted signal suffers attenuation and distortion resulted from inter-

ference, shadowing, process noise, and fading, and all these factors can frequently result in packet dropout [25].

The wireless communication network is generally time-varying. In an industrial setting this time-variant characteristic may be resulted from moving machines, buildings, obstacle, and so forth, the receptor or the sender built on a moving device can also result in the time-variable property of the channel. Hence, except for the propagation path loss, channels also suffer shadowing and small-scale fading.

The architecture of wireless communication channel is depicted in Fig. 2. All frequency elements of the communication packet suffer a analogical fading or damping. As a result, the obtained signal at the receptor is provided as

$$r_t = \sqrt{g_t}s_t + \varpi_t, \quad (3)$$

where s_t denotes the channel input which has an average energy constraint $E[s_t^2] \leq P$. r_t represents the channel output; ϖ_t is an additive white Gaussian noise (AWGN) whose mean is zero and variance is σ_ϖ^2 . Throughout the article, we will refer to the attenuation g_t simply as the fading channel gain.

Considering that the main characteristics of fading channels is a correlated, time-varying stochastic process. Specifically, the wireless transmission channel is a dynamic system, and the fading channel gain g_t is a random process that transforms over time. An easy-to-handle mathematical model is needed to precisely describe the dynamic characteristics of time-varying fading channel. In this paper, the common scheme such as finite state Markov chain (FSMC) is utilized to model wireless fading channels. It is assumed throughout the paper that the following assumption holds:

Assumption 1: g_k is the physical interpretation for channel quality and takes value in a finite set Ξ whose elements are denoted by $\{Z_1, Z_2, \dots, Z_l\}$. Without loss of generality, we assume that $Z_1 < Z_2 < Z_3 < \dots < Z_l$.

- 1) $\Xi = \{Z_k\}_{k=1}^l$ is an ergodic Markov chain; We denote by μ the row vector of stationary probability distribution for the Markov chain Ξ , and by $\mu_i > 0$ its i -th entry corresponding to state $Z_i \in \Xi$.
- 2) The one-step transition probability for this chain is denoted by $\Pi(\cdot|\cdot) : \Xi \times \Xi \mapsto [0, 1]$, where $\Pi(\cdot|\cdot)$ is known *a priori*. Also, $\Pi(\cdot|\cdot)$ is aperiodic and irreducible.
- 3) The channel is block fading, i.e., the channel gain g_k keeps unchanged during each signal transmission but transforms from block to block.
- 4) The acceptor can verify the the received signal. Only the signal packets reconstructed error-free are identified as successful reception.

Finite state channel models (FSCM) have been widely accepted as an effective method to describe the related structure of the fading channel [22]. The FSCM is characterized by a deterministic or probabilistic function of a first-order Markov chain, where each element may be related to a particular channel state. The Markov state process is in general stationary, therefore, the state transition probability is time-independent. And the distribution of initial state is assumed to be $u = [\mu_1, \mu_2, \dots, \mu_l]$. This is a common assumption in a real communication scenario for channel statistics are not

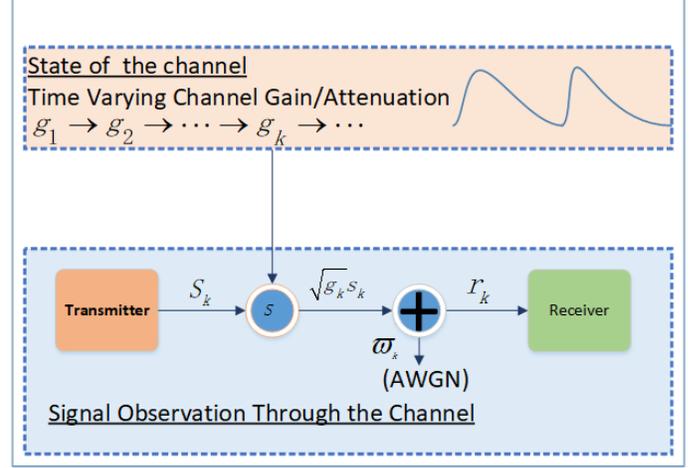


Fig. 2: Fading Channel Model

fast-changing over time [22]. Random data packet dropout will take place due to fading and interference. To describe this scenario, we adopt an Additive White Gaussian Noise (AWGN) network, which chooses Quadrature Amplitude Modulation (QAM), to describe the communication between the transmitter and the receiver. After that, the symbol error rate (SER) is tightly connected with the signal to noise ratio (SNR) as $SER = 2Q(\sqrt{\alpha SNR})$, where $\alpha > 0$ is a parameter and $Q(x) \triangleq \frac{1}{\sqrt{2\pi}} \int_x^\infty \exp(-\eta^2/2) d\eta$. Consider a DoS attack congests the communication channel of the network. The corresponding SNR of the channel is transformed to SINR:

$$SINR = \frac{\Psi^s g^s}{\Psi^a g^a + \sigma^2},$$

where Ψ^s is the transmitted energy used by the sensor, g^s represents the channel gain for sensors, Ψ^a is the interfering energy from the attacker, g^a represents the channel gain for attackers, and σ^2 represents the additive white Gaussian noise. Thus taking account of both fading and additive white Gaussian noise in the transmission, whether the signals transmitted by the sensor are successfully accepted by the remote center can be formulated as a binary random process $\gamma_k, k \in \mathbb{N}$ (which indeed follows a Bernoulli distribution), in which $\gamma_k = 0$ indicates that the packet has been lost.

$$\gamma_k = \begin{cases} 1, & \text{if data packet is received error-free,} \\ 0, & \text{otherwise.} \end{cases} \quad (4)$$

Denote the energy levels of the sensor and the attacker, respectively, as:

$$\mathbb{P}_S \triangleq [\mathcal{P}_{s_1}, \dots, \mathcal{P}_{s_{max}}] \quad \text{and} \quad \mathbb{P}_A \triangleq [\mathcal{P}_{a_1}, \dots, \mathcal{P}_{a_{max}}].$$

The successful packet reception is not only statistically determined by the power levels but also by the channel gains of the sensor and the attacker.

This finite state fading channel model generates an error symbol based on the following probabilistic mechanism. At time k , the chain state of two player is g_k^s, g_k^a , respectively. It generates an output symbol $\gamma_k \in \{0, 1\}$ with probability

$$q(\mathcal{P}_{s_k}, g_k^s, \mathcal{P}_{a_k}, g_k^a) \triangleq Pr(\gamma_k = 1 | \mathcal{P}_{s_k}, g_k^s, \mathcal{P}_{a_k}, g_k^a), \quad (5)$$

where $\mathcal{P}_{s_k} \in \mathbb{P}_{\mathcal{S}}$, $\mathcal{P}_{a_k} \in \mathbb{P}_{\mathcal{A}}$, $g_k^s \in \Xi$ and $g_k^a \in \Xi$. Based on the state process and channel gains, the error symbol is memoryless, this is

$$Pr(\gamma_{1:k} | \mathcal{P}_{s_{1:k}}, \mathcal{P}_{a_{1:k}}, g_{1:k}^s, g_{1:k}^a) = \prod_{i=1}^k Pr(\gamma_i | \mathcal{P}_{s_i}, \mathcal{P}_{a_i}, g_i^s, g_i^a).$$

To avoid trivial problems, we assume that the following equation holds: $\min_{\mathcal{P}_{s_k}, g_k^s, \mathcal{P}_{a_k}, g_k^a} q(\mathcal{P}_{s_k}, g_k^s, \mathcal{P}_{a_k}, g_k^a) > 1 - \frac{1}{\rho(A)^2}$, where A is the system matrix and $\rho(A)$ represents the spectral radius of A . Under the above sufficient condition, the expected estimation error covariance is bounded. While the above condition is not satisfied, the attacker would jam the channel with a certain interfering energy continuously to obtain an unbounded estimation error, that is to say, the attacker dominates the estimation process and thereby there exists no equilibrium for the attacker and sensor.

B. Remote State Estimation

Denote \hat{x}_k and P_k as state estimate and corresponding error covariance of the system in the remote center side. According to the work [24], they can be obtained via the following procedure:

$$\hat{x}_k = \begin{cases} \hat{x}_k^s, & \gamma_k = 1, \\ A\hat{x}_{k-1}, & \gamma_k = 0. \end{cases} \quad (6)$$

And P_k is computed as follows:

$$P_k = \begin{cases} \bar{P}, & \gamma_k = 1, \\ h(P_{k-1}), & \gamma_k = 0, \end{cases} \quad (7)$$

where \bar{P} represents the steady-state error covariance. Without loss of generality, we assume that the initial packet \hat{x}_0^s is acquired by the remote center and hence $P_0 = \bar{P}$.

In order to express succinctly, we define a random variable $\tau_k \in \mathbb{N}$ as the duration between two transmission:

$$\tau_k \triangleq k - \max_{0 \leq t \leq k} \{t : \gamma_t = 1\}, \quad (8)$$

which represents the distances between the time k and the most recent time that the transmitted signal is acquired by the remote center. The estimation error covariance is associated with the holding time and the relationship is described as $P_k = h^{\tau_k}(\bar{P})$, and the holding time updates as follows:

$$\tau_k = \begin{cases} 0, & \gamma_k = 1, \\ \tau_{k-1} + 1, & \gamma_k = 0. \end{cases} \quad (9)$$

Note that the energy and channel gains of the two agents (the sensor and the attacker), i.e., $\mathcal{P}_{s_k}, \mathcal{P}_{a_k}, g_k^s, g_k^a$ are given, and the sequence of stochastic variable τ_k forms a Markov chain with the transition probability matrix \mathbb{T} given as follows:

$$\mathbb{T} = \begin{bmatrix} q & 1-q & 0 & 0 & 0 & \dots \\ q & 0 & 1-q & 0 & 0 & \dots \\ q & 0 & 0 & 1-q & 0 & \dots \\ \vdots & \vdots & \vdots & \vdots & \ddots & \dots \end{bmatrix} \quad (10)$$

where the elements of \mathbb{T} represent the transition probability from the state $\tau_k = i$ to $\tau_{k+1} = j$, and the missing elements are 0. And the probability $q = q(\mathcal{P}_{s_k}, g_k^s, \mathcal{P}_{a_k}, g_k^a)$ is given by (5). In the following subsection, we formulate the problem of interest.

C. Problem of Interest

Depending on the channel knowledge of sensors and attackers, we investigate how to adopt game theory to develop a transmission schedule for sensors and attackers under Nash equilibrium, where the choice of each player is the best response to the choice of other opponents. The sensor and the attacker are assumed to be rational and they will always adopt the behavior that offers the highest expected reward. Therefore, in this work, our goal is to find the optimal strategy for both sides such that no one obtains more through unilateral deviation. The complete information for the stochastic game is constructed as follows.

III. MAIN RESULTS

A. Stochastic Game Description

In this subsection, we first model the schedule of scheduling energy-efficient actions in an infinite time horizon. In other words, we investigate how to arrange the jamming power (or transmission energy) for the attacker (or the sensor) in a stochastic game framework. In this stochastic game framework, players decide action simultaneously. We assume that the state set and action set are discrete. The formal definition of this stochastic game is provided in the following:

Definition 1: An attacker-sensor stochastic game Γ consists of a tuple $\langle \mathcal{S}, \mathcal{A}^1, \mathcal{A}^2, r^1, r^2, p \rangle$, where \mathcal{S} represents the state set, \mathcal{A}^i stands for the action set for player i . $r^i : \mathcal{S} \times \mathcal{A}^1 \times \mathcal{A}^2 \rightarrow R$ represents the reward function for player i ($i = 1, 2$), $p : \mathcal{S} \times \mathcal{A}^1 \times \mathcal{A}^2 \rightarrow \Delta(\mathcal{S})$ stands for the transition probability mapping, where $\Delta(\mathcal{S})$ represents the set of probability distribution over state set \mathcal{S} .

In our problem, we provide the following specific content to describe the sensor-attacker game.

Player: We assume that the attacker and the sensor are all rational players. Denote by \mathcal{I}^1 the attacker and \mathcal{I}^2 the sensor. The attacker and the sensor decide the best action among all available choice for them in terms of their own goals.

State: The state space \mathcal{S} can be expressed as $\mathcal{S} = \{(\tau_k, g_s, g_a)\}$, where $\tau_k \in \mathbb{N}$, g_s and g_a are the channel gain of sensor and attacker, respectively. Notice that the holding time is tightly associated with the estimation error covariance P_k as $P_k = h^{\tau_k}(\bar{P})$.

Action: Denote by \mathcal{A}^i the action (or pure strategy) space for player i , $i = 1, 2$. At time k , the attacker decides the interfering energy $a_k \in \mathbb{P}_{\mathcal{A}} \triangleq [\mathcal{P}_{a_1}, \dots, \mathcal{P}_{a_{max}}]$, and the sensor selects the transmission energy $b_k \in \mathbb{P}_{\mathcal{S}} \triangleq [\mathcal{P}_{s_1}, \dots, \mathcal{P}_{s_{max}}]$. Denote by (a_k, b_k) the joint action (or pure strategy) at time k .

Transition probability: Note that the holding time τ_k forms a Markov chain in which the transition matrix is presented in (10). And the transition probability is determined by the packet arrival probability in (5). From (15), s_k has the Markov property. Denoted by $s_{k+1} = (\tau_{k+1}, g_s, g_a)$, $s_k = (\tau_k, g'_s, g'_a) \in \mathcal{S}$ and $a \in \mathbb{P}_{\mathcal{A}}, b \in \mathbb{P}_{\mathcal{S}}$, $g_s = t, g'_s = t', g_a = e, g'_a = e'$ where $t, e, t', e' \in \Xi$, then $\forall k \geq 0$, $Pr(s_{k+1} | s_k, a_k = a, b_k = b) =$

$$\begin{cases} [1 - q(a, t', b, e')]u(t')u(e'), & s_{k+1} = (\tau_k + 1, t, e), \\ q(a, t', b, e')u(t')u(e'), & s_{k+1} = (0, t, e), \\ 0, & \text{otherwise,} \end{cases}$$

where $u(g_s), u(g_a) \in [0, 1]$ stands for the stationary distribution probability of channel gain g_s and g_a , respectively.

Reward function: Denote r^i the immediate payoff function of player i with $r^i : \mathbb{N} \times \mathcal{A}^1 \times \mathcal{A}^2 \rightarrow R$. The payoff function of attacker is provided as $r^1(m, a, b) = Tr[h^m(\bar{P})] + \alpha_s b - \alpha_a a$. And the sensor's immediate reward function is denoted as $r^2(m, a, b) = -r^1(m, a, b)$.

Defining the infinite time horizon discounted sum of rewards as follows:

$$v^1(s, \pi^1, \pi^2) = \sum_{k=0}^{+\infty} \beta^k E[r^1 | \pi^1, \pi^2, s_0 = s], \quad (11)$$

$$v^2(s, \pi^1, \pi^2) = \sum_{k=0}^{+\infty} \beta^k E[r^2 | \pi^1, \pi^2, s_0 = s], \quad (12)$$

where $v^1(s, \pi^1, \pi^2)$ and $v^2(s, \pi^1, \pi^2)$ represent the value for state s under the circumstance when the attacker adopts the strategy π^1 and the sensor adopts strategy π^2 . A *strategy* is a schedule for the players to take action. Here

$$\pi^i = (\pi_0^i, \dots, \pi_k^i, \dots) \quad (13)$$

for $i = 1, 2$ is defined on the whole process, where π_k^i stands for the *decision schedule*. A decision schedule is a mapping $\pi_k^i : \mathbf{H}_k \mapsto \Delta(A)$, where \mathbf{H}_k represents the space of the history of the probability before time k , with each $H(k) \in \mathbf{H}_k, H_k = (s_0, a_0^1, a_0^2, \dots, s_{k-1}, a_{k-1}^1, a_{k-1}^2, s_k)$, and $\Delta(A)$ stands for the set of probability distributions over the player's actions.

The process of game is summarized as follows. When the process is in state s_k at time $k > 0$, they independently and simultaneously take action (a_k, b_k) from the available action set on the basis of stochastic stationary policy that will be explained in the following subsection. Therefore, the attacker obtains an immediate reward $r^1(s_k, a_k, b_k)$ (or cost $-r^1(s_k, a_k, b_k)$ is generated for the sensor simultaneously); the process jumps to a new state s_{k+1} with a conditional probability depended on $Pr(s_{k+1} | s_k, a_k, b_k)$. The objective of the attacker (or the sensor) is to maximize its rewards in regard to the discounted sum standard $v^1(s, \pi^1, \pi^2)$, which is defined in (11).

Therefore, the attacker-sensor game is constructed to formulate the conflicting characteristics between the attacker and the sensor [26]. Besides, the specific description of game elements are provided. We present in the following subsection that the Nash equilibrium of attacker-sensor game is existed.

B. Existence of Equilibrium Strategies

The strategy π^i is referred to a **stationary strategy** if $\pi_k^i = \bar{\pi}$, i.e., the decision schedule is time-independent and determined only by the current state $s \in \mathcal{S}$. π^i is called a **behavior strategy** if its decision schedule is determined by the previous information of game, $\pi_k^i = f(H_k)$.

The Nash equilibrium is composed of a joint strategy where the attacker (the sensor) has a best response to the sensor (the attacker). For this attacker-sensor game, the attacker's (or the sensor's) schedule is defined in the infinite time horizon.

Definition 2: In our attacker-sensor game Γ , a Nash equilibrium point is composed of two strategies (π_*^1, π_*^2) such that for all $s \in \mathcal{S}$ we have

$$v^i(s, \pi_*^1, \pi_*^2) \geq v^i(s, \pi^1, \pi_*^2), v^i(s, \pi_*^1, \pi_*^2) \geq v^i(s, \pi_*^1, \pi^2)$$

for all $\pi^i \in \Omega^i$ and $i = 1, 2$, where Ω^i represents the set of strategies for player i .

However, the strategy pair which forms a Nash equilibrium point may be a stationary strategy or a behavior strategy. We prove that an Nash equilibrium in stationary strategies is always existed as follows.

Lemma 3.1 (cf. [27]): Under the stationary strategy, every n -player discounted game has at least one Nash equilibrium point.

Throughout this work, we focus on stationary strategy. Non-stationary strategy, i.e., behavior strategy, which is based on the action history, are rather complicated, and relatively less research in the game framework. Though the existence of a stationary Nash equilibrium has been demonstrated, it is still hard to establish practically a look-up table about the optimal strategy. Thus, we provide the calculation method in the following.

C. Practical Implementation

In this subsection, we provide a modified Q-learning algorithm, which is called Nash Q-learning algorithm, to find the optimal solution (π_*^1, π_*^2) for sensors and attackers. To adopt Q-learning to multi-players, we should recognize that it is necessary to investigate joint actions instead of only individual action. As to the attacker-sensor game, the Q-function of each player is $Q(s, a_1, a_2)$, instead of the single player Q-function $Q(s, a)$. Based on the extended form of Q-function and concept of Nash equilibrium, the Nash Q-value is defined as the expected sum of discounted reward when all players adopt the Nash equilibrium strategy from the next state of arrival. The above definition is different from the single player scenario in which the future rewards are depended only on the player's personal optimal scheme. To be more precise, we define Q_*^i as a Nash Q-function for player i .

Definition 3: The Nash Q-function of player i is defined over (s, a_1, a_2) , as the sum of player's current payoff plus its future rewards when all players adopt a joint Nash equilibrium strategy. More specifically,

$$Q_*^i(s, a_1, a_2) = r^i(s, a_1, a_2) + \beta \sum_{s' \in \mathcal{S}} Pr(s' | s, a_1, a_2) v^i(s', \pi_*^1, \pi_*^2),$$

where (π_*^1, π_*^2) constitutes the joint Nash equilibrium strategy, $r^i(s, a_1, a_2)$ represents player i 's immediate payoff in state s and with the action pair (a_1, a_2) , $v^i(s', \pi_*^1, \pi_*^2)$ stands for player i 's entire discounted reward over infinite time horizon beginning with state s' provided that the player adopts the Nash equilibrium strategy.

In Nash Q-learning algorithm, the player makes an attempt to acquire its equilibrium Q-values, beginning with any initial state. For this purpose, the player keeps a record of opponent players' Q-values and takes advantages of that message to

calculate its own Q-values. The updating manner is depended on the fact that opponents adopt their equilibrium strategy in every state. Before designing the algorithm, we need the following definition.

Definition 4: We define a two-player stage game as (U^1, U^2) , where U^k represents player k 's immediate reward function over the entire joint pairs for $k = 1, 2$. More specifically, $U^k = \{r^k(s, a_1, a_2) | a_1 \in \mathcal{A}^1, a_2 \in \mathcal{A}^2\}$, and r^k stands for the payoff of player k .

Denote by π^{-k} the product of strategies of all players except for k , $\pi^{-k} \triangleq \pi^1 \dots \pi^{k-1} \cdot \pi^{k+1} \dots \pi^n$.

Definition 5: A joint strategy (π^1, π^2) constitutes a Nash equilibrium for the stage game (U^1, \dots, U^n) if, for $k = 1, \dots, n$, $\pi^k \pi^{-k} U^k \geq \vartheta^k \pi^{-k} U^k$ for all $\pi^k \in \vartheta^k(\mathcal{A}^k)$ and ϑ^k is an arbitrary strategy of player k .

The baseline method for attacker-sensor game is to adopt the Nash equilibrium. In a Nash equilibrium point, each participant actually keeps a right expectation about the opponent players' responses, and behaves reasonably according to this expectation.

The goal of this paper is to obtain a mixed strategy pair $\{\pi_*^1, \pi_*^2\}$ at a Nash equilibrium, where $\pi_*^1 = [\pi_{\mathcal{A}0}^*, \dots, \pi_{\mathcal{A}max}^*]$ and $\pi_*^2 = [\pi_{\mathcal{S}0}^*, \dots, \pi_{\mathcal{S}max}^*]$. The optimal Q-value function for the attacker is defined as

$$Q_*^1(s, a_1, a_2) = r^1(s, a_1, a_2) + \beta \max_{\pi^1} \min_{\pi^2} \sum_{a_1'} \sum_{a_2'} Q_*^1(s', a_1', a_2') \pi^1(a_1') \pi^2(a_2'),$$

where $\pi^1(a_1')$ and $\pi^2(a_2')$ are the probabilities of choosing a_1' in strategy π^1 for the attacker and adopting a_2' in strategy π^2 for the sensor, respectively. $Q_*^1(s, a_1, a_2)$ is thought as the expected payoff for attackers taking action a_1 and sensors executing a_2 , and then they execute the optimal policy. While the optimal Q-value is acquired, we can easily find the optimal policies π_*^1 .

Similarly, the Q-value for sensors is exactly the opposite in the zero-sum game, i.e., $Q_*^2(s, a_1, a_2) = -Q_*^1(s, a_1, a_2)$. More specifically, the participants will provide the initial values of $Q(s, a_1, a_2)$ for all $a_1 \in \mathbb{P}_{\mathcal{A}}$, $a_2 \in \mathbb{P}_{\mathcal{S}}$, and $s \in \mathcal{S}$. Without loss of generality, let $Q_0^i(s, a_1, a_2) = 0$. At each step, player i acquires the current state, and chooses its action. Then, it collects its own payoff, all opponent players' action, opponents' rewards, and the new state s' . When an action is taken, r^1 and r^2 are obtained. The corresponding Q-values of attacker are calculated as follows:

$$Q_{k+1}^1(s, a_1, a_2) = (1 - \alpha_k) Q_k^1(s, a_1, a_2) + \alpha_k \left[r_k^1 + \beta \max_{\pi^1} \min_{\pi^2} \sum_{a_1'} \sum_{a_2'} Q_k^1(s', a_1', a_2') \pi^1(a_1') \pi^2(a_2') \right],$$

where $\alpha_k \in [0, 1)$ represents the learning rate and it decays over time. Notice that the attacker updating its Q-value can be represented in a general form:

$$Q_{k+1}^1(s, a) = (1 - \alpha_k) Q_k^1(s, a) + \alpha_k [r_k^1 + \beta \text{Nash} Q_k^1(s')] \quad (14)$$

where $a = (a_1, a_2)$ and

$$\text{Nash} Q_k^1(s') = \max_{\pi^1} \min_{\pi^2} \pi^1(s') \pi^2(s') Q_k^1(s'). \quad (15)$$

Algorithm 1 Nash Q-learning algorithm

Input: Finite state channel gain set Ξ , action space for the attacker $\mathcal{P}_{\mathcal{A}}$ and the sensor $\mathcal{P}_{\mathcal{S}}$, packet arrival function $q(\cdot)$, learning rate α_k , discount factor ψ .

Output: Nash Q-function value $Q_*^i(\cdot, \cdot, \cdot)$, Nash equilibrium strategy (π_*^1, π_*^2) .

Initialize: Let time $k = 0$, define the initial state s_0 ; Assign the learning player be indexed i ; For all $s \in \mathcal{S}$ and $a_i \in \mathcal{A}^i$, $i = 1, 2$, let $Q_0^i(s, a_1, a_2) = 0$.

repeat

1: Choose action a_i^k at time k .

2: Observe the reward function of all player r_k^1, r_k^2 , action a_1^k, a_2^k , and $s_{k+1} = s'$

3: **for** each player $j = 1, 2$ **do**

$$Q_{k+1}^j(s) = (1 - \alpha_k) Q_k^j(s) + \alpha_k [r_k^j + \beta \text{Nash} Q_k^j(s')]$$

where $\alpha_k \in (0, 1)$ represents the learning rate, and $\text{Nash} Q_k^j$ is defined in (15).

end

4: Decay the learning rate α_k and update the time $k = k + 1$.

until convergence;

The corresponding Q-values of the sensor $Q_*^2(s, a_1, a_2)$ can be obtained in a similar way. Distinct means of choosing from all of the equilibrium points will generally cause different updates. $\text{Nash} Q_k^i(s')$ stands for player i 's reward in state s' a scalar. In our implementation, we find the Nash equilibria by using the Lemke-Howson method [28], which is rather efficient in reality in spite of exponential worst-case behavior. The Lemke-Howson method is based upon a simple pivoting strategy, which corresponding to following a path whose endpoints is a Nash equilibrium.

Player i need to know $Q_k^1(s')$ and $Q_k^2(s')$ so as to compute the Nash equilibrium $(\pi^1(s'), \pi^2(s'))$. Note that information about other players' Q-values is not known. Player i makes guesses about those Q-functions at the initial moment of game, for instance, $Q_0^i(s, a_1, a_2) = 0$ for all i, s, a_1, a_2 . With the proceeding of game, player i collects other players' immediate rewards and previous actions. Those information is utilized to update player i 's guesses on opponent players' Q-functions. Player i updates its conjectures about player j 's Q-function based on the same updating rule (14) it applied to itself,

$$Q_{k+1}^j(s, a) = (1 - \alpha_k) Q_k^j(s, a) + \alpha_k [r_k^j + \beta \text{Nash} Q_k^j(s')]. \quad (16)$$

Note that $\alpha_k = 0$ for $(s, a_1, a_2) \neq (s_k, a_1^k, a_2^k)$. It only updates the entry corresponding to the same state and actions selected by players. Such updating is referred to asynchronous updating. This learning algorithm is summarized in **Algorithm 1**.

D. Convergence analysis

We now prove Q_k^i of the player i converges to the optimal Q-value Q_*^i . The value of Q_*^i is decided on the common

$$Q_*^i(s', \vec{a}_1^+) = r^i(m+1, a_1^+, a_2^+) + \beta[q(a_1^+, a_2^+, g'_s, g'_a)u(g'_s)u(g'_a)v_*^i(0) + (1 - q(a_1^+, a_2^+, g'_s, g'_a))u(g'_s)u(g'_a)v_*^i(m+2)] \quad (\text{A1})$$

$$Q_*^i(s', \vec{a}_2^-) = r^i(m+1, a_1^-, a_2^-) + \beta[q(a_1^-, a_2^-, g'_s, g'_a)u(g'_s)u(g'_a)v_*^i(0) + (1 - q(a_1^-, a_2^-, g'_s, g'_a))u(g'_s)u(g'_a)v_*^i(m+2)] \quad (\text{A2})$$

$$Q_*^i(s, \vec{a}_2^+) = r^i(m, a_1^-, a_2^+) + \beta[q(a_1^-, a_2^+, g_s, g_a)u(g_s)u(g_a)v_*^i(0) + (1 - q(a_1^-, a_2^+, g_s, g_a))u(g_s)u(g_a)v_*^i(m+1)] \quad (\text{A3})$$

$$Q_*^i(s, \vec{a}_1^+) = r^i(m, a_1^+, a_2^+) + \beta[q(a_1^+, a_2^+, g_s, g_a)u(g_s)u(g_a)v_*^i(0) + (1 - q(a_1^+, a_2^+, g_s, g_a))u(g_s)u(g_a)v_*^i(m+1)] \quad (\text{A4})$$

strategy of all participants. This means that we need to demonstrate (Q_k^1, Q_k^2) converges to (Q_*^1, Q_*^2) .

The convergence analysis of our algorithm is based on the following three basic assumptions which is connected with infinite sampling and decaying of learning rate [29]:

Assumption 2: The learning rate α_k satisfies $\sum_{k=0}^{\infty} \alpha_k = +\infty$ and $\sum_{k=0}^{\infty} \alpha_k^2 < +\infty$, where $0 \leq \alpha_k \leq 1$.

Assumption 3: All states $s \in \mathcal{S}$ and actions $a^i \in \mathcal{A}^i$ for $i = 1, 2$ have been visited infinitely often.

Assumption 4: One of the following conditions holds during learning.

Condition 1: Every stage game $(Q_k^1(s), Q_k^2(s))$, for all k and s , possesses a global optimal point, and players' rewards in this equilibrium are utilized to calculate their Q -functions.

Condition 2: Every stage game $(Q_k^1(s), Q_k^2(s))$, for all k and s , possesses a saddle point, and players' rewards in this equilibrium are utilized to calculate their Q -functions.

Assumption 2 implies the decaying of the learning rate. In order to guarantee *Assumption 2* satisfied, the learning rate is scheduled to be a non-zero decreasing function and the current state-action pair. *Assumption 3* is satisfied with a great deal of update processes since the action set is finite.

Now, we prove that the process incurred by NashQ updates in (14) converges to Nash Q-values in the following theorem.

Theorem 1: When the Assumption 2 – 4 are satisfied, the sequence $Q_k = (Q_k^1, Q_k^2)$, updated by $Q_{k+1}^i(s, a_1, a_2) = (1 - \alpha_k)Q_k^i(s, a_1, a_2) + \alpha_k(\tau_k^i + \beta\psi^1(s')\psi^2(s')Q_k^i(s'))$, where $i = 1, 2$, and $(\psi^1(s'), \psi^2(s'))$ is the calculated Nash equilibrium solution for the stage game $(Q_k^1(s'), Q_k^2(s'))$, converges to the Nash Q-value $Q_* = (Q_*^1, Q_*^2)$.

Proof: See appendix A. ■

Remark 1: The convergence of Nash Q-learning algorithm for zero-sum stochastic game is guaranteed if either *Condition 1* or *Condition 2* satisfies. However, such conditions are not necessary [30]. With respect to the practical example, experiments with a large number of two-player games suggested that such limitations in the game framework are not necessarily required and results all show the empirical convergence of the Q-value.

E. Strictly increasing Structure of Optimal Nash Stationary Strategies

In this subsection, we aim at establishing the optimal Nash stationary strategies with special structure. The significance of conclusion in regard to the optimality of structured strategies consists in their attraction to deciders, their convenience in implementation, and their enabling efficient computation. For example, if we have proved that the optimal Nash stationary strategies are strictly increasing functions of state, which

means that the higher the current states, the larger the optimal action in the subsequent period. The special structure of the optimal Nash stationary strategy is presented as follows.

In the discounted attacker-sensor stochastic game, each player aims at maximizing the the sum of discounted rewards. Player i aims at maximizing

$$v^i(s, \pi^1, \pi^2) = \sum_{k=0}^{+\infty} \beta^k E(r^i | \pi^1, \pi^2, s_0 = s). \quad (34)$$

Note that we have defined the *Equilibrium* strategy in *Definition 3*. Based on the result in *Lemma 1*, we obtain that our sensor-attacker game owns at least one Nash equilibrium point in stationary strategies. Besides, we employ the Nash Q-learning algorithm to acquire this optimal strategy at the Nash equilibrium.

As to the attacker, the solution to the problem above is obtained by seeking a fixed point of the equation $v^1(s) = \max_{a_1} \min_{a_2} \{r^1(s, a_1, a_2) + \beta^k \sum_{s' \in \mathcal{S}} Pr(s' | s, a_1, a_2) v^1(s')\}$. Note that in *Definition 4*, we have defined the Nash Q-function as

$$\begin{aligned} Q_*^i(s, a_1, a_2) &= r^i(s, a_1, a_2) + \beta \sum_{s' \in \mathcal{S}} Pr(s' | s, a_1, a_2) v_*^i(s', \pi_*^1, \pi_*^2). \end{aligned}$$

Remark 2: Note that $Q_*^i(s, a_1, a_2)$ can be thought as the expected payoff for the player i in which attackers take action a_1 and sensors execute action a_2 , and then they follow the optimal schedule thereafter. If the optimal Q-value $Q_*^i(s, a_1, a_2)$ is acquired, the optimal policies (π_*^1, π_*^2) can be easily found. Therefore, the strictly increasing structure of optimal policies are analyzed based on the strict supermodularity of $Q_*^i(s, a_1, a_2)$ in the following.

To simplify notations, we ignore the optimal strategy of $v_*^i(s, \pi_*^1, \pi_*^2)$ and instead represent the optimal accumulated expected reward with the discounted criterion by $v_*^i(s)$ without ambiguity. It is not hard to find that

$$v_*^i(s) = \max_{a_1} \min_{a_2} Q_*^i(s, a_1, a_2). \quad (35)$$

Our goal is to characterize the strictly increasing property of optimal strategy (π_*^1, π_*^2) . We first prove that $Q_*^i(s, a_1, a_2)$ is strictly supermodular. Formally, we give the definition of the partially-ordered set as follows:

Definition 6: The set $X = \{y = (y_1, y_2, \dots, y_n) : y_i \in R^1 \text{ for } i = 1, 2, \dots, n\}$ with the ordering relation \succ where $y' \succ y''$ in X if $y'_i > y''_i$ in R^1 for $i = 1, 2, \dots, n$, is a partially order

set. A partially-ordered set (X, \succ) is referred as lattice iff for all $a, b \in X$,

$$\begin{aligned} a \vee b &\triangleq \inf\{c \in X, |c \succ a, c \succ b\} \in X, \\ a \wedge b &\triangleq \sup\{c \in X, |a \succ c, b \succ c\} \in X. \end{aligned}$$

Here, operators \vee and \wedge are referred to *join* and *meet*, respectively. Note that, $a \vee b$ stands for the smallest upper bound for $\{a, b\}$. Similarly, $a \wedge b$ represents the greatest lower bound for $\{a, b\}$ in the sense that $a \succ a \wedge b, b \succ a \wedge b$, and if $a \succ c$ and $b \succ c$, it is easily to acquire that $a \wedge b \succ c$.

Definition 7: Given any lattice (X, \succ) , a function $h : X \rightarrow \mathbb{R}$ is referred to be strictly supermodular if for all $a, b \in X$,

$$h(a \wedge b) + h(a \vee b) > h(a) + h(b). \quad (36)$$

The function h is referred to be strictly submodular if $-h$ is strictly supermodular.

Note that when $X = X_1 \times X_2$ is ordered coordinate-wise, supermodularity catches the idea of complementarity between X_1 and X_2 accurately. Actually, if we let $a = (x_1, x_2)$ and $b = (y_1, y_2)$ with $x_1 \succ y_1$ and $y_2 \succ x_2$, we have $a \vee b = (x_1, y_2)$ and $a \wedge b = (y_1, x_2)$. Then, we can write the inequality in the definition of strictly supermodularity as

$$h(x_1, y_2) - h(x_1, x_2) > h(y_1, y_2) - h(y_1, x_2). \quad (37)$$

We present the main result for the individual decision problems, establishing the lattice structure of the optimal strategies and deriving monotonicity of the solution to the complementary payoff parameters. Before giving the monotone structures of optimal strategies, we provide the following lemma which is a key step in deriving monotone structure of optimal strategies.

Lemma 3.2: For any lattices (\mathcal{S}, \succ) and (\mathcal{A}, \succ) , let $Q_* : \mathcal{S} \times \mathcal{A} \rightarrow \mathbb{R}$ be a strictly supermodular function (with coordinate-wise order) and define

$$a^*(s) = \arg \max_{x \in \mathcal{A}_s} Q(s, x). \quad (38)$$

If $s \succ s'$ and $a(s) \succ a(s')$, then $a^*(s) \succ a^*(s')$.

Proof: See appendix B. ■

Denote by $\vec{a}_1^+ = (a_1^+, a_2^+)$, $\vec{a}_2^- = (a_1^-, a_2^-)$, $s' = (m + 1, g'_s, g'_a)$, and $s = (m, g_s, g_a)$ for any $a_1^+ > a_1^-$, $a_2^+ > a_2^-$, where $a_1^+, a_1^- \in \mathcal{P}_A$, $a_2^+, a_2^- \in \mathcal{P}_S$, $m \in \mathbb{Z}$, $g'_s > g_s$, and $g'_a > g_a$. It follows that $s' \succ s$. We take $x = (s', \vec{a}_1^+)$, $y = (s, \vec{a}_2^-)$ and it follows that $x \succ y$. Note that in order to prove $Q_*(s, a_1, a_2)$ is strictly supermodular, it suffices to show that

$$\begin{aligned} &Q_*^i(x \vee y) + Q_*^i(x \wedge y) - Q_*^i(x) - Q_*^i(y) \\ &= Q_*^i(s', \vec{a}_1^+) + Q_*^i(s, \vec{a}_2^-) - Q_*^i(s', \vec{a}_2^-) - Q_*^i(s, \vec{a}_1^+) > 0. \end{aligned}$$

Define

$$\varepsilon \triangleq \frac{u(g_a)u(g_s)[q(a_1^+, a_2^+, g_s, g_a) - q(a_1^-, a_2^-, g_s, g_a)]}{u(g'_a)u(g'_s)[q(a_1^+, a_2^+, g'_s, g'_a) - q(a_1^-, a_2^-, g'_s, g'_a)]} \quad (39)$$

in which g_s, g_a, g'_s , and g'_a belong to a finite set Ξ and $a_1^-, a_2^-, a_1^+, a_2^+$ are the action power selected from the finite set \mathcal{P}_A and \mathcal{P}_S by the attacker and sensor, respectively. Due to the fact that ε belongs to a finite set, there exists an upper bound which is denoted by ε_{max} . Therefore, a sufficient condition

for the strictly supermodularity of the $Q_*(s, a_1, a_2)$ function is acquired, that is, $\frac{v_*^i(0) - v_*^i(m+2)}{v_*^i(0) - v_*^i(m+1)} > \varepsilon_{max}$.

Definition 8: (strictly increasing stationary strategies) For a stationary strategy taken by the attacker $\{u(\cdot|s), s \in \mathcal{S}\}$, denote by $a_1(\pi^1 = u|s)$ the action point of strategy u in state s . This strategy is strictly increasing if $a_1(\pi^1 = u|s = s_2) < a_1(\pi^1 = u|s = s_1)$ holds for any $s_1, s_2 \in \mathcal{S}$ with $s_1 \succ s_2$.

Notice that similar definition is applicable to the stationary strategy of the sensor. The special structure of the optimal stationary strategy for the attacker-sensor game Γ is established in the following.

Theorem 2: If there exists a state i such that

$$\frac{v_*^i(0) - v_*^i(m+2)}{v_*^i(0) - v_*^i(m+1)} > \frac{r(0) + \dots + r(i+1)}{r(0) + \dots + r(i)} > \varepsilon_{max}$$

for the given ε_{max} and $a_2^+ a_1^- \geq a_2^- a_1^+$ holds for any $a_1^+, a_1^- \in \mathcal{P}_A$, $a_2^+, a_2^- \in \mathcal{P}_S$, where $a_1^+ > a_1^-$ and $a_2^+ > a_2^-$. Then any of the optimal stationary strategies (π_*^1, π_*^2) of the attacker-sensor game is strictly increasing for $s \succ i$.

Proof: See appendix C. ■

What we have assumed so far is that everything in the game is common knowledge for sensors and attackers. But in practice there is some private information such as payoffs, type or preferences that is not known by the opposite player. So the next thing we are going to consider is the incomplete information scenarios.

IV. INCOMPLETE INFORMATION-BAYESIAN GAME FRAMEWORK

A. Game Formulation

The assumption that the sensor and attacker know the channel information of each other is hard to implement in a real scenario. In light of this, we extend the DoS attack to a Bayesian game model, where both the sensor and attacker have incomplete information [31], in other words, the sensor has its own channel gain g_k^s , but does not acquire the channel gains of the attacker g_k^a . Similar assumption applies to the attacker.

Apart from the actual players such as sensors and attackers in the game, we assume that a special player called *Nature* is existed. The nature appoints a random variable to the sensor and the attacker which represents the value of type for the attacker (or the sensor) and provide the probability distribution for those types. In other words, Nature can randomly select a type for the attacker (or the sensor) according to the probability distribution of types.

The formal definitions of Bayesian game is provided as follows:

B. Bayesian Game Framework

The Bayesian Game, denote by \mathcal{G} , is defined as $< \mathcal{I}^B, \mathcal{A}^B, \Theta, \Delta(\Theta), R^B >$ where

Players: $\mathcal{I}^B = \{I^1, I^2\}$ represents the set of players where I^1 stands for the attacker and I^2 denotes the sensor. Each player acts as a selfish and rational decision maker (this means a player always choose the action that brings the best response).

Actions: $\mathcal{A}^B = \{\mathcal{A}^1, \mathcal{A}^2\}$ stands for the action pair set. Denote \mathcal{A}^i as the action set chosen by the player i . The attacker decides the attacking energy $a_k \in \mathbb{P}_{\mathcal{A}} \triangleq [\mathcal{P}_{a_1}, \dots, \mathcal{P}_{a_{max}}]$, and the sensor adopts the transmission energy $b_k \in \mathbb{P}_{\mathcal{S}} \triangleq [\mathcal{P}_{s_1}, \dots, \mathcal{P}_{s_{max}}]$. The action pair is denoted by (a_k, b_k) .

Types: $\Theta = \{\Theta_1, \Theta_2\}$ is the set of types for the sensor and attacker. The *type* of a player is a kind of private information which is not known by opponents but plays a role in the player's decision making. In this game, the channel gain is private, and hence it is known as the type of the sensor and the attacker, respectively, i.e., $\Theta_i = \Xi$ for $i = 1, 2$.

Belief: $\Delta(\Theta) = (\Delta(\Theta_1), \Delta(\Theta_2))$ is joint probability distribution over the type of sensors and attackers. This belief is regarded as the common knowledge shared by all the players. And the players will obtain a belief from the opponent's type according to channel state transition probability matrix \mathcal{T} .

Rewards: Denote r^i as the immediate payoff function of player i with $r^i: \mathcal{S} \times \mathcal{A}^1 \times \mathcal{A}^2 \rightarrow R$. The immediate payoff of the attacker is provided as

$$r^1(m, a, b) = Tr[h^m(\bar{P})] + \alpha_s b - \alpha_a a. \quad (40)$$

In this Bayesian games, a pure strategy is a function $\pi^1(g_k^s)$ for the sensor and $\pi^2(g_k^a)$ for the attacker which is given in (13) and it assigns an action that sensors or attackers will select when a particular type is acquired.

Denote g_{-i} as the type of its opponent and \mathcal{P}_i as the set of functions $p_i: \mathcal{G} \rightarrow \mathcal{P}_i$ for player i , where $i \in \{1, 2\}$.

As we know, the channel gains transition probability matrix and stationary distribution are common knowledge to the sensor and attacker.

Definition 9: Given a strategy $a_i(g_i)$ and $a'_i(g_i)$, the strategy profile $\{a_i^*, a'_{-i}\}$ is a pure-strategy Bayesian Nash equilibrium if for each participant $i \in \{1, 2\}$ and every $g_i \in \Xi$,

$$a_i^*(g_i) = \arg \max_{a_i} \sum_{g_{-i}} r_i(a_i, a'_{-i}(g_{-i}) | g_i, g_{-i}) Pr(g_{-i} | g_i).$$

That is, no matter what the type implementation is, changing the strategy $p_i^*(g_i)$ will not benefit the player. The extension to a best mixed strategy pair $\{\pi_1^*, \pi_2^*\}$ is given as follows

$$\pi_i^*(g_i) = \arg \max_{\pi_i} \sum_{g_{-i}} r_i(\pi_i, \pi'_{-i}(g_{-i}) | g_i, g_{-i}) Pr(g_{-i} | g_i).$$

Firstly, the matrix form of zero-sum Bayesian games is derived. For a participant with type size $|\Theta_1|$ and action set size $|\mathbb{P}_{\mathcal{A}}|$, strategy set has $|\Theta_1|^{|\mathbb{P}_{\mathcal{A}}|}$ entries. The joint probability and two players' strategies are used to calculate the sensor and attacker's payment. This led to a size $|\Theta_1|^{|\mathbb{P}_{\mathcal{A}}|} \times |\Theta_2|^{|\mathbb{P}_{\mathcal{S}}|}$ matrix game, the game can be calculated by linear programming.

V. NUMERICAL EXAMPLES

The numerical examples are given in this section to demonstrate that the results in our work are correct. First, the system parameters are provided as $A = 1.2$, $C = 0.7$, $Q = R = 0.8$, $\sigma^2 = 0.5$. In our simulations, the action sets of the attacker and the sensor are $\{1, 6\}$ and $\{2, 5\}$, respectively. And the channel gain for attackers and sensors are selected from the

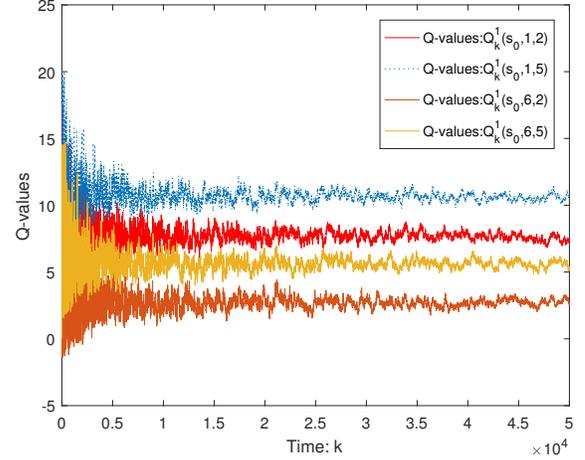


Fig. 3: The Qvalues in the state of s_0

set $\Xi = \{0.8, 0.6\}$. Besides, the channel state transition probability \mathcal{T} is given as

$$\mathcal{T} = \begin{bmatrix} \Pi(0.8|0.8) & \Pi(0.6|0.8) \\ \Pi(0.8|0.6) & \Pi(0.6|0.6) \end{bmatrix} = \begin{bmatrix} 1/2 & 1/2 \\ 1/2 & 1/2 \end{bmatrix}.$$

Note that \mathcal{T} is irreducible as the graph formed by this matrix is strongly connected. Also, \mathcal{T} is aperiodicity due to the fact that the diagonal elements of \mathcal{T} are all positive. Define the learning rate as $\alpha_k = \frac{10}{15 + \text{count}(s, a_1, b_1)}$, where $\text{count}(s, a_1, b_1)$ represents the number of occurrence of the combination (s, a_1, b_1) . Note that the decay learning rate designed above guarantees that the conditions in *Assumption 2* is satisfied. Therefore, the state which is rarely accessed and action combinations will put more weight on the next learning process.

First, we present the calculation of $NashQ_k^i(s')$ which is the player i 's reward in state s' for the chosen equilibria. It is easy to see that $\pi^1(s')\pi^2(s')Q_k^i(s')$ is a scalar. Obviously, we need to obtain a mixed-strategy Nash equilibrium denoted by $(\pi^1(s'), \pi^2(s'))$ for stage game $(Q_k^1(s'), Q_k^2(s'))$ with the maximum value method or equivalent method. We assume that the next state $s' = (0, 0.8, 0.6)$ and the stage game is described in the Table I. Let $(p, 1-p)$ be attacker's probability of taking

TABLE I: Stage Game for state s'

Stage Game $(Q_k^1(s'), Q_k^2(s'))$	Attacker's action a_1		
	1	6	
Sensor's action a_2	2	(-1.9906, 1.9906)	(-4.9245, 4.9245)
	5	(3.0094, -3.0094)	(0.0755, -0.0755)

action 1 and 6, and $(q, 1-q)$ be sensor's probability of choosing energy level 2 and 5. Now we apply the Lemke-Howson method to calculate the mixed-strategy Nash equilibrium as $\pi^1(s') = (0.4718, 0.5282)$ and $\pi^2(s') = (0.2297, 0.7703)$, that is, in state $s' = (0, 0.8, 0.6)$, $\mathbb{P}(a_1 = 1) = 0.4718$, $\mathbb{P}(a_1 = 6) = 0.5282$ and $\mathbb{P}(a_2 = 2) = 0.2287$, $\mathbb{P}(a_2 = 5) = 0.7703$.

A learning player, such as the attacker, initializes $Q_0^1(s, a_1, b_1) = 0$ and $Q_0^2(s, a_1, b_1) = 0$ for all $a_1 \in \mathbb{P}_{\mathcal{A}}$, $b_1 \in \mathbb{P}_{\mathcal{S}}$, and $s \in \mathcal{S}$. A game begins with the initial state $s' = (0, 0.8, 0.8)$. Players take their actions at the same time when they obtain their current state. Then, the next state, rewards of both the attacker and the sensor, and the energy

level chosen by the opponent are obtained. Based on the rule in (14), the Q-functions are updated by learning player. In the next state, the player repeats the procedure above. While at least one player gets its optimal Q-value, the procedure restarts. In the new stage, each player is randomly assigned a new state. The training stops after 50000 episodes.

We can see that the result in Fig. 3 is coincident with the theoretical derivation. Our example proves that the learning Q-functions have the equilibrium strategies as Q_* . And the optimal Q-value of other state for every action pair is represented in Table II.

TABLE II: Optimal Q-value of all state for every action pair

$Q_*^1(s, a_1, a_2)$	Action pair (a_1, a_2)			
	(1,2)	(1,5)	(6,2)	(6,5)
s_0	7.73	10.33	3.12	5.51
s_1	7.57	11.04	2.97	5.72
s_2	7.79	10.89	2.79	6.03
s_3	7.87	10.95	3.18	5.79
s_4	8.08	10.96	3.79	6.91
s_5	8.38	10.87	3.76	6.71
s_6	9.03	10.83	4.33	6.82
s_7	8.73	10.98	4.24	6.80
s_8	10.50	11.54	6.63	9.24
s_9	10.28	11.73	6.75	9.29
s_{10}	10.57	11.85	6.61	9.22
s_{11}	10.33	12.00	6.78	8.76
s_{12}	14.19	13.69	11.52	13.64
s_{13}	14.40	13.61	11.86	13.78
s_{14}	15.53	15.54	11.82	14.28
s_{15}	15.25	15.08	12.23	14.40
s_{16}	23.91	19.70	23.16	24.00
s_{17}	23.11	19.71	22.77	24.14
s_{18}	25.08	22.09	23.14	25.19
s_{19}	24.60	22.68	23.57	25.46

Next, we present that the optimal Nash stationary policies are monotone functions of state when the conditions are satisfied. We assume that the system parameters are same as the previous scenario other than adjusting the energy level sets of the attacker and the sensor to $\{9, 3\}$ and $\{7, 2\}$, respectively. It is easy to obtain that $\frac{g_s a_2^+}{g_a a_1^+ + \sigma^2} > \frac{g_s a_2^-}{g_a a_1^- + \sigma^2}, \forall g_s, g_a \in \Xi$, where $\sigma^2 = 0.5$, $a_1^+ = 9$, $a_1^- = 3$, $a_2^+ = 7$, $a_2^- = 2$. Then, we have $q(a_1^+, a_2^+, g_s, g_a) - q(a_1^-, a_2^-, g_s, g_a) > 0$. As depicted in Fig. 4, the optimal transmission schedule for the sensor is transmitting the data packet in a minimum energy level 2 in a high probability when states $s \prec s_5 = (1, 0.8, 0.8)$ and use power 7 with the probability of 0.8323 for state $s \succ s_{12} = (3, 0.8, 0.8)$; while the attacker adopts jamming power 3 with a high probability when $s \prec s_{12} = (3, 0.8, 0.8)$ and 9 for states $s \succ s_{12} = (3, 0.8, 0.8)$ with the probability of 0.9108. This demonstrates that the optimal stationary strategy is monotone functions of state, which represents that the higher the current states, the larger the power actions of the sensor and the attacker.

Finally, we present Bayesian Nash equilibria in incomplete information games in which players only know their channel types. Based on the channel gains transition probability matrix \mathcal{T} , the stationary distribution of gains is obtained as $\mu = [0.5, 0.5]$. Applying the result from Section IV, the mixed strategies $\pi_1^*(g_a)$ and $\pi_2^*(g_s)$ at the Bayesian Nash equilibrium

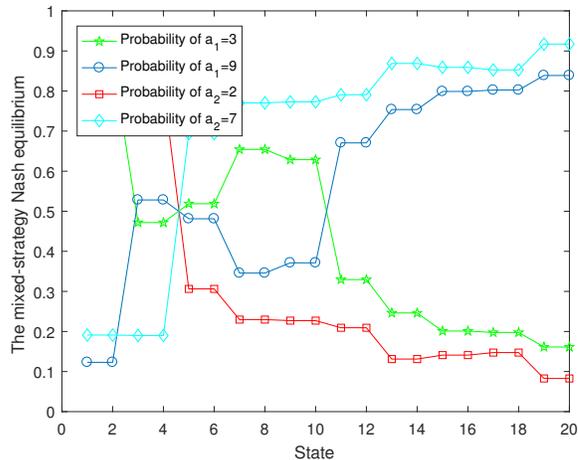


Fig. 4: The mixed-strategy stationary Nash equilibrium for the attacker/sensor with different states.

is presented in the following. Notice that, from Table III, IV,

TABLE III: The attacker's strategy $\pi_1^*(g_a)$

	$g_a = 0.6$	$g_a = 0.8$
$Pr(a_1 = 1 g_a)$	0.4058	0.0350
$Pr(a_1 = 6 g_a)$	0.5942	0.9650

TABLE IV: The sensor's strategy $\pi_2^*(g_s)$

	$g_s = 0.6$	$g_s = 0.8$
$Pr(a_2 = 2 g_s)$	0.4445	0.1723
$Pr(a_2 = 5 g_s)$	0.5555	0.8277

regardless of the state of the attacker's channel, when $g_s = 0.8$ is observed, the probability that the sensor chooses to transmit high power is 0.8277. If the channel of the sensor is changed to $g_s = 0.6$, it would use a low power level with a probability of 0.44445. Similarly interpretation can be acquired from the attacker's energy selection strategy $\pi_1^*(g_a)$ in Table III.

VI. CONCLUSIONS

In this paper, we have discussed a cyber-physical system security issue, where a smart attacker deploys DoS attacks to destroy the transmission channel through which a sensor transmits data packets to the remote center. The sensor using a higher power level can guarantee a lower packet dropout rates and then improves the system performance. In contrast, the attacker sends a jamming data packet to destroy the signal transmitted by the sensor and then causes the performance degradation. With the goals of two players in infinite-time horizon, we describe the conflicting characteristic between the attacker and the sensor with a general-sum stochastic game. And the Nash Q-learning techniques are applied to find an optimal solution at a Nash equilibrium. Also the convergence analysis of the proposed algorithm in our game is provided. Besides, the monotone structure of the optimal stationary strategy is constructed under a sufficient condition. For the incomplete information scenario, the original stochastic game is extended to the Bayesian game.

REFERENCES

- [1] K. H. Johansson, G. J. Pappas, P. Tabuada and C. J. Tomlin, "Guest editorial special issue on control of cyber-physical systems," *IEEE Transactions on Automatic Control*, vol. 59, no. 12, pp. 3120–3121, 2014.
- [2] P. Hovareshti, V. Gupta, and J. S. Baras, "Sensor scheduling using smart sensors," *46th IEEE Conference on Decision and Control*, New Orleans, LA, USA, 2007, pp. 494–499.
- [3] R. Poovendran, K. Sampigethaya, S. K. S. Gupta, I. Lee, K. V. Prasad, D. Corman, and J. Paunicka, "Special issue on cyber-physical systems," *Proceedings of the IEEE*, vol. 100, no. 1, pp. 6–12, 2012.
- [4] A. A. Cardenas, S. Amin, and S. Sastry, "Secure control: Towards survivable cyber-physical systems," *The 28th International Conference on Distributed Computing Systems Workshops, IEEE*, Beijing, China, 2008, pp. 495–500.
- [5] H. Fawzi, P. Tabuada, and S. Diggavi, "Secure estimation and control for cyber-physical systems under adversarial attacks," *IEEE Transactions on Automatic Control*, vol. 59, no. 6, pp. 1454–1467, 2014.
- [6] A. Cardenas, S. Amin, and S. Sastry, "Research challenges for the security of control systems," in *Proceedings of the 3rd conference on Hot topics in security*, CA, USA, 2008, pp. 1–6.
- [7] D. Ding, Z. Wang, Q. Han, and G. Wei, "Security control for discrete-time stochastic nonlinear systems subject to deception attacks," *IEEE Transactions on Systems, Man, and Cybernetics: Systems*, vol. 48, no. 5, pp. 779–789, 2018.
- [8] G. Befeckadu, V. Gupta, and P. Antsaklis, "Risk-sensitive control under Markov modulated denial-of-service (DoS) attack strategies," *IEEE Transactions on Automatic Control*, vol. 60, no. 12, pp. 3299–3304, 2015.
- [9] J. Chen, C. Dou, L. Xiao, and Z. Wang, "Fusion state estimation for power systems under DoS attacks: A switched system approach," *IEEE Transactions on Systems, Man, and Cybernetics: Systems*, vol. 49, no. 8, pp. 1679–1687, 2019.
- [10] C. D. Peris and P. Tesi, "Input-to-state stabilizing control under denial-of-service," *IEEE Transactions on Automatic Control*, vol. 60, no. 11, pp. 2930–2944, 2015.
- [11] J. Qin, M. Li, L. Shi, and X. Yu, "Optimal denial-of-service attack scheduling with energy constraint over packet-dropping networks," *IEEE Transactions on Automatic Control*, vol. 63, no. 6, pp. 1648–1663, 2018.
- [12] W. Chen, D. Ding, H. Dong, and G. Wei, "Distributed resilient filtering for power systems subject to denial-of-service attacks," *IEEE Transactions on Systems, Man, and Cybernetics: Systems*, vol. 49, no. 8, pp. 1688–1697, 2019.
- [13] A. S. Leong, S. Dey, G. N. Nair, and P. Sharma, "Power allocation for outage minimization in state estimation over fading channels," *IEEE Transactions on Signal Processing*, vol. 59, no. 7, pp. 3382–3397, 2011.
- [14] M. Adibi and V. T. Vakil, "Comparison of cooperative and non-cooperative game schemes for SINR-constrained power allocation in multiple antenna cdma communication systems," in *Proceedings of IEEE International Conference on Signal Processing and Communications*, Dubai, United Arab Emirates, 2007, pp. 1151–1154.
- [15] K. Ding, S. Dey, D. E. Quevedo, and L. Shi, "Stochastic game in remote estimation under DoS attacks," *IEEE control systems letters*, vol. 1, no. 1, pp. 146–151, 2017.
- [16] J. Qin, M. Li, J. Wang, L. Ling, Y. Kang, and W. X. Zheng, "Optimal denial-of-service attack energy management against state estimation over an SINR-based network," *Automatica*, <https://doi.org/10.1016/j.automatica.2020.109090>.
- [17] H. Zhang, P. Cheng, L. Shi, and J. Chen, "Optimal denial-of-service attack scheduling with energy constraint," *IEEE Transactions on Automatic Control*, vol. 60, no. 11, pp. 3023–3028, 2015.
- [18] H. Zhang, Y. Qi, J. Wu, L. Fu, and L. He, "DoS attack energy management against remote state estimation," *IEEE Transactions on Control of Network Systems* vol. 5, no. 1, pp. 383–394, 2018.
- [19] A. Agah, S. K. Das, and K. Basu, "A game theory based approach for security in wireless sensor networks," in *Proceedings of IEEE International Conference on Performance, Computing, and Communications*, Phoenix, AZ, USA, 2004, pp. 259–263.
- [20] Y. Li, D. E. Quevedo, S. Dey, and L. Shi, "SINR-based DoS attack on remote state estimation: A game-theoretic approach," *IEEE Transactions on Control of Network Systems*, vol. 4, no. 3, pp. 632–642, 2016.
- [21] H. Liu, "SINR-based multi-channel power schedule under DoS attacks: A Stackelberg game approach with incomplete information," *Automatica*, vol. 100, pp. 274–280, 2019.
- [22] P. Sadeghi, R. A. Kennedy, P. B. Rapajic, and R. Shams, "Finite-state Markov modeling of fading channels: a survey of principles and applications," *IEEE Signal Processing Magazine*, vol. 25, no. 5, pp. 57–80, 2008.
- [23] G. Caire and S. Shamai, "On the capacity of some channels with channel state information," *IEEE Transactions on Information Theory*, vol. 45, no. 6, pp. 2007–2019, 1999.
- [24] B. Sinopoli, L. Schenato, M. Franceschetti, K. Poolla, M. I. Jordan, and S. S. Sastry, "Kalman filtering with intermittent observations," *IEEE Transactions on Automatic Control*, vol. 49, no. 9, pp. 1453–1464, 2004.
- [25] S. Wu, X. Ren, Q. Jia, K. H. Johansson, and L. Shi, "Learning optimal scheduling policy for remote state estimation under uncertain channel condition," *IEEE Transactions on Control of Network Systems*, vol. 7, no. 2, pp. 579–591, 2020.
- [26] J. Filar and K. Vrieze, "Competitive Markov Decision Processes," New York, NY, USA: Springer-Verlag, 1997.
- [27] A. M. Fink, *Equilibrium in a stochastic n-person game*, Journal of Science in Hiroshima University, Series A-I, 1964.
- [28] R. W. Cottle, J. S. Pang, and R. E. Stone, *The Linear Complementarity Problem*, Academic Press, New York, 1992.
- [29] J. Hu and M. P. Wellman, "Multiagent reinforcement learning: Theoretical framework and an algorithm," in *Proceedings of the 15th International Conference on Machine Learning*, San Francisco, CA, USA, 1998, pp. 242–250.
- [30] K. G. Vamvoudakis, "Non-zero sum Nash Q-learning for unknown deterministic continuous-time linear systems," *Automatica*, vol. 61, pp. 274–281, 2015.
- [31] X. Liang, J. Xu, and H. Zhang, "Optimal control and stabilization for networked control systems with asymmetric information," *IEEE Transactions on Control of Network Systems*, vol. 7, no. 3, pp. 1355–1365, 2020.

APPENDIX A

Proof of Theorem 2: Before proceeding, we provide an important lemma which presents a pseudo-contraction mapping for the convergence analysis of Q-learning algorithm. Denote \mathcal{Q} as the set of all Q functions.

Lemma A.1 (cf. [19]): Assume that the mapping $f_k : \mathcal{Q} \rightarrow \mathcal{Q}$ satisfies the following condition if there exists a number $0 < \rho < 1$ and a sequence κ_k converging to zero with probability 1 such that $\|f_k Q_k^i - f_k Q_*^i\| \leq \rho \|Q_k^i - Q_*^i\| + \kappa_k$ for all $Q_k^i \in \mathcal{Q}$ and $Q_*^i = \mathbb{E}[f_k Q_*^i]$, then the update defined by $Q_{k+1}^i = (1 - \alpha_k) Q_k^i + \alpha_k [f_k Q_k^i]$ converges to Q_*^i with probability 1 provided that α_k satisfies *Assumption 2*.

For this attacker-sensor zero-sum game, the mapping f_k is defined as follows. Let $Q = (Q_k^1, Q_k^2)$, where $Q_k^i \in \mathcal{Q}^i$ for $i = 1, 2$, and $\mathcal{Q} = \mathcal{Q}^1 \times \mathcal{Q}^2$. $f_k : \mathcal{Q} \rightarrow \mathcal{Q}$ is a function from the \mathcal{Q} to \mathcal{Q} , $f_k Q = (f_k Q^1, f_k Q^2)$, where

$$f_k Q_k^i(s, a_1, a_2) = r^i(s, a_1, a_2) + \beta \psi^1(s') \psi^2(s') Q_k^i(s') \quad (41)$$

for $i = 1, 2$, where s' is the next state.

Based on the *lemma A.1* and the equation (41), we can obtain that $\mathbb{E}[f_k Q_*] = Q_*$ for the proposed two-player stochastic game, where $Q_* = (Q_*^1, Q_*^2)$. Since $v^i(s', \psi_*^1, \psi_*^2)$ is the player i 's Nash equilibrium reward for the state game $(Q_*^1(s'), Q_*^2(s'))$, and $(\psi_*^1(s), \psi_*^2(s))$ is its Nash equilibrium strategy, it follows $v^i(s', \psi_*^1, \psi_*^2) = \psi_*^1(s') \psi_*^2(s') Q_*^i(s')$. Thus, we obtain that

$$\begin{aligned} Q_*^i(s, a_1, a_2) &= r^i(s, a_1, a_2) + \beta \sum_{s' \in \mathcal{S}} Pr(s' | s, a_1, a_2) v^i(s', \psi_*^1, \psi_*^2) \\ &= \sum_{s' \in \mathcal{S}} Pr(s' | s, a_1, a_2) \left(r^i(s, a_1, a_2) + \beta \psi_*^1, \psi_*^2 Q_*^i(s') \right) \\ &= \mathbb{E}[f_k Q_*^i(s, a_1, a_2)]. \end{aligned}$$

However, our convergence analysis requires that the stage games possess global optima, or alternatively, that they possess

$$\begin{aligned} \Delta_2 &\triangleq q(a_1^+, a_2^+, g'_s, g'_a)u(g'_s)u(g'_a)v_*^i(0) + (1 - q(a_1^+, a_2^+, g'_s, g'_a))u(g'_s)u(g'_a)v_*^i(m+2) + q(a_1^-, a_2^-, g_s, g_a)u(g_s)u(g_a)v_*^i(0) + \\ &\quad (1 - q(a_1^-, a_2^-, g_s, g_a))u(g_s)u(g_a)v_*^i(m+1) - q(a_1^-, a_2^-, g_s, g_a)u(g_s)u(g_a)v_*^i(0) - (1 - q(a_1^-, a_2^-, g_s, g_a))u(g_s)u(g_a) \\ &\quad v_*^i(m+1) - q(a_1^+, a_2^+, g_s, g_a)u(g_s)u(g_a)v_*^i(0) - (1 - q(a_1^+, a_2^+, g_s, g_a))u(g_s)u(g_a)v_*^i(m+1) \triangleq u(g'_s)u(g'_a)[q(a_1^+, a_2^+, \\ &\quad g'_s, g'_a) - q(a_1^-, a_2^-, g'_s, g'_a)][v_*^i(0) - v_*^i(m+2)] - u(g_s)u(g_a)[q(a_1^+, a_2^+, g_s, g_a) - q(a_1^-, a_2^-, g_s, g_a)][v_*^i(0) - v_*^i(m+1)]. \\ \Delta_1 &\triangleq r^i(m+1, a_1^+, a_2^+) + r^i(m, a_1^-, a_2^-) - r^i(m+1, a_1^-, a_2^-) - r^i(m, a_1^+, a_2^+) \triangleq \text{Tr}[h^{m+1}(\bar{P})] + \alpha_s a_2^+ - \alpha_a a_1^+ + \text{Tr}[h^m(\bar{P}) \\ &\quad] + \alpha_s a_2^- - \alpha_a a_1^- - (\text{Tr}[h^{m+1}(\bar{P})] + \alpha_s a_2^- - \alpha_a a_1^-) - (\text{Tr}[h^m(\bar{P})] + \alpha_s a_2^+ - \alpha_a a_1^+). \end{aligned}$$

saddle points at every state s . Besides, they should order the attacker or the sensor to select either global optima or saddle points to carry out the update of Q-values. What we need to do is proving that the f_k mapping is a pseudo-contraction mapping. That is, our f_k satisfies $\|f_k Q - f_k \tilde{Q}\| \leq \varrho \|Q - \tilde{Q}\|$ for all $Q, \tilde{Q} \in \mathcal{Q}$. Before that, we define

$$\begin{aligned} \|Q - \tilde{Q}\| &\triangleq \max_i \max_s \|Q^i(s) - \tilde{Q}^i(s)\|_{(i,s)} \\ &\triangleq \max_i \max_s \max_{a_1, a_2} \|Q^i(s, a_1, a_2) - \tilde{Q}^i_{s, a_1, a_2}\|. \end{aligned}$$

Now, the statement that mapping f_k is a contraction mapping operator is demonstrated, i.e., $\|f_k Q - f_k \tilde{Q}\| \leq \beta \|Q - \tilde{Q}\|$. Note that

$$\begin{aligned} \|f_k Q - f_k \tilde{Q}\| &= \max_i \max_s |\beta \psi^1(s) \psi^2(s) Q^i(s) - \beta \tilde{\psi}^1(s) \tilde{\psi}^2(s) \tilde{Q}^i(s)| \\ &= \max_i \beta |\psi^1(s) \psi^2(s) Q^i(s) - \tilde{\psi}^1(s) \tilde{\psi}^2(s) \tilde{Q}^i(s)|. \end{aligned}$$

We proceed to prove that

$$|\psi^1(s) \psi^2(s) Q^i(s) - \tilde{\psi}^1(s) \tilde{\psi}^2(s) \tilde{Q}^i(s)| \leq \|Q^i(s) - \tilde{Q}^i(s)\|.$$

For the sake of simplicity, $\psi^i(s) \pi^{-i}(s)$ is represented as $\psi^1(s) \psi^2(s)$, and $\tilde{\psi}^i(s) \tilde{\psi}^{-i}(s)$ is rewritten as $\tilde{\psi}^1(s) \tilde{\psi}^2(s)$. The proposition we want to prove is

$$|\psi^i(s) \psi^{-i}(s) Q^i(s) - \tilde{\psi}^i(s) \tilde{\psi}^{-i}(s) \tilde{Q}^i(s)| \leq \|Q^i(s) - \tilde{Q}^i(s)\|.$$

Suppose that $(\psi^i(s), \psi^{-i}(s))$ and $(\tilde{\psi}^i(s), \tilde{\psi}^{-i}(s))$ satisfy the Assumption 4, which means they are global optimal points or saddle points. If $\psi^i(s) \psi^{-i}(s) Q^i(s) \geq \tilde{\psi}^i(s) \tilde{\psi}^{-i}(s) \tilde{Q}^i(s)$, we have

$$\begin{aligned} |\psi^i(s) \psi^{-i}(s) Q^i(s) - \tilde{\psi}^i(s) \tilde{\psi}^{-i}(s) \tilde{Q}^i(s)| &\leq \psi^i(s) \psi^{-i}(s) Q^i(s) \\ &\quad - \psi^i(s) \psi^{-i}(s) \tilde{Q}^i(s) \leq \|Q^i(s) - \tilde{Q}^i(s)\|. \end{aligned}$$

If $\psi^i(s) \psi^{-i}(s) Q^i(s) \leq \tilde{\psi}^i(s) \tilde{\psi}^{-i}(s) \tilde{Q}^i(s)$, then

$$\begin{aligned} \tilde{\psi}^i(s) \tilde{\psi}^{-i}(s) \tilde{Q}^i(s) - \psi^i(s) \psi^{-i}(s) Q^i(s) &\leq \tilde{\psi}^i(s) \tilde{\psi}^{-i}(s) Q^i(s) - \tilde{\psi}^i(s) \tilde{\psi}^{-i}(s) \tilde{Q}^i(s), \end{aligned}$$

and the following proof is analogous to the above. Thus,

$$\begin{aligned} \|f_k Q - f_k \tilde{Q}\| &\leq \beta \max_i \max_s |\psi^1(s) \psi^2(s) Q^i(s) - \tilde{\psi}^1(s) \tilde{\psi}^2(s) \tilde{Q}^i(s)| \\ &\leq \beta \max_i \max_s \|Q^i(s) - \tilde{Q}^i(s)\| = \beta \|Q - \tilde{Q}\|. \end{aligned}$$

The proof of *Theorem 2* is mainly based on the *Lemma A.1*, which presents the convergence analysis provided the two conditions are satisfied. Note that f_k is a contraction operator,

and we prove that f_k is also a pseudo-contraction mapping. Furthermore, the constant point condition, $\mathbb{E}(f_k Q_*) = Q_*$, is obtained. Hence, the process $Q_{k+1} = (1 - \alpha_k) Q_k + \alpha_k [f_k Q_k]$ converges to Q_* .

APPENDIX B

Proof of Lemma 3.1: Assuming $s \succ s'$ and $\mathcal{A}(s) \succ \mathcal{A}(s')$, take any $p \in a^*(s)$ and $p' \in a^*(s')$. In order to show that $a^*(s) \succ a^*(s')$, we need to show that $p \vee p' \in a^*(s)$ and $p \wedge p' \in a^*(s')$. For this, it suffices to show that $p \vee p' \in \mathcal{A}(s)$, $p \wedge p' \in \mathcal{A}(s')$, $Q_*(s, p \vee p') = Q_*(s, p)$ and $Q_*(s, p \wedge p') = Q_*(s', p')$. First, since $p \in a^*(s) \subset \mathcal{A}(s)$, $p \in \mathcal{A}(s)$. Similarly, $p' \in \mathcal{A}(s')$. Since $\mathcal{A}(s) \succ \mathcal{A}(s')$, we obtain $p \vee p' \in \mathcal{A}(s)$ and $p \wedge p' \in \mathcal{A}(s')$. To show $Q_*(s, p \vee p') = Q_*(s, p)$ and $Q_*(s, p \wedge p') = Q_*(s', p')$, note that since $p \in a^*(s)$ and $p \vee p' \in \mathcal{A}(s)$, $Q_*(s, p \vee p') \leq Q_*(s, p)$. Similarly, $Q_*(s', p \wedge p') \leq Q_*(s', p')$. If either of these inequalities were strict, we would have

$$Q_*(s, p \vee p') + Q_*(s', p \wedge p') < Q_*(s, p) + Q_*(s', p'),$$

contradicting the strictly supermodularity condition of $Q_*(s, a)$ above. Therefore, $Q_*(s, p \vee p') = Q_*(s, p)$ and $Q_*(s', p \wedge p') = Q_*(s', p')$.

Note that when the optimization function $Q_*(s, a)$ is a strictly supermodular over a lattice, the above result implies that the optimal solutions are strictly increasing.

Next, we establish the monotonicity of (π_*^1, π_*^2) via checking a sufficient condition that $Q_*(s, a)$ is a strictly supermodular function as mentioned previously.

APPENDIX C

Proof of Theorem 3: First, assume that (π_*^1, π_*^2) is the optimal stationary strategy for the attacker-sensor game. In order to prove the strictly increasing of π_*^1 and π_*^2 , it is sufficient to verify that $Q_*^i(s, a_1, a_2)$ is strictly supermodular. It suffices to prove that $Q_*^i(s', \bar{a}_1^+) + Q_*^i(s, \bar{a}_2^+) - Q_*^i(s', \bar{a}_2^+) - Q_*^i(s, \bar{a}_1^+) > 0$ for $\bar{a}_1^+ \succ \bar{a}_2^+$ and $s' = (m+1, g'_a, g'_s) \succ s = (m, g_a, g_s)$, which is equivalent to verify that $\Delta_1 + \beta \Delta_2 > 0$, as shown in the top of this page, for any $\bar{a}_1^+ \succ \bar{a}_2^+$ and $s, s' \in \mathcal{S}$. One easily obtains that $\Delta_1 = 0$. Since $\beta > 0$, it is sufficient to verify that $\Delta_2 > 0$. First, we have that

$$\frac{v_*^i(0) - v_*^i(m+2)}{v_*^i(0) - v_*^i(m+1)} > \varepsilon_{max}$$

and $a_2^+ a_1^- > a_2^- a_1^+$ holds for any $a_1^+, a_1^- \in \mathcal{P}_A$, $a_2^+, a_2^- \in \mathcal{P}_S$ and $a_1^+ > a_1^-$, $a_2^+ > a_2^-$. It follows that $\frac{g_s a_2^+}{g'_a a_1^+ + \sigma^2} > \frac{g'_s a_2^-}{g_a a_1^- + \sigma^2}$. This is equivalent to that the SINR of the first

transmission is larger than the second one. Notice that the symbol error rate (SER) is tightly connected with the SINR as $SER = 2Q(\sqrt{\alpha SINR})$, where $\alpha > 0$ is a parameter and $Q(x) \triangleq \frac{1}{\sqrt{2\pi}} \int_x^\infty \exp(-\eta^2/2) d\eta$ is nonincreasing function. Thus, the symbol error rate (SER) of the first transmission is lower than the second one. We then obtain that the reception rate $q(a_1^+, a_2^+, g_s, g_a) - q(a_1^-, a_2^-, g_s, g_a) > 0$ for any channel gain g_s and g_a . Define

$$\chi = \frac{v_*^i(0) - v_*^i(m+2)}{v_*^i(0) - v_*^i(m+1)},$$

$$\phi = \frac{u(g_a)u(g_s)[q(a_1^+, a_2^+, g_s, g_a) - q(a_1^-, a_2^-, g_s, g_a)]}{u(g'_a)u(g'_s)[q(a_1^+, a_2^+, g'_s, g'_a) - q(a_1^-, a_2^-, g'_s, g'_a)]}.$$

It follows that $\chi \geq \phi$. Hence, we can obtain that

$$\begin{aligned} \Delta_2 &= u(g'_s)u(g'_a)[q(a_1^+, a_2^+, g'_s, g'_a) - q(a_1^-, a_2^-, g'_s, g'_a)][v_*^i(0) \\ &\quad - v_*^i(m+2)] - u(g_s)u(g_a)[q(a_1^+, a_2^+, g_s, g_a) - q(a_1^-, a_2^-, \\ &\quad g_s, g_a)][v_*^i(0) - v_*^i(m+1)] > 0. \end{aligned} \quad (42)$$

Now since $Q_*^i(s', \vec{a}_1) + Q_*^i(s, \vec{a}_2) - Q_*^i(s', \vec{a}_2) - Q_*^i(s, \vec{a}_1) = \Delta_1 + \beta\Delta_2 > 0$ for any $\vec{a}_1 \succ \vec{a}_2$ and $s' \succ s$, it follows that $Q_*^i(s, a_1, a_2)$ is strictly supermodular. According to the *Lemma 3.1*, we can obtain that $\arg \max_{s \in \mathcal{S}} Q_*^i(s, a_1, a_2)$ is strictly increasing in (a_1, a_2) . Due to the fact that $v_*^i(s) = \max_{a_1} \min_{a_2} Q_*^i(s, a_1, a_2)$, we can obtain that the energy action of attacker $a_1(s)$ is strictly increasing with the state s when fixing the energy action of sensor a_2 in the *Nash* equilibrium points. The same things happen to the sensor. Thus, the sufficient condition for the strictly increasing structure of the optimal strategies (π_*^1, π_*^2) of the attacker-sensor game is obtained.