

A fast and efficient numerical method for computing the stress concentration between closely located stiff inclusions of general shapes

Xiaofei Li* Shengqi Lin[†] Haojie Wang[†]

July 10, 2024

Abstract

When two stiff inclusions are closely located, the gradient of the solution to the Lamé system, in other words the stress, may become arbitrarily large as the distance between two inclusions tends to zero. To compute the gradient of the solution in the narrow region, extremely fine meshes are required. It is a challenging problem to numerically compute the stress near the narrow region between two inclusions of general shapes as their distance goes to zero. A recent study [15] has shown that the major singularity of the gradient can be extracted in an explicit way for two general shaped inclusions. Thus the complexity of the computation can be greatly reduced by removing the singular term and it suffices to compute the residual term only using regular meshes. The goal of this paper is to numerically compute the stress concentration in a fast and efficient way. In this paper, we compute the value of the stress concentration factor, which is the normalized magnitude of the stress concentration, for general shaped domain as the distance between two inclusions tends to zero. We also compute the solution for two closely located inclusions of general shapes and show the convergence of the solution. Only regular meshes are used in our numerical computation and the results clearly show that the characterization of the singular term method can be efficiently used for computation of the stress concentration between two closely located inclusions of general shapes.

Key words. Stress concentration; High contrast; Closely located; General shapes; Characterization of singularity

1 Introduction

Let D_1 and D_2 be two closely located strictly convex simply connected domains in \mathbb{R}^2 with $C^{2,\gamma}$ smooth boundaries for some $\gamma \in (0, 1)$, see, for example, Figure 1. Let

$$\epsilon := \text{dist}(D_1, D_2),$$

which is assumed to be small. Assume that there are unique points $z_1 \in \partial D_1$ and $z_2 \in \partial D_2$ such that

$$|z_1 - z_2| = \text{dist}(D_1, D_2),$$

*School of mathematical sciences, Zhejiang University of Technology, Hangzhou, 310023, P. R. China (xiaofeilee@hotmail.com, shengqilin@zjut.edu.cn, haojiewang@zjut.edu.cn).

where $z_1 \in \partial D_1$ and $z_2 \in \partial D_2$ are the closest points. One can further relax the (global) strict convexity assumption of D_1 and D_2 by assuming that D_j is strictly convex near z_j , $j = 1, 2$, namely, there is a common neighborhood U of z_1 and z_2 such that $D_j \cap U$ is strictly convex for $j = 1, 2$. Moreover, we assume that

$$\text{dist}(D_1, D_2 \setminus U) \geq C \quad \text{and} \quad \text{dist}(D_2, D_1 \setminus U) \geq C$$

for some positive constants C independent of ϵ . Note that strictly convex domains satisfy all the assumptions.

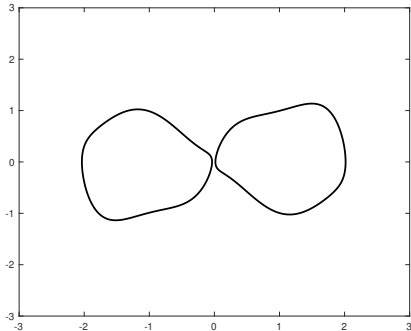


Figure 1: General geometry.

Let H be a given entire harmonic function in \mathbb{R}^2 . We consider the following two dimensional problem

$$\begin{cases} \Delta u = 0 & \text{in } \mathbb{R}^2 \setminus \overline{(D_1 \cup D_2)}, \\ u = \lambda_j(\text{constant}) & \text{on } \partial D_j, \quad j = 1, 2, \\ u - H(x) = O(|x|^{-1}) & \text{as } |x| \rightarrow \infty, \end{cases} \quad (1.1)$$

where the constants λ_j are determined by the conditions

$$\int_{\partial D_j} \frac{\partial u_\epsilon}{\partial \nu} \Big|_+ ds = 0, \quad j = 1, 2.$$

Here and throughout this paper, ν denotes the unit outward normal on ∂D_j . The notations $|_+$ and $|_-$ are for limits from outside and inside of inclusions, respectively. It is worth mentioning that the constants λ_1 and λ_2 may or may not be the same depending on the applied field H . Two inclusions D_1 and D_2 may represent the two dimensional cross-sections of two parallel elastic fibers embedded in an infinite elastic matrix. The solution u represents the out-of-plane elastic displacement, and the gradient of the solution is proportional to the shear stress. When the inclusions are fiber-reinforced composites that are densely packed, the stress concentration may occur and cause material failure due to the damage of fiber composites. Thus, it is important to quantitatively understand the stress concentration. This problem was first raised in [6]. During the last two decades or more, significant development on this problem has been developed. It has been proved that the gradient blow-up rate is $\epsilon^{-1/2}$ in two dimensions [3, 4, 5, 7, 9, 11, 12, 18, 23, 24, 25], and $|\epsilon \ln \epsilon|^{-1}$ in three dimensions [8, 9, 10, 16, 19, 20, 21, 22], see [13] for more references.

As for the numerical computation, due to the stress concentration near the narrow region between two inclusions, extremely fine meshes are required to numerically compute the stress. Recently, a better understanding of the stress concentration has been proposed in [24] and used for various different circumstances [1, 14, 15, 16, 17]. It is shown that the asymptotic behavior of the gradient of the solution can be characterized by a singular function associated with two inclusions as the distance ϵ tends to zero. Using this singular function, the solution can be decomposed into a singular and a regular term. After extracting the singular term in an explicit way, it is sufficient to compute the residual term only using regular meshes. Therefore, the complexity of computation can be greatly reduced by removing the singular term. In fact, this idea was exploited numerically in [14] for the special case when two inclusions are of circular shapes. The stress concentration factor, which is the normalized magnitude of the stress concentration, is only related to the radii of two disks as well as the applied field which is easy to compute. Meanwhile, the singular function which characterizes the singular behavior of the stress is also explicit for circular domains. The numerical results in [14] showed that the characterization of the singular term method can be effectively used for computation of the gradient in the presence of two nearly touching disks.

However, if two nearly touching inclusions are of general shapes, it is difficult to find accurate stress concentration factor since it is related to the global information of the singular function which is not explicit for general shapes. Thanks to the study in [15], where it shows that as the distance between two inclusions tends to zero, the stress concentration factor converges to a certain integral of the solution to the system when two inclusions are touching. Our goal of this paper is to numerically compute the stress concentration between two closely located stiff inclusions of general shapes in a fast and accurate way. Motivated by the idea of characterization of the singular term and the fact that the stress concentration factor converges to a certain integral of the solution to the touching case which is shown in [15], we are able to obtain fast and accurate numerical computation of the stress concentration only using regular meshes. We will compute the value of the stress concentration factor accurately by numerically solving the touching case. We then numerically compute the solution for two closely located inclusions of general shapes and show the convergence of the solution. Our numerical computations clearly show that the characterization of the singular term method can be efficiently used for computation of the stress concentration when two closely located inclusions are of general shapes. It is worth mentioning that only regular meshes are used in our computations.

This paper is organized as follows. In section 2, we briefly review on the characterization of the singular term method. In section 3, we show how to compute the stress concentration factor by solving the touching problem. In section 4, we give the numerical computation scheme of the characterization of singular term method and show the effectiveness of it. Some numerical examples of the computation of the solution for general shaped domains are given in Section 5. This paper ends with a short inclusion.

2 Review on the characterization of the singular term method

In this section, we briefly review the characterization of the singular term method in [1, 15].

Let D_1 and D_2 be two stiff inclusions in \mathbb{R}^2 with $C^{2,\gamma}$ smooth boundaries for some

$\gamma \in (0, 1)$. They satisfy the geometric description in the previous section. Let $z_1 \in \partial D_1$ and $z_2 \in \partial D_2$ are the closest points such that $|z_1 - z_2| = \text{dist}(D_1, D_2)$. Let $\epsilon := \text{dist}(D_1, D_2)$. After rotation and translation, we assume that $z = (z_1 + z_2)/2$ is at the origin. We also assume that the x_1 -axis is parallel to the vector $z_2 - z_1$. Then

$$z_1 = (-\epsilon/2, 0) \quad \text{and} \quad z_2 = (\epsilon/2, 0).$$

Let B_j be the disk osculating to D_j at z_j ($j = 1, 2$). Let R_j be the reflection with respect to ∂B_j , $j = 1, 2$, and let $p_1 \in B_1$ is the fix point of the mixed reflection $R_1 R_2$, and $p_2 \in D_2$ be that of $R_2 R_1$. Let q be the singular function associated with B_1 and B_2 , given as follows:

$$q(x) = \frac{1}{2\pi} (\ln|x - p_1| - \ln|x - p_2|). \quad (2.1)$$

It is easy to see that ∇q blows up at the order of $\epsilon^{-1/2}$ near the narrow region between two inclusions.

It is proved in [1, 15] that the solution u to the problem (1.1) admits the following representation:

$$\nabla u(x) = \alpha_0 \nabla q(x) (1 + O(\epsilon^{\gamma/2})) + O(1) \quad \text{as } \epsilon \rightarrow 0. \quad (2.2)$$

Since ∇q blows up at the order of $\epsilon^{-1/2}$, $\alpha_0 \nabla q$ is the singular part of ∇u . Here, α_0 is the so called stress concentration factor. In particular, if two inclusions are disks of radii r_1 and r_2 , respectively, the stress concentration factor is given as

$$\alpha_0 = \frac{4\pi r_1 r_2}{r_1 + r_2} (\nu \cdot \nabla H)(z).$$

For general shaped inclusions, the stress concentration factor was shown, in [15], to converge to a certain integral of the solution to the touching case as the distance between two inclusions tends to zero, namely, the case when $\epsilon = 0$. In fact, it is shown in [15] that α_0 can be computed in the following way. For $\rho > 0$, let

$$D_\rho = (D_1^0 \cup D_2^0) \cup ([-\rho, \rho] \times [-\rho, \rho]), \quad (2.3)$$

which is of dumbbell shape. Let u_ρ be the solution to

$$\begin{cases} \Delta u_\rho = 0 & \text{in } \mathbb{R}^d \setminus \overline{D}_\rho, \\ u_\rho = \lambda_\rho(\text{constant}) & \text{on } \partial D_\rho, \\ u_\rho(x) - H(x) = O(|x|^{-1}) & \text{as } |x| \rightarrow \infty, \end{cases} \quad (2.4)$$

where the constant λ_ρ is determined by the additional condition

$$\int_{\partial D_\rho} \partial_\nu u_\rho|_+ ds = 0.$$

Let

$$\alpha_\rho = \int_{\partial D_1^0 \setminus [-2\rho, 2\rho] \times [-2\rho, 2\rho]} \partial_\nu u_\rho|_+ ds. \quad (2.5)$$

Then there are constants C and $A > 0$ independent of ρ such that

$$|\alpha_0 - \alpha_\rho| \leq C \exp\left(-\frac{A}{\rho}\right). \quad (2.6)$$

By (2.6), one can obtain an accurate approximation of the stress concentration factor α_0 by computing (2.5) through the touching case (2.4). Therefore, by (2.2), the solution u to the problem (1.1) can be decomposed as a singular term and a regular term:

$$u(x) = \alpha_0 q(x) + b(x),$$

where q is given by (2.1) and

$$\|\nabla b\|_{L^\infty(\mathbb{R}^2 \setminus D_1 \cup D_2)} \leq C$$

for a constant C independent of ϵ . For the numerical computation, it is sufficient to compute b only using regular meshes. As it is shown above, it is a key point to obtain accurate value of the stress concentration factor α_0 . In the next section, we will show how to obtain the accurate value of the stress concentration factor through numerically solving the touching case.

3 Computation of the stress concentration factor α_0

In this section, we compute the stress concentration factor α_0 by solving the touching case (2.4) using boundary element method by Matlab. We also show the convergent rate of the computation. Before doing so, we introduce some basic concepts on layer potentials.

Let

$$\Gamma(x) = \frac{1}{2\pi} \ln |x|,$$

the fundamental solution to the Laplacian in two dimensions. Let Ω be a simply connected domain with the Lipschitz boundary. The single and double layer potentials of a function φ on $\partial\Omega$ are defined to be

$$\begin{aligned} \mathcal{S}_{\partial\Omega}[\varphi](x) &:= \int_{\partial\Omega} \Gamma(x-y)\varphi(y) ds(y), \quad x \in \mathbb{R}^2, \\ \mathcal{D}_{\partial\Omega}[\varphi](x) &:= \int_{\partial\Omega} \partial_{\nu_y} \Gamma(x-y)\varphi(y) ds(y), \quad x \in \mathbb{R}^2 \setminus \partial\Omega, \end{aligned}$$

where ∂_{ν_y} denotes outward normal derivative with respect to y -variables. It is well known (see, for example, [2]) that the single and double layer potentials satisfy the following jump relations:

$$\partial_\nu \mathcal{S}_{\partial\Omega}[\varphi](x) \Big|_{\pm} = (\pm \frac{1}{2}I + \mathcal{K}_{\partial\Omega}^*)[\varphi](x), \quad \text{a.e. } x \in \partial\Omega, \quad (3.1)$$

$$\mathcal{D}_{\partial\Omega}[\varphi](x) \Big|_{\pm} = (\mp \frac{1}{2}I + \mathcal{K}_{\partial\Omega})[\varphi](x), \quad \text{a.e. } x \in \partial\Omega, \quad (3.2)$$

where the operator $\mathcal{K}_{\partial\Omega}$ on $\partial\Omega$ is defined by

$$\mathcal{K}_{\partial\Omega}[\varphi](x) = \text{p.v.} \int_{\partial\Omega} \partial_{\nu_y} \Gamma(x-y)\varphi(y) ds(y),$$

and $\mathcal{K}_{\partial\Omega}^*$ is the L^2 -adjoint of $\mathcal{K}_{\partial\Omega}$. Here, p.v. stands for the Cauchy principal value.

The stress concentration factor can be precisely estimated by the integral (2.5) through solving the touching problem (2.4), which is demonstrated in the previous section. By layer potential techniques, the solution u_ρ to (2.4) can be represented as

$$u_\rho(x) = H(x) + \mathcal{S}_{\partial D_\rho}[\psi](x), \quad x \in \mathbb{R}^2 \setminus \overline{D}_\rho, \quad (3.3)$$

for $\psi \in L_0^2(\partial D_\rho)$, where L_0^2 denotes the set of L^2 functions with mean zero. Since u_ρ is constant on ∂D_ρ , ψ should satisfy

$$\frac{\partial H}{\partial \nu} + \frac{\partial}{\partial \nu} \mathcal{S}_{\partial D_\rho}[\psi] \Big|_- = 0 \quad \text{on } \partial D_\rho,$$

which, according to (3.1), can be written as

$$\frac{\partial H}{\partial \nu} + \left(-\frac{1}{2}I + \mathcal{K}_{\partial D_\rho}^* \right) [\psi] = 0 \quad \text{on } \partial D_\rho. \quad (3.4)$$

Taking outward normal derivative of (3.3), and by the jump relation (3.1), we have

$$\frac{\partial u_\rho}{\partial \nu} \Big|_+ = \frac{\partial H}{\partial \nu} + \left(\frac{1}{2}I + \mathcal{K}_{\partial D_\rho}^* \right) [\psi] \quad \text{on } \partial D_\rho. \quad (3.5)$$

In view of (3.4), then (3.5) becomes

$$\frac{\partial u_\rho}{\partial \nu} \Big|_+ = \psi \quad \text{on } \partial D_\rho. \quad (3.6)$$

Hence by (2.5) and (3.6), we have

$$\alpha_\rho = \int_{\partial D_1^0 \setminus [-2\rho, 2\rho] \times [-2\rho, 2\rho]} \psi ds, \quad (3.7)$$

where ψ is given by (3.4) as follows

$$\psi = \left(\frac{1}{2}I - \mathcal{K}_{\partial D_\rho}^* \right)^{-1} \left[\frac{\partial H}{\partial \nu} \right].$$

The density function ψ can be uniquely solved. In fact, it is well known, see for example [2], that the operator $\lambda I - \mathcal{K}_{\partial D_\rho}^*$ is one to one on $L_0^2(\partial D_\rho)$ if $|\lambda| \geq 1/2$ when D_ρ is a bounded Lipschitz domain.

We now compute (3.7) using boundary element method. For example, let D_1 and D_2 be two elliptic inclusions of the same major axis $a = 2$ and minor axis $b = 1$, centered at $(-a - \epsilon/2, 0)$ and $(a + \epsilon/2, 0)$, respectively, where $\epsilon = 0.01$. The domain D_ρ which is defined by (2.3) is the dumbbell shaped domain shown in Figure 2. Discretize each boundary of D_j , $j = 1, 2$ into N points and each connecting segment between D_1 and D_2 into $N/16$ points.

Firstly, we fix $\rho = 0.05$ in (3.7) and change the values of the grids number N with $N = 256, 512, 1024, 2048, 4096$. Figure 3 shows the numerical result of α_ρ for different values of N . One can easily see that α_ρ converges as the number of grids points increases. Denote α_* as the value of α_ρ with finer grids $N = 4096$. We then compare each α_ρ with




Figure 2: D_ρ for two touching ellipses.

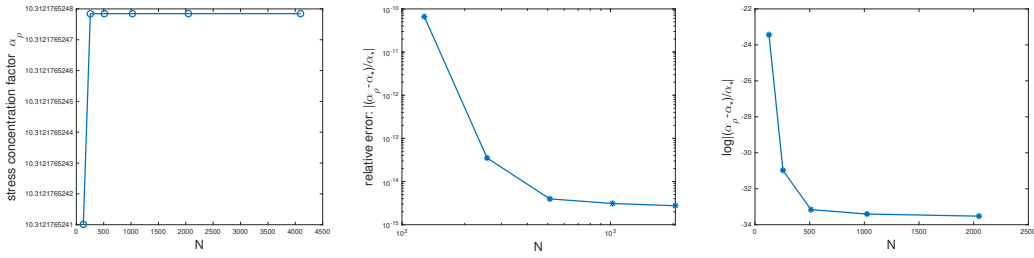


Figure 3: Left: α_ρ for different values of the grids number N . Middle: The relative error: $|(\alpha_\rho - \alpha_*)/\alpha_*|$. Right: The convergent rate: $\log |(\alpha_\rho - \alpha_*)/\alpha_*|$.

α_* . The relative error is shown in Figure 3 (Middle). The convergent rate is shown in Figure 3 (Right). One can see that α_ρ converges very fast as N increases.

Secondly, we fix $N = 512$ and change ρ from 0.3 to 0.1. Figure 4 shows the numerical values of α_ρ for different values of ρ . From the left-hand side figure one can see that α_ρ converges as ρ decreases. Denote α_* as the value of α_ρ when $\rho = 0.1$. Then the relative errors of α_ρ and the convergent rate is shown in the middle and right-hand side figure of Figure 4, respectively. One can also see that α_ρ converges very fast as ρ decreases.

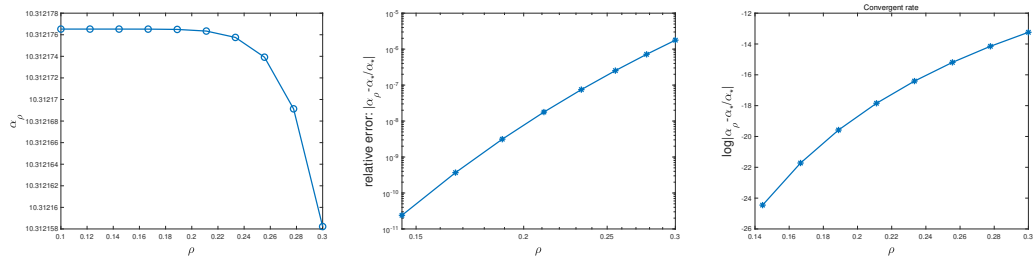


Figure 4: Left: α_ρ for different values of ρ . Middle: The relative error: $|(\alpha_\rho - \alpha_*)/\alpha_*|$. Right: The convergent rate: $\log |(\alpha_\rho - \alpha_*)/\alpha_*|$.

Figure 3 and Figure 4 both show that we can obtain accurate value of the stress concentration factor by numerical computation.

4 Numerical computations

In this section, we provide numerical scheme on the computation of the solution to (1.1) using characterization of the singular term method. We show that it can be efficiently used for the computation of the stress concentration by comparing the convergent rate with the solution computed using layer potential techniques in a direct way. The boundary element method is used for both methods.

Before providing the numerical scheme, we first derive the related system of integral equations.

4.1 System of the integral equations

Let D_1 and D_2 be the same as in the previous section. Let B_j be the disk osculating to D_j at z_j ($j = 1, 2$), where $z_1 = (-\epsilon/2, 0)$ and $z_2 = (\epsilon/2, 0)$. Let κ_j be the curvature of D_j at z_j . Then the radius of B_j is $r_j = 1/\kappa_j$, $j = 1, 2$. Let c_j be the center point of the disk B_j , $j = 1, 2$.

Define singular function q in the spirit of (2.1) as follows

$$q(x) = \frac{1}{2\pi} (\ln|x - p_1| - \ln|x - p_2| - \ln|x - c_1| + \ln|x - c_2|), \quad (4.1)$$

for $x \in \mathbb{R}^2 \setminus \overline{(D_1 \cup D_2)}$, where p_1 and p_2 are two fix points of the mixed reflection with respect to ∂B_j , $j = 1, 2$. In fact, it is shown in [24, 25] that the fixed points p_1 and p_2 are given by

$$p_1 = \left(-\sqrt{2} \sqrt{\frac{r_1 r_2}{r_1 + r_2}} \sqrt{\epsilon} + O(\epsilon), 0 \right) \quad \text{and} \quad p_2 = \left(\sqrt{2} \sqrt{\frac{r_1 r_2}{r_1 + r_2}} \sqrt{\epsilon} + O(\epsilon), 0 \right). \quad (4.2)$$

In view of (2.2), we look for a solution u to (1.1) in the following form

$$u(x) = \alpha_0 q(x) + H(x) + \mathcal{S}_{\partial D_1}[\phi_1](x) + \mathcal{S}_{\partial D_2}[\phi_2](x), \quad x \in \mathbb{R}^2 \setminus \overline{(D_1 \cup D_2)}, \quad (4.3)$$

where $(\phi_1, \phi_2) \in L_0^2(\partial D_1) \times L_0^2(\partial D_2)$ are to be determined. It is worth mentioning that the gradient of $H + \mathcal{S}_{\partial D_1}[\phi_1] + \mathcal{S}_{\partial D_2}[\phi_2]$ is bounded on $\mathbb{R}^2 \setminus \overline{(D_1 \cup D_2)}$ according to (2.2), and hence $\|\phi_1\|_{L^\infty(\partial D_1)}$ and $\|\phi_2\|_{L^\infty(\partial D_2)}$ are bounded regardless of ϵ . We use the fact that $\frac{\partial u}{\partial \nu}|_- = 0$ on ∂D_j , $j = 1, 2$ to find the integral equations for (ϕ_1, ϕ_2) . In order to do so, we take harmonic extension of u toward the interior of $D_1 \cup D_2$. Note that H , $\mathcal{S}_{\partial D_1}[\phi_1]$ and $\mathcal{S}_{\partial D_2}[\phi_2]$ are continuous in \mathbb{R}^2 and harmonic in $D_1 \cup D_2$. Hence, it remains to find the harmonic extension of q toward the interior of $D_1 \cup D_2$.

Let q_j be the harmonic extension of q towards the interior of D_j , $j = 1, 2$, respectively. Then q_j should satisfy the following Dirichlet problem:

$$\begin{cases} \Delta q_j(x) = 0 & \text{in } D_j, \\ q_j(x) = q_j|_{\partial D_j}, \end{cases} \quad (4.4)$$

where the boundary data is given explicitly by (4.1):

$$q_j|_{\partial D_j} = \frac{1}{2\pi} (\ln|x - p_1| - \ln|x - p_2| - \ln|x - c_1| + \ln|x - c_2|) \quad \text{on } \partial D_j.$$

By numerically solving (4.4) for each $j = 1, 2$, one can obtain the interior harmonic extension of the singular function q_j in D_j . Let

$$q^G(x) = \begin{cases} q_1(x) & \text{in } D_1, \\ q_2(x) & \text{in } D_2, \\ q(x) & \text{in } \mathbb{R}^2 \setminus \overline{(D_1 \cup D_2)}. \end{cases}$$

Then q^G is continuous in \mathbb{R}^2 and harmonic in D_1 and D_2 as well as in $\mathbb{R}^2 \setminus \overline{(D_1 \cup D_2)}$.

Define

$$u^G(x) = \alpha_0 q^G(x) + H(x) + \mathcal{S}_{\partial D_1}[\phi_1](x) + \mathcal{S}_{\partial D_2}[\phi_2](x), \quad x \in \mathbb{R}^2.$$

Then u^G is continuous in \mathbb{R}^2 and harmonic in D_1 , D_2 and $\mathbb{R}^2 \setminus \overline{(D_1 \cup D_2)}$. Since u^G is constant on ∂D_j , $j = 1, 2$, u^G should be constant in D_j , $j = 1, 2$. Taking inward normal derivative of u^G on ∂D_j and by the jump relation (3.1), we obtain the following integral equations for (ϕ_1, ϕ_2) :

$$\begin{cases} \left(-\frac{1}{2}I + \mathcal{K}_{\partial D_1}^* \right) [\phi_1] + \frac{\partial}{\partial \nu_{D_1}} \mathcal{S}_{\partial D_2}[\phi_2] = -\frac{\partial H}{\partial \nu_{D_1}} - \alpha_0 \frac{\partial q_1}{\partial \nu_{D_1}} \Big|_- & \text{on } \partial D_1, \\ \frac{\partial}{\partial \nu_{D_2}} \mathcal{S}_{\partial D_1}[\phi_1] + \left(-\frac{1}{2}I + \mathcal{K}_{\partial D_2}^* \right) [\phi_2] = -\frac{\partial H}{\partial \nu_{D_2}} - \alpha_0 \frac{\partial q_2}{\partial \nu_{D_2}} \Big|_- & \text{on } \partial D_2, \end{cases} \quad (4.5)$$

where $\frac{\partial q_j}{\partial \nu_{D_j}} \Big|_-$, $j = 1, 2$, can be obtained by solving (4.4) numerically. The density functions $(\phi_1, \phi_2) \in L_0^2(\partial D_1) \times L_0^2(\partial D_2)$ can be uniquely determined by solving the system of integral equations (4.5). In fact, denote

$$\mathbb{I} = \begin{bmatrix} I & 0 \\ 0 & I \end{bmatrix}, \quad \mathbb{K}^* = \begin{bmatrix} \mathcal{K}_{\partial D_1}^* & \frac{\partial}{\partial \nu_{D_1}} \mathcal{S}_{\partial D_2} \\ \frac{\partial}{\partial \nu_{D_2}} \mathcal{S}_{\partial D_1} & \mathcal{K}_{\partial D_2}^* \end{bmatrix},$$

then $-\frac{1}{2}\mathbb{I} + \mathbb{K}^*$ is invertible on $L_0^2(\partial D_1) \times L_0^2(\partial D_2)$, which is shown in, for example, [1].

To solve (ϕ_1, ϕ_2) from (4.5), discretize each boundary ∂D_j , $j = 1, 2$ into N points, respectively. Let x_j^k , $k = 1, \dots, N$, be the nodal points on ∂D_j . Then (4.5) becomes

$$\left(-\frac{1}{2}I + A \right) \begin{bmatrix} \phi_1 \\ \phi_2 \end{bmatrix} = \begin{bmatrix} Y_1 \\ Y_2 \end{bmatrix},$$

where

$$I = \begin{bmatrix} I_N & 0 \\ 0 & I_N \end{bmatrix}, \quad A = \begin{bmatrix} A_{11} & A_{12} \\ A_{21} & A_{22} \end{bmatrix}, \quad (4.6)$$

and

$$Y_1 = - \begin{bmatrix} \frac{\partial H}{\partial \nu_{D_1}}(x_1^1) + \alpha_0 \frac{\partial q_1}{\partial \nu_{D_1}} \Big|_-(x_1^1) \\ \vdots \\ \frac{\partial H}{\partial \nu_{D_1}}(x_1^N) + \alpha_0 \frac{\partial q_1}{\partial \nu_{D_1}} \Big|_-(x_1^N) \end{bmatrix}, \quad Y_2 = - \begin{bmatrix} \frac{\partial H}{\partial \nu_{D_2}}(x_2^1) + \alpha_0 \frac{\partial q_2}{\partial \nu_{D_2}} \Big|_-(x_2^1) \\ \vdots \\ \frac{\partial H}{\partial \nu_{D_2}}(x_2^N) + \alpha_0 \frac{\partial q_2}{\partial \nu_{D_2}} \Big|_-(x_2^N) \end{bmatrix}.$$

Here A is the evaluation of the kernel of \mathbb{K}^* . It is worth mentioning that the matrix $-\frac{1}{2}I + A$ has small singular values and the condition number of A becomes worse as ϵ

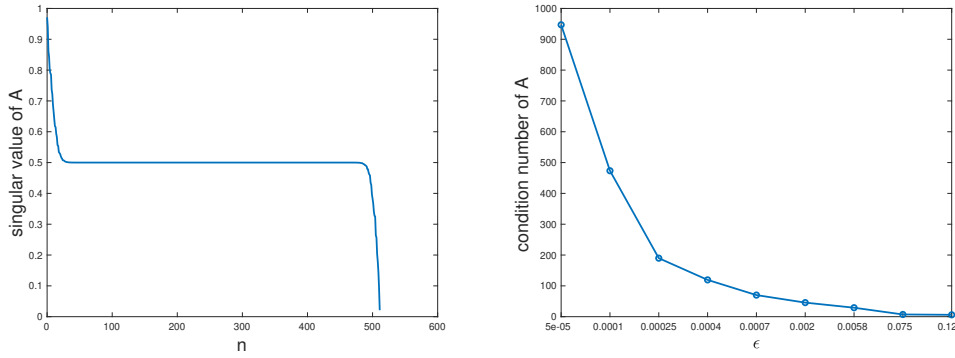


Figure 5: Left: the singular values of A in the decreasing order of n when ϵ is 0.01. Right: the condition numbers of A as the distance ϵ tends to 0. The dimension of A is 512×512 .

tends to zero, as shown in Figure 5. However, $\|\phi_1\|_{L^\infty(\partial D_1)}$ and $\|\phi_2\|_{L^\infty(\partial D_2)}$ are bounded regardless of ϵ .

We compute (ϕ_1, ϕ_2) with $N = 256, 512, 1024, 2048, 4096$ equi-spaced points on ∂D_j , $j = 1, 2$, respectively. And then they are compared with the solution on the finer grid with $N = 4096$. Denote (ϕ_1^*, ϕ_2^*) as the solution with grid number $N = 4096$. Let

$$\frac{\|\phi_1 - \phi_1^*\|_{L^2(\partial D_1)}}{2\|\phi_1^*\|_{L^2(\partial D_1)}} + \frac{\|\phi_2 - \phi_2^*\|_{L^2(\partial D_2)}}{2\|\phi_2^*\|_{L^2(\partial D_2)}}$$

be the relative L^2 -errors of (ϕ_1, ϕ_2) compared with (ϕ_1^*, ϕ_2^*) . Figure 6 (Left) shows that the relative errors decrease as the grid number N increases. Figure 6 (Right) shows the logarithm of the relative error. One can see that (ϕ_1, ϕ_2) converges very fast.

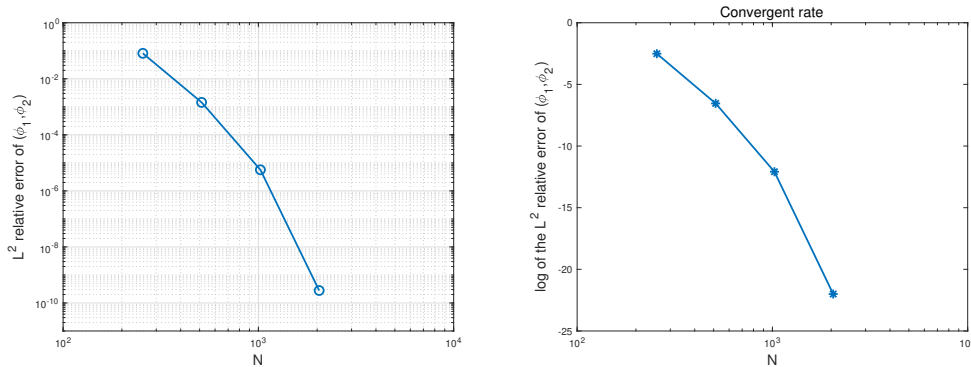


Figure 6: Left: Relative error of (ϕ_1, ϕ_2) . Right: Logarithm of the relative error of (ϕ_1, ϕ_2) .

4.2 Numerical scheme and effectiveness of the method

In this subsection we give the numerical scheme on the computation of the solution using characterization of the singular term method in the following Algorithm 1. We show the

effectiveness of this method by comparing the convergent rate with the solution computed using layer potential techniques in a direct way.

Algorithm 1 Numerical scheme

Step 1. Look for the solution to (1.1) in terms of the following form:

$$u(x) = \alpha_0 q(x) + H(x) + \mathcal{S}_{\partial D_1}[\phi_1](x) + \mathcal{S}_{\partial D_2}[\phi_2](x), \quad x \in \mathbb{R}^2 \setminus \overline{(D_1 \cup D_2)},$$

where q is given by (4.1) and $\alpha_0, (\phi_1, \phi_2)$ are to be computed.

Step 2. Compute the stress concentrator factor α_0 by considering the touching case (2.4):

- Discretize ∂D_ρ into $2N + N/8$ points;
- Solve integral equation (3.4) numerically;
- Obtain α_0 through (3.7).

Step 3. Compute the density functions (ϕ_1, ϕ_2) through (4.5):

- Discretize each $\partial D_j, j = 1, 2$ into N points, respectively;
- Compute the inward normal derivative $\frac{\partial q_j}{\partial \nu} \Big|_-, j = 1, 2$ by solving the Dirichlet problem (4.4), respectively;
- Obtain (ϕ_1, ϕ_2) by numerically solving (4.5).

Step 4. Plot u .

Denote u^{deco} the solution computed following Algorithm 1. Denote u^{dire} the solution to (1.1) by direct computation method. In fact, u^{dire} can be written as

$$u(x) = H(x) + \mathcal{S}_{\partial D_1}[\psi_1](x) + \mathcal{S}_{\partial D_2}[\psi_2](x), \quad x \in \mathbb{R}^2 \setminus (D_1 \cup D_2),$$

where two density functions $(\psi_1, \psi_2) \in L_0^2(\partial D_1) \times L_0^2(\partial D_2)$ satisfy

$$\left(-\frac{1}{2}I + A \right) \begin{bmatrix} \psi_1 \\ \psi_2 \end{bmatrix} = - \begin{bmatrix} \frac{\partial H}{\partial \nu_{D_1}} \\ \frac{\partial H}{\partial \nu_{D_2}} \end{bmatrix},$$

where A is given by (4.6). Note that the density functions $\psi_j, j = 1, 2$ are as big as $1/\sqrt{\epsilon}$ near the origin point $(0, 0)$ when $\nu \cdot \nabla H \neq 0$. Thus, applying single layer on $\psi_j, j = 1, 2$, the error in the discretization of the single layer potential should become significant.

Let D_1 and D_2 be the same as in Section 3. Let the distance between D_1 and D_2 be $\epsilon = 0.01$. Let $z_1 = (-\epsilon/2, 0)$ and $z_2 = (\epsilon/2, 0)$ be the closest points on ∂D_1 and ∂D_2 . The background potential is given by $H(x) = x_1$. Discretize each boundary $\partial D_j, j = 1, 2$ into N points. Figure 7 (Left) shows the normal derivative of u^{dire} (orange) and u^{deco} (blue) at z_1 for different values of N . Figure 7 (Right) shows the L^2 -norm of those on boundary ∂D_1 . One can see that both methods obtain convergent result, but the direct computation method needs finer meshes to obtain the accurate result. In fact, from Figure 7 one can see that the direct computation method needs at least $N = 1024$ nodes on each boundary to obtain good result, whereas the characterization of the singular term method needs only needs $N = 512$. This further indicates that the scale of the line element of

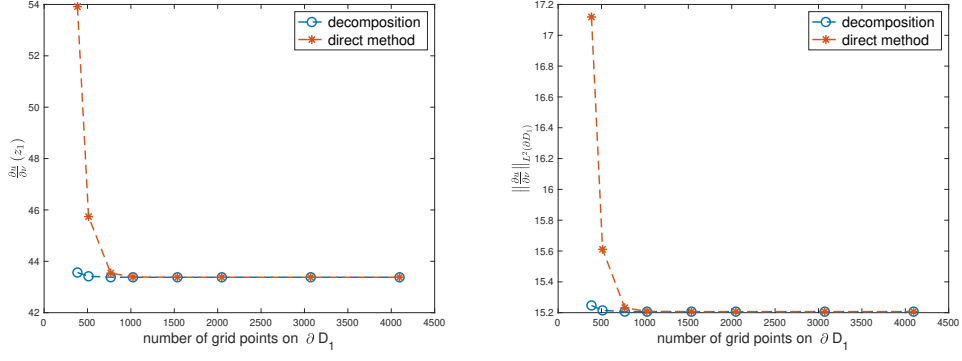


Figure 7: Left: $\frac{\partial u^{deco}}{\partial \nu}$ and $\frac{\partial u^{dire}}{\partial \nu}$ at the closest point z_1 ; Right: L^2 -norm of $\frac{\partial u^{deco}}{\partial \nu}$ and $\frac{\partial u^{dire}}{\partial \nu}$.

the discretization should be comparable with the scale of ϵ using the direct computation method, whereas the characterization of the singular term method does not limit to this restriction.

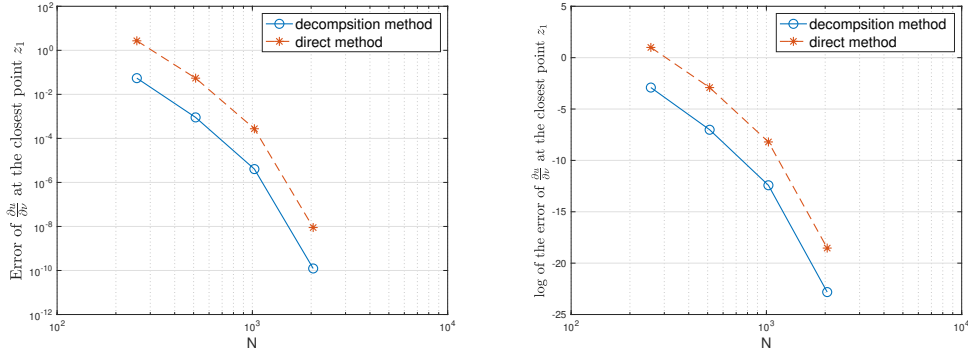


Figure 8: Left: the relative errors of $\frac{\partial u^{dire}}{\partial \nu}$ and $\frac{\partial u^{deco}}{\partial \nu}$ compared to $\frac{\partial u^*}{\partial \nu}$; Right: the logarithm of the relative errors. The distance $\epsilon = 0.01$. The background potential is given by $H(x) = x_1$.

From Figure 7, one can see that both methods obtain accurate results when the number of grid N is sufficiently large. Hence, we assume that upon $N = 4096$ the solution is regarded as the exact solution and denote it by u^* .

Fix $\epsilon = 0.01$. To show the effectiveness of the characterization of the singular term method, we compare the normal derivative $\frac{\partial u^{dire}}{\partial \nu}$ and $\frac{\partial u^{deco}}{\partial \nu}$, with $\frac{\partial u^*}{\partial \nu}$, at the closest point z_1 , for different values of $N = 256, 512, 1024, 2048$. Let

$$\frac{\left| \frac{\partial u^{dire}}{\partial \nu_{D_1}}(z_1) - \frac{\partial u^*}{\partial \nu_{D_1}}(z_1) \right|}{\left| \frac{\partial u^*}{\partial \nu_{D_1}}(z_1) \right|} \quad \text{and} \quad \frac{\left| \frac{\partial u^{deco}}{\partial \nu_{D_1}}(z_1) - \frac{\partial u^*}{\partial \nu_{D_1}}(z_1) \right|}{\left| \frac{\partial u^*}{\partial \nu_{D_1}}(z_1) \right|}$$

be the relative errors of $\frac{\partial u^{dire}}{\partial \nu}$ and $\frac{\partial u^{deco}}{\partial \nu}$ at the closest point z_1 , respectively. Figure 8 (Left) shows that the relative errors of $\frac{\partial u^{dire}}{\partial \nu}$ and $\frac{\partial u^{deco}}{\partial \nu}$ both decrease as the grid number N

increases. However, the error of $\frac{\partial u^{deco}}{\partial \nu}$ is much smaller than that of $\frac{\partial u^{dire}}{\partial \nu}$. The convergent speed of $\frac{\partial u^{deco}}{\partial \nu}$ is faster than that of $\frac{\partial u^{dire}}{\partial \nu}$, which is shown in Figure 8 (Right).

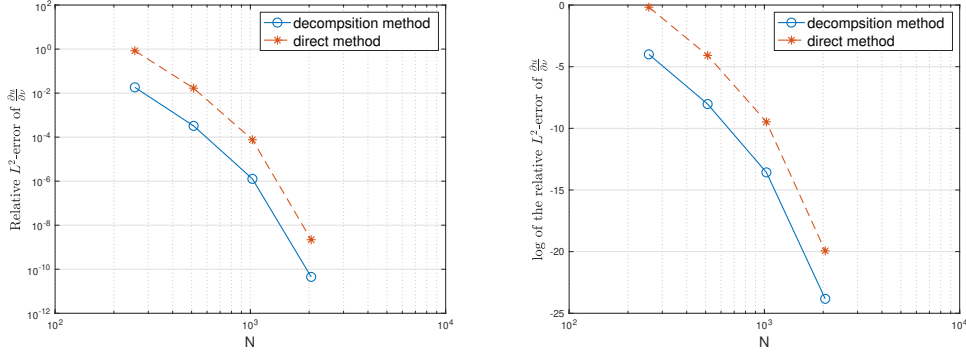


Figure 9: Left: The relative L^2 -errors of $\frac{\partial u^{dire}}{\partial \nu}$ and $\frac{\partial u^{deco}}{\partial \nu}$, respectively. Right: The logarithm of the relative L^2 -error.

We also compare the relative L^2 -errors of $\frac{\partial u^{dire}}{\partial \nu}$ and $\frac{\partial u^{deco}}{\partial \nu}$, respectively, for different grid numbers $N = 256, 512, 1024, 2048$. Let

$$\frac{\left\| \frac{\partial u^{dire}}{\partial \nu_{D_1}} - \frac{\partial u^*}{\partial \nu_{D_1}} \right\|_{L^2(\partial D_1)}}{2 \left\| \frac{\partial u^*}{\partial \nu_{D_1}} \right\|_{L^2(\partial D_1)}} + \frac{\left\| \frac{\partial u^{dire}}{\partial \nu_{D_2}} - \frac{\partial u^*}{\partial \nu_{D_2}} \right\|_{L^2(\partial D_2)}}{2 \left\| \frac{\partial u^*}{\partial \nu_{D_2}} \right\|_{L^2(\partial D_2)}}$$

and

$$\frac{\left\| \frac{\partial u^{deco}}{\partial \nu_{D_1}} - \frac{\partial u^*}{\partial \nu_{D_1}} \right\|_{L^2(\partial D_1)}}{2 \left\| \frac{\partial u^*}{\partial \nu_{D_1}} \right\|_{L^2(\partial D_1)}} + \frac{\left\| \frac{\partial u^{deco}}{\partial \nu_{D_2}} - \frac{\partial u^*}{\partial \nu_{D_2}} \right\|_{L^2(\partial D_2)}}{2 \left\| \frac{\partial u^*}{\partial \nu_{D_2}} \right\|_{L^2(\partial D_2)}}$$

be the relative L^2 -errors of $\frac{\partial u^{dire}}{\partial \nu}$ and $\frac{\partial u^{deco}}{\partial \nu}$, respectively. Figure 9 (Left) shows that the relative L^2 -errors of both methods decrease as the grid number N increases, while the error of $\frac{\partial u^{deco}}{\partial \nu}$ is much smaller than that of $\frac{\partial u^{dire}}{\partial \nu}$. Figure 9 (Right) shows that the convergent rate of $\frac{\partial u^{deco}}{\partial \nu}$ is faster than that of $\frac{\partial u^{dire}}{\partial \nu}$, which indicates that the characterization of the singular term method is more effective.

ϵ	$\frac{\partial u^{deco}}{\partial \nu}(z_1)$
0.018	31.745002
0.016	33.802881
0.014	36.292441
0.012	39.387485
0.010	43.378565
0.008	48.798534
0.006	56.770126
0.004	70.326757

Table 1: The value of $\frac{\partial u^{deco}}{\partial \nu}$ at the closest point z_1 , for different ϵ .

If we fix the number of grid points $N = 1024$ and vary the distance ϵ from 0.018 to 0.004. Table 1 lists the values of the normal flux of u^{deco} at the closest point z_1 for different values of ϵ . The values are plotted as the blue star points in Figure 10. The blow up rate of $\frac{\partial u^{deco}}{\partial \nu}$ is known to be $1/\sqrt{\epsilon}$ in two dimension. In fact, by (4.3), we have

$$\frac{\partial u^{deco}}{\partial \nu}(z_1) = \alpha_0 \frac{\partial q}{\partial \nu}(z_1) + O(1).$$

By (4.1) and (4.2), the above formula becomes

$$\frac{\partial u^{deco}}{\partial \nu}(z_1) = \frac{\alpha_0}{2\pi} \left(\frac{z_1 - p_1}{|z_1 - p_1|^2} - \frac{z_1 - p_2}{|z_1 - p_2|^2} \right) + O(1).$$

The concentration stress factor α_0 is 10.312176 which is given by Figure 3 and Figure 4. Together with the explicit value of $r_1 = 1/2$, $r_2 = 1/2$ in (4.2), we have

$$\frac{\partial u^{deco}}{\partial \nu}(z_1) = 4.632\epsilon^{-1/2} + O(1). \quad (4.7)$$

We now confirm the blow up rate $\epsilon^{-1/2}$ and its coefficient in (4.7) by fitting the values of $\frac{\partial u^{deco}}{\partial \nu}$ in Table 1 with ϵ decreases from 0.018 to 0.004. The result is plotted as the red curve in Figure 10. One can clearly see that the blow up rate is $\epsilon^{-1/2}$ and the coefficient of the fitting curve 4.593 matches well with the coefficient in (4.7). This result is interesting and reasonable.

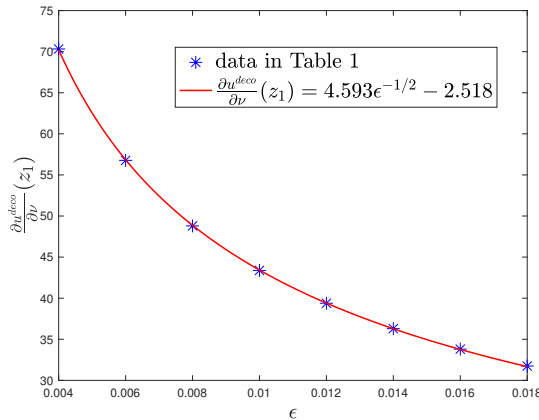


Figure 10: Fitting curve and $\frac{\partial u^{deco}}{\partial \nu}$ at the closest point z_1 for different ϵ .

5 Numerical examples

In this section, we present some examples of numerical experiments on various different shapes of two closely located inclusions. The distance between two inclusions is $\epsilon = 0.01$.

Firstly, let D_1 and D_2 be two elliptic inclusions of the same major axis $a = 2$ and minor axis $b = 1$, centered at $(-a - \epsilon/2, 0)$ and $(a + \epsilon/2, 0)$, respectively. Discretize each boundary

∂D_j , $j = 1, 2$, into 256 grid nodes. Applying linear field $H(x) = x_1$, Figure 11 (Left) shows the uniformly spaced contour level curves. Applying linear field $H(x) = x_2$, one can see from Figure 11 (Middle) that the gradient does not blow up. Let $H(x) = x_1 + x_2$, Figure 11 (Right) shows the uniformly spaced contour level curves.

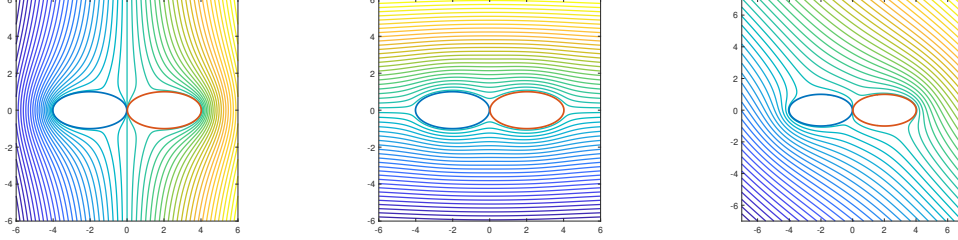


Figure 11: Level curves of the stiff inclusions of elliptic shapes. Left: $H(x) = x_1$; Middle: $H(x) = x_2$; Right: $H(x) = x_1 + x_2$.

Secondly, let D_1 be an ellipse with the major axis $a = 2$ and minor axis $b = 1$, centered at $(-a - \epsilon/2, 0)$, and let D_2 be a circle of radius $r = 1$ centered at $(r + \epsilon/2, 0)$. Figure 12 shows the uniformly spaced contour level curves when $H(x) = x_1$, $H(x) = x_2$ and $H(x) = x_1 + x_2$, respectively.

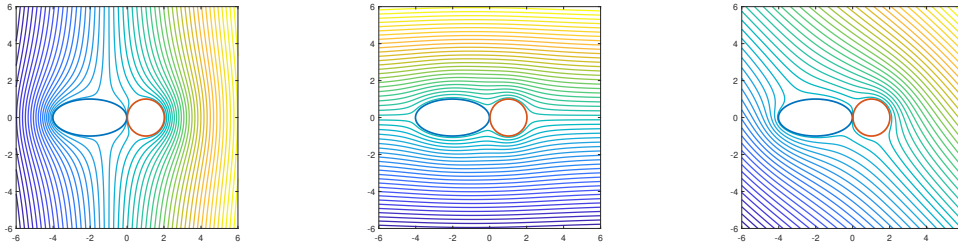


Figure 12: Level curves of the stiff inclusions of elliptic and disk shapes. Left: $H(x) = x_1$; Middle: $H(x) = x_2$; Right: $H(x) = x_1 + x_2$.

As the final example, Figure 13 shows the uniformly spaced contour level curves for two stiff inclusions of general shape, when $H(x) = x_1$, $H(x) = x_2$ and $H(x) = x_1 + x_2$, respectively. The boundaries of two inclusions are given by the following parametrization functions for $\theta \in [0, 2\pi)$:

$$\begin{cases} x_1 = -\frac{\epsilon}{2} - 1 + \cos(\theta), \\ x_2 = -\frac{1}{12} + \sin(\theta) - \frac{1}{6} \sin(2\theta) + \frac{1}{12} \cos(4\theta). \end{cases}$$

6 Conclusion

In this paper, we show through numerical simulations that the computation of the stress concentration between closely located stiff inclusions of general shapes can be realized by only using regular meshes. Using the characterization of the singular term method, we can

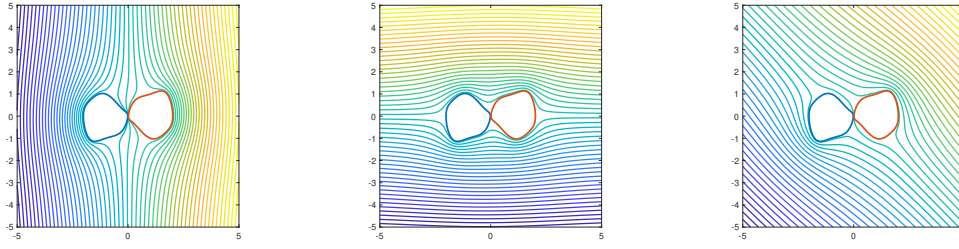


Figure 13: Level curves of the stiff inclusions of general shape. Left: $H(x) = x_1$; Middle: $H(x) = x_2$; Right: $H(x) = x_1 + x_2$.

decompose the solution into a singular and a regular term. After extracting the singular in a precise way, we can compute the remaining term using regular meshes. The key point in our computation lies in the computation of the stress concentration factor as well as the singular term. We have shown that the computation of the stress concentration factor converges very fast. By comparing the convergent rate with the solution computed using layer potential techniques in a direct way, we conclude that the characterization of the singular term method can be used effectively for the computation of the solution. This numerical method could also be generalized to the three dimensional case, which we will investigate in a forthcoming work.

References

- [1] H. Ammari, G. Ciraolo, H. Kang, H. Lee and K. Yun, Spectral Analysis of the Neumann-Poincaré Operator and Characterization of the Stress Concentration in Anti-Plane Elasticity, *Arch. Rational Mech. Anal.* 208, 275–304 (2013).
- [2] H. Ammari and H. Kang, *Polarization and moment tensors*, Applied Mathematical Sciences, 162, Springer, New York, 2007.
- [3] H. Ammari, H. Kang, H. Lee, J. Lee and M. Lim, Optimal bounds on the gradient of solutions to conductivity problems, *J. Math. Pure Appl.* 88, 307-324 (2007).
- [4] H. Ammari, H. Kang, H. Lee and H. Zribi, Decomposition theorem and fine estimates for electric fields in the presence of closely located circular inclusions, *J. Differ. Equ.* 247, 2897-2912 (2009).
- [5] H. Ammari, H. Kang and M. Lim, Gradient estimates for solutions to the conductivity problem, *Math. Ann.* 332(2), 277–286 (2005).
- [6] I. Babuška, B. Andersson, P. Smith and K. Levin, Damage analysis of fiber composites Part I: Statistical analysis on fiber scale, *Comput. Methods Appl. Mech. Eng.* 172, 27–77 (1999).
- [7] J. Bao, H. Li and Y. Li, Gradient estimates for solutions of the Lamé system with partially infinite coefficients, *Arch. Rational Mech. Anal.* 215, 307–351 (2015).

- [8] J. Bao, H. Li and Y. Li, Gradient estimates for solutions of the Lamé system with partially infinite coefficients in dimensions greater than two, *Adv. Math.* 305, 298–338 (2017).
- [9] E. Bao, Y. Li and B. Yin, Gradient estimates for the perfect conductivity problem, *Arch. Ration. Mech. Anal.* 193, 195–226 (2009).
- [10] E. Bao, Y. Li and B. Yin, Gradient estimates for the perfect and insulated conductivity problems with multiple inclusions, *Commun. Partial Differ. Equ.* 35, 1982–2006 (2010).
- [11] B. Budiansky and G. Carrier High shear stresses in stiff fiber composites, *J. Appl. Mech.* 51, 733–735 (1984).
- [12] E. Bonnetier and M. Vogelius, An elliptic regularity result for a composite medium with “touching” fibers of circular cross-section, *SIAM J. Math. Anal.* 31, 651–677 (2000).
- [13] H. Kang Quantitative analysis of field concentration in presence of closely located inclusions of high contrast, *Proceedings ICM 2022*.
- [14] H. Kang, M. Lim and K. Yun, Asymptotics and computation of the solution to the conductivity equation in the presence of two adjacent inclusions with extreme conductivities, *J. Math. Pure. Appl.* 99, 234-249 (2013).
- [15] H. Kang, H. Lee and K. Yun, Optimal estimates and asymptotics for the stress concentration between closely located stiff inclusions, *Math. Ann.* 363: 1281-1306 (2015).
- [16] H. Kang, H. Lee and K. Yun, Characterization of the electric field concentration between two adjacent spherical perfect conductors, *SIAM J. Appl. Math.* Vol. 74, No. 1, pp. 125-146 (2014).
- [17] H. Kang and S. Yu, Quantitative characterization of stress concentration in the presence of closely spaced hard inclusions in two-dimensional linear elasticity, *Arch. Rational Mech. Anal.* 232, 121-196 (2019).
- [18] J. Keller, Stresses in narrow regions, *Trans. ASME J. Appl. Mech.* 60, 1054-1056 (1993).
- [19] J. Lekner, Analytical expression for the electric field enhancement between two closely-spaced conducting spheres, *J. Electrostatics* 68, 299–304 (2010).
- [20] J. Lekner, Near approach of two conducting spheres: enhancement of external electric field, *J. Electrostatics* 69, 559–563 (2011).
- [21] J. Lekner, Electrostatics of two charged conducting spheres, *J. Proc. R. Soc. A* 468, 2829-2848 (2012).
- [22] M. Lim and K. Yun, Blow-up of electric fields between closely spaced spherical perfect conductors, *Commun. Partial Differ. Equ.* 34, 1287–1315 (2009).

- [23] M. Lim and K. Yun, Strong influence of a small fiber on shear stress in fiber-reinforced composites, *J. Differ. Equ.* 250, 2402–2439 (2011).
- [24] K. Yun, Estimates for electric fields blow up between closely adjacent conductors with arbitrary shape, *SIAM J. Appl. Math.* 67, 714-730 (2007).
- [25] K. Yun, Optimal bound on high stresses occurring between stiff fibers with arbitrary shaped cross sections, *J. Math. Anal. Appl.* 350, 306–312 (2009).