# Improving Patient Transport in Hospitals: A Literature Review of Operations Research Methods

Tom Lorenz Klein<sup>a,\*</sup>, Clemens Thielen<sup>a,b</sup>

<sup>a</sup>TUM Campus Straubing for Biotechnology and Sustainability, Weihenstephan-Triesdorf University of Applied Sciences, Am Essigberg 3, Straubing, 94315, Germany

<sup>b</sup>Department of Mathematics, School of Computation, Information and

Technology, Technical University of Munich, Boltzmannstr. 3, Garching bei München, 85748, Germany

#### Abstract

Most activities in hospitals require the presence of the patient. Delays in patient transport can therefore cause disruptions and costly downtime in many different areas and departments, which makes patient transport planning a central operational problem in hospitals. This paper provides the first literature review of Operations Research approaches for improving non-emergency patient transport in hospitals. We structure the different patient transport problems considered in the literature according to several main characteristics and introduce a four-field notation for patient transport problems that allows for a concise representation of different problem variants. We then analyze the relevant literature with respect to different aspects related to the considered problem variant, the employed modeling and solution techniques, as well as the data used and the level of practical implementation achieved. Based on our literature analysis and semi-structured interviews with hospital practitioners, we provide a comparison of current hospital practice and the existing literature on patient transport, and we identify research gaps and formulate an agenda for relevant future research in this area.

*Keywords:* Patient Transport, Hospital, Health Care, Operations Research, Literature Review

<sup>\*</sup>Corresponding author

*Email addresses:* tom.klein@tum.de (Tom Lorenz Klein), clemens.thielen@tum.de (Clemens Thielen)

# 1. Introduction

A well-functioning health care system is crucial for modern societies and significantly impacts people's lives and livelihood [1]. This is underlined for instance by the fact the European Union spent 10.9 % of its GDP on health care in 2020 [2]. Hospitals are a central element of any health care system and account for almost 40 % of health care spending in OECD countries [2].

While the demand and the required spending for hospital services are expected to increase even further in the future due to demographic changes such as an aging population and longer life expectancy in developed countries [3], a major shortage of hospital staff is already observed today. In 2010, it was predicted that Germany would face a glaring shortage of nursing staff by 2025, with an estimated deficit of around 112.000 full-time employees [4]. In 2024, this prediction can be confirmed [5]. A new study even predicts 1.8 million open jobs in the health care sector in Germany by 2035 [6]. This development, which can also be observed in most other developed countries, already presents hospitals with enormous challenges that have a profound impact on day-to-day work. A direct consequence of the staff shortage is the increasing workload for the existing staff. This situation leads to a downward spiral of deteriorating working conditions and further decreasing staff availability in hospitals. In view of these challenges, the effective use of existing personnel resources becomes all the more critical.

Another important issue is that the high operational costs and the increasing demand for hospital services put enormous financial pressure on hospitals. Consequently, hospitals need to improve the efficiency of their operations as much as possible [7] – particularly in cost and revenue driving areas like operating theaters and diagnostic departments such as radiology [8]. An important issue that reduces efficiency in these and many other hospital departments are missed appointments due to the absence of patients, which lead to unwanted waiting time and downtime in processes and, in turn, cause additional costs and impair the quality of medical care [9].

Since most important hospital activities require the presence of the patient, the need for effective use of existing personnel resources and the requirement of avoiding unnecessary downtime explained above make patient transport a central element in day-to-day hospital operations. In fact, it is widely recognized that optimized patient transports can have positive effects on the workload and working conditions of medical staff [6], while a poorly functioning transport process can lead to indirect costs by disrupting operations, delaying or postponing procedures, contributing to financial losses, and worsening patient satisfaction and the quality of care [10–12].

For this reason, this paper reviews the Operations Research literature on non-emergency patient transport planning in hospitals. Here, non-emergency indicates a focus on planned transports such as transfers between wards or scheduled trips to the operating theater or to diagnostic departments. Moreover, we identify and highlight differences in the aspects of patient transport modeled in the relevant literature as well as existing research gaps. To align this analysis with requirements from hospital practice and derive a practically relevant research agenda, we conducted semi-structured interviews with practitioners from several European hospitals and compare the resulting insights with the current state of the literature.

The rest of this paper is structured as follows: Section 2 presents the methodological approach to the literature search, which led to the identification of the relevant scientific contributions. Afterwards, Section 3 introduces patient transport problems and the associated terminology and outlines the existing modeling approaches found in the identified literature. Moreover, a comprehensive classification of different variants of patient transport problems by means of a four-field notation is developed. We use this notation in Section 4 as a basis for classifying the relevant publications from the literature search. The section then provides a detailed discussion of key characteristics of patient transport problems considered in the examined literature and analyzes other relevant aspects such as modeling and solution methods used or approaches for handling uncertainty. Moreover, cross comparisons are made between the considered aspects. Section 5 then identifies research gaps and formulates an agenda for future research based on our literature analysis and interviews with hospital practitioners. Finally, Section 6 concludes the paper with a summary and discussion of the obtained insights.

# 2. Literature search methodology

In order to provide a sound and comprehensive basis for our review, an indepth literature search was carried out in February 2024 using the databases Scopus and Web of Science within journals classified as "Operations Research & Management Science" (OR&MS). To ensure that no relevant literature is overlooked, the number of required search terms was deliberately restricted to a minimum. The requirement was that at least one term from each column in Table 1 appears in the title, the abstract, or the author keywords. Here, the first column "Hospital terms" ensures the connection of the publication to the hospital, while the second column "Transport terms" ensures a transport focus. Note that, since patient transport problems are often modeled as vehicle routing problems (VRPs) and in particular as Dial-a-Ride Problems (DARPs), corresponding search terms have been included in the transport terms column.

Hospital terms	Transport terms
hospital\$	dial*
$\operatorname{clinic}$	$ride^*$
infirmary	vehicle*
infirmaries	$\operatorname{rout}^*$
"medical school\$"	$\mathrm{transp}^*$
"college\$ of medicine"	DARP*
"department\$"	VRP*
$\mathrm{surger}^*$	
$surgeo^*$	
patient\$	

Table 1: Hospital and transport search terms. The wildcard "\$" stands for at most one character, while the wildcard "\*" stands for any group of characters (including no characters).

The search yielded 911 results in the Scopus database and 674 results in the Web of Science database, whose titles and abstracts were carefully read in order to identify relevant papers. A decisive selection factor was that the papers deal with patient transport within hospitals, for example, from a ward to the radiology department or from the operating theater to a ward. However, as some hospitals extend over several buildings or even different locations within a city, papers dealing with patient transport between hospitals were also selected.

After the title and abstract screening described above, a total of 74 potentially relevant papers were left. The full texts of these papers were then read in detail. Here, only papers that focus on patient transport and use methods from Operations Research & Management Science were selected as relevant. Afterwards, a forward and backward search was performed on the selected papers in order to avoid overlooking relevant papers, e.g., papers not published in journals classified as "Operations Research & Management Science" (OR&MS)

Overall, using the process described above, we identified 22 papers that apply Operations Research & Management Science approaches and focus on patient transport within hospitals or between hospital complexes and have, thus, been included in the review. A list of these papers together with a classification of each paper according to the four-field notation introduced in the following section is provided in Table 3.

# 3. Problem definition

In this section, we first introduce patient transport in hospitals and the associated terminology in Subsection 3.1. Afterwards, Subsection 3.2 describes the existing modeling approaches for patient transport problems and places them in the surrounding literature. Subsection 3.3 then introduces a fourfield notation for the classification of different variants of patient transport problems that are considered in the relevant papers found in our literature search.

#### 3.1. Patient transport in hospitals

Most actions carried out in hospitals require the presence of the patient. For this reason, patient transport represents a central challenge for the overall process. Examples of transport include taking a patient from a ward to the operating theatre or picking up a patient in the radiology department after an X-ray examination. A transport means that a patient is accompanied if they are able to walk, or transported if they are in a wheelchair or lying in bed. A transport is preceded by a transport request. This includes a pick-up location and a drop-off location, as well as a time or a time window when the transport is to be carried out. Within hospitals, these transports are performed by different groups of staff since some transports, such as those of patients under the influence of certain medications, can only be carried out by medically trained nurses. Other transports are often carried out by transporters (also referred to as *porters* in the literature), which are specifically employed for patient transport and do not usually have any advanced medical training. Moreover, there are special characteristics of transports to consider such as isolated transports, where the patients may be infectious, or transports where special equipment (e.g., oxygen supplies) must be carried.

When a transport is requested, the person carrying out the transport (transporter or nurse) may start at an assembly point (a depot for transporters, a nurse's ward, or a garage in case of vehicle-based transport), where wheelchairs are often parked temporarily for transport, and goes to the pickup location. After completing the transport, they may return to an assembly point or be called directly to a follow-up transport, which can result in tours. In larger hospitals or in the case of transfers between hospitals, it is common that the pick-up and drop-off locations are not in the same building, in which case vehicles are often used for transports. These vehicles include minibuses that can transport several patients in wheelchairs or beds simultaneously as well as ambulances that can only transport one patient at a time. This means that the capacity of the vehicle and the nature of the vehicle fleet are also important factors. Finally, restrictions on travel times must usually be adhered to since weak patients must not be exposed to the stress of excessively long journeys, vehicles only have certain ranges, or the transport staff are subject to working and break times.

A transport plan consists of an assignment of transport requests to transport personnel and means of transport, such as wheelchairs or ambulances, and the determination of the corresponding transport routes. The goal is to optimize different objectives of the hospital and the patients subject to various constraints that arise from the specific transport setting (a detailed discussion of constraints and objectives is provided in Subsection 3.3). For the hospital, one typical objective is the minimization of transport costs. For patients, it is important that travel and waiting times are kept short. When determining a transport plan, various criteria must therefore be taken into account in order to keep a balance between hospital interests and patient needs.

# 3.2. Modelling approaches for patient transport problems

Except for Séguin et al. [13] and Maka et al. [14], who model patient transport problems as assignment problems and resource allocation problems, respectively, and Fiegl et al. [15] and von Elmbach et al. [16], who model patient transport problems as scheduling problems, all relevant papers identified in our literature search model patient transport problems as *vehicle routing problems* or closely related problems (see [17] for a comprehensive general overview).

Important vehicle routing problems (VRPs) that are relevant for modelling patient transport are the Capacitated VRP (CVRP), which includes different capacities of transport vehicles, the VRP with Pick-up and Delivery (PDVRP), which can represent pick-up locations of patients such as wards and delivery locations such as operating rooms, and the VRP with Time Windows (VRPTW), which includes time windows obtained from earliest possible pick-up times and latest possible delivery times of patients. The combination of all of these important aspects can be modeled by means of a Dial-a-Ride Problem (DARP), which is therefore the most frequently used model for patient transport problems in the relevant literature. The unique feature of the DARP with respect to modelling patient transport is the consideration of patient inconvenience, which can be composed of complex factors such as patient travel times and waiting times [18]. In the relevant literature, the DARP is supplemented by factors such as isolated transports, the adherence to working hours of transport staff, or the fulfillment of skill or equipment requirements of transports.

# 3.3. Classification of patient transport problems

Even thought patient transport problems are often modeled based on the DARP, the problem variants examined in the relevant literature still differ significantly with respect to several important aspects that cannot be comprehensively expressed using standard classifications of DARP variants as provided, e.g., in [18]. To facilitate a better understanding of the particular characteristics of patient transport problems described in the relevant literature and to aid future research, we therefore introduce a four-field notation  $\alpha |\beta| \gamma |\delta$  for the classification of patient transport problems. This notation is inspired by the well-known three-field notation for scheduling problems proposed by Graham et al. [19] and comprises the following four fields: fleet characteristics ( $\alpha$ ), depot characteristics ( $\beta$ ), constraints ( $\gamma$ ), and problem objective(s) ( $\delta$ ). These fields are explained in more detail in Table 2 and in the following subsections.

# 3.3.1. Fleet characteristics $(\alpha)$

The first field  $\alpha$  of our four-field notation is used to classify the fleet characteristics. Here, the term *fleet* refers to the group of people or manned

Fle	eet characteristics $\alpha$	Depot characteristics $\beta$		
$F_{\rm mult}$	multiple vehicle types	$D_{\rm mult}$	multiple depots	
$F_n$	n vehicle types	$D_n$	n depots	
$F_1$	single vehicle type	$D_1$	single depot	
$F_{\emptyset}$	vehicle-free	$D_{\emptyset}$	no depots	

Constraints $\gamma$								
Capacity		Equipment		Isolated transports		Time		
$CAP_1$	unit	EQ	equipment	ISO	isolated	$T_s$	staff	
$CAP_{unif}$	uniform		transport		transports	$T_l$	loading	
$CAP_{mult}$	multi					$T_{tt}$	travel time	

	Problem objective $\delta$								
0	Cost Waiting time Travel time		vel time	Ergonomic burden		Flow time			
C	cost	$WT_v$	vehicles	$TT_v$	vehicles	$\max B$	maximum	$\sum w_j F_j$	total
		$WT_p$	patients	$TT_p$	patients		ergonomic		weighted
				$TT_e$	empty		burden		flow time

Table 2: Overview of the fields of the four-field notation  $\alpha |\beta| \gamma |\delta|$  with a description of the possible entries of each field.

vehicles responsible for patient transports. In many of the examined papers, patient transports inside hospitals are exclusively carried out by transport personnel accompanying a walking patient or pushing a patient in a wheelchair or bed, which we refer to as a vehicle-free fleet and denote by  $\alpha \equiv F_{\emptyset}$ . In cases where vehicles are used, the characteristics in which the fleet can differ are vehicle capacity, speed, and range, the ability to transport equipment, and the option to execute isolated transports. A multiple-vehicletypes fleet or heterogeneous fleet that contains at least two vehicle types that differ in at least one of these characteristics is denoted by  $\alpha \equiv F_{\text{mult}}$ . Additionally, to specify a fleet with a specific number n of vehicle types, the notation  $\alpha \equiv F_n$  is used. In particular, a single-vehicle-type fleet or homogeneous fleet of identical vehicles that do not differ in any of the mentioned characteristics is denoted by  $\alpha \equiv F_1$ .

# 3.3.2. Depot characteristics $(\beta)$

The second field  $\beta$  characterizes how the depots (hubs, assembly points) of the transport staff or vehicles are modeled. In case that *multiple depots* are considered, we use the notation  $\beta \equiv D_{\text{mult}}$ . Moreover, we use  $\beta \equiv D_n$ 

for models with a specific number n of depots. In particular, some relevant papers utilize a *single-depot* approach to model a patient transport problem, which we denote by  $\beta \equiv D_1$ . Other models do not utilize depots at all. These models assume that the transport staff (e.g., nurses) work on the wards that are also the pick-up locations of the patients they transport, which means that no travel is required in order to reach the pick-up location of a transport. This assumption is represented by  $\beta \equiv D_{\emptyset}$ .

#### 3.3.3. Constraints $(\gamma)$

The third field  $\gamma$  indicates the presence of several kinds of important constraints that can be considered in patient transport problems. These include capacity constraints, equipment constraints, constraints concerning isolated transports, and time-related constraints. If more than one of these is considered, the third field will have multiple entries, which are sorted in the same order as in Table 2 and separated by semicolons.

The first entry in the third field specifies the capacity constraints. Here, the entry  $CAP_1$  indicates *unit capacity*, which means that each transporter or transport vehicle can only transport one unit (whether bed, wheelchair, or walking patient) at a time. Unit capacity modeling is often used for the transport of non-disabled patients and for ambulance transport. Uniform capacity, indicated by  $CAP_{unif}$  describes that all transporters or transport vehicles have a uniform capacity strictly larger than one. Finally, we indicate *multi-capacity* problems by adding  $CAP_{mult}$  to the third field. Multi-capacity problems have at least two vehicles with different capacities in the transport fleet.

In addition, some patient transport problems include the need for transport equipment such as oxygen supply or monitoring equipment, or restrictions concerning isolated patient transports. To indicate the consideration of transports with equipment, we add EQ to the third field, and for isolated transports, we add ISO.

Furthermore, we indicate presence of different kinds of *time-related con*straints in the third field. Possible time-related constraints include constraints on the compliance with working times and the consideration of break times of the transport *staff*, which we denoted by an entry  $T_s$ . Likewise, some problem definitions consider times for disinfecting transport vehicles or other times for preparation and post-processing, as well as the times for loading and unloading of patients. We denote these constraints jointly by  $T_l$  as loading time constraints. In problems where several patients are transported together on one tour, as well as for severely injured patients, a certain maximum travel time may be defined and should not be exceeded, which we indicate by  $T_{tt}$ . These time constraints are not exclusive, i.e., staff time constraints, loading time constraints, and travel time constraints may all be considered together in one model, which is then indicated by multiple indices at the letter T. Thus, a multi-capacity problem that considers all constraints mentioned will have  $\gamma \equiv CAP_{mult}; EQ; ISO; T_{s,l,tt}$  as the corresponding entry in the third-field.

# 3.3.4. Problem objective(s) ( $\delta$ )

The fourth field describes the problem objective(s). Here, the first important distinction is between singleobjective problems, multiobjective problems, and problems that use a weighted sum objective. Singleobjective problems use only one of the minimization objectives described below. In multiobjective problems, where several objectives are considered separately, the different minimization objectives are separated using semicolons. To show that a problem uses a weighted sum objective, where a single minimization objective is obtained as a nonnegative weighted sum of several objectives, the minimization objectives are connected by a plus ("+").

A very common objective considered in patient transport problems is cost minimization. There are many different and complex combinations of costs found in the literature, so we simply indicate *cost minimization* by an entry C in the fourth field. Examples of cost objectives found in the literature are staff costs, transport costs (consisting of fuel costs, maintenance costs, cleaning costs, and general vehicle costs), and many more.

Another common objective is the minimization of waiting times. Here, a distinction must be made between the minimization of waiting times for vehicles, denoted by  $WT_v$ , and the minimization of waiting times for patients, denoted by  $WT_p$ . Waiting times for vehicles arise if vehicles are already on site earlier than a specified pick-up time or if it is required that a patient may not be unloaded before a specified unloading time. Waiting times for patients arise from the difference between the earliest possible pick-up time and the actual pick-up time, as well as in the event of over-punctuality at the delivery location.

A related type of objective considered is the minimization of *travel times*.

Here, we distinguish the minimization of travel times of vehicles  $(TT_v)$ , travel times of patients  $(TT_p)$ , and empty travel times of vehicles  $(TT_e)$ . Minimizing travel times of vehicles  $(TT_v)$  might result in longer travel times for patients, as this approach focuses on reducing the duration of vehicle usage and optimizing operational efficiency. This is particularly important in scenarios with limited vehicle availability or high operational costs of vehicles. Conversely, minimizing *patient* travel time  $(TT_p)$  often involves choosing direct routes over collective tours, prioritizing patient comfort and well-being. This is crucial in emergency situations or when transporting critically ill patients. The *empty* travel time of vehicles  $(TT_e)$  is also a key factor. It refers to the time when vehicles are traveling without patients, either to reach a patient or returning post-transport. Minimizing empty travel times of vehicles  $(TT_e)$  is aimed at reducing operational costs and improving overall service efficiency. Thus, striking a balance between minimizing  $TT_v$ ,  $TT_p$ , and  $TT_e$ is essential. It involves a trade-off between operational efficiency and patient needs, ensuring that the transport system is both cost-effective and patient-centered. By combining the sub-objectives, complex objectives such as  $\delta \equiv C + WT_{v,p} + TT_{v,p,e}$  can be represented.

Two further objectives considered are the minimization of the maximum ergonomic burden of the transport staff, denoted by max B, and the minimization of the total weighted flow time, denoted by  $\sum w_j F_j$ . Here, the ergonomic burden depends on several factors such the tour length, the transported patient's weight, or how the patients is transported (e.g, in a bed or in a wheelchair). For the total weighted flow time – as is common for jobs in scheduling problems – the flow time  $F_j$  of a transport request j is its completion time minus its release date (earliest possible start time).

## 4. Literature classification and analysis

In this section, we first demonstrate the versatility of the four-field notation introduced in Section 3 by classifying the problems described in the relevant papers obtained from our literature search. Afterwards, we present a detailed analysis of the patient transport problems considered in these papers with respect to different criteria.

Table 3 classifies the patient transport problems considered in the relevant papers identified in our literature search according to the developed four-field notation.


Publication	α	β	$\gamma$	δ
Nickel et al. [20]	$F_{\emptyset}$	$D_1$	$CAP_1$	$C;TT_e$
Kallrath [21]	$F_{\rm mult}$	$D_{\rm mult}$	$CAP_{\text{mult}}; EQ; ISO; T_{tt}$	$C + WT_{v,p} + TT_{v,p}$
Melachrinoudis et al. [22]	$F_{\rm mult}$	$D_{\rm mult}$	$CAP_{\text{mult}}$	$C + WT_p + TT_p$
Fiegl et al. [15]	$F_{\emptyset}$	$D_{\emptyset}$	$CAP_{\rm mult}$	$\sum w_i F_i$
Hanne et al. [23]	$F_{\rm mult}$	$D_{\rm mult}$	$CAP_{\text{mult}}; EQ; ISO; T_{s,l,tt}$	$C + WT_{v,p} + TT_{v,p}$
Beaudry et al. [24]	$F_{\rm mult}$	$D_{\rm mult}$	$CAP_{\text{mult}}; EQ; ISO; T_{s,l,tt}$	$C + WT_{v,p} + TT_{v,p,e}$
Kergosien et al. [25]	$F_{\rm mult}$	$D_{\rm mult}$	$CAP_1; EQ; ISO; T_s$	C
Turan et al. [26]	$F_{\emptyset}$	$D_{\text{mult}}$	$CAP_1; T_l$	$C + WT_{v,p} + TT_{v,e}$
Kergosien et al. [27]	$F_1$	$D_{\text{mult}}$	$CAP_1; T_s$	$C; WT_p; \hat{T}T_e$
Schmid et al. [28]	$F_{\emptyset}$	$D_{\text{mult}}$	$CAP_1$	$C + WT_{v,p} + TT_e$
von Elmbach et al. [16]	$F_{\emptyset}$	$D_{\text{mult}}$	$CAP_1$	$\max B$
Zhang et al. [29]	$F_1$	$D_{\text{mult}}$	$CAP_{\mathrm{mult}}; T_{s,l,tt}$	$C + WT_{v,p} + TT_{v,p}$
Detti et al. [30]	$F_{\rm mult}$	$D_{\text{mult}}$	$CAP_{\text{mult}}; ISO; T_{l,tt}$	$C + WT_{v,p} + TT_{v,p,e}$
Vancroonenburg et al. [31]	$F_{\emptyset}$	$D_{\text{mult}}$	$CAP_1; T_s$	$TT_v$
Séguin et al. [13]	$F_{\emptyset}$	$D_{\emptyset}$	$T_s$	C
von Elmbach et al. $[32]$	$F_{\emptyset}$	$D_{\text{mult}}$	$CAP_1; T_l$	$\max B$
Van den Berg et al. [33]	$F_{\rm mult}$	$D_{\text{mult}}$	$CAP_1; T_s$	$TT_v$
Xiao et al. [34]	$F_{\emptyset}$	$D_{\emptyset}$	$CAP_1$	$WT_p + TT_p$
Nasira et al. [35]	$F_1$	$D_1$	$CAP_{\text{mult}}; T_l$	$C + WT_{v,p} + TT_{v,p,e}$
Maka et al. [14]	$F_{\emptyset}$	$D_{\text{mult}}$	$CAP_1; T_{s,l,tt}$	$C + WT_p + TT_{v,p}$
Kergosien et al. [36]	$F_1$	$D_1$	$CAP_1; T_{s,l}$	$C + TT_v$
Bärmann et al. [37]	$F_{\emptyset}$	$D_{\emptyset}$	$CAP_1; ISO; T_s$	$TT_e$

Table 3: Classification of the patient transport problems considered in the relevant papers identified in our literature search (in chronological order) using the four-field notation introduced in Table 2.

# 4.1. Transport origins, destinations, and items

We begin by examining the transport origins and destinations as well as the transported items. As already described in Section 2, the focus of the literature search is on papers that cover at least the context of patient transport within hospitals or between hospitals. However, integrated problems with other kinds of transports also occurred during the search. Therefore, Figures 1a and 1b show the absolute frequencies of the transport origins / destinations and the transported items, respectively, in the relevant literature.

In Figure 1a, transports inside hospital buildings or between buildings of a hospital complex are denoted by *Inside hospitals*, while transports of patients between hospitals (e.g., planned transfers to a different hospital) are referred to as *Hospital to hospital*. Transports of patients from home to hospital or discharges from hospital to home are denoted by *Hospital to home* and

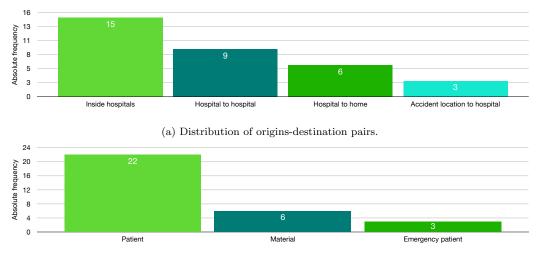

(b) Distribution of transported items.

Figure 1: Absolute frequencies of different transport origins / destinations, and transported items in the examined papers.

transports from an accident site to the hospital, which are usually emergency transports, are denoted by *Accident location to hospital*. As can be seen from Figure 1a, transports inside hospitals and between hospitals are considered most frequently, which reflects the focus of our review. However, transports between a patient's home and a hospital are also considered frequently, which indicates that these transport problems are closely linked to transports inside and between hospitals. Transports from an accident site to the hospital are examined particularly in the approaches in [27, 33, 36], which consider non-emergency patient transport and emergency transport as an integrated optimization problem in order to utilize transport resources optimally.

Figure 1b shows the distribution of the transported items. While the focus of our review is on non-emergency patient transport, denoted by *Patient* in Figure 1b, some of the relevant papers [15, 21–23, 31] also describe the combination of patient transport with the transport of portable material such as blood products, wheelchairs, or medication, while other papers [27, 33, 36] combine planned transports of non-emergency patients with transports of emergency patients by the emergency medical services (EMS). As demanded by the inclusion criteria of our literature search, all examined papers consider non-emergency patient transport. It is notable, however, that only few of the examined papers additionally consider transports of material or emergency

patients. This shows that models that combine planned patient transport with other transportation tasks in the hospital are not very common, even though, as stated in [31], sterilized or new material is often required to treat patients.


# 4.2. Transport fleet, depots, and constraints

We now consider the characteristics of the transport fleet and the depots in the relevant literature as well as the considered constraints.

Figure 2a shows the distribution of fleet characteristics. Most models do not consider transport with vehicles, i.e., they use a vehicle-free fleet. The reason for this is certainly the focus of our literature search on patient transport within hospitals. Indeed, the papers that use a vehicle-free fleet are a subset of the papers categorized as inside hospitals in Figure 1a. The papers [21, 23, 24], which only mention transport inside hospitals and use vehicles for transport, consider larger hospital complexes – sometimes on milelong road networks [24]. In most papers considering vehicles, ambulances are used for transport. However, ambulances for non-emergency transport (so-called Basic Life Support and Advanced Life Support Ambulances [22]) are often mentioned, which leads to an increased use of heterogeneous fleets, alongside fleets that also differ in their capacity and tasks. In addition, some studies [22, 25] describe that they consider a heterogeneous fleet due to real conditions.

With respect to depots, Figure 2b shows a clear dominance of multi-depot models. It should be noted, however, that a large proportion of papers do not give specific reasons for using multi-depot concepts. Some papers [22, 24] state that the use of a multi-depot approach is based on real data. The few problems where single depot approaches are used are models with a central assembly point for the transporters or transportation vehicles, which can also be seen as a result of real data [20]. For the problems that do not use depots, this modeling choice results from the specific approaches. For instance, Séguin et al. [13] assign responsibilities to the transporters for transport corridors between building sections, and in [34], the transporting nurses are assigned to the starting ward anyway and therefore return to their normal workplace after the transport.

During our interviews with hospital practitioners, we were told that the transporters do not have real depots, i.e., a rooms, but simply return to various places in the hospital complex where they can sit and wait between

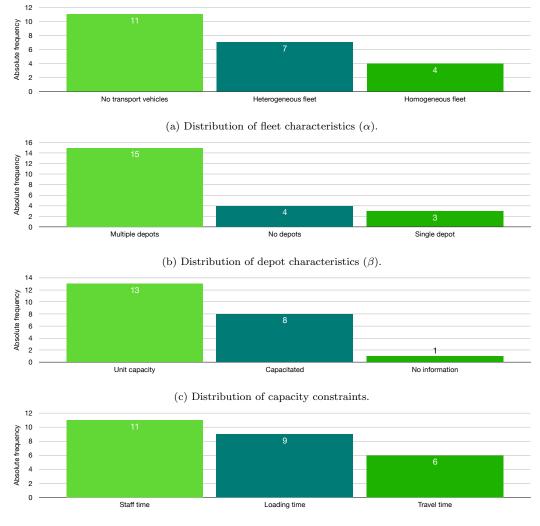

(d) Distribution of time-related constraints.

Figure 2: Absolute frequencies of different fleet characteristics, depot characteristics, capacity constraints, and time-related constraints in the examined papers.

transports. This indicates that the establishment of assembly points or depots in a hospital is not exactly planned, but that tactically useful and central waiting points with seating facilities, for example, are established as depots by the transporters. The use of multiple depots can also be advantageous in terms of minimizing walking distances and waiting times and, thus, lead to overall gains in efficiency of the patient transport process.

Figure 2c shows the distribution of capacity constraints. The majority of the models assume a unit capacity, which is mainly due to the dominance of vehicle-free transport. In addition, ambulances, which in some papers [27, 33, 36] also provide non-emergency patient transport in addition to emergency transport, have unit capacity. Capacitated problems are usually associated with a heterogeneous fleet, but vehicle-free problems are also modeled as capacitated problems. This is due to the fact that transport personnel can usually only push one bed or wheelchair at a time, but can accompany two walking patients simultaneously [15].

Figure 2d considers time-related constraints, where staff time constraints are most frequently considered, followed by loading time and travel time constraints. It should be noted, however, that time-related constraints are not exclusive, i.e., staff time constraints, loading time constraints, and travel time constraints may all be considered together in one model. For staff time constraints, it is noticeable that these are in 8 out of 11 cases considered in papers that incorporate uncertainties [23–25, 27, 31, 33, 36, 37]. A possible reason for this is that uncertainties in a model make it harder to adhere to working and break time restrictions, which makes the explicit consideration of staff time constraints more relevant. Loading times appear in the examined papers as times for the disinfection of ambulances [21, 24] or as times for preparation and follow-up work [26, 29, 30]. For problems with capacities strictly larger than the unit capacity, where several patients are transported and a loaded patient is not necessarily at their destination at the next stop. travel times are more important. For example, in the case of combined transports of several patients, the maximum travel time is sometimes limited by a multiple of the direct travel time [29].




Figure 3: Absolute frequencies of different objectives ( $\delta$ ) considered in the examined papers ordered as in the four-field notation (WT = waiting time, TT = travel time).

# 4.3. Objectives

Figure 3 shows the distribution of optimization objectives. Here, as already mentioned, cost minimization may comprise many different kinds of costs, some of which arise by assigning costs to constraint violations. The most important costs considered in the relevant literature are the total costs of transport [29, 36], the costs of the vehicles [35], and the personnel costs [13]. Concerning the optimization of waiting times, some papers minimize waiting times for patients [14, 21–24, 26–30, 34, 35], while others minimize vehicle waiting times [21, 23, 24, 26, 28–30, 35].

It can be seen that there are differences between waiting times and travel times with respect to the prioritization of patients and vehicles. For example, all of the 12 papers considering waiting times include waiting times for patients. A potential reason for this is that patients need to be monitored for safety during transport, so minimizing waiting times for patients not only improves the quality of service, but also saves human resources required for monitoring. Waiting times for vehicles also play an important role, but are only considered in 8 out of 12 papers modeling waiting times [21, 23, 24, 26, 28– 30, 35]. The consideration of vehicle waiting times is sometimes explained by the low availability of vehicles [24, 26, 29, 30].

When optimizing travel times, a different approach can be seen in the prioritization of patients and vehicles. In 11 out of 17 cases [14, 21, 23, 24, 26, 29–31, 33, 35, 36], the focus of travel time optimization is on vehicles, which is again motivated by the low availability of vehicles or the goal of using vehicles as efficiently as possible. This is underpinned by the fact that 8 out of the 17 papers minimizing travel times also try to minimize empty travel times of vehicles [20, 24, 26–28, 30, 35, 37]. The minimization of travel times for patients, which is considered in 9 out of the 17 papers [14, 21–




Figure 4: Absolute frequencies of different modeling and solution methods used in the examined papers. The term *Other heuristics* summarizes all heuristics that occur too infrequently to warrant a separate listing, while the term *Others* similarly summarizes all other methods occurring too infrequently.

24, 29, 30, 34, 35], is slightly less common in the examined papers with a travel time objective than the minimization of vehicle travel times. Reasons for this may be that travel times for transportation within hospitals are often considered irrelevant [15], as well as that many of the studied papers work with unit capacities, where a direct trip from origin to destination can be assumed and, thus, travel times for patients are fixed in models without uncertain travel times.

# 4.4. Modeling and solution methods


Figure 4 shows the distribution of different modeling and solution methods used in the examined papers. Note that these are not mutually exclusive, so it is possible that several methods are used in a single paper either independently or in combination. Most frequently, (mixed-) integer programming is used to model patient transport problems in the relevant papers. One advantage of (mixed-) integer programming for modeling is that it has interdisciplinary recognition and allows to represent complex details of an optimization problem in an exact way [38]. Other approaches include modeling a patient transport problem as a quadratic assignment problem [20] or as a job scheduling problem [15, 16].

Concerning solution methods, the examined papers often combine other methods with heuristics, especially with local search heuristics. The reasons for this are diverse. Firstly, heuristics offer the possibility of generating highquality initial solutions, which can reduce the computation time required by other solution methods such as (mixed-) integer programming solvers. Moreover, local search heuristics offer the possibility to improve existing solutions. Other papers utilize insertion approaches to solve the considered problem or to find partial solutions [23, 24, 29–31]. This offers an advantage regarding re-optimization, as arising requests can be quickly integrated into existing tours. One of the examined papers also uses clustering [35]. This is very well-suited to determining a pre-selection of potential requests for a route and, thus, save computation time.

#### 4.5. Uncertainty and uncertainty handling

With regard to models for patient transport problems, a wide range of uncertainties are conceivable, such as uncertain requests, uncertain travel times, uncertain availability of staff or vehicles, and many more. The importance of taking uncertainties into account is highlighted in some papers [16, 22, 28], which describe that their models have not made it into practical use due to a lack of consideration of uncertainties (the relationship between the inclusion of uncertainties and the level of practical implementation is considered in more detail in Section 5). It is remarkable, however, that, as illustrated in Figure 5a, almost half of the examined papers do not incorporate uncertainties into their models at all. As the figure shows, the most frequently considered kind of uncertainty is uncertain transport requests, which means that additional transport requests become known after the optimization process has already started. These requests, however, contain all relevant information once they become known, i.e., no uncertainty (e.g., regarding the associated travel time) remains about a request after it has been revealed. The paper by Turan et al. [26] states that a major reason for the increasing consideration of uncertain requests is the observation that a large proportion of transport requests are not communicated to the transport service as soon as they become known. Avoiding this delay could potentially allow more time for incorporating arriving requests in the existing transport plan. As can also be seen from Figure 5a, uncertain travel times are considered much less frequently than uncertain requests. A potential reason could be that the focus of the examined papers is mostly on transport within the hospital and, as stated in [15], routes within a hospital are often very short and therefore rather insignificant for optimization. Overall, the consideration of uncertainties means that models that are already hard to solve become even more complex.

Various approaches to handle the mentioned types of uncertainty are used in the examined literature. Figure 5b shows that re-optimization is the most frequently used method for dealing with uncertainties. The only exceptions

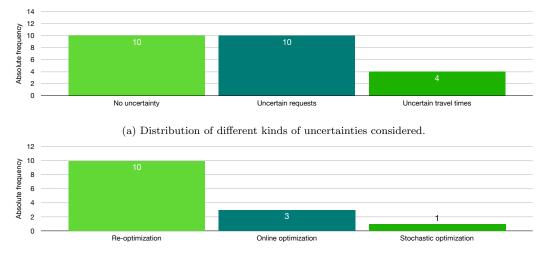

(b) Distribution of different methods used to deal with uncertainties.

Figure 5: Absolute frequencies of different kinds of uncertainties considered and uncertainty handling methods used in the examined papers.

are Nickel and Tenfelde [20], who use a combination of stochastic and online optimization, and Fiegl and Pontow [15], who also use an online optimization approach. In re-optimization, either the optimization process is re-started from scratch in order to find a new solution, or parts of the existing solution are re-optimized as soon as problem parameters, such as the set of requests, change. One reason for the frequent use of re-optimization as a strategy for dealing with uncertainty is that re-optimization can react flexibly to a constantly changing number of requests. Moreover, as in [23, 24, 31], reoptimization allows to integrate new requests quickly into existing solutions.

# 4.6. Data and level of real-world implementation

A real-world patient transport problem instance consists of various data. First of all, the pick-up and delivery locations and, if applicable, the locations of the depots should be specified. This can be done using coordinates or a distance matrix. If the problem instance is a problem with capacities or a heterogeneous fleet, the vehicle or transporter properties must also be specified, as well as the starting depots in the case of multi-depot approaches. Finally, the data for the requests must be provided. In the examined literature, a distinction is only made between real location data and real requests. Figure 6a shows that about half of the proposed models are tested with com-



(b) Distribution of the level of practical implementation achieved.

Figure 6: Absolute frequencies of the use of real data and the level of practical implementation achieved in the examined papers.

pletely real data. In contrast, the papers by Vancroonenburg et al. [31] and Nasir et al. [35] only use real hospital layouts or real location data. The reason for this is that plans are usually available for the hospital buildings, or distances outside hospitals can be easily determined using geological services [33]. None of the papers examined use real requests as its only piece of real data. The reason for this is that there are often no records of requests [20] and that the origin and the destination are part of the information that a request must contain, so using real request data usually implies the use of a real-world hospital layout.

It is also noticeable that, apart from [31], none of the examined papers provide the considered problem instances. Since the paper [31] works with real hospital data but artificially generated requests, this means that no benchmark instances consisting of completely real data are currently available for future research.

Moreover, as Figure 6b shows, except for [23], none of the developed models have been implemented in practice. The reasons for this stated in the papers range from performance issues to missing practice-relevant constraints to uncertainty about the cost-benefit aspect of integration in practice. A more detailed overview and categorization of the mentioned reasons for missing practical implementation is provided Section 5.

# 4.7. Cross Comparisons

We now investigate connections that result from cross comparisons between the different aspects analysed in the previous subsections.

First, we present findings concerning relationships associated with the modeling of transport capacity (see also Table 3). Here, it can be seen that, among the 13 papers that use unit capacity, only [14] includes maximum travel time constraints, while 5 out of the 8 papers that use capacities strictly larger than one include constraints on maximum travel times. This is because unit capacity models assume direct transport between origin and destination, which means optimizing travel times for patients is impossible. In models with larger capacities, however, longer tours involving simultaneous transport of several patients can be formed, which makes limiting patient travel times much more relevant.

Further modeling differences result from the area of application that the considered patient transport problem is intended to cover. If a model is intended to represent patient transport inside hospitals (15 of 22 papers), maximum travel times for patients are rarely considered (5 of 15 papers). On the one hand, this can be explained by the fact that unit capacity is often assumed for internal hospital transport (12 of 15 papers), which leads to a lower significance of travel times due to the resulting direct transport routes. On the other hand, it is pointed out in [15] that the distances / travel times considered for patient transport within a hospital are so marginal that they are of little relevance for optimization.

In models that exclusively model patient transport outside of hospital buildings (6 of 22 papers), transports are always assumed to be carried out with vehicles in the corresponding papers, and there is a higher interest in minimizing patient travel times and / or ensuring that maximum patient travel times are not exceeded [22, 29, 30, 35]. The reason for this is that capacities larger than one are considered, which results in tours involving several patient transports, so direct journeys between origin and destination can no longer be assumed for each patient. Another reason for minimizing travel times, especially vehicle travel times, is the additional cost of the vehicles that occurs during transport outside of hospitals buildings.

With regard to uncertainty modeling in patient transport problems, 11 of the 22 relevant papers consider uncertainties in the form of uncertain travel times or uncertain (dynamically occurring) requests, and 9 of these 11

papers use re-optimization approaches, i.e., the re-calculation or modification of overall or partial solutions, to deal with these uncertainties [21, 23–25, 27, 31, 33, 36, 37]. Moreover, it can be seen that models incorporating uncertain travel times or uncertain requests are more likely to have constraints on working hours and break times of staff (8 of 11 papers). This could be explained by the higher risk of working or break time violations that results from uncertain travel times or requests, which makes it more important to explicitly incorporate constraints that avoid these violations into the models.

Finally, we look at the different types of patient transport with respect to origin-destination pairs. It turns out that, with the exception of [22], none of the papers consider all three types of non-emergency patient transport (transports inside hospitals, transports between hospitals (transfers), and transports from home to hospital or hospital to home (discharges). In contrast, several of the examined papers consider transfers and discharges of patients together [27, 30, 33, 35, 36], in some cases also in combination with the transport of patients from accident locations to the hospital [27, 33, 36]. Finally, it is also noticeable that there is a connection between the transports considered and the use of real data. The papers dealing exclusively with patient transports within hospitals [13–16, 20, 21, 24, 26, 28, 31, 32, 34, 37] are less likely to use real data. One reason for this could be the practice of registering transports by telephone in some hospitals, which does not include data storage due to the lack of digitization [20, 23].

# 5. Research gaps and agenda

This section identifies research gaps resulting from our literature analysis derives an agenda for future research. In order to optimally align our findings with requirements from hospital practice, we conducted semi-structured interviews with people responsible for the organization of patient transport in several European hospitals. Besides specific questions that resulted from our literature analysis, we also asked open questions regarding the organization of patient transport, occurring problems, and possible potential for improvement, so that our interview partners had the opportunity to also mention aspects not considered by us or the existing literature.

In the following, we first provide a short description of the organization of patient transport that is currently in place at our partner hospitals (Subsection 5.1). The following subsections then compare the research gaps and results of our literature analysis with the statements made during the interviews in order to obtain a comprehensive research agenda. In particular, we identify important aspects of the practical problem that are currently missing from the patient transport models presented in the literature (Subsection 5.2), research gaps related to the integration of patient transport with other planning problems in hospitals (Subsection 5.3), problems related to data availability (Subsection 5.4), and possible reasons for the low number of successful practical implementations of existing patient transport models and algorithms (Subsection 5.5).

#### 5.1. Current situation at partner hospitals

In some cases, patient transport at our partner hospitals is still organized without any software support. This means that, every morning, a roster is manually created in which each transporter is assigned a specific task, for example all transports to and from the radiology department. This roster is provided to the relevant departments of the hospital along with the transporters' phone numbers. To submit a transport request, the initiating person (e.g., a nurse on a ward) calls the transporter assigned to this specific transport task and registers the transport by telephone. Transports performed by medical staff (e.g., nurses) are initiated similarly via phone calls.

The majority of our partner hospitals, however, use software that is directly connected to the hospital information system and coordinates patient transportation. In one case, in addition to patient transport, the software also coordinates the transport of materials, medicines, and blood samples. In order to initiate a patient transport to be performed by a transporter via the software, the department or ward from which the transport originates submits a transport request in the software, which is then automatically forwarded by the system to one or several transporters. The transporters carry a smartphone with them on which a dedicated app informs them about incoming transport requests, which they can then accept directly via the app. In the case of one practice partner, to carry out a transport, a transporter has to scan QR codes at the pick-up location and on the patient's wristband when the transport starts, and afterwards at the drop-off location and again on the patient's wristband in order to allow the software to register the pickup and delivery times and keep track of the patient's location. In the case of another partner hospital, the patient is identified by a five-point system at the start of a transport, which includes checking the patient's location on the ward plan and on the room allocation plan, as well as checking the patient's number, name, and date of birth. After the transport, the successful delivery is then confirmed via the app. In all cases, however, the software and smartphone app do not include any assistance for the routing of the transporters, and the decision about which transporters are notified of an incoming transport request is based only on a very basic algorithm that tries to balance the number of requests across transporters during periods of low transport demand. Moreover, the software systems only coordinate transports carried out by patient transporters, while transports to be performed by medical personnel, such as nurses, are handled manually, similar to the phone call-based process described above.

#### 5.2. Missing aspects in patient transport

This subsection highlights important aspects of patient transport pointed out by our practice partners that are currently missing from or not sufficiently considered in the models from the literature and/or the practical processes currently used for organizing patient transport.

One important aspect mentioned by all of our practice partners is considering the workload and ergonomic burden of the transport staff – in particular, the dedicated patient transporters. Due to personnel shortages, minimizing the workload of these employees and distributing it fairly is very according to all of our interview partners. This aspect, however, is not sufficiently considered so far either in practice or in the literature.

For example, the practice partners who still coordinate patient transport without any software assistance state that their current system does not allow for any systematic consideration or balancing of individual workloads of transporters, even though the employees of the transport service often show a large number of physical symptoms resulting from an excessive workload and ergonomic burden, which often leads to a large number of sick days and, in turn, to an even larger workload for the remaining staff. To tackle this problem, both better planning that takes individual workloads into account and the use of pushing aids for patient transport are mentioned as very desirable by most of the practical partners. One of the partner hospitals already describes using a complete fleet of pushing aids (so-called bed movers). These devices make transport more comfortable for the transporters and reduce their ergonomic burden because the transporters can travel on them. In addition, this partner hospital uses an interesting workload-balancing strategy based on rotating responsibilities. Here, the transport staff belong to a logistics department that is responsible for material transport, patient transport, as well as bed cleaning. The work in bed cleaning is described as being physically easier than in patient transport, even though pushing aids are used. During busy periods, all logistics department staff work in patient transport; during periods with less workload, the employees switch to bed cleaning according to a predefined roster. The roster rotates so that each employee is assigned to a different responsibility each day in order to balance the workload. Another practice partner who uses software to coordinate the patient transporters states that the software already balances the number of transports to be performed between the transporters during periods of low demand. However, both approaches do not yet take into account the specific workload and ergonomic strain resulting from individual transport requests. Apart from these basic balancing methods, no approaches for minimizing the workload (e.g., by suggesting transport tours that minimize transport distances or times) are currently in place.

We believe that this feedback from practice demonstrates the high relevance of including transport staff workload and ergonomic burden in patient transport models. In the patient transport literature, however, this is currently only considered by von Elmbach et al. [16, 32]. They investigate the reasons and factors that lead to ergonomic stress on transporters in order to minimize the maximum ergonomic burden. In doing so, they look at an increasingly important aspect for the sustainable use of transport and nursing staff in hospitals, who are exposed to rising workloads due to staff shortages and an increasing demand for health care. Future research should therefore put a larger emphasis on both ergonomic aspects of patient transport and workload distribution among the transport staff, which could also contribute to breaking the downward spiral between staff shortages and overloading of available employees.

Another aspect of patient transport that is essential in practice, as described by our practice partners, are different qualification levels of transport staff required for different kinds of patient transport in hospitals. On the one hand, there is transport by medically trained personnel who must have several years of medical training. On the other hand, there is transport by medically untrained transporters. Medical-trained personnel are authorized to transport patients under the influence of medication. Examples of these transports are trips to and from the operating room, where patients are often already or still under the influence of medication. In contrast, the medically untrained transporters can only carry out less risky transports, such as transports to radiology or other examinations. Therefore, the required qualifications for patient transports are an essential constraint to be considered in practice, as is confirmed by all of our partner hospitals. For transports to and from the operating room, for example, the different qualification levels are often taken into account by administering medication for surgeries on site, so that patients can be transported to the operating room by medically untrained staff. After surgery, all patients are then divided into low-risk and high-risk patients, so that the untrained transporters can transport the low-risk patients, while all other transports must be carried out by medical personnel of the destination wards. These two kinds of transports, however, are not yet planned jointly in a centralized manner since, even in the partner hospital that already uses software to coordinate the patient transports performed by medically untrained transporters, all transports performed by medical personnel are still planned separately without any software support. In the literature, there also seems to be a large gap with respect to the consideration of qualification levels of transport staff, which are so far only considered in [23, 31]. Therefore, including qualification levels and the joint planning of medically-trained and untrained transport staff in patient transport models represents an important topic for future research with a large practical relevance.

A further relevant but not yet sufficiently considered aspect of patient transport is to integrate transports of material such as bed sheets, blood samples, medication, or bandages. While all of our interview partners acknowledge the potential of joint patient and material transports by patient transporters, this is only very rarely implemented in our partner hospitals so far. One of our partner hospitals, who does not use software for patient transport scheduling, states that the integration of material transports into patient transports is not currently practiced and is not planned for the future. This has mainly administrative reasons resulting from different cost centers for patient transport and material transport that require a strict separation of the two kinds of transports. While another partner hospital already has a joint logistics department that handles patient transport as well as material transport, they nevertheless perform the two types of transports separately. Other partner hospitals confirm that a few transports of materials are already carried out by untrained transporters mainly responsible for patient transport and that further material transport tasks, such as transports of surgical instruments to and from the sterilization department, are planned to be integrated with patient transports in the future. The challenge here is the need for additional capacity of the patient transport service. Moreover, one of our partner hospitals states that transports of wheelchairs back to their desired storage locations are not yet considered during patient transport planning, which results in a lack of wheelchairs when picking up patients or the parking of wheelchairs in inconvenient places.

In summary, the integration of material transport and the transport of devices such as wheelchairs into patient transport is an important aspect in practice that offers large potential for better staff utilization and cost savings. In the patient transport literature, however, only a few of the examined papers consider this aspect [15, 21, 22, 31], and no results are available on the practical implementation of models for integrated patient and material transport.

## 5.3. Integration with other planning problems

We now consider the integration of patient transport with other planning problems in hospitals. It is well-known that patients must be present for a large part of the activities performed in a hospital. As a consequence delayed arrivals of patients for examination, surgery, or other procedures can lead to significant disruptions in day-to-day operations. It is, therefore, surprising that, as also observed in [39], there are only few papers that deal with the integration of patient transport with other planning problems in hospitals.

In our literature search, we found two papers that consider the integration of patient transport with other planning problems in hospitals [20, 28]. However, the integration into hospital layout planning considered in [20] cannot be assigned to the operational planning and optimization of daily hospital activities. Thus, the paper by Schmid and Doerner [28] is the only paper in our literature search that integrates patient transport with other operational planning problems in hospitals – in this case, operating room scheduling. The observation that patient transport is first integrated with operating room scheduling is not surprising since a large part of the integrated planning in hospitals is aimed at optimizing the operating room, which represents the largest cost an revenue driver in hospitals [39]. However, since patient transport interacts with a large variety of planning problems in hospitals, it should ideally be integrated with all of these problems arising in many different departments. Therefore, we conclude that, in addition to further research on patient transport in itself, integration with other operational planning problems in hospitals also represents an important area for future research.

Moreover, as already remarked in Section 4.7, there is no work that examines patient transport in hospitals, patient transport between hospitals, and the transport of patients after discharge jointly in one model. As these different kinds of patient transports clearly interact and sometimes involve the same staff, this represents another research gap and also a practical challenge. One of the hospitals among our practice partners already using software for patient transport planning explains that some of the external patient transports mentioned above could be integrated into the software tool they use. Still, technical and management interfaces to external partners such as ambulance services and other hospitals are missing. Another partner hospital states that patients are not usually discharged directly from the regular wards, but that most patients are transferred to a dedicated rehabilitation ward within the hospital complex after their stationary treatment. The discharge is then coordinated on the rehabilitation ward, which again means that no integration of discharges and patient transports within the hospital takes place. Therefore, future research should further investigate the benefits of more integrated planning of patient transportation inside and outside of the hospital.

# 5.4. Data availability

A major research gap discovered during our literature analysis on patient transport in hospitals is the availability of data for future research. While most papers test their developed models with real data including real hospital layouts and distance matrices as well as real transport requests, others only use real layout data [31, 35]. A significant gap, however, is that, apart from [31], who only use real layout data, none of the examined papers make their problem instances publicly available. Therefore, no complete real-world test instances are accessible for future research, which hinders the both design of new methods as well as comparisons between different modeling approaches and algorithms for patient transport problems.

# 5.5. Practical implementation

Finally, potential reasons that can be found in the literature are given as to why, apart from [23], none of the methods developed in the relevant literature on patient transport have been implemented in ever-day hospital practice.

Some of the papers state that no or only incomplete real data was available at the time of modeling [20, 31, 35]. The most common reason for missing practical implementation mentioned, however, is a lack of uncertainty handling [16, 22, 24, 28, 32]. Uncertainty handling, however, is very important since, as the papers also indicate, poor communication with regard to patient transport is normal, which often leads to uncertainty and incomplete information during patient transport planning. For instance, it is mentioned that upcoming transports are often not requested as soon as they become known, which would give some time for planning, but usually just before the desired pick-up time [24]. This is also corroborated by the statements of our practice partners not using any software for patient transport planning, who have established the workflow of registering transports just in time via phone calls. Other reasons for missing or unsuccessful practical implementation mentioned in the literature are that hospital information systems are not considered suitable for the integration of the developed models [13], not all desired constraints and special features could be modeled [22, 32], the solvable instances are too small for practical use, or the optimization takes too long to run under real conditions [21, 26, 29].

All of these reasons have so far hindered practical implementation of patient transport models, which in turn results in a lack of experience with the cost-benefit ratio of implementation. This, in turn, means that newly developed models do not reach practical implementation due to uncertainty about the cost-benefit ratio [36]. In addition, the high costs of commercial mixedinteger programming solvers are a deterrent for many hospitals [33]. Overall, even though uncertainties are already at least partly considered in various papers on patient transport, it seems that better uncertainty modeling and handling still represents a promising area of research that is integral in order to enable the practical implementation of the developed models in the future. Moreover, taking all relevant practical constraints and the existing hospital information systems into account in order to integrate the developed models with these systems could help to foster the practical uptake of developed approaches.

# 6. Conclusion

Motivated by the central role of patient transport in day-to-day hospital operations resulting from to the fact that most activities require the presence of the patient, this paper provides an overview of the existing Operations Research literature on patient transport in hospitals. Due to the different requirements of hospitals and the large variety of organisational units between which patients have to be transported in various situations, no general patient transport problem can be defined, and many different variations of patient transport problems are considered in the literature. Therefore, a four-field notation for patient transport problems is developed in this review, which is inspired by the well-known three-field notation for scheduling problems. This four-field notation, which can easily be extended in the future (e.g., by adding further relevant constraints or objectives), provides a concise representation of the main distinguishing features of the patient transport problems considered in the literature, and all examined papers on patient transport in hospitals are categorized using this notation.

By analyzing the relevant literature and comparing the existing approaches with insights obtained from interviews with hospital practitioners, we identify important research gaps and directions for future work in the area of hospital patient transport. Given the fact that, apart from Opti-Trans<sup>®</sup> [23] (discontinued in 2021 [40]), none of the methods developed in the literature have been successfully implemented in practice, we particularly focus on possible ways of fostering the practical uptake of developed approaches by integrating central aspects of patient transport problems arising in practice. These directions include a better consideration of the workload and ergonomic burden of transport staff, taking different qualification requirements of transport requests into account, and at least partly combining patient transports with transports of material such as bed sheets, blood samples, medication, or bandages. Moreover, obstacles for practical implementation mentioned in the literature such as a lack of uncertainty handling in the developed models, missing integration with hospital information systems, or excessively long computation times need to be overcome in the future in order to increase the practical relevance and implementation of patient transport research.

Moreover, the already mentioned fact that patients need to be present for most tasks performed in a hospital and that delays in patient transport may therefore cause costly downtime and disruptions of operations in many different departments underlines the importance of integrating patient transport with other operational planning problems in hospitals. This has so far only been considered explicitly in [28], where patient transport is integrated with operating room scheduling. Thus, the integration of patient transport with other operational planning problems represents an important area for future research. A related point is that even though patient transports do not only take place inside hospitals, but also between hospitals and other care facilities (transfers) and from hospitals to the patients' homes (discharges), none of the examined studies consider all of these transports jointly, even thought they at least partly involve the same staff.

Finally, it should be mentioned that a large proportion of the examined papers state that they have tested their models on fully or partially real data. Apart from [31], however, none of the papers make generated or real instances of the developed patient transport problems publicly available for future research. Thus, creating an instance generator for different patient transport problems based on the four-field notation introduced in this review could be useful in order to foster future research on patient transport in hospitals and enable more direct comparisons between different modeling and solution approaches.

# Statements and declarations

#### Declarations of interest

This research was partially funded by the Deutsche Forschungsgemeinschaft (DFG, German Research Foundation) – Project number 443158418.

#### Author contributions

**Tom Lorenz Klein:** Validation, Formal Analysis, Investigation, Data Curation, Writing - Original Draft, Writing - Review and Editing, Visualization, Project Administration. **Clemens Thielen:** Conceptualization, Methodology, Writing - Review and Editing, Supervision, Project Administration.

# References

- [1] World Health Organization (WHO), The world health report 2000
  Health systems: Improving performance, https://apps.who.int/ iris/handle/10665/42281 (2000).
- [2] OECD/European Union, Health at a glance: Europe 2022: State of health in the EU cycle, https://doi.org/10.1787/507433b0-en (2022).
- [3] A. Rais, A. Viana, Operations research in healthcare: A survey, International Transactions in Operational Research 18 (1) (2011) 1–31.
- [4] Statistisches Bundesamt Deutschland, Projektion des Personalbedarfs in Pflegeberufen bis 2025, https://www.destatis. de/DE/Methoden/WISTA-Wirtschaft-und-Statistik/2010/11/ projektion-personalbedarf-112010.pdf?\_\_blob=publicationFile (2010).
- [5] Deutsches Pflegehilfswerk e.V. i.G., Personalmangel in der Pflege verschärft sich weiter, https://www.pflegenot-deutschland.de/ct/ personalmangel-pflege/ (2024).
- [6] PwC Deutschland, Fachkräftemangel im deutschen Gesundheitswesen 2022, https://www.pwc.de/de/gesundheitswesen-und-pharma/ fachkraeftemangel-im-deutschen-gesundheitswesen-2022.html (2022).
- [7] J. Drupsteen, T. van der Vaart, D. P. van Donk, Integrative practices in hospitals and their impact on patient flow, International Journal of Operations & Production Management 33 (7) (2013) 912–933.
- [8] H. Otto, Responsibilities in the high-cost area of operating theatres, HealthManagement 9 (4) (2007) 1–3.
- [9] C. Norman, First steps towards patient safety and reduced operating theatres and hoscosts in https://www.openaccessgovernment.org/ pitals, patient-safety-reduced-costs-operating-theatres-hospitals/ 154978/ (2023).

- [10] U. Beckmann, D. M. Gillies, S. M. Berenholtz, A. W. Wu, P. Pronovost, Incidents relating to the intra-hospital transfer of critically ill patients, Intensive Care Medicine 30 (2004) 1579–1585.
- [11] R. S. Ulrich, X. Zhu, Medical complications of intra-hospital patient transports: Implications for architectural design and research, Health Environments Research & Design Journal 1 (1) (2005) 31–34.
- [12] C. Wels-Maug, Operating theatres efficiency impacts on quality care, https://healthcare-in-europe.com/en/news/ operating-theatres-efficiency-impacts-on-quality-care.html (2016).
- [13] S. Séguin, Y. Villeneuve, C.-H. Blouin-Delisle, Improving patient transportation in hospitals using a mixed-integer programming model, Operations Research for Health Care 23 (2019) 100202.
- [14] T. Maka, C. Kasemset, T. Phongthiya, Intra-hospital patient transportation system planning using bi-level decision model, LogForum 18 (2) (2022) 237–246.
- [15] C. Fiegl, C. Pontow, Online scheduling of pick-up and delivery tasks in hospitals, Journal of Biomedical Informatics 42 (4) (2009) 624–632.
- [16] A. F. von Elmbach, N. Boysen, D. Briskorn, S. Mothes, Scheduling pick-up and delivery jobs in a hospital to level ergonomic stress, IIE Transactions on Healthcare Systems Engineering 5 (1) (2015) 42–53.
- [17] P. Toth, D. Vigo (Eds.), The Vehicle Routing Problem, Society for Industrial and Applied Mathematics, 2002.
- [18] J.-F. Cordeau, G. Laporte, The dial-a-ride problem: models and algorithms, Annals of Operations Research 153 (1) (2007) 29–46.
- [19] R. Graham, E. Lawler, J. Lenstra, A. Rinnooy Kan, Optimization and approximation in deterministic sequencing and scheduling: a survey, Annals of Discrete Mathematics 5 (1979) 287–336.
- [20] S. Nickel, D. Tenfelde, Planning and organisation in the hospital, in: Operations Research Proceedings 1999: Selected Papers of the Symposium on Operations Research, Springer, 2000, pp. 548–553.

- [21] J. Kallrath, Vehicle routing problems in hospital transportation. I models and solution approaches, in: Online Storage Systems and Transportation Problems with Applications, Vol. 91 of Applied Optimization, Springer, 2005, Ch. 4, pp. 57–120.
- [22] E. Melachrinoudis, A. B. Ilhan, H. Min, A dial-a-ride problem for client transportation in a health-care organization, Computers & Operations Research 37 (3) (2007) 742–759.
- [23] T. Hanne, T. Melo, S. Nickel, Bringing robustness to patient flow management through optimized patient transports in hospitals, Interfaces 39 (3) (2009) 241–255.
- [24] A. Beaudry, G. Laporte, T. Melo, S. Nickel, Dynamic transportation of patients in hospitals, OR Spectrum 32 (1) (2010) 77–107.
- [25] Y. Kergosien, C. Lenté, D. Piton, J.-C. Billaut, A tabu search heuristic for a dynamic transportation problem of patients between care units, Preprint, https://hal.science/hal-00488270 (2010).
- [26] B. Turan, V. Schmidt, K. F. Doerner, Models for intra-hospital patient routing, in: Proceedings of the 3rd IEEE International Symposium on Logistics and Industrial Informatics, 2011, pp. 51–60.
- [27] Y. Kergosien, M. Gendreau, A. Ruiz, P. Soriano, Managing a fleet of ambulances to respond to emergency and transfer patient transportation demands, in: A. Matta, J. Li, E. Sahin, E. Lanzarone, J. Fowler (Eds.), Proceedings of the International Conference on Health Care Systems Engineering (HCSE), Vol. 61 of Springer Proceedings in Mathematics & Statistics, Springer, 2014, pp. 424–439.
- [28] V. Schmid, K. F. Doerner, Examination and operating room scheduling including optimization of intrahospital routing, Transportation Science 48 (1) (2014) 59–77.
- [29] Z. Zhang, M. Liu, A. Lim, A memetic algorithm for the patient transportation problem, Omega 54 (2015) 60–71.
- [30] P. Detti, F. Papalini, G. Z. M. de Lara, A multi-depot dial-a-ride problem with heterogeneous vehicles and compatibility constraints in healthcare, Omega 70 (2017) 1–14.

- [31] W. Vancroonenburg, E. Esprit, P. Smet, G. Vanden Berghe, Optimizing internal logistic flows in hospitals by dynamic pick-up and delivery models, in: Proceedings of the 11th International Conference on the Practice and Theory of Automated Timetabling (PATAT), 2016, pp. 371–383.
- [32] A. F. von Elmbach, A. Scholl, R. Walter, Minimizing the maximal ergonomic burden in intra-hospital patient transportation, European Journal of Operational Research 276 (3) (2019) 840–854.
- [33] P. L. van den Berg, J. T. van Essen, Scheduling non-urgent patient transportation while maximizing emergency coverage, Transportation Science 53 (2) (2019) 492–509.
- [34] L. Xiao, L. Zhen, G. Laporte, R. Baldacci, C. Wang, A column generation-based heuristic for a rehabilitation patient scheduling and routing problem, Computers & Operations Research 148 (1) (2022) 105970.
- [35] J. A. Nasir, Y.-H. Kuo, R. Cheng, Clustering-based iterative heuristic framework for a non-emergency patients transportation problem, Journal of Transport & Health 26 (2022) 101411.
- [36] Y. Kergosien, V. Bélanger, A. Ruiz, A capacity sharing approach to manage jointly transportation and emergency fleets at EMS organisations, International Journal of Production Research 61 (3) (2023) 880– 897.
- [37] A. Bärmann, A. Marting, A. Müller, D. Weninger, A column generation approach for the lexicographic optimization of intra-hospital transports, OR Spectrum (online first) (2023) 1–50. doi:10.1007/ s00291-023-00741-z.
- [38] C. A. Floudas, X. Lin, Mixed integer linear programming in process scheduling: Modeling, algorithms, and applications, Annals of Operations Research 139 (2005) 131–162.
- [39] S. Rachuba, M. Reuter-Oppermann, C. Thielen, Integrated planning in hospitals: A review, https://arxiv.org/abs/2307.05258 (2023).
- [40] SIEDA GmbH, Opti-TRANS: Patient and Material Transport Optimization Software, https://www.sieda.com/dienstplan/ opti-trans/ (2024).