

ASSESSING GLOBAL CRABBING SCHEME FEASIBILITY FOR ELECTRON-ION COLLIDER*

Derong Xu[†], Yun Luo, Daniel Marx, Christoph Montag, Brookhaven National Laboratory, Upton, NY, USA
Yue Hao, Michigan State University, East Lansing, MI, USA

Abstract

The Electron-Ion Collider (EIC) plans to utilize the local crabbing crossing scheme. This paper explores the feasibility of adopting a single crab cavity with adjusted voltage, inspired by the successful global crabbing scheme in KEKB, to restore effective head-on collisions. Using weak-strong simulations, the study assesses the potential of this global crabbing scheme for the EIC while emphasizing the need for adiabatic cavity ramping to prevent luminosity loss. Additionally, the research outlines potential risks associated with beam dynamics in implementing this scheme.

INTRODUCTION

A crab cavity is a specialized type of radio-frequency (RF) cavity designed to deliver a time-dependent electromagnetic transverse kick to particle bunches. In colliders, this transverse kick tilts the bunches at the interaction point (IP), ensuring that beams from two storage rings collide in a head-on manner. This method, known as the crab crossing scheme [1], compensates for the geometric luminosity loss resulting from a large crossing angle, thereby significantly enhancing the collider's luminosity and overall performance.

The crab crossing scheme, along with the concept of crab cavities, was initially introduced for linear colliders [2] and subsequently adapted for use in circular colliders [3]. This scheme was first successfully implemented at the KEKB-factory [4] (High Energy Accelerator Research Organization), where a world record luminosity of $2.1 \times 10^{34} \text{ cm}^{-2} \text{ s}^{-1}$ was obtained. Additionally, the experiment demonstrating crabbing with high energy protons was successfully conducted at CERN's Super Proton Synchrotron (SPS) [5]. Many future particle colliders, including the High Luminosity Large Hadron Collider (HL-LHC) [6] and the Electron-Ion Collider (EIC) [7], have incorporated the crab crossing scheme to meet their luminosity objectives.

The EIC, to be constructed at Brookhaven National Laboratory (BNL), is designed to collide polarized high-energy electron beams and hadron beams. It aims to achieve luminosities up to $10^{34} \text{ cm}^{-2} \text{ s}^{-1}$ within a center-of-mass energy range of 29 – 140 GeV. The EIC will feature two storage rings: the Hadron Storage Ring (HSR) and the Electron Storage Ring (ESR), both of which will be accommodated within the existing tunnel of the Relativistic Heavy Ion Collider (RHIC). A distinctive feature of the EIC is the implementation of crabbing for both electron and hadron beams.

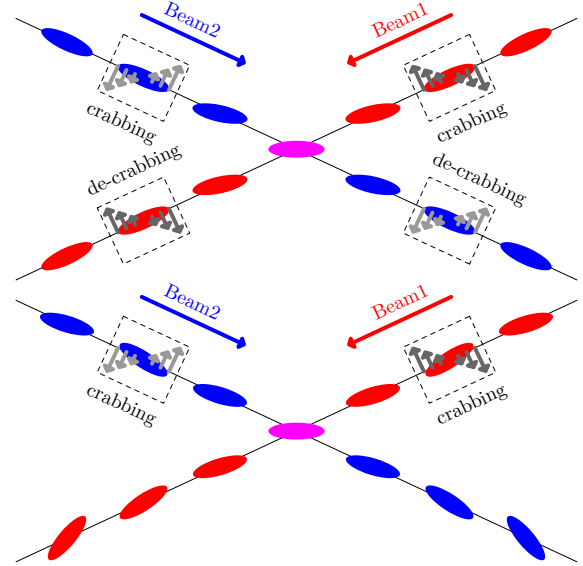


Figure 1: Schematic of the crab crossing scheme: top (local), bottom (global).

GLOBAL VS LOCAL CRABBING

There are two distinct crab crossing schemes: a local scheme and a global scheme. Figure 1 illustrates the distinctions between these crab crossing schemes.

In the local scheme, a pair of crab cavity sections are strategically positioned: one upstream and one downstream of the IP. The upstream crab cavity induces a tilt in the bunch, which is subsequently cancelled by the downstream crab cavity. Consequently, the bunch is only tilted within these crab cavities, resulting in no tilt beyond this specific area.

Conversely, the global scheme employs crab cavities located at one specific point in the accelerator. The bunch tilt is never cancelled, but evolves throughout the entire ring, intertwining the horizontal and longitudinal dynamics.

The concept of crab dispersion is introduced to quantify the bunch tilt effect induced by the crab cavities [8]. In both the local and global schemes, achieving an effective head-on collision necessitates specific crab dispersion at the IP. This required crab dispersion can be mathematically represented as follows:

$$\zeta^* = (\theta_c, 0) \quad (1)$$

where θ_c is the half crossing angle. To meet the condition specified in Eq. (1), two adjustment mechanisms, or “knobs”, are essential.

In the local scheme, the available knobs are the upstream and downstream crab cavity voltages. Two more knobs are

* Work supported by Brookhaven Science Associates, LLC under Contract No. DE-SC0012704 with the U.S. Department of Energy

[†] dxu@bnl.gov

needed to cancel out the crab dispersion.

$$|V_{b,a}| = \frac{cE}{2\pi f_{b,a} \sqrt{\beta^*} \beta_{b,a}} \theta_c \quad (2)$$

$$\Psi_b = \frac{\pi}{2} \bmod \pi, \quad \Psi_a = \frac{\pi}{2} \bmod \pi$$

where the subscript b refers to parameters associated with the crab cavity positioned before the IP, while a denotes parameters for the cavity located after the IP. The variable V is the required crab cavity voltage, c speed of the light, E the particle energy, f the crab cavity frequency, while β^* and $\beta_{b,a}$ refer to the beta functions at the IP and at the respective crab cavity locations. Ψ_b (Ψ_a) indicates the phase advance needed from the crab cavity (IP) and the IP (crab cavity).

In the global scheme, control over the beam dynamics is achieved using two primary variables: the crab cavity voltage and the phase advance between the crab cavity and the IP. The equations defining these control parameters are:

$$|V_c| = \frac{cE}{2\pi f_c \sqrt{\beta^*} \beta_c} \cdot 2\theta_c \sin(\pi\nu) \quad (3)$$

$$\Psi_c = \pi\nu \bmod \pi$$

where ν is the tune in the crabbing plane when the crab cavities are turned off and in the absence of beam-beam interactions.

KEKB was the world's first collider to use a crab crossing scheme, choosing the global method [9]. For the HL-LHC, both local and global schemes were considered [10], but the global scheme did not fit LHC's varied crossing angles at IPs. The HL-LHC upgrade thus adopted the local scheme for better performance and machine protection [11]. The EIC will also use the local scheme from the start, but revisiting the global scheme presents an opportunity to explore alternative strategies.

GLOBAL CRABBING IN HSR

In the case of the ESR, the global crabbing scheme has been ruled out. The latest working point for the ESR has tunes set to $(0.08, 0.14, -0.069)$ based on the beam-beam study and polarization requirement [12–14]. The negative sign signifies that, in the longitudinal phase space, particles rotate in a direction opposite to that in the horizontal or vertical phase space. Because ν_x is very close to ν_z , even a minor crabbing leakage can cause instability in the horizontal plane [8]. To completely eliminate crabbing leakage, the downstream crab cavity is positioned further away from the IP, ensuring that the phase advance between the upstream and downstream crab cavities is precisely 2π . This approach has been implemented in the design of the ESR lattice, as documented in [15].

For the HSR, the working point is set to $(0.228, 0.210, -0.010)$ with the transverse tunes significantly distanced from the longitudinal tune. This separation enables the implementation of the global crabbing scheme within the HSR.

We use a custom weak-strong code to check the feasibility of a global crabbing scheme in the HSR. In the simulation, the strong electron beam remains a rigid Gaussian distribution, and is cut into multiple slices. The weak proton bunches are simulated by a number of macro particles. A second-order harmonic crab cavity is used [16]. The one-turn map at IP is represented by the linear betatron map. The beam-beam kick is calculated by the Bassetti and Erskine formula [17].

Figure 2 presents a comparison of the results from weak-strong simulations. The blue and orange curves illustrate the outcomes for the local and global crabbing schemes, respectively, with crab cavity voltages adjusted in accordance with Equations (2-3). The blue curve serves as a benchmark for comparison. In the case of the orange curve, the horizontal dimension significantly increases upon reaching its “equilibrium”, and the growth rate of the vertical dimension is notably quicker. This phenomenon is attributed to the beam's initial Gaussian distribution and the absence of horizontal-longitudinal coupling, leading to a beam distribution that does not align with the lattice configuration.

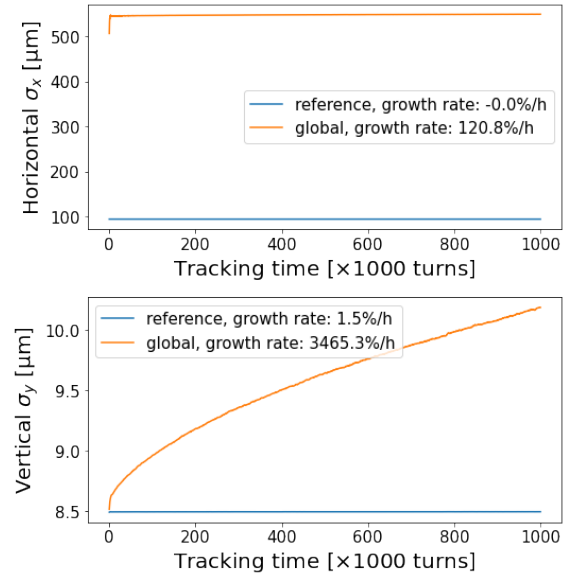


Figure 2: Comparison of weak-strong simulations for local and global crabbing schemes: horizontal beam size evolution (top), vertical beam size evolution (bottom).

To validate the effects of the initial mismatched beam distribution, Figure 3 presents the tracking outcomes when the initial beam is aligned with the lattice. This adjustment leads to a diminished horizontal beam size and a reduction in vertical expansion, as opposed to Fig. 2. Besides the initial beam distribution, the nonzero longitudinal tune also lead to linear synchro-betatron coupling when the crab cavity is turned on, as detailed in the study [8]. A potential strategy involves altering the momentum dispersion at the IP to completely decouple the linear one-turn map in the head-on frame. As shown in Fig. 3, the green curve shows much slower growth in vertical plane compared with the orange curve.

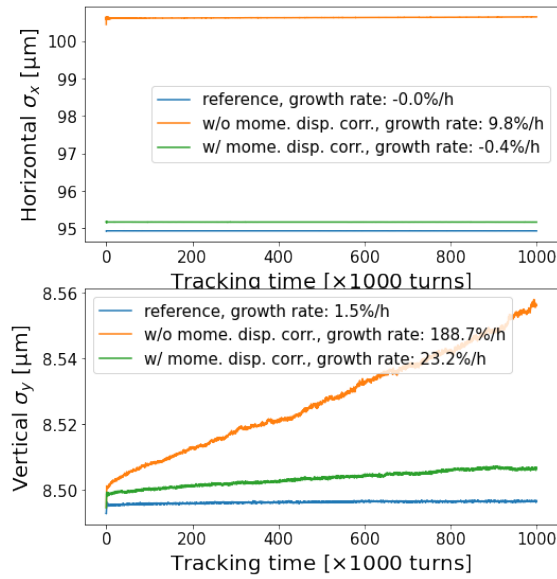


Figure 3: Tracking with initial matched beam distribution: horizontal beam size evolution (top), vertical beam size evolution (bottom). For the orange curve, momentum dispersion has been optimized to ensure complete decoupling of the linear one-turn map in the head-on frame, separating transverse and longitudinal planes.

To create an initial matched beam distribution, one effective method is to gradually increase the crab cavity’s voltage. Initially, the injected beam is perfectly matched to the lattice configuration when the crab cavities are deactivated. Subsequently, the voltage of the crab cavity is incrementally raised to its intended design values. It’s important to note that during this gradual ramping process of the crab cavity, no beam-beam interactions occur, allowing the beam distribution to adapt smoothly. Once the voltage ramping is complete, collisions are initiated. The effectiveness of this method is demonstrated in Figure 4, which displays simulation outcomes when the crab cavity’s voltage is methodically ramped up across 1000 turns. Notably, the orange curve in this figure mirrors the vertical growth rate seen in the green curve of Fig. 3, suggesting that adiabatic ramping effectively achieves a matched beam distribution.

DISCUSSION

It should be emphasized that, although the initial beam aligns with the lattice and the momentum dispersion is finely tuned at the IP, vertical growth remains an issue when compared to the reference curve, as illustrated in both Fig.3 and Fig.4. In the design of the HSR, the absence of efficient cooling techniques necessitates minimizing vertical growth to ensure an adequate luminosity lifetime. From this perspective, the global crabbing scheme does not reach the level of performance attainable with the local crabbing scheme.

The primary incentive for adopting the global scheme is the potential for cost reduction associated with crab cavities. In contrast to electron storage rings, hadron beams

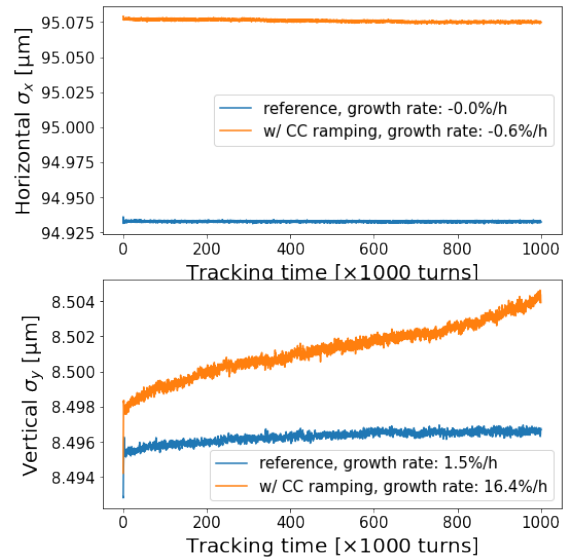


Figure 4: Tracking with the crab cavity voltage ramped over 1000 turns: horizontal beam size evolution (top), vertical beam size evolution (bottom).

exhibit significantly higher rigidity, necessitating the use of multiple cavities to achieve an effective crab kick within the hadron storage ring. The quantity of crab cavities required is directly proportional to the voltage needed. An examination of the formula presented in Eq. (3) reveals that the requisite voltage is proportional to $2 \sin(\pi\nu)$. Applying this to the horizontal tune $\nu_x = 0.228$ yields a value of 1.3. Consequently, the reduction in voltage – or equivalently, the number of crab cavities – is approximately 35%. However, when considering the second-order harmonic crab cavities, the cost savings are not as substantial as those observed in the KEKB project.

The marginal cost savings offered by the global crabbing scheme are outweighed by the introduction of synchrotron coupling throughout the ring, which in turn presents numerous dynamic challenges, including issues related to dynamic aperture, intra-beam scattering, and collimation, among others. Given these associated risks, the implementation of the global scheme is not recommended for the HSR design.

ACKNOWLEDGEMENTS

The authors wish to extend their sincere gratitude to Dr. Katsunobu Oide for his suggestion to explore a non-closed crabbing bump scheme for the EIC.

REFERENCES

- [1] J. Wei, “Crab crossing in a large hadron collider,” Brookhaven National Lab.(BNL), Upton, NY (United States), Tech. Rep., 1996.
- [2] R. Palmer, “Energy scaling, crab crossing and the pair problem,” Stanford Linear Accelerator Center, Tech. Rep., 1988.

- [3] K. Oide and K. Yokoya, “Beam-beam collision scheme for storage-ring colliders,” *Physical Review A*, vol. 40, no. 1, p. 315, 1989.
- [4] T. Abe *et al.*, “Compensation of the crossing angle with crab cavities at kekb,” in *2007 IEEE Particle Accelerator Conference (PAC)*, IEEE, 2007, pp. 27–31.
- [5] R. Calaga *et al.*, “First demonstration of the use of crab cavities on hadron beams,” *Physical Review Accelerators and Beams*, vol. 24, no. 6, p. 062001, 2021.
- [6] G. Arduini *et al.*, “High luminosity lhc: Challenges and plans,” *Journal of Instrumentation*, vol. 11, no. 12, pp. C12081–C12081, 2016.
- [7] F. Willeke and J. Beebe-Wang, “Electron ion collider conceptual design report 2021,” Brookhaven National Lab.(BNL), Upton, NY (United States); Thomas Jefferson National Accelerator Facility (TJNAF), Newport News, VA (United States), Tech. Rep., 2021.
- [8] D. Xu, Y. Luo, and Y. Hao, “Combined effects of crab dispersion and momentum dispersion in colliders with local crab crossing scheme,” *Phys. Rev. Accel. Beams*, vol. 25, p. 071002, 7 2022. 10.1103/PhysRevAccelBeams.25.071002
- [9] Y. Funakoshi, “Operational experience with crab cavities at kekb,” *arXiv preprint arXiv:1410.4036*, 2014.
- [10] Y.-P. Sun *et al.*, “Beam dynamics aspects of crab cavities in the cern large hadron collider,” *Phys. Rev. ST Accel. Beams*, vol. 12, p. 101002, 10 2009. 10.1103/PhysRevSTAB.12.101002
- [11] R. Calaga *et al.*, “Crab cavities for the high-luminosity lhc,” in *18th Int. Conf. on RF Superconductivity (SRF’17), Lanzhou, China, July 17-21, 2017*, JACOW, Geneva, Switzerland, 2018, pp. 695–699.
- [12] Y. Luo *et al.*, “Optimizing the design tunes of the electron storage ring of the electron-ion collider,” in *Proc. IPAC’23, Venice, Italy, 2023*, pp. 128–131. 10.18429/JACoW-IPAC2023-MOPA047
- [13] D. Marx *et al.*, “Task force report: ESR linear lattice design,” 2021. 10.2172/1837215
- [14] D. Marx *et al.*, “Design updates to the eic electron storage ring lattice,” in *Proceedings of the 14th International Particle Accelerator Conference (IPAC’24)*, 2024.
- [15] D. Xu and Y. Luo, “Detector Solenoid Compensation in the EIC Electron Storage Ring,” in *Proc. IPAC’22, Bangkok, Thailand, 2022*, paper WEPOPT050, pp. 1972–1975. 10.18429/JACoW-IPAC2022-WEPOPT050
- [16] D. Xu, Y. Hao, Y. Luo, C. Montag, and J. Qiang, “Study of Harmonic Crab Cavity in EIC Beam-Beam Simulations,” in *Proc. IPAC’21, Campinas, SP, Brazil, 2021*, paper WEPAB009, pp. 2595–2597. 10.18429/JACoW-IPAC2021-WEPAB009
- [17] M. Bassetti and G. A. Erskine, “Closed expression for the electrical field of a two-dimensional gaussian charge,” Tech. Rep., 1980.