

# Graph Neural Networks and Deep Reinforcement Learning Based Resource Allocation for V2X Communications

Maoxin Ji, Qiong Wu, *Senior Member, IEEE*, Pingyi Fan, *Senior Member, IEEE*,  
Nan Cheng, *Senior Member, IEEE*, Wen Chen, *Senior Member, IEEE*,  
Jiangzhou Wang, *Fellow, IEEE*, Khaled B. Letaief, *Fellow, IEEE*

**Abstract**—In the rapidly evolving landscape of Internet of Vehicles (IoV) technology, Cellular Vehicle-to-Everything (C-V2X) communication has attracted much attention due to its superior performance in coverage, latency, and throughput. Resource allocation within C-V2X is crucial for ensuring the transmission of safety information and meeting the stringent requirements for ultra-low latency and high reliability in Vehicle-to-Vehicle (V2V) communication. This paper proposes a method that integrates Graph Neural Networks (GNN) with Deep Reinforcement Learning (DRL) to address this challenge. By constructing a dynamic graph with communication links as nodes and employing the Graph Sample and Aggregation (GraphSAGE) model to adapt to changes in graph structure, the model aims to ensure a high success rate for V2V communication while minimizing interference on Vehicle-to-Infrastructure (V2I) links, thereby ensuring the successful transmission of V2V link information and maintaining high transmission rates for V2I links. The proposed method retains the global feature learning capabilities of GNN and supports distributed network deployment, allowing vehicles to extract low-dimensional features that include structural information from the graph network based on local observations and to make independent resource allocation decisions. Simulation results indicate that the introduction of GNN, with a modest increase in computational load, effectively enhances the decision-making quality of agents, demonstrating superiority to other methods. This study not only provides a theoretically efficient resource allocation strategy for V2V and V2I communications but also paves a new technical path for resource management in practical IoV environments.

**Index Terms**—V2X, Resource Allocation, Graph Neural Network, Reinforcement Learning

## I. INTRODUCTION

**I**N the development of smart cities, Vehicle-to-Everything (V2X) technology plays an essential role within intelligent

Maoxin Ji and Qiong Wu are with the School of Internet of Things Engineering, Jiangnan University, Wuxi 214122, China (e-mail: maouxinji@stu.jiangnan.edu.cn, qiongwu@jiangnan.edu.cn).

Pingyi Fan is with the Department of Electronic Engineering, Beijing National Research Center for Information Science and Technology, Tsinghua University, Beijing 100084, China (e-mail: fpy@tsinghua.edu.cn).

Nan Cheng is with the State Key Lab. of ISN and School of Telecommunications Engineering, Xidian University, Xi'an 710071, China (e-mail: dr.nan.cheng@ieee.org).

Wen Chen is with the Department of Electronic Engineering, Shanghai Jiao Tong University, Shanghai 200240, China (e-mail: wenchen@sjtu.edu.cn).

Jiangzhou Wang is with the School of Engineering, University of Kent, CT2 7NT Canterbury, U.K. (email: j.z.wang@kent.ac.uk).

K. B. Letaief is with the Department of Electrical and Computer Engineering, the Hong Kong University of Science and Technology (HKUST), Hong Kong (email: eekhaled@ust.hk).

transportation systems [1], [2]. V2X is designed to enable comprehensive communication between vehicles and their surrounding environments, including other vehicles, transportation infrastructure, pedestrians, and network resources [3]–[5]. As the automotive industry transitions toward cutting-edge technologies such as autonomous driving, intelligent navigation, and automated parking [6]–[10], the importance of V2X is increasingly underscored [11], [12]. Vehicle networking technologies are continuously emerging [13]–[21], yet V2X communication still encounters challenges regarding performance and safety [22], [23].

Among the various V2X technologies, Cellular Vehicle-to-Everything (C-V2X) is considered to offer higher data rates, lower latency, and higher reliability than IEEE 802.11p technology [24]–[28]. Recently, the 3rd Generation Partnership Project (3GPP) has standardized the New Radio Vehicle-to-Everything (NR-V2X) technology in its Release 16 standards [29], [30].

In practical deployments, the resource allocation problem becomes a crucial aspect of vehicular network technology to support the substantial wireless communication demands brought by V2X communication [31]. This problem is typically NP-hard [32], making it challenging to simultaneously meet the reliability requirements of vehicle-to-vehicle (V2V) links and the rate requirements of vehicle-to-infrastructure (V2I) links in vehicular network environments [33]. Additionally, traditional resource allocation methods often rely on accurate channel state information (CSI), which is quite difficult in environments where vehicles move at high speeds [34].

With the advancement of deep learning (DL) and reinforcement learning (RL), researchers have begun to leverage the powerful function approximation characteristics of deep reinforcement learning (DRL) to address the resource allocation problem [35], [36]. In the presence of inaccurate CSI, DRL can accumulate experience through continuous trial and error, learning a general strategy that can achieve better performance in distributed resource allocation scenarios.

Nonetheless, it has been observed that, under normal circumstances, centralized resource allocation schemes typically outperform their distributed counterparts in terms of effectiveness [37]. This superiority is attributed to the centralized approach's access to global information on resource occupancy and the specific demands of each link, which facilitates the

formulation of superior allocation strategies.

In a distributed setting, however, the agents within reinforcement learning are limited to making decisions based on their local observations, which often lack sufficient total system information. This limitation hinders effective collaboration among vehicles, significantly compromising the quality of global resource scheduling. The scenario is further complicated by the high likelihood of resource collisions and congestion, as well as the difficulty in managing mutual interference between communication links. Additionally, in environments where vehicles are in high-speed motion, the CSI derived from local vehicle observations is laden with considerable noise [38], making it challenging to accurately characterize the channel conditions. This, in turn, can adversely affect the performance of DRL.

Graph Neural Networks (GNNs) possess unique advantages in extracting global information and mitigating noise, which is reflected in their superior performance across a variety of tasks such as link prediction [39], node classification [40], graph classification [41], and graph generation. The mechanism of GNNs involves iteratively aggregating features from neighboring nodes, allowing information to propagate layer by layer along the edges. Consequently, multi-layer GNNs are capable of capturing node features that encapsulate global information while also effectively suppressing noise during the aggregation process. This hierarchical and iterative approach to information processing enables GNNs to discern complex patterns and dependencies within graph-structured data, thereby enhancing their utility in a wide range of applications.

In fact, in the literature, many works have already attempted to integrate GNNs with DRL to address complex issues. However, due to the unique structure of GNNs, most methods that combine GNNs operate as a centralized framework. Moreover, traditional GNNs struggle to handle dynamic changes in graph structures; once the number of nodes or the connections between nodes change, various adjustments to the graph are required, and in some cases, the network needs to be retrained. This is particularly problematic in vehicular networks where vehicles are in high-speed motion and the number of vehicles frequently fluctuates, as it can be detrimental to the network's adaptability and efficiency.

The Graph Sample and Aggregate (GraphSAGE) model, introduced by William Hamilton, Rex Ying, and Jure Leskovec in 2017 [42], is a variant of GNNs tailored for dynamic graph structures. However, GraphSAGE primarily focuses on aggregating node features and overlooks the significance of edge weights. In the context of vehicular networks, where V2V links are represented as nodes and the mutual interference between these links is depicted as edges, the weight of edges emerges as a critical parameter.

Moreover, the vehicular network environment is commonly represented as a complete graph, where nodes (V2V Links) are interconnected through the relationships of interference. As the number of vehicles in the environment grows, the graph's complexity escalates, leading to a substantial increase in the demand for computational resources. This high resource consumption is not feasible in a vehicular network environment where low latency is a critical requirement.

In this paper, to achieve a more efficient distributed resource allocation scheme, we propose a GNN-assisted distributed DRL algorithm<sup>1</sup>. The main contributions of this paper are summarized as follows:

- 1) To enrich the state information available for vehicles to autonomously select resources, we introduce the GraphSAGE framework, which is capable of adapting to dynamic graph structures, and we take into account the characteristics of edges.
- 2) To construct the GraphSAGE framework, and find a way to do the resource allocation, we integrate GNN with Double Deep Q-Network (DDQN) in a distributed scenario, where each V2V link is represented as a node in the graph and as an agent in the DDQN. In addition, the computational complexity and the robustness to the increasing of vehicles. We then test this approach by simulation.

The remainder of this paper is organized as follows: Section II reviews the related work. Section III introduces the system model. Section IV presents the proposed GNN model, providing a novel graph construction method. In Section V, we utilize the previously constructed GNN model to extract low-dimensional features containing global information based on local observations of vehicles and collaborate with the DDQN model to solve the joint resource allocation problem. Section VI presents the simulation results. Finally, Section VII concludes the paper.

## II. RELATED WORK

In this section, we first review some related work based on traditional methods, and then we review the latest work that utilizes DRL and GNN to address the resource allocation problem.

Traditional resource allocation methods often employ game theory, auction theory, and evolutionary algorithms for their studies [43]. In [44], a wireless channel resource management method based on Device-to-Device (D2D) communication was investigated, where the requirements for delay and reliability in V2V communication are transformed into optimization constraints that can be directly computed using slowly varying channel information. The channel resource allocation problem was formulated as an optimization problem, and a heuristic algorithm was employed to solve it. In [45], vehicle service access categories were divided into safety and non-safety Vehicle User Equipment, and its target was to maximize the system's total throughput. In [46], coexistence issues between C-V2X users and vehicle ad hoc network users in unlicensed spectrum were studied, and a spectrum sharing scheme based on energy sensing was proposed to reduce conflicts between the two types of users. Where a matching theory was used to study the wireless resource allocation problem, and a dynamic resource allocation algorithm for vehicles was proposed. In [47], considering imperfect CSI, the exact expression for the ergodic capacity of a single VUE was derived, and a Simulated Annealing (SA) algorithm was used to obtain a good power

<sup>1</sup>The source code has been released at: <https://github.com/qiongwu86/GNN-and-DRL-Based-Resource-Allocation-for-V2X-Communications>

allocation result. In [48], a low-latency V2V communication resource allocation scheme based on 802.11p and C-V2X technologies was proposed, using a hybrid architecture where cellular base stations determine the channel selection for V2V links. The problem of minimizing the total delay was described as an equivalent problem of the maximum weighted independent set with associated weights, and a greedy cellular V2V link selection algorithm was proposed, deriving a theoretical performance lower bound for the algorithm.

In [49], a multi-state cooperation methodology was proposed where energy was allocated among nodes state-by-state using geometric and network decomposition methods. The duration of each state was optimized to maximize the utility of the nodes. In [50], a cross-layer adaptive resource allocation algorithm for packet-based OFDM (Orthogonal Frequency Division Multiplexing) systems was presented. This algorithm considered random traffic arrivals and user fairness issues, enhancing system spectral efficiency and improving queuing performance. In [51], a wireless powered communication network with cooperative groups was investigated. It employed a semi-definite relaxation method to jointly optimize time allocation, beamforming vectors, and power distribution under the constraints of available power and quality of service requirements for two communication groups. The global optimal solution for each problem was guaranteed. In [52], a scenario in sensor networks was studied where a mobile control center powered the sensors via RF signals and collected their information. Two solutions were provided, which enhanced energy efficiency. In [53], the multicast routing problem based on network coding was explored, aiming to achieve the maximum flow multicast routes in ad hoc networks. It also analyzed the statistical characteristics of encoding nodes and maximum flow in ad hoc networks based on random graph theory. In [54], node mobility was considered, and a method capable of tracking dynamic topology changes was proposed. This method allowed for intersecting paths and significantly improved end-to-end delay and packet delivery ratio performance.

Recently, DRL and GNN have increasingly been applied to solve resource allocation problems. In [55], reinforcement learning was first introduced to the resource allocation domain, proposing a distributed decision-making scheme. In [56], DRL was used to study resource allocation in an uplink Non-Orthogonal Multiple Access (NOMA) system, designing a discretized multi-Deep Q-learning (DQN) structure to reduce the output dimension, while introducing Deep Deterministic Policy Gradient (DDPG) for decision-making in continuous power allocation. In [57], considering user privacy protection, Federated Learning (FL) was introduced into resource allocation. On a large time scale, vehicles with similar channel conditions are grouped using spectral clustering, and vehicles within each group train models through FL. On a smaller time scale, vehicles upload their models to a central entity, which aggregates the models and distributes them back to each vehicle. In [58], DQN and DDPG methods were applied within an Actor-Critic framework, using DQN for discrete channel selection and DDPG for continuous power selection. Finally, Meta Reinforcement Learning was used to learn a good initialization method for the network, enhancing its rapid

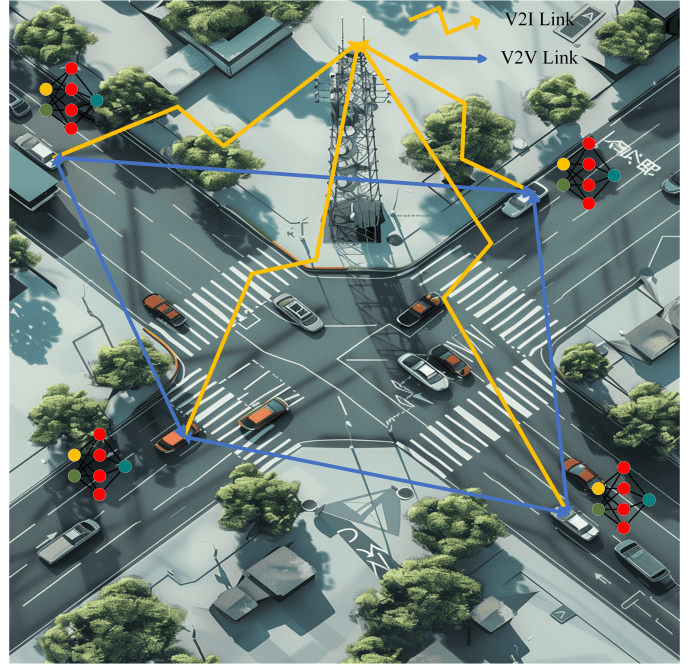


Fig. 1: System model.

adaptability in dynamically changing environments. In [59], graph embedding methods were used for D2D network link scheduling, using graph representation learning to extract node features for power selection, and analyzing the impact of supervised and unsupervised training on network performance. In [60], D2D communication links were treated as nodes in a graph, with interference between links represented as edges, modeling the wireless network as a directed graph for joint channel and power allocation, achieving near-optimal results with only a few samples, and requiring execution times of just a few milliseconds. In [61], a heterogeneous graph was constructed, and a heterogeneous GNN was used to learn policies, providing prior knowledge for Deep Neural Network (DNN) to make channel and power selections, reducing training complexity when the environment changes and DNN needs to be retrained. A parameter sharing strategy was also proposed to ensure that the prior knowledge learned by GNN is beneficial for DNN decision-making.

In summary, while much of the existing work has focused on refining network architectures to achieve more efficient resource allocation strategies, there has been a notable absence of consideration for enriching the information derived from local observations of vehicles. This gap in the literature has prompted us to embark on this research endeavor.

### III. SYSTEM MODEL

This work mainly focus on the V2I and V2V communications within the V2X paradigm. As depicted in Fig. 1, we consider a vehicular traffic model of an intersection, where the Base Station (BS) is strategically located at the intersection's core, and vehicles are introduced onto the roads in a random distribution, maintaining a constant velocity as per their predefined initial speeds. The environment is assumed to contain  $m$

Cellular Users (CUEs), denoted by  $M = [1, 2, 3, \dots, m]$ , which employ V2I links to communicate with the BS, transmitting high-rate entertainment and lifestyle information crucial for daily requirements. Additionally, there are  $k$  pairs of V2V Users (VUEs), represented by  $K = [1, 2, 3, \dots, k]$ , which utilize V2V links for communication, exchanging safety-critical information during vehicle operation. Considering the relatively sparse utilization of uplink resources, we posit that V2V and V2I links share an orthogonal allocation of uplink spectrum to optimize spectral efficiency. Consequently, the Signal-to-Interference-plus-Noise Ratio (SINR) for the  $i$ -th CUE can be formulated as:

$$\gamma^c[i] = \frac{P_i^c h_i}{\sigma^2 + \sum_{j \in K} \rho_j[i] P_j^v \tilde{h}_j} \quad (1)$$

In this formulation, the term  $\sum_{j \in K} \rho_j[i] P_j^v \tilde{h}_j$  represents the interference caused to the  $i$ -th CUE by VUEs using the same channel. Here,  $\rho_j[i] = 1$  indicates that the  $j$ -th VUE and the  $i$ -th CUE are utilizing the same channel, whereas  $\rho_j[i] = 0$  otherwise.  $P_j^v$  denotes the transmit power of the  $j$ -th VUE, and  $\tilde{h}_j$  signifies the power gain of the  $j$ -th VUE. The term  $\sigma^2$  represents the noise power, while  $P_i^c$  indicates the transmit power of the  $i$ -th CUE, and  $h_i$  denotes the channel gain. According to Shannon's formula, the communication capacity of the  $i$ -th CUE can be expressed as:

$$C^c[i] = B \cdot \log(1 + \gamma^c[i]) \quad (2)$$

where  $B$  represents the channel bandwidth.

Similarly, the SINR for the  $j$ -th VUE can be expressed as:

$$\gamma^v[j] = \frac{P_j^v \cdot g_j}{\sigma^2 + G_{V2I} + G_{V2V}} \quad (3)$$

where:

$$G_{V2I} = \sum_{i \in M} \rho_j[i] P_i^c g_{i,j} \quad (4)$$

represents the interference from V2I links within the same resource block and

$$G_{V2V} = \sum_{i \in M} \sum_{j' \in K, j' \neq j} \rho_j[i] \rho_{j'}[i] P_{j'}^v g_{j',j}^v \quad (5)$$

represents the interference from other V2V links within the same resource block. The term  $g_j$  represents the power gain of the  $j$ -th VUE, while  $g_{i,j}$  and  $g_{j',j}^v$  denote the interference power gains from the  $i$ -th CUE and the  $j'$ -th VUE, respectively. The channel capacity of the  $j$ -th VUE can be expressed as follows:

$$C^v[j] = B \cdot \log(1 + \gamma^v[j]) \quad (6)$$

In this paper, we refine the resource selection for vehicles into channel selection and power level selection. Each vehicle selects a channel and a corresponding power level within that channel. We assume that the number of subchannels equals the number of V2I links, denoted as  $m$ , and the number of power levels in the power list is  $n$ . Since each vehicle can simultaneously select only one channel and one transmit power level, there are a total of  $m \cdot n$  resource selection options for each link. Furthermore, the BS does not participate in the resource selection for V2V links. Consequently, we manage

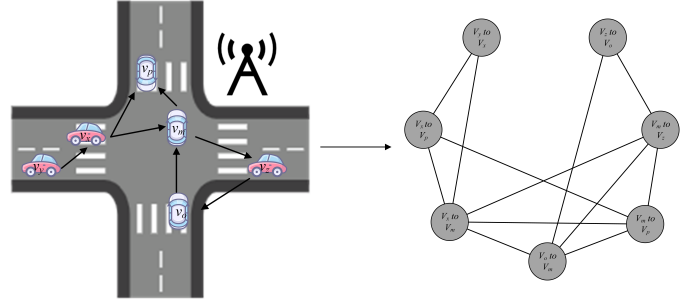


Fig. 2: Vehicle network graph construction.

V2I and V2V links separately, considering that each V2V link autonomously selects resources given a predetermined resource allocation for V2I links. The learning objective is to minimize the interference to V2I links while satisfying the latency requirements and reliability of V2V links, thereby maximizing the transmission rate of V2I links. For ease of description, we transform the reliability requirements of V2V links into outage probabilities [24-25]. The interaction process between the model and the environment can be described as follows:

At a large time scale, vehicles determine neighbor information based on distance relationships, implicitly constructing a graph. At a smaller time scale, vehicles acquire local observations of the environment and collect information transmitted by neighbors. They aggregate these inputs through a model to obtain low-dimensional features that encapsulate global information. Subsequently, a policy learned through DRL is employed to select channels and transmit powers. It is important to note that vehicles are not nodes in the graph nor agents in the DRL framework, however, the final actions are executed by the vehicles themselves. This decentralized approach leverages local interactions and learned strategies to optimize resource allocation in vehicular networks.

## IV. DESIGN OF GRAPH NEURAL NETWORK MODELS

### A. Graph Construction

To construct a graph representation of the vehicular network, we treat each V2V pair as a node, denoted as  $N_g = [v_1, v_2, v_3, \dots, v_k]$ , and the interference relationships between links as edges. For node  $v$ , it contains an initial feature vector  $x_v$  and a list  $N(v)$  storing the indices of its neighboring nodes. The initial feature of a node encapsulates the local observations of channels and interference information by the vehicle. Based on the assumption that the number of subchannels equals the number of CUEs, denoted as  $m$ , we record for the  $i$ -th subchannel the instantaneous channel power gain for V2V links, represented as  $G_t[i]$ ,  $i \in M$ , the subchannel power gain from the transmitter to the receiver in V2I links, denoted as  $H_t[i]$ ,  $i \in M$ , and the interference signal strength from the previous time slot, denoted as  $I_{t-1}[i]$ ,  $i \in M$ . Consequently, the feature of node  $v$  can be expressed as

$$x_v = \{G_t || H_t || I_{t-1}\} \quad (7)$$

where  $||$  denotes the concatenation of vectors.

Existing methods predominantly construct the vehicular network as a complete graph, emulating the mutual interference relationships among all links. However, when the number of vehicles in the environment is substantial, the graph becomes exceedingly complex, and the computational load for aggregating node features escalates, leading to prolonged decision-making times and potentially introducing additional delays. To address this issue, we propose constructing the graph based on the communication relationships between vehicles. Since each V2V pair consists of a transmitting vehicle and a receiving vehicle, and assuming there are  $s$  vehicles in the environment, represented as  $v = [V_1, V_2, V_3, \dots, V_s]$ . We assign a unique label to each V2V link, denoted as  $V_t \text{to} V_r$ , where  $V_t, V_r \in V$ . Here,  $V_t$  signifies the transmitting vehicle, and  $V_r$  denotes the receiving vehicle. Referring to Fig. 2, let's assume that vehicle  $V_x$  has three destination vehicles, namely  $V_m, V_p$ , and  $V_o$ , and that  $V_x$  is also the target vehicle for  $V_y$  and  $V_z$ . The labels for the V2V link nodes formed by these vehicles are as follows:  $V_x \text{to} V_m, V_x \text{to} V_p, V_x \text{to} V_o, V_y \text{to} V_x$ , and  $V_z \text{to} V_x$ . For each node, taking the node  $V_x \text{to} V_m$  as an example, we consider all nodes with labels containing either  $V_x$  or  $V_m$  as neighbors of node  $V_x \text{to} V_m$ . This includes all nodes labeled as  $V_x \text{to} Z, Z \text{to} V_x, V_m \text{to} Z$ , and  $Z \text{to} V_m$ , where  $Z$  represents any vehicle that meets the conditions.

We stipulate that each vehicle selects three transmission destinations from a list of nearby neighboring vehicles, meaning that each vehicle initiates three V2V links. As a result, the total number of V2V links in the environment is  $3s$ , where  $s$  is the number of vehicles. For each vehicle, the number of its neighboring vehicles can be approximated to be around 12. This approximation is based on the fact that each vehicle ( $V_x, V_m$ ) has three outgoing links ( $V_x \text{to} Z, V_m \text{to} Z$ ) and an uncertain number of incoming links ( $Z \text{to} V_x, Z \text{to} V_m$ ). However, since the total number of links is three times the number of vehicles, the average number of times a vehicle serves as a receiver is also 3. Therefore, the number of neighbors for each vehicle is approximately 12 and remains constant regardless of the increase in the number of vehicles in the environment. In contrast, in a complete graph, the number of neighbors for each node is  $3s - 1$ , which continuously increases with the number of vehicles, leading to a higher complexity as the number of vehicles grows.

In practice, although the graph construction method we propose overlooks some interference relationships between links, it essentially preserves the strongest interference from neighbors. Moreover, GNN operates through a multi-layer aggregation process, where information is continuously propagated along edges. Consequently, even distant nodes can exert an influence on the current node. Furthermore, the rationale behind our choice to construct a graph based on communication relationships rather than physical distances is that such a method facilitates the implicit construction of the graph among vehicles. For the six neighbor nodes represented by  $V_x \text{to} Z$  and  $V_m \text{to} Z$ , vehicles  $V_x$  and  $V_m$  possess all relevant information. As for the neighbor nodes represented by  $Z \text{to} V_x$  and  $Z \text{to} V_m$ , they can carry node features and other pertinent information when transmitting to  $V_x$  and  $V_m$ . Thus, by establishing a bidirectional connection between  $V_x$  and  $V_m$ , information can

be transmitted within the graph without incurring additional communication overhead.

We have performed a comparative analysis of the computational load in graph networks under both complete and non-complete graph scenarios. With  $s$  vehicles in the environment, the graph contains  $3s$  nodes. Assuming each node has a feature dimension of  $D_{input} = 60$  and an output dimension of  $D_{output} = 20$ , considering a single-layer aggregation model. The number of neighbors for each node is  $N_{nei}$ , thus, the required multiplication operations can be calculated as follows:

$$N = D_{input} \cdot D_{output} \cdot 3s \cdot N_{nei} \quad (8)$$

When constructing a complete graph,  $N_{nei} = 3s - 1$ , whereas for the graph construction method we propose,  $N_{nei} = 12$ . Essentially, the difference in the number of multiplication operations between these two graph construction methods is determined by the number of neighbors, and the ratio of their computational loads is also the ratio of the number of neighbors. Therefore, the property of our proposed method, where the number of neighbors does not increase with the number of vehicles, becomes particularly significant.

To better characterize the vehicular network environment, we assign a weight to each edge in the graph. Generally, the interference caused by links that are farther away is smaller to the current link. Therefore, we record the distances between transmitters, represented as a square matrix  $D = [d_{11}, d_{12}, \dots, d_{1s}; d_{21}, d_{22}, \dots, d_{2s}; \dots; d_{s1}, d_{s2}, \dots, d_{ss}]$ . Suppose the interference between the links  $V_m$  to  $V_n$  and  $V_x$  to  $V_y$  corresponds to the edge between nodes  $v_p$  and  $v_q$ , the weight of which can be represented as:

$$\delta_{pq} = 1 - \frac{d_{mx}}{\max(D)} \quad (9)$$

## B. GNN Network

After constructing the graph, we will introduce the GNN model. Due to the frequent changes in the number of vehicles and the communication relationships between vehicles in vehicular networks, traditional GNN models struggle to adapt to the rapid changes in node count and adjacency matrix, necessitating frequent adjustments to the graph structure such as pruning or adding edges, and even requiring retraining of the model. Therefore, we introduce the GraphSAGE model, which is adept at handling dynamic and large-scale graph structures, and enhance it by incorporating edge weights into the node feature aggregation process.

The operation of the GraphSAGE model can be divided into three main steps: neighbor sampling, feature aggregation, and feature update. Neighbor sampling is applicable to large-scale graph processing, where the number of neighbors to be sampled for each node at various layers is predefined, allowing for the random selection of these neighbors. This random sampling mechanism constrains the computational demand for feature aggregation at each node, ensuring that the model remains computationally feasible even when confronted with exceedingly intricate graph structures. Although both the neighbor sampling function and our proposed graph construction method serve to manage computational resource expendi-

ture, our approach differs from random sampling across all nodes in a complete graph. In our constructed graph, the neighbors sampled at each layer are confined to a defined scope, and the interference they exert on the current node decreases with the increasing layer depth. This hierarchical reduction in interference facilitates the extraction of superior features, as the influence of second-layer neighbors on the current node is less than that of first-layer neighbors.

Assuming the number of neighbors sampled is  $S$ , for a node  $v$ , the set of sampled neighbors is denoted as  $N_s(v)$ , and the aggregated node feature is represented as  $z_v$ . The feature aggregation process can be expressed as follows:

$$z_v = f_{aggregate}(\{x_u | u \in N_s(v)\}) \quad (10)$$

where,  $f_{aggregate}$  denotes the aggregation function of the model. We employ the mean aggregation function, but with a key distinction: we incorporate edge weights to reflect the importance of each neighboring node's features. This can be represented as:

$$z_v = \sigma(W_a \cdot \sum_{u \in N_s(v)} \frac{X_u \cdot \delta_{uv}}{|N_s(v)|} + b_a) \quad (11)$$

where,  $W_a$  signifies the weights of the aggregation function,  $b_a$  denotes the bias term of the aggregation function, and  $\sigma$  signifies the activation function.

For the feature update process, we combine the aggregated results of the neighbor features with the initial features of the node itself to obtain the final node feature embedding:

$$h_v = f_{update}(z_v, x_v) \quad (12)$$

In this approach, we select summation as the method to integrate the aggregated results of the neighbor features with the initial node features. This integration is then processed through feature extraction using weight parameters obtained from training. The resulting node embedding is denoted as  $h_v$ . Thus, the update function  $f_{update}$  can be expressed as follows:

$$f_{update}(z_v, x_v) = \sigma(W_u \cdot (z_v + x_v) + b_u) \quad (13)$$

where,  $W_u$  and  $b_u$  denote the trained weights and bias vector in the feature update function. Consequently, the complete aggregation process for a single round can be represented as:

$$h_v = f_{update}(x_v, f_{aggregate}(\{x_u | u \in N_s(v)\})) \quad (14)$$

Similarly, the two-layer aggregation process can be expressed as:

$$h_v = f_{update}(x_v, f_{aggregate}(\{f_{update}(x_u, f_{aggregate}(\{x_n | n \in N_s(u)\})) | u \in N_s(v)\})) \quad (15)$$

Algorithm 1 summarizes the feature extraction process of the GraphSAGE model.

To ensure that the features extracted by the GraphSAGE model are beneficial for the agent's decision-making, we have designed a unique updating mechanism for it. Since the GraphSAGE model is deployed globally, while the DDQN model only affects a single agent, it is challenging to integrate the two networks for joint training. Therefore, we opt to train

---

**Algorithm 1:** GraphSAGE

---

```

1 Large Time Scale: Construct global graph;
2 Small Time Scale: Update and Aggregate Node
  Features;
3 Input: Graph network model, node features;
4 Output: Aggregation result;
5 Initialization: Initialize model;
6 while True do
7   for each node  $v$  from  $N_g$  do
8     Node Neighbor Sampling:
9     Randomly select five neighbors of node  $v$  and
      store them in  $N_s(v)$ 
10    for each neighbor  $u \in N_s(v)$  do
11      Randomly select five neighbors of node  $u$ 
        and store them in  $N_s(u)$ 
12    end
13    Feature Aggregation and Update:
14    for each neighbor  $u \in N_s(v)$  do
15       $h_u = f_{update}(x_u, f_{aggregate}(x_n, n \in$ 
         $N_s(u)))$ 
16    end
17     $h_v = f_{update}(x_v, f_{aggregate}(h_u, u \in N_s(v)))$ 
18  end
19 end

```

---

the GraphSAGE model separately.

The training of GNNs typically falls into supervised learning, semi-supervised learning, or unsupervised learning. Unsupervised learning can incur significant computational overhead during the training phase, while supervised and semi-supervised learning are limited by the cost of obtaining node labels. Consequently, we aim to find a cost-effective method that provides a learning direction for the network and enhances the decision-making capabilities of the DDQN model.

In fact, we employ the key role of GraphSAGE model to aggregate node features, aiding the agent in discerning the quality of each channel. The rewards obtained after the DDQN network taking actions provide a sound assessment of the channels. Consequently, it can store the reward information acquired by the agent for each sub-channel in a matrix corresponding to the number of sub-channels,  $R_g = [r_1, r_2, r_3, \dots, r_m]$ . This matrix serves as the labels for the corresponding nodes.

However, the stored reward values are with a certain latency, making them unsuitable as absolute labels currently. Instead, they still provide a fuzzy directional guide for the network's learning in complex environments. To address such a problem and trying to efficiently use the restored reward values, we propose a more moderate update strategy. This strategy involves using a lagged network to aggregate node features and weighting them with the labels according to a specific ratio. This approach has two main benefits:

- 1) It weakens the absolute influence of the labels, maintaining the stability of learning.
- 2) It gradually guides the network's predictions towards the ideal label values.

By incorporating this moderated update strategy, one can ensure a balance between learning stability and directional guidance, ultimately enhancing the performance of the DDQN model in making decisions based on the aggregated features from the GraphSAGE model.

Specifically, the Mean Squared Error (MSE) function is used here as the loss function for the network, defined as follows:

$$Loss(\theta) = \sum_{v \in N_g} (y_v - h_v)^2 \quad (16)$$

where:

$$y_v = \kappa h_v^{old} + (1 - \kappa) R_g^v \quad (17)$$

In this context,  $\theta$  represents the weighting parameters in the GraphSAGE model,  $y_v$  denotes the smoothed labels used for network updates,  $\kappa$  indicates the weighting factor for the aggregation results,  $R_g^v$  represents the label for node  $v$ , and  $h_v^{old}$  signifies the aggregation result from the lagged network.

## V. THE GNN-DDQN MODEL FOR RESOURCE ALLOCATION PROBLEMS

In this section, we primarily introduce the method for solving the resource allocation problem in V2X communication based on the GNN-DDQN model. First, we present the key equations of reinforcement learning and the core principles of the DDQN model. Then, we discuss how to combine the DDQN model with the previously mentioned GraphSAGE model to address the resource allocation problem.

### A. Key Formulas in RL and DDQN

Reinforcement learning are typically formulated as Markov Decision Processes (MDPs), which manifest as interactions between an agent and an environment. The agent acquires state information from the environment, makes decisions according to a policy  $\pi$ , and then executes an action. The environment, in turn, provides the agent with a reward and updates the current state.

Specifically, at each time step  $t$ , the agent obtains the current state  $s_t$  from the state space of the environment and selects an appropriate action  $a_t$  from the action space  $A$  according to the existing policy  $\pi$  to choose the transmission channel and transmission power for the V2V link. The policy  $\pi$  is determined by a state-action function, also known as the Q-function, denoted as  $Q(s_t, a_t)$ . In deep reinforcement learning, the Q-function is typically approximated using deep learning to adapt to complex environmental changes. After the agent takes an action, the environment will transit to a new state  $s_{t+1}$  and provides a reward  $r_t$  that evaluates the quality of the action based on the results of the agent's choice. In this paper, the reward is derived from the outage probability of the V2V link and the rate of the V2I link.

Next, we will sequentially introduce the details of state, action, and reward in the DDQN network:

1) *State space*: For the V2X environment we consider, the true state information primarily consists of the vehicle's observations of the environment  $x_v$  and the low-dimensional features  $h_v$  extracted from these observations by the GraphSAGE model. To assist the agent in making better decisions,

each vehicle sends its channel selection information to its target vehicles. Based on this, we collect each agent's neighboring agents' previous channel selection information  $N_{t-1}$  and calculate the ratio  $L_t$  between the remaining bits to be sent by the vehicle and the total bits that need to be sent, as well as the remaining transmission time  $U_t$  under the delay constraint. Combining these pieces of information, the state acquired by the agent is represented as follows:

$$S_v^t = \{h_v^t || x_v^t || N_{t-1}^v || L_t^v || U_t^v\} \quad (18)$$

2) *Action space*: Based on the collected and observed state information, the DDQN network selects an action  $a_t \in A$  according to the policy  $\pi$ . Since the agent needs to select both the subchannel and the power level simultaneously, we combine these two types of actions into a composite action. The composite action selected by the agent is mapped onto two dimensions, representing the choices of subchannel and power level, respectively. In this paper, we consider a relatively simple case with three power levels and  $m$  resource blocks. Therefore, there are a total of  $3 \times m$  possible actions. Assuming the agent selects action  $a_t$ , we decompose it as follows:

$$a_r^t = a_t \% m \quad (19)$$

and

$$a_p^t = a_t / m \quad (20)$$

where  $\%$  denotes the modulo operation, and  $/$  represents division with rounding down to the nearest integer.  $a_r^t$  denotes the decomposed subchannel selection action, and  $a_p^t$  represents the choice of power level.

3) *Reward function*: The objective of reinforcement learning is to enable V2V links in the environment to meet the low latency and high reliability requirements of V2V communication to the maximum extent, while minimizing interference to V2I links to maximize the transmission rate of V2I links. Previously, we transformed the latency and reliability requirements of V2V links into a requirement for outage probability. Therefore, for the design of the reward, we only need to consider the outage probability of V2V links and the transmission rate of V2I links. Additionally, we have set a penalty term based on the time already spent on the link transmission. The reward function is expressed as follows:

$$r_t = \lambda_c \sum_{i \in M} C^c[i] + (1 - \lambda_c) \sum_{j \in K} C^v[j] - \lambda_p (T_0 - U_t) \quad (21)$$

where,  $\lambda_c$  represents the weight of the V2I link, and  $\lambda_p$  represents the weight of the utilized transmission time.  $U_t$  denotes the remaining time, and  $T_0$  signifies the transmission delay limit. Therefore,  $(T_0 - U_t)$  indicates the time used for transmission. The agent's long-term discounted return can be expressed as:

$$R_t = E \left[ \sum_{n=0}^{\infty} \beta^n r_{t+n} \right] \quad (22)$$

where,  $\beta \in [0, 1]$  represents the discount factor for the reward. A larger  $\beta$  indicates that the agent has a longer-term perspective, while a smaller  $\beta$  means the agent is more focused

on immediate rewards.

In deep reinforcement learning, the primary objective is to learn an optimal policy  $\pi^*$  that maximizes the long-term discounted reward, as well as to develop a deep network model that can predict the Q-values corresponding to state-action pairs. For a given state-action pair  $(s_t, a_t)$ , the Q-value  $Q(s_t, a_t)$  represents the expected cumulative discounted reward obtained after taking action  $a_t \in A$  according to policy  $\pi$ . Thus, the Q-value can be used to assess the quality of an action in a given state. Once we have an accurate estimation of the Q-values, actions can be selected according to the following equation:

$$a_t = \arg \max_{a \in A} Q(s_t, a) \quad (23)$$

This implies that we select the action with the maximum Q-value. In the DDQN, the Q-values corresponding to the optimal policy, denoted as  $Q^*$ , can be obtained through the following update equation:

$$Q_{new}(s_t, a_t) = Q_{old}(s_t, a_t) + \alpha[r_{t+1} + \beta Q_{old}^{target}(s_{t+1}, \arg \max_{a \in A} Q_{old}(s_{t+1}, a)) - Q_{old}(s_t, a_t)] \quad (24)$$

where,  $\alpha$  is the learning rate, and the second term on the right-hand side of the equation is the Temporal Difference (TD) error used to update the Q-value. The discount factor is denoted by  $\gamma$ .  $Q_{old}$  represents the Q-value predicted by the Q-network, while  $Q_{old}^{target}$  represents the Q-value predicted by the target Q-network.

Assuming the weights of the Q-network are denoted by  $\varphi$ , the output will be the Q-values corresponding to each action when the input is the observed state of the agent. We optimize the parameters  $\varphi$  of the Q-network using the TD error, which can be expressed as follows:

$$Loss(\varphi) = \sum_{(s_t, a_t) \in D} (y_Q - Q(s_t, a_t, \varphi))^2 \quad (25)$$

where,  $D$  denotes the set of state-action pairs, and  $y_Q$  represents the expected target Q-value, which can be given by the following equation:

$$y_Q = r_t + \beta Q_{old}^{target}(s_{t+1}, \arg \max_{a \in A} Q_{old}(s_{t+1}, a), \varphi') \quad (26)$$

where,  $\varphi'$  denotes the parameters of the target Q-network.

### B. GNN-DDQN Framework and Training-Testing Process

As illustrated in Fig. 3, the operation of the GNN-DDQN model can be divided into three steps: constructing the graph, extracting low-dimensional features about global information, and making decisions based on the Q-values predicted by the Q-network. Note that the training process of the GraphSAGE model can be followed that introduced previously, we will now focus on the training of the DDQN model and the testing of the GNN-DDQN model here.

In reinforcement learning, all data required by the agents are generated through interactions between the agents and the environment. We use the tuple  $(s_t, a_t, r_t, s_{t+1})$  as a single

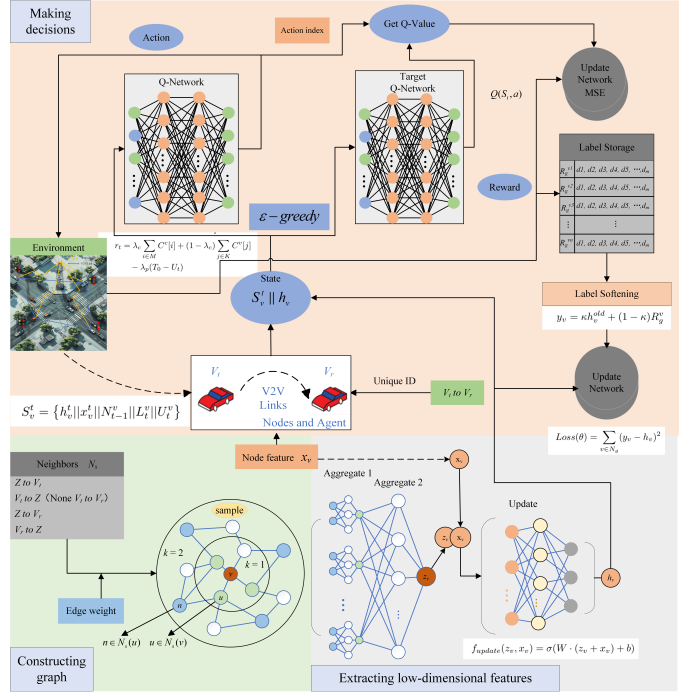


Fig. 3: GNN-DDQN framework.

training sample and store it in a replay buffer, from which samples are periodically drawn to update the DDQN network. The environment simulator comprises VUEs, CUEs, and their channel models. Vehicles in the environment are randomly placed at the intersection model according to a uniform distribution. Based on the distance relationships between vehicles, V2V and V2I communication links are established. The agent selects the channel and transmission power based on the CSI in the environment. The environment then updates the fading information and interference information accordingly, resulting in a new state  $s_{t+1}$ . Concurrently, the agent receives a reward  $r_t$  based on the quality of the action taken. During the training phase, we adopt an  $\epsilon$ -greedy policy to balance exploration and exploitation. In the testing phase, actions are selected based on the predicted Q-values, specifically choosing the action with the highest Q-value.

Upon initialization, the agent, operating on a large temporal scale, identifies its neighbors based on vehicle-to-vehicle communication links, implicitly constructing a graph where edge weights are determined by proximity. On a smaller temporal scale, the agent collects local observations denoted as  $S_v^t$  and aggregates these with features from neighboring agents to perform feature updates, yielding a low-dimensional representation  $h_v$ . This representation, combined with the local observations  $S_v^t$ , forms the agent's state. The agent then predicts the action with the highest Q-value using the Q-network. Rewards are obtained from the environment. During training, the Q-values predicted for each action are stored as baseline evaluations, which are then softened to yield  $y_v$ , guiding the updates of the GNN model. The agent's strategy is refined using Q-values predicted by the target Q-network, which also updates the Q-network itself. In the testing phase, the action with the maximum predicted Q-value from the Q-



**Algorithm 2: Training Process for GNN-DDQN**


---

**Input:** GraphSAGE model, Q-network model, simulation environment

**Output:** Q-network, GraphSAGE-network

- 1 **Initialize:** Randomly initialize policy  $\pi$ , initialize model, start environment simulation and add vehicles, CUEs, and VUEs;
- 2 **Large Time Scale:** Construct global graph;
- 3 **Small Time Scale:** Joint GNN-DDQN model selects actions;
- 4 **while not converged do**
  - 5 **Execute Algorithm 1**
  - 6 **Run DDQN Network:**
  - 7 For node  $v$ , the agent selects subchannels and transmission power based on policy  $\pi$  using  $h_v$  and locally observed states
  - 8 The environment simulator generates a new state  $s_{t+1}$  and reward  $r_t$  based on the agent's actions
  - 9 Store the selected subchannels and corresponding rewards in  $R_g$
  - 10 Collect and store the tuple  $(s_t, a_t, r_t, s_{t+1})$  in the experience replay buffer
  - 11 Sample a mini-batch from the experience replay buffer
  - 12 Train the DDQN network using the mini-batch
  - 13 Update the GNN network using labels derived from  $R_g$
  - 14 Update policy  $\pi$ : select the action with the highest Q-value

---

network is directly executed as the decision.

Algorithm 2 explicitly expresses the training process of the GNN-DDQN model, while Algorithm 3 illustrates the testing process of the GNN-DDQN model.

## VI. SIMULATION RESULTS AND ANALYSIS

### A. Simulation settings

The simulations in this study were conducted using Python 3.8 and TensorFlow 2.6, adopting settings similar to those assumed in the literature [55]. We consider a single-cell system operating at a 2 GHz carrier frequency. The simulations follow the Manhattan scenario setup as described in 3GPP TR 36.885 [62], covering both Line of Sight (LOS) and Non-Line of Sight (NLOS) channel conditions. The distribution of vehicles is modeled as a spatial Poisson process, randomly distributed across each lane. It assumes that each vehicle established V2V communication links with its three nearest neighbors, resulting in the number of V2V links being three times the number of vehicles.

We utilize a GraphSAGE model with a depth of 2, sampling 5 neighbors at each layer, and incorporating the node's own features for updates. The feature dimension extracted by the graph network set as 20. Each node's feature dimension input to the graph network is 60, and an average aggregation function is adopted. For the DDQN model, the state dimension

**Algorithm 3: Testing Process for GNN-DDQN**


---

**Input:** Trained Q-network model, Trained GraphSAGE model, simulation environment

**Output:** Evaluation results

- 1 **Initialize:** Load the Q-network model and GraphSAGE model, start the environment simulation, and add vehicles, CUEs, and VUEs;
- 2 **Large Time Scale:** Construct global graph;
- 3 **Small Time Scale:** Joint GNN-DDQN model selects actions;
- 4 **while not finished do**
  - 5 **Execute Algorithm 1**
  - 6 **Run DDQN Network:**
  - 7 For node  $v$ , the agent selects the action with the highest Q-value based on  $h_v$  and locally observed states
  - 8 The environment simulator updates the environment based on the agent's actions
  - 9 Update the evaluation results, which include the average V2I capacity and the success rate of V2V communication

---

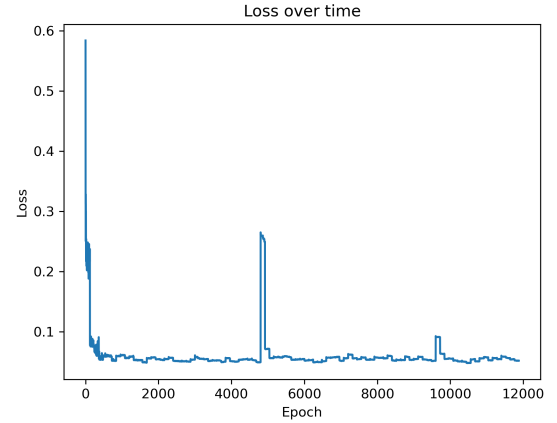


Fig. 4: Training loss of GraphSAGE.

input is 102, employing a three-layer neural network model with 500, 250, and 120 neurons in each layer, respectively. The final output the Q-values for 60-dimensional actions. A Rectified Linear Unit (ReLU) function is used as the nonlinear activation function between layers. The activation function can be expressed as follows:

$$f_{Relu}(x) = \max(0, x) \quad (27)$$

The learning rate is set to decrease over the training period. The initial learning rate for the graph network is selected as 0.01, and for the DDQN network, it is selected as 0.005, with both having a minimum value of 0.0001. More detailed parameter settings are provided in Table I.

### B. Model Training Status

To analyze the training process of the network, we monitored the training progress. Since our GraphSAGE model and

TABLE I: System Parameters

Parameters of System Model	
Description	Specification
Carrier Frequency	2 GHz
Height of Vehicle Antenna	1.5 meters
Bandwidth of Single Subchannel	1.5 MHz
Gain of Vehicle Antenna	3 dBi
Height of Base Station Antenna	25 meters
Noise Figure of Vehicle Receiver	9 dB
Gain of Base Station Antenna	8 dBi
Vehicle Speed	36 km/h to 54 km/h
Noise Figure of Base Station Receiver	5 dB
Distance Threshold for Neighbor Vehicles	150 meters
Number of Lanes in Environment	4 per direction, total 16 lanes
Maximum Delay for V2V Link	100 ms
Transmission Power Levels	[23, 10, 5] dBm
Noise Power	-114 dBm
Weight Coefficients $[\lambda_c, \lambda_p]$	[0.3, 1]
First Layer Neighbor Sampling Count	5
Second Layer Neighbor Sampling Count	5
Depth of GraphSAGE	2
Dimension of Node Feature Output	20

Note: Parameters such as "Carrier Frequency", "Height of Vehicle Antenna", "Bandwidth of Single Subchannel", "Gain of Vehicle Antenna", "Height of Base Station Antenna", and others are adapted from [55].

DDQN network are trained separately, we will analyze the training performance of the two networks individually.

- 1) Training Loss of the GraphSAGE Model: Fig. 4 illustrates the loss performance of the GraphSAGE model over 5000 training iterations, where the GraphSAGE model is updated 120 times every 50 iterations. It can be observed that the loss converges rapidly. Since the environment is reset every 2000 iterations, there is a significant fluctuation in loss whenever the environment is reset. However, as the number of iterations increases, the fluctuation due to environmental resets diminishes, and the model begins to adapt to different environments.
- 2) Performance Comparison of the GNN-DDQN Network at Different Training Iterations: Fig. 5 depict the testing performance of the policy obtained from training within 10,000 iterations in the simulated environment. In practice, to achieve a convergent policy, we conduct nearly 40,000 training iterations. Here, we present the results of the first 10,000 training iterations. It can be observed that the performance of the learned policy generally exhibits an upward trend, although the rate of improvement gradually slows down.

### C. Static Environment Testing

Three baseline methods are used for comparison. The first is the random resource allocation method, where the agent randomly selects channels and power levels, serving as a lower bound. The second is the one mentioned in [63], which groups vehicles with similar channel conditions together and iteratively allocates sub-channels. The third is the one used in [55], which employs a general DQN model for resource allocation, helping us analyze the performance gains brought by introducing GNN.

We divide the decision-making process of all agents into ten batches to address the issue of resource collisions caused by

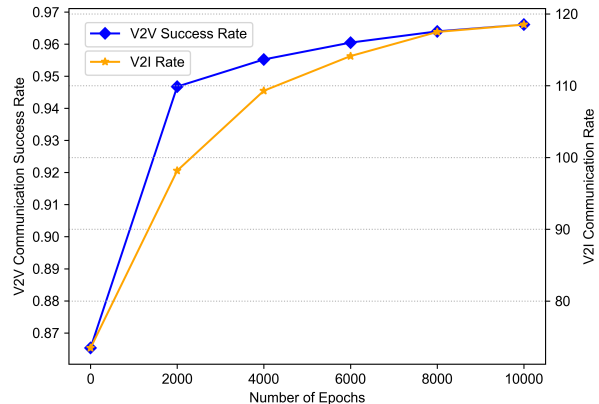


Fig. 5: Training effect of GNN-DDQN.

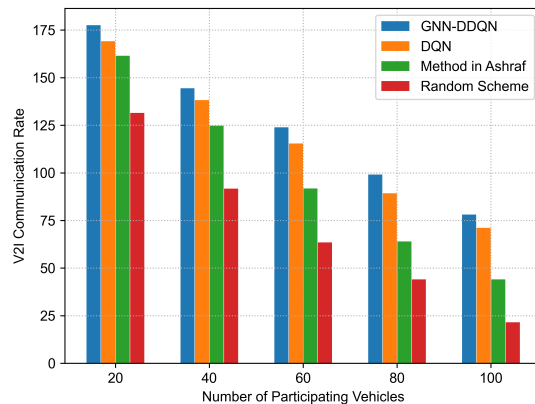


Fig. 6: Relationship between average V2I rate and number of vehicles.

information delay when agents simultaneously select channels. Once the agents have made their decisions, they keep their actions fixed until the next round of reallocation. To obtain more generalizable policies, we periodically reset the environment during the training phase.

When obtaining test results and plotting graphs, we reset the environment 100 times, taking the average of 200 samples for each environment, and then averaging the data across the 100 environments. We observed that the policies learned by the agents exhibit fluctuations in changing environments, but the fluctuation range is controllable. Given that factors such as vehicle density can vary significantly across different environments, there is no constant optimal solution, which makes the presence of fluctuations reasonable.

- 1) V2I Communication Rate: Fig. 6 illustrates the relationship between the total V2I rate across all sub-channels and the number of vehicles. From the figure, it is evident that as the number of vehicles increases, the number of V2V links in the environment also increases. Consequently, the interference from V2V communication links to V2I links increases, resulting in a decrease in the V2I link rate. Both the DQN method and our

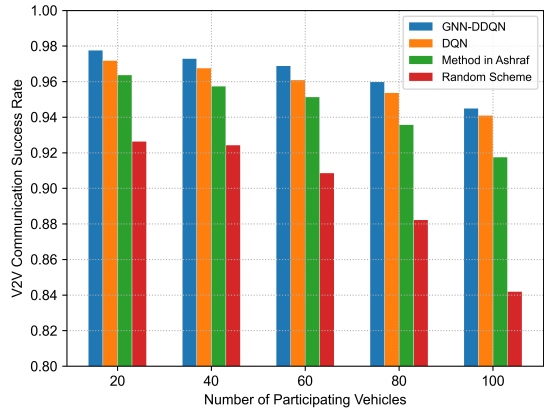


Fig. 7: Relationship between average V2V success rate and number of vehicles.

proposed GNN-DDQN method are fundamentally based on reinforcement learning. However, the incorporation of GNN allows the agent to acquire richer and more comprehensive global state information, thereby leading to superior performance.

- 2) V2V Communication Success Rate: Fig. 7 illustrates the relationship between the transmission success rate of all V2V links in the environment and the number of vehicles. As previously mentioned, the number of V2V links in the environment is three times the number of vehicles. It can be observed that as the number of vehicles increases, the success rate of V2V communication using a random strategy declines at the fastest rate. Other methods exhibit a slower rate of decline, indicating an improved utilization of resources. It is evident that our proposed GNN-DDQN method outperforms the simple DQN network.

#### D. Strategy Analysis

As shown in Fig. 8, to analyze the impact of the GNN on the strategies learned by the agents, we followed the method of [55] by collecting the decisions made by the agents under different remaining transmission times and analyzing the statistical probability of each power level being selected. Unlike [55], we imposed a significant penalty on the agents when V2V link transmission failed. Consequently, when the remaining transmission time is only 0.01 seconds, the agents tend to choose higher power levels. As illustrated in the figure, when the transmission time is ample, the agents tend to select lower power levels to reduce interference with V2I links. However, when the transmission time is tight, they tend to choose higher power to ensure the success of V2V link transmission. Additionally, at the beginning of the transmission, agents also tend to select higher power, possibly because the agents do not reselect channels in every time slot, and initially setting a higher power level is a prudent choice.

Fig. 9 illustrates the performance differences when constructing the GNN using either a complete graph or an incomplete graph. When using a complete graph, the number

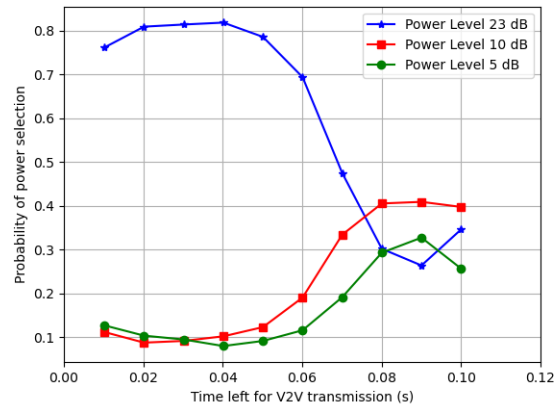


Fig. 8: Relationship between remaining time and power selection.

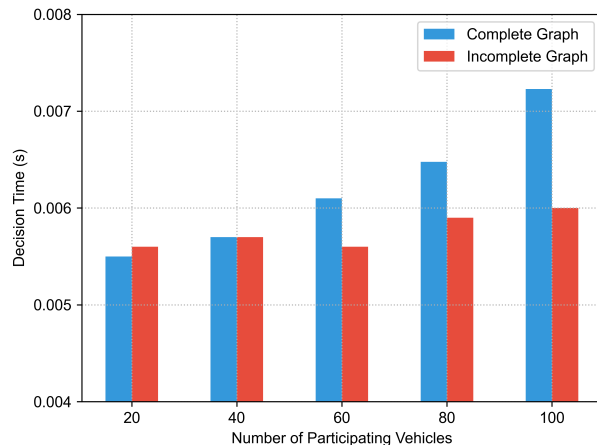


Fig. 9: Comparison of single decision time between complete and incomplete graphs.

of nodes in the environment increases linearly with the number of vehicles, causing a slight increase in the training time required. To ensure the reliability of the comparison, we omit here the data preprocessing steps conducted on the CPU for the incomplete graph scenario. This is because the incomplete graph requires an additional step of obtaining neighbors from the graph. We do not employ efficient, advanced APIs optimized for GNN to accelerate this process; instead, we implement it with the original code. As a result, processing on the CPU may consume some time, including delays caused by transferring data from the CPU to the GPU. Our comparison focuses on the computation speed on the GPU. For the curve of the incomplete graph, since the number of neighbors is small and does not increase with the number of vehicles, the time required for a single decision remains relatively small and is less affected by the number of vehicles in the environment.

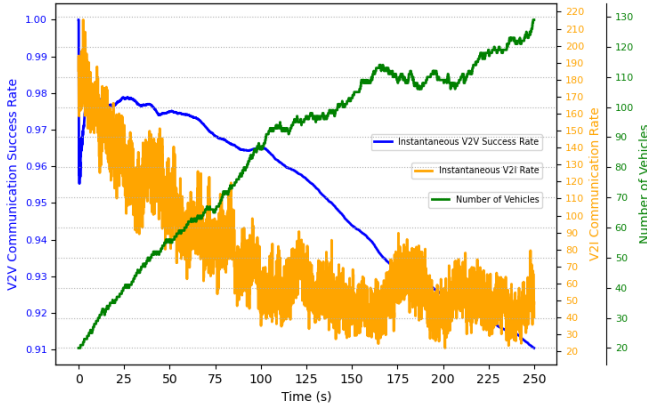


Fig. 10: Temporal dynamics of vehicle count, V2I rates, and V2V success rates in dynamic environments.

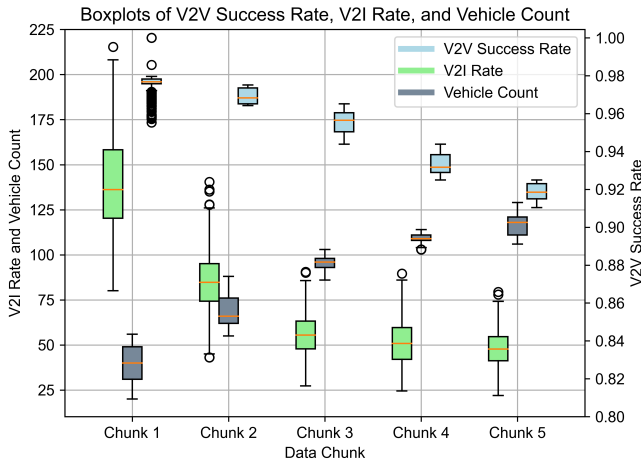


Fig. 11: Algorithm performance box plot: vehicle count, V2I rates, and V2V success across five time segments.

### E. Dynamic Environment Testing

Finally, to validate the performance of our proposed method in environments with dynamically changing vehicle numbers, we provide the test results under dynamic conditions. To obtain a rich set of test data, we designed the dynamic environment using a dictionary to store the vehicles, deleting the corresponding vehicle entry when a vehicle leaves the environment. Each time vehicle positions are updated, there is a certain probability of adding new vehicles; if no vehicles are added, the probability increases. Once a vehicle is added, the probability is reset to zero. To ensure a thorough exploration of a greater number of vehicles, we adopt the probability mode of vehicle addition, ensuring a steady increase in the number of vehicles within the environment.

In the decision-making process within the dynamic environment, one-tenth of the vehicles in the environment make decisions in each time slot. That is, vehicles are divided into ten batches to make decisions sequentially, completing one batch every 0.005 seconds, consistent with the method we previously proposed.

1) The number of vehicles, instantaneous V2I rate, and instantaneous V2V success rate in a dynamic environment: Fig. 10 shows the variation over time of the number of vehicles, the instantaneous average success rate of V2V communication, and the sum of the instantaneous V2I communication rates across all channels. The number of vehicles increases continuously over time. At the beginning of the environment, there is a significant oscillation in the V2V communication success rate. This oscillation, which does not occur consistently in every test, is due to the randomness of the environment and quickly stabilizes. As can be seen from the figure, the V2V communication success rate remains very stable and does not fluctuate with changes in vehicle positions, but it gradually decreases as the number of vehicles in the environment increases. For the V2I rate, since the strategy is trained in a static environment, it cannot fully adapt to the changing environment. While ensuring the success rate of V2V communication, it does not effectively minimize interference with the V2I links, resulting in considerable fluctuations in the V2I rate. Overall, the V2I rate shows a downward trend with the increase in the number of vehicles.

2) Results Analysis: In Fig. 11, the sampled 5000 data points are divided into five segments, each representing data over a specific time period. The performance of the number of vehicles, V2I communication rate, and V2V communication success rate are analyzed for each time period. During the first time period, the V2V communication success rate exhibits a higher frequency of outliers, which can be attributed to oscillations in the environment observed from instantaneous values. Although the V2I communication rate occasionally shows outliers, these remain within a controllable range.

## VII. CONCLUSIONS

In this paper, we started with the reason that centralized resource allocation methods outperform distributed ones, and attempted to integrate GNN with DRL to enable each agent to acquire more information from local observations. To address the issue that GNNs are typically deployed on a global scale and struggle to adapt to dynamic graph structures, we proposed a novel graph construction method that is perfectly suited for vehicular networks. This method implicitly constructs the graph network without adding extra communication overhead. Additionally, an inductive GraphSAGE model was employed to handle the variability in the number of vehicles. Finally, we combined the proposed GNN model with a DDQN to solve the resource allocation problem, and constructed both a static environment with a fixed number of vehicles and a dynamic environment with a varying number of vehicles to test it. Simulation results demonstrated that our proposed GNN model can effectively improve the policies learned by the agents, achieving better performance than the standalone DQN method.

Based on theoretical analysis and simulation results, the conclusions can be summarized as follows:

- The graph construction method proposed in this paper ensures distributed network deployment and reduces the decision-making time required.
- The GraphSAGE model can capture features that include global structural information from the graph.
- The integration of GNN enables intelligent agents to capture more information from local observations, facilitating better decision-making.

## REFERENCES

- [1] A. Zanella, N. Bui, A. Castellani, L. Vangelista, and M. Zorzi, "Internet of things for smart cities," *IEEE Internet of Things Journal*, vol. 1, no. 1, pp. 22–32, 2014.
- [2] S. Wan, J. Lu, P. Fan, Y. Shao, C. Peng, and K. B. Letaief, "Convergence Analysis and System Design for Federated Learning Over Wireless Networks," *IEEE Journal on Selected Areas in Communications*, vol. 39, no. 12, pp. 3622–3639, 2021.
- [3] K. Abboud, H. A. Omar, and W. Zhuang, "Interworking of dsrc and cellular network technologies for v2x communications: A survey," *IEEE Transactions on Vehicular Technology*, vol. 65, no. 12, pp. 9457–9470, 2016.
- [4] J. B. Kenney, "Dedicated short-range communications (dsrc) standards in the united states," *Proceedings of the IEEE*, vol. 99, no. 7, pp. 1162–1182, 2011.
- [5] Q. Wu, S. Xia, P. Fan, Q. Fan, and Z. Li, "Velocity-Adaptive V2I Fair-Access Scheme Based on IEEE 802.11 DCF for Platooning Vehicles," *Sensors*, vol. 18, no. 12, pp. 4198, 2018.
- [6] N. Lu, N. Cheng, N. Zhang, X. Shen, and J. W. Mark, "Connected vehicles: Solutions and challenges," *IEEE Internet of Things Journal*, vol. 1, no. 4, pp. 289–299, 2014.
- [7] J. E. Siegel, D. C. Erb, and S. E. Sarma, "A survey of the connected vehicle landscape—architectures, enabling technologies, applications, and development areas," *IEEE Transactions on Intelligent Transportation Systems*, vol. 19, no. 8, pp. 2391–2406, 2018.
- [8] J. Wang, J. Liu, and N. Kato, "Networking and communications in autonomous driving: A survey," *IEEE Communications Surveys & Tutorials*, vol. 21, no. 2, pp. 1243–1274, 2019.
- [9] Q. Wu, S. Wang, H. Ge, P. Fan, Q. Fan, and K. B. Letaief, "Delay-sensitive Task Offloading in Vehicular Fog Computing-Assisted Platoons," *IEEE Transactions on Network and Service Management*, vol. 21, no. 2, Apr. 2024, pp. 2012–2026.
- [10] Q. Wu, S. Nie, P. Fan, H. Liu, Q. Fan, and Z. Li, "A Swarming Approach to Optimize the One-Hop Delay in Smart Driving Inter-Platoon Communications," *Sensors*, vol. 18, no. 10, art. no. 3307, Oct. 2018.
- [11] Q. Wu, Y. Zhao, Q. Fan, P. Fan, J. Wang, and C. Zhang, "Mobility-Aware Cooperative Caching in Vehicular Edge Computing Based on Asynchronous Federated and Deep Reinforcement Learning," *IEEE Journal of Selected Topics in Signal Processing*, vol. 17, no. 1, pp. 66–81, Jan. 2023.
- [12] S. Song, Z. Zhang, Q. Wu, P. Fan, and Q. Fan, "Joint Optimization of Age of Information and Energy Consumption in NR-V2X System Based on Deep Reinforcement Learning," *Sensors*, vol. 24, no. 13, Art. no. 3448, 2024.
- [13] K. Xiong, P. Fan, Z. Xu, H.-C. Yang, and K. B. Letaief, "Optimal Cooperative Beamforming Design for MIMO Decode-and-Forward Relay Channels," *IEEE Transactions on Signal Processing*, vol. 62, no. 6, pp. 1476–1489, 2014.
- [14] J. Liu, K. Xiong, D. W.K. Ng, P. Fan, Z. Zhong, and K. B. Letaief, "Max-Min Energy Balance in Wireless-Powered Hierarchical Fog-Cloud Computing Networks," *IEEE Transactions on Wireless Communications*, vol. 19, no. 11, pp. 7064–7080, 2020.
- [15] R. Jiang, K. Xiong, P. Fan, Y. Zhang, and Z. Zhong, "Power Minimization in SWIPT Networks With Coexisting Power-Splitting and Time-Switching Users Under Nonlinear EH Model," *IEEE Internet of Things Journal*, vol. 6, no. 5, pp. 8853–8869, 2019.
- [16] Y. Guo, K. Xiong, Y. Lu, D. Wang, P. Fan, and K. B. Letaief, "Achievable Information Rate in Hybrid VLC-RF Networks With Lighting Energy Harvesting," *IEEE Transactions on Communications*, vol. 69, no. 10, pp. 6852–6864, 2021.
- [17] H. Zheng, K. Xiong, P. Fan, Z. Zhong, and K. B. Letaief, "Age of Information-Based Wireless Powered Communication Networks With Selfish Charging Nodes," *IEEE Journal on Selected Areas in Communications*, vol. 39, no. 5, pp. 1393–1411, 2021.
- [18] Q. Wu, W. Wang, P. Fan, Q. Fan, J. Wang, and K. B. Letaief, "URLLC-Aware Resource Allocation for Heterogeneous Vehicular Edge Computing," *IEEE Transactions on Vehicular Technology*, 2024, doi: 10.1109/TVT.2024.3370196.
- [19] Q. Wu, W. Wang, P. Fan, Q. Fan, H. Zhu, and K. B. Letaief, "Cooperative Edge Caching Based on Elastic Federated and Multi-Agent Deep Reinforcement Learning in Next-Generation Networks," *IEEE Transactions on Network and Service Management*, 2024, doi: 10.1109/TNSM.2024.3403842.
- [20] Q. Wu and J. Zheng, "Performance Modeling and Analysis of the ADHOC MAC Protocol for VANETs," in *Proc. of IEEE International Conference on Communication (ICC'15)*, London, UK, Jun. 2015, pp. 3646–3652.
- [21] J. Fan, Q. Wu, and J. Hao, "Optimal Deployment of Wireless Mesh Sensor Networks based on Delaunay Triangulations," in *Proc. of IEEE International Conference on Information, Networking and Automation (ICINA'10)*, Kunming, China, Oct. 2010, pp. 1–5.
- [22] Q. Wu, H. Liu, C. Zhang, Q. Fan, Z. Li, and K. Wang, "Trajectory Protection Schemes Based on a Gravity Mobility Model in IoT," *Electronics*, vol. 8, no. 148, Feb. 2019.
- [23] Q. Wu, S. Shi, Z. Wan, Q. Fan, P. Fan, and C. Zhang, "Towards V2I Age-aware Fairness Access: A DQN Based Intelligent Vehicular Node Training and Test Method," *Chinese Journal of Electronics*, vol. 32, no. 6, 2023, pp. 1230–1244.
- [24] Q. Wu and J. Zheng, "Performance Modeling of IEEE 802.11 DCF Based Fair Channel Access for Vehicular-to-Roadside Communication in a Non-Saturated State," in *Proc. of IEEE International Conference on Communication (ICC'14)*, Sydney, Australia, Jun. 2014, pp. 2575–2580.
- [25] Q. Wu, S. Xia, Q. Fan, and Z. Li, "Performance Analysis of IEEE 802.11p for Continuous Backoff Freezing in IoV," *Electronics*, vol. 8, no. 12, Art. no. 1404, Dec. 2019.
- [26] Q. Wu and J. Zheng, "Performance Modeling and Analysis of the ADHOC MAC Protocol for Vehicular Networks," *Wireless Networks*, vol. 22, no. 3, Apr. 2016, pp. 799–812.
- [27] Q. Wu and J. Zheng, "Performance Modeling of the IEEE 802.11p EDCA Mechanism for VANET," in *Proc. of IEEE Global Communications Conference (GLOBECOM'14)*, Austin, USA, Dec. 2014, pp. 57–63.
- [28] Q. Wu and J. Zheng, "Performance Modeling and Analysis of IEEE 802.11 DCF Based Fair Channel Access for Vehicle-to-Roadside Communication in a Non-Saturated State," *Wireless Networks*, vol. 21, no. 1, Jan. 2015, pp. 1–11.
- [29] M. H. C. Garcia, A. Molina-Galan, M. Boban, J. Gozalvez, B. Coll-Perales, T. Şahin, and A. Kousaridas, "A tutorial on 5g nr v2x communications," *IEEE Communications Surveys & Tutorials*, vol. 23, no. 3, pp. 1972–2026, 2021.
- [30] K. Sehla, T. M. T. Nguyen, G. Pujolle, and P. B. Velloso, "Resource allocation modes in c-v2x: From lte-v2x to 5g-v2x," *IEEE Internet of Things Journal*, vol. 9, no. 11, pp. 8291–8314, 2022.
- [31] S. A. Ashraf, R. Blasco, H. Do, G. Fodor, C. Zhang, and W. Sun, "Supporting vehicle-to-everything services by 5g new radio release-16 systems," *IEEE Communications Standards Magazine*, vol. 4, no. 1, pp. 26–32, 2020.
- [32] J. Fan, S. Yin, Q. Wu, and F. Gao, "Study on Refined Deployment of Wireless Mesh Sensor Network," in *Proc. of IEEE International Conference on Wireless Communications, Networking and Mobile Computing (WICOM'10)*, Chengdu, China, Jul. 2010, pp. 370–375.
- [33] D. Zhai, R. Zhang, L. Cai, B. Li, and Y. Jiang, "Energy-efficient user scheduling and power allocation for noma-based wireless networks with massive iot devices," *IEEE Internet of Things Journal*, vol. 5, no. 3, pp. 1857–1868, 2018.
- [34] X. Chen, J. Lu, P. Fan, and K. B. Letaief, "Massive MIMO Beamforming With Transmit Diversity for High Mobility Wireless Communications," *IEEE Access*, vol. 5, pp. 23032–23045, 2017.
- [35] Y. Xiao, J. Liu, J. Wu, and N. Ansari, "Leveraging deep reinforcement learning for traffic engineering: A survey," *IEEE Communications Surveys & Tutorials*, vol. 23, no. 4, pp. 2064–2097, 2021.
- [36] Z. Zhao, S. Bu, T. Zhao, Z. Yin, M. Peng, Z. Ding, and T. Q. S. Quek, "On the design of computation offloading in fog radio access networks," *IEEE Transactions on Vehicular Technology*, vol. 68, no. 7, pp. 7136–7149, 2019.
- [37] D. Long, Q. Wu, Q. Fan, P. Fan, Z. Li, and J. Fan, "A Power Allocation Scheme for MIMO-NOMA and D2D Vehicular Edge Computing Based on Decentralized DRL," *Sensors*, vol. 23, no. 7, Art. no. 3449, 2023.
- [38] C. Guo, L. Liang, and G. Y. Li, "Resource allocation for low-latency vehicular communications: An effective capacity perspective," *IEEE Journal on Selected Areas in Communications*, vol. 37, no. 4, pp. 905–917, 2019.

- [39] M. Zhang and Y. Chen, "Link prediction based on graph neural networks," in *Neural Information Processing Systems*, 2018. [Online]. Available: <https://api.semanticscholar.org/CorpusID:3573161>
- [40] T. Kipf and M. Welling, "Semi-supervised classification with graph convolutional networks," *ArXiv*, vol. abs/1609.02907, 2016. [Online]. Available: <https://api.semanticscholar.org/CorpusID:3144218>
- [41] M. Zhang, Z. Cui, M. Neumann, and Y. Chen, "An end-to-end deep learning architecture for graph classification," in *AAAI Conference on Artificial Intelligence*, 2018. [Online]. Available: <https://api.semanticscholar.org/CorpusID:4770492>
- [42] W. L. Hamilton, Z. Ying, and J. Leskovec, "Inductive representation learning on large graphs," in *Neural Information Processing Systems*, 2017. [Online]. Available: <https://api.semanticscholar.org/CorpusID:4755450>
- [43] K. Wang, F. R. Yu, L. Wang, J. Li, N. Zhao, Q. Guan, B. Li, and Q. Wu, "Interference Alignment with Adaptive Power Allocation in Full-Duplex-Enabled Small Cell Networks," *IEEE Transactions on Vehicular Technology*, vol. 68, no. 3, Mar. 2019.
- [44] W. Sun, E. G. Ström, F. Brännström, K. C. Sou, and Y. Sui, "Radio resource management for d2d-based v2v communication," *IEEE Transactions on Vehicular Technology*, vol. 65, no. 8, pp. 6636–6650, 2016.
- [45] Q. Wei, L. Wang, Z. Feng, and Z. Ding, "Wireless resource management in lte-u driven heterogeneous v2x communication networks," *IEEE Transactions on Vehicular Technology*, vol. 67, no. 8, pp. 7508–7522, 2018.
- [46] P. Wang, B. Di, H. Zhang, K. Bian, and L. Song, "Cellular v2x communications in unlicensed spectrum: Harmonious coexistence with vanet in 5g systems," *IEEE Transactions on Wireless Communications*, vol. 17, no. 8, pp. 5212–5224, 2018.
- [47] X. Li, L. Ma, Y. Xu, and R. Shankaran, "Resource allocation for d2d-based v2x communication with imperfect csi," *IEEE Internet of Things Journal*, vol. 7, no. 4, pp. 3545–3558, 2020.
- [48] F. Abbas, P. Fan, and Z. Khan, "A novel low-latency v2v resource allocation scheme based on cellular v2x communications," *IEEE Transactions on Intelligent Transportation Systems*, vol. 20, no. 6, pp. 2185–2197, 2019.
- [49] W. Chen, L. Dai, K. B. Letaief, and Z. Cao, "A unified cross-layer framework for resource allocation in cooperative networks," *IEEE Transactions on Wireless Communications*, vol. 7, no. 8, pp. 3000–3012, 2008.
- [50] Y. J. Zhang and K. B. Letaief, "Adaptive resource allocation and scheduling for multiuser packet-based OFDM networks," in *2004 IEEE International Conference on Communications (IEEE Cat. No.04CH37577)*, vol. 5, 2004, pp. 2949–2953.
- [51] K. Xiong, C. Chen, G. Qu, P. Fan, and K. B. Letaief, "Group cooperation with optimal resource allocation in wireless powered communication networks," *IEEE Transactions on Wireless Communications*, vol. 16, no. 6, pp. 3840–3853, 2017.
- [52] T. Li, P. Fan, Z. Chen, and K. B. Letaief, "Optimum transmission policies for energy harvesting sensor networks powered by a mobile control center," *IEEE Transactions on Wireless Communications*, vol. 15, no. 9, pp. 6132–6145, 2016.
- [53] J. Zhang, P. Fan, and K. B. Letaief, "Network coding for efficient multicast routing in wireless ad-hoc networks," *IEEE Transactions on Communications*, vol. 56, no. 4, pp. 598–607, 2008.
- [54] Z. Yao, J. Jiang, P. Fan, Z. Cao, and V. O. K. Li, "A neighbor-table-based multipath routing in ad hoc networks," in *Proc. 57th IEEE Semiannual Vehicular Technology Conference, 2003. VTC 2003-Spring*, vol. 3, 2003, pp. 1739–1743.
- [55] H. Ye, G. Y. Li, and B.-H. F. Juang, "Deep reinforcement learning based resource allocation for v2v communications," *IEEE Transactions on Vehicular Technology*, vol. 68, no. 4, pp. 3163–3173, 2019.
- [56] X. Wang, Y. Zhang, R. Shen, Y. Xu, and F.-C. Zheng, "Drl-based energy-efficient resource allocation frameworks for uplink noma systems," *IEEE Internet of Things Journal*, vol. 7, no. 8, pp. 7279–7294, 2020.
- [57] X. Zhang, M. Peng, S. Yan, and Y. Sun, "Deep-reinforcement-learning-based mode selection and resource allocation for cellular v2x communications," *IEEE Internet of Things Journal*, vol. 7, no. 7, pp. 6380–6391, 2020.
- [58] Y. Yuan, G. Zheng, K. Wong, and K. B. Letaief, "Meta-reinforcement learning based resource allocation for dynamic v2x communications," *IEEE Transactions on Vehicular Technology*, vol. 70, pp. 8964–8977, 2021. [Online]. Available: <https://api.semanticscholar.org/CorpusID:237600245>
- [59] M. Lee, G. Yu, and G. Y. Li, "Graph embedding-based wireless link scheduling with few training samples," *IEEE Transactions on Wireless Communications*, vol. 20, no. 4, pp. 2282–2294, 2021.
- [60] T. Chen, X. Zhang, M. You, G. Zheng, and S. Lambotharan, "A gnn-based supervised learning framework for resource allocation in wireless iot networks," *IEEE Internet of Things Journal*, vol. 9, no. 3, pp. 1712–1724, 2022.
- [61] J. Guo and C. Yang, "Learning power allocation for multi-cell-multi-user systems with heterogeneous graph neural networks," *IEEE Transactions on Wireless Communications*, vol. 21, no. 2, pp. 884–897, 2022.
- [62] "3rd generation partnership project; technical specification group radio access network; evolved universal terrestrial radio access (e-utra); further advancements for e-utra physical layer aspects (release 9)." [Online]. Available: <https://api.semanticscholar.org/CorpusID:16652630>
- [63] M. I. Ashraf, M. Bennis, C. Perfecto, and W. Saad, "Dynamic proximity-aware resource allocation in vehicle-to-vehicle (v2v) communications," in *2016 IEEE Globecom Workshops (GC Wkshps)*, 2016, pp. 1–6.