MagAO-X: Commissioning Results and Status of Ongoing Upgrades

Jared R. Males^a, Laird M. Close^a, Sebastiaan Y. Haffert^a, Maggie Y. Kautz^{a,b}, Jay Kueny^{a,b}, Joseph D. Long^a, Eden McEwen^a, Noah Swimmer^f, John I. Bailey, III^g, Warren Foster^{a,b}, Benjamin A. Mazin^f, Logan Pearce^a, Joshua Liberman^{a,b}, Katie Twitchell^{a,b}, Alycia J. Weinberger^e, Olivier Guyon^{a,b,c,d}, Alexander D. Hedglen^{a,b}, Avalon McLeod^{a,b}, Roz Roberts^a, Kyle Van Gorkom^{a,b}, Jialin Li^a, Isabella Doty^a, and Victor Gasho^{a,b}

^aSteward Observatory, University of Arizona
^bJames C. Wyant College of Optical Sciences, University of Arizona
^cSubaru Telescope, National Astronomical Observatory of Japan
^dAstrobiology Center, National Institutes of Natural Sciences, Japan
^eEarth and Planets Laboratory, Carnegie Institution for Science
^fDepartment of Physics, University of California, Santa Barbara
^gCaltech Optical Observatories, California Institute of Technology, Pasadena

ABSTRACT

MagAO-X is the coronagraphic extreme adaptive optics system for the 6.5 m Magellan Clay Telescope. We report the results of commissioning the first phase of MagAO-X. Components now available for routine observations include: the > 2 kHz high-order control loop consisting of a 97 actuator woofer deformable mirror (DM), a 2040 actuator tweeter DM, and a modulated pyramid wavefront sensor (WFS); classical Lyot coronagraphs with integrated low-order (LO) WFS and control using a third 97-actuator non-common path correcting (NCPC) DM; broad band imaging in g, r, i, and z filters with two EMCCDs; simultaneous differential imaging in H α ; and integral field spectroscopy with the VIS-X module. Early science results include the discovery of new white dwarf companions, resolved images of young extrasolar giant planets in the optical, discovery of new white dwarf companions, resolved images of evolved stars, and high-contrast images of circumstellar disks in scattered light in g-band (500 nm). We have commenced an upgrade program, called "Phase II", to enable high-contrast observations at the smallest inner working angles possible. These upgrades include a new 952 actuator NCPC DM to enable coronagraphic wavefront control; phase induced amplitude apodization coronagraphs; new fast cameras for LOWFS and Lyot-LOWFS; and real-time computer upgrades. We will report the status of these upgrades and results of first on-sky testing in March-May 2024.

Keywords: adaptive optics

1. INTRODUCTION

MagAO-X¹⁻³ is an "extreme" adaptive optics (ExAO) system optimized for high-contrast science at visible-to-near-IR wavelengths. It is installed on the Magellan Clay 6.5 m telescope at Las Campanas Observatory (LCO), in Chile. Construction and commissioning of MagAO-X was funded by the NSF MRI program. Commissioning of MagAO-X is now complete, and it is routinely offered to all Magellan partners for observations. Here we report on the outcome of this first phase of MagAO-X.

MagAO-X was conceived with the ultimate goal of reflected light characterization of nearby temperate exoplanets. This will require achieving exquisite wavefront control on-sky. This motivates a program of continued upgrades and testing dubbed "Phase II". We next provide a status update on these upgrades, including the

Further author information: (Send correspondence to J.R.M.)

J.R.M.: E-mail: jrmales@arizona.edu

installation of a new 952 actuator non-common path deformable mirror (DM), a high-speed low-order wavefront sensor (LOWFS) camera, and a real-time computer (RTC) upgrade.

When not at the telescope, MagAO-X also serves as a valuable testbed for future technology, including for AO and segment phasing technologies for the Giant Magellan Telescope (GMT). We will also provide a brief overview of these activities and recent results.

2. INSTRUMENT OVERVIEW

Here we briefly present the design of MagAO-X and its key specifications. Previous SPIE contributions provide more detail. ¹⁻¹⁴ In addition, the complete preliminary design review (PDR) documentation is available at https://magao-x.org/docs/handbook/appendices/pdr/, and results of laboratory integration and preparation for shipment can be bound in the pre-ship review (PSR) documentation: https://magao-x.org/docs/handbook/appendices/psr/index.html.






Figure 1. When observing at LCO, MagAO-X occupies the Nasmyth platform of the Magellan Clay 6.5 m telescope.

MagAO-X is installed on the Nasmyth platform of the 6.5 Magellan Clay telescope (Figure 1) at Las Campanas Observatory, Chile. MagAO-X is a woofer-tweeter system, with a 97-actuator deformable mirror (DM) serving as the woofer and a 2040 actuator MEMS DM as the tweeter. The pupil illuminates 48 actuators across in the short direction, giving a 13.5 cm actuator pitch, with approximately 1640 actuators illuminated.

MagAO-X is a two-level optical bench (Figure 2). The upper-level houses the k-mirror derotator, woofer, tweeter, and atmospheric dispersion compensator. A periscope relay folds the beam to the lower level containing the pyramid wavefront sensor (PyWFS). A selectable beamsplitter sends light to the PyWFS and to a Lyot-coronagraph system feeding a dual-EMCCD simultaneous differential imaging (SDI) system or optionally visitor instruments such as the VIS-X spectrograph. ¹⁵ The coronagraph contains a third deformable mirror, originally with 97 actuators but now upgraded to 952, after the beamsplitter. This enables non-common path offloading without offsetting the PyWFS. All of these components and subsystems are described in great detail in the references and documents noted above.

Science cases motivating MagAO-X include:

- 1. The search for and characterization of young accreting planets in $H\alpha$ orbiting nearby T Tauri and Herbig Ae/Be stars. ¹⁶ See Li et al¹⁷ in these proceedings for an update on this project.
- 2. Circumstellar disk characterization
- 3. Young EGP characterization in the red-optical/near-IR
- 4. Spatially resolved stellar surface and evolved star imaging at high spectral resolution.
- 5. Characterization of tight binary star systems.
- 6. Kepler and TESS followup: MagAO-X can be used for high spatial-resolution follow-up of potential transiting planet host stars to search for binarity and other sources of contamination.






Figure 2. Left: Overview of the MagAO-X opto-mechanical layout. Recently installed Phase II upgrades highlighted in orange. Right: as-built MagAO-X just prior to the May 2024 observing run.

Table 1: On-sky nights for MagAO-X.

		Nights				Return	
Run	Dates	Tot.	Com.a	VIS-X ^b	Ph. II ^c	Shipment ^d	Notes
2019B	Dec 2 – Dec 8	4	4			Y	two separate 2-night blocks
2022A	Apr 9 – Apr 23	15	5	1		Y	
2022B	Nov 28 – Dec 9	12	2	1		N	significant weather losses
2023A	Mar 3 – Mar 16	14	2		1	Y	XKID commissioning
$2024 \mathrm{Aa^e}$	Mar 18 – Apr 1	13.5			2	N	1 night shared
$2024 \mathrm{Ab^e}$	May 14 – May 24	11			1	N	> 80% lost due to weather
	total:	69.5	13	2	4		

 $^{^{\}rm a}$ \sim 0.5 night used each time for post-installation checkout, here included in commissioning and Ph. II allocations

- 7. Accelerating Stars: Stars exhibiting accelerations measured by astrometry and radial velocity are proving to be excellent places to search for low-mass companions. Led by S. Haffert and L. Pearce, the MagAO-X Xoomies survey is conducting a cued search of such stars.
- 8. White Dwarf Companions: MagAO-X is sensitive to an understudied population of white dwarf companions to nearby main sequence stars (so-called Sirius-like systems). The ExAO Pup Search is characterizing such systems (Pearce et al, in prep).
- 9. High spatial resolution imaging of asteroid surfaces and asteroid companion searches.

3. COMMISSIONING RESULTS

Commissioning of the initial MRI-funded capabilities of MagAO-X is now complete. Table 1 summarizes the on-sky time utilized by MagAO-X on the Clay Telescope. Starting with the 2nd commissioning run (2022A) we have made significant time available for partner observations. 13 nights out of 69.5 were used for explicit commissioning tasks. Additionally 2 nights have been used for VIS-X IFU commissioning and 4 nights so far have been devoted to commissioning Phase II upgrades.

^b Nights allocated for commissioning of VIS-X

^c Nights allocated for commissioning Phase II upgrades

^d Denotes whether MagAO-X was returned to Tucson, AZ, following the run

^e 2024A was scheduled in two distinct runs



Figure 3. The XKID IFU dewar aligned to MagAO-X.

3.1 XKID

In March, 2023, we commissioned the MagAO-X Kinetic Inductance detector (XKID) IFU behind MagAO-X. XKID is a superconducting integral field spectrograph designed for low spectral resolution, photon counting spectroscopy of exoplanets in the optical and near-IR (800-1400 nm) based on an MKIDs array. The high time resolution (microsecond photon counting) and lack of detector noise (zero read noise or dark current) allows significant reduction of speckle backgrounds through the Stochastic Speckle Discrimination (SSD) technique. Figure 3 shows the XKID dewar aligned to MagAO-X on the Clay platform.

3.2 VIS-X

VIS-X is a visible wavelength IFU spectrograph in MagAO-X, see Haffert et al.¹⁵ VIS-X supports three modes: the wide-field "Emission Line Mode" ($\mathcal{R}=15,000,\,653-658$ nm, 1.15"X1.15") and the wide-field "Low-res Mode" ($\mathcal{R}=50-100,\,450-900$ nm, 1.15"X1.15"), and narrow-field "Characterization Mode" ($\mathcal{R}=15,000,\,500-900$ nm, 0.063"X0.5"). The "Emission Line Mode" has been commissioned and has been used to observe young stellar objects with jets, accreting companions, resolved stellar surfaces and (interacting) close binaries in the H α emission line (Haffert et al, in prep). Final commissioning of the remaining two modes is planned for the Fall 2024 semester.

4. PHASE II UPGRADES

4.1 NCPC DM

The correction of non-common path aberrations (NCPA) is critical to achieving the highest image quality in the science focal plane of an AO system. In typical AO systems the only corrective elements are prior to the beamsplitter, and so are in common-path with the WFS and the science instrumentation. The challenge this creates is that any aberrations non-common between the WFS and science instrument must be corrected using the upstream DM(s), which then requires that offsets be applied to the WFS signal such that the control loop does not simply remove the desired correction.

The solution we arrived at in MagAO-X is to place a non-common path correcting DM, which we refer to as "dmncpc", after the beamsplitter. This DM can then be used to correct NCPA without disturbing the upstream high-order loop. The original version of MagAO-X included a 97 actuator device identical to the woofer. In Phase II we have upgraded this to a 952 actuator MEMS device. We make use of focus diversity phase retrieval (FDPR), as well as coronagraphic low-order wavefront sensing using defocused spots to sense and correct NCPA. See Kueny et al. (these proceedings) for details about the characterization and on-sky commissioning of the

new 1K dmncpc. See Haffert et al.²³ (these proceedings) for details on how this upgrade has revolutionized our post-coronagraph high-contrast imaging capabilities, and Liberman et al.²⁴ (these proceedings) for an analysis of the NCPC DM and coronagraph alignment tolerances.



Figure 4. New NCPC DM

4.2 RTC

The control system for MagAO-X is based on commercial-off-the-shelf (COTS) computing components, including standard ATX motherboards, CPUs, and consumer-grade GPUs. This enables us to upgrade the performance of MagAO-X as computer hardware improves. The original RTC of MagAO-X was based on dual Intel Xeon 18 core processors on a PCIe Gen 3 motherboard, and utilized three NVIDIA 2080 Ti GPUs on an PCIe expansion board. As part of Phase II we upgraded to the AMD Threadripper architecture, with a 64 core processor on a PCIe Gen 4 motherboard. Additionally two GTX 4090 GPUs replaced the 2080s. This improved our total reconstruction time from $\sim 200~\mu \rm sec$ to $\sim 75~\mu \rm sec$. The move to PCIe Gen 4 also resulted in significantly improved timing stability, as we now have many fewer PCIe bus collisions between the WFS images, DM commands, and GPU memory operations.

The computer hardware upgrade enabled us to achieve 3 kHz loop speeds on-sky for the first time. The resulted in an over 10% reduction in residual flux, see Figure 5.

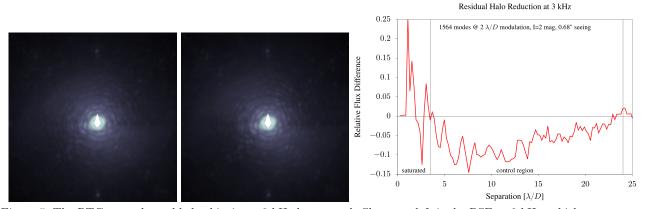


Figure 5. The RTC upgrade enabled achieving a 3 kHz loop speed. Shown at left is the PSF at 2 kHz, which compares to the middle PSF at 3 kHz. The middle image is more saturated in the core and improvements in the residual wind-driven halo are evident. The right-hand plot shows the improvement in residual flux at 3 kHz compared to 2 kHz.

4.3 PIAA

A further upgrade underway is the implementation of Phase Induced Amplitude Apodization Complex Mask Coronagraphs (PIAACMC) in MagAO-X. We have designed, procured, and installed a set of PIAA and inverse PIAA lenses and conducted initial tests on-sky.²⁵ Results with an opaque focal plane mask (FPM) are shown in

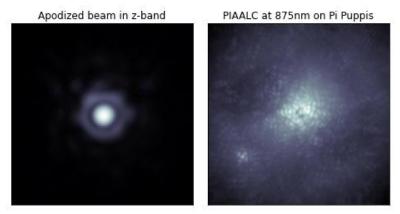


Figure 6. On-sky results with Phase Induced Apodization (PIAA) lenses. Left image shows the on-axis PSF with no focal plane mask (FPM), demonstrating that the PIAA lenses are aligned. Right image shows the result with a opaque Lyot Coronagraph (LC) FPM in the beam. The off-axis companion has only a small amount of residual astigmatism, showing that the inverse PIAA lenses are also well aligned.

Figure 6. We are finalizing designs for transmissive complex FPMs to complete the PIAACMC implementation for demonstration on-sky in Fall, 2024.

4.4 LOWFS Upgrades

To take advantage of the high-speed capabilities of the new NCPC DM and to prepare for using transmissive complex masks in PIAACMC, we have upgraded our low-order WFS (LOWFS) camera to use the Teledyne Kinetix camera. Over the small FOVs used for LOWFS on MagAO-X²⁶ this device is capable of over 10,000 frames per second. In addition to upgrading the existing FPM based LOWFS, we have also begun implementing a second Lyot-based LOWFS²⁷ system using a second Kinetix camera. We plan to demonstrate this capability in Fall, 2024.

4.5 Algorithm Development

We continue to optimize the control system. Ongoing efforts include machine-learning driving non-linear PyWFS reconstruction algorithms (Landman et al,²⁸ these proceedings), and PyWFS "optical gain" characterization and on-line correction (McEwen et al.,²⁹ these proceedings). Efforts are also underway to implement real-time atmospheric dispersion corrector (ADC) control (Twitchell et al.,³⁰ these proceedings). Finally, we are working to implement PSF/speckle reconstruction using system telemetry, see Long et al.³¹ (these proceedings) for recent results.

5. TESTBED OPERATIONS

As part of the plan to continuously improve MagAO-X, it was designed for routine shipment between LCO and the University of Arizona in Tucson. This has enabled MagAO-X to serve as a key part of the High-Contrast Adaptive Optics Testbed (HCAT) for the Giant Magellan Telescope (GMT), part of the overall program to develop segment phase sensing and control strategies for the GMT.³² MagAO-X serves as the simulated GMT-AO system for HCAT, and is used to conduct phase sensing and control experiments.^{33–37} For more details on these experiments see Close et al.,³⁸ Quiros-Pacheco et al.,³⁹ Plantet et al.,⁴⁰ and Demers et al.⁴¹ in these proceedings, and Kautz et al. (in prep).

As of July, 2024 MagAO-X is set up at LCO for remote operations. It is available for WFS&C experiments and algorithm development. We expect it to remain at LCO through April, 2025.

6. CONCLUSION

MagAO-X has now completed initial commissioning at LCO, and is supporting science observations by Magellan partner scientists. Significant improvements in performance have been realized over the commissioning period which began in Dec, 2019. In addition, ongoing upgrades to MagAO-X and its ability to serve as a WFS&C testbed will continue to improve performance.

ACKNOWLEDGMENTS

We are very grateful for support from the NSF MRI Award #1625441 (MagAO-X). The Phase II upgrade program is made possible by the generous support of the Heising-Simons Foundation.

REFERENCES

- [1] Males, J. R., Close, L. M., Miller, K., Schatz, L., Doelman, D., Lumbres, J., Snik, F., Rodack, A., Knight, J., Van Gorkom, K., Long, J. D., Hedglen, A., Kautz, M., Jovanovic, N., Morzinski, K., Guyon, O., Douglas, E., Follette, K. B., Lozi, J., Bohlman, C., Durney, O., Gasho, V., Hinz, P., Ireland, M., Jean, M., Keller, C., Kenworthy, M., Mazin, B., Noenickx, J., Alfred, D., Perez, K., Sanchez, A., Sauve, C., Weinberger, A., and Conrad, A., "MagAO-X: project status and first laboratory results," in [Adaptive Optics Systems VI], Society of Photo-Optical Instrumentation Engineers (SPIE) Conference Series 10703, 1070309 (July 2018).
- [2] Males, J. R., Close, L. M., Guyon, O., Hedglen, A. D., Van Gorkom, K., Long, J. D., Kautz, M., Lumbres, J., Schatz, L., Rodack, A., Miller, K., Doelman, D., Snik, F., Bos, S., Knight, J. M., Morzinski, K., Gasho, V., Keller, C., Haffert, S., and Pearce, L., "MagAO-X first light," in [Society of Photo-Optical Instrumentation Engineers (SPIE) Conference Series], Society of Photo-Optical Instrumentation Engineers (SPIE) Conference Series 11448, 114484L (Dec. 2020).
- [3] Males, J. R., Close, L. M., Haffert, S., Long, J. D., Hedglen, A. D., Pearce, L., Weinberger, A. J., Guyon, O., Knight, J. M., McLeod, A., Kautz, M., Van Gorkom, K., Lumbres, J., Schatz, L., Rodack, A., Gasho, V., Kueny, J., and Foster, W., "MagAO-X: current status and plans for Phase II," in [Adaptive Optics Systems VIII], Schreiber, L., Schmidt, D., and Vernet, E., eds., Society of Photo-Optical Instrumentation Engineers (SPIE) Conference Series 12185, 1218509 (Aug. 2022).
- [4] Van Gorkom, K., Miller, K. L., Males, J. R., Guyon, O., Rodack, A. T., Lumbres, J., and Knight, J. M., "Characterization of deformable mirrors for the MagAO-X project," in [Adaptive Optics Systems VI], Society of Photo-Optical Instrumentation Engineers (SPIE) Conference Series 10703, 107035A (July 2018).
- [5] Hedglen, A. D., Close, L. M., Males, J. R., and Durney, O., "Optical field/pupil rotator with a novel compact K-mirror for MagAO-X," in [Adaptive Optics Systems VI], Society of Photo-Optical Instrumentation Engineers (SPIE) Conference Series 10703, 1070355 (July 2018).
- [6] Lumbres, J., Males, J., Douglas, E., Close, L., Guyon, O., Cahoy, K., Carlton, A., Clark, J., Doelman, D., Feinberg, L., Knight, J., Marlow, W., Miller, K., Morzinski, K., Por, E., Rodack, A., Schatz, L., Snik, F., Van Gorkom, K., and Wilby, M., "Modeling coronagraphic extreme wavefront control systems for high contrast imaging in ground and space telescope missions," in [Adaptive Optics Systems VI], Society of Photo-Optical Instrumentation Engineers (SPIE) Conference Series 10703, 107034Z (July 2018).
- [7] Close, L. M., Males, J. R., Durney, O., Sauve, C., Kautz, M., Hedglen, A., Schatz, L., Lumbres, J., Miller, K., Van Gorkom, K., Jean, M., and Gasho, V., "Optical and mechanical design of the extreme AO coronagraphic instrument MagAO-X," in [Adaptive Optics Systems VI], Society of Photo-Optical Instrumentation Engineers (SPIE) Conference Series 10703, 107034Y (July 2018).
- [8] Kautz, M., Close, L. M., and Males, J. R., "A locking clamp that enables high thermal and vibrational stability for kinematic optical mounts," in [Adaptive Optics Systems VI], Society of Photo-Optical Instrumentation Engineers (SPIE) Conference Series 10703, 107032Q (July 2018).
- [9] Rodack, A. T., Males, J. R., Guyon, O., Mazin, B. A., Fitzgerald, M. P., and Mawet, D., "Real-time estimation and correction of quasi-static aberrations in ground-based high contrast imaging systems with high frame-rates," in [Adaptive Optics Systems VI], Society of Photo-Optical Instrumentation Engineers (SPIE) Conference Series 10703, 107032N (July 2018).

- [10] Schatz, L. H., Males, J. R., Close, L. M., Durney, O., Guyon, O., Hart, M., Lumbres, J., Miller, K., Knight, J., Rodack, A. T., Long, J. D., Van Gorkom, K., Jean, M., and Kautz, M., "Design of the MagAO-X pyramid wavefront sensor," in [Adaptive Optics Systems VI], Society of Photo-Optical Instrumentation Engineers (SPIE) Conference Series 10703, 1070321 (July 2018).
- [11] Miller, K., Males, J. R., Guyon, O., Close, L. M., Doelman, D., Snik, F., Por, E., Wilby, M. J., Bohlman, C., Lumbres, J., Van Gorkom, K., Kautz, M., Rodack, A., Knight, J., Jovanovic, N., Morzinski, K., and Schatz, L., "Focal plane wavefront sensing and control strategies for high-contrast imaging on the MagAO-X instrument," in [Adaptive Optics Systems VI], Society of Photo-Optical Instrumentation Engineers (SPIE) Conference Series 10703, 107031T (July 2018).
- [12] Knight, J. M., Guyon, O., Lozi, J., Jovanovic, N., and Males, J. R., "Phase-induced amplitude apodization complex-mask coronagraph tolerancing and analysis," in [Advances in Optical and Mechanical Technologies for Telescopes and Instrumentation III], Society of Photo-Optical Instrumentation Engineers (SPIE) Conference Series 10706, 107065O (July 2018).
- [13] Guyon, O., Sevin, A., Gratadour, D., Bernard, J., Ltaief, H., Sukkari, D., Cetre, S., Skaf, N., Lozi, J., Martinache, F., Clergeon, C., Norris, B., Wong, A., and Males, J., "The compute and control for adaptive optics (CACAO) real-time control software package," in [Adaptive Optics Systems VI], Society of Photo-Optical Instrumentation Engineers (SPIE) Conference Series 10703, 107031E (July 2018).
- [14] Close, L. M., Males, J., Long, J. D., Van Gorkom, K., Hedglen, A. D., Kautz, M., Lumbres, J., Haffert, S. Y., Follette, K., Wagner, K., Miller, K., Apai, D., Wu, Y.-L., Guyon, O., Schatz, L., Rodack, A., Doelman, D., Snik, F., Knight, J. M., Morzinski, K., Gasho, V., Keller, C., Pearce, L., Weinberger, A., Pérez, L., and Doyon, R., "Prediction of the planet yield of the MaxProtoPlanetS high-contrast survey for H-alpha protoplanets with MagAO-X based on first light contrasts," in [Society of Photo-Optical Instrumentation Engineers (SPIE) Conference Series], Society of Photo-Optical Instrumentation Engineers (SPIE) Conference Series 11448, 114480U (Dec. 2020).
- [15] Haffert, S. Y., Males, J. R., Close, L., Long, J., Schatz, L., van Gorkom, K., Hedglen, A., Lumbres, J., Rodack, A., Guyon, O., Knight, J., Kautz, M., and Pearce, L., "The Visible Integral-field Spectrograph eXtreme (VIS-X): high-resolution spectroscopy with MagAO-X," in [Society of Photo-Optical Instrumentation Engineers (SPIE) Conference Series], Society of Photo-Optical Instrumentation Engineers (SPIE) Conference Series 11823, 1182306 (Sept. 2021).
- [16] Close, L. M., "The Separation and H α Contrasts of Massive Accreting Planets in the Gaps of Transitional Disks: Predicted H α Protoplanet Yields for Adaptive Optics Surveys," AJ 160, 221 (Nov. 2020).
- [17] Li, J. et al., "Challenge of Direct Imaging of Exoplanets Within Structures: Disentangling Real Signal from Point Source from Background Light," Society of Photo-Optical Instrumentation Engineers (SPIE) Conference Series 13097 (2024).
- [18] Walter, A. B., Fruitwala, N., Steiger, S., Bailey, John I., I., Zobrist, N., Swimmer, N., Lipartito, I., Smith, J. P., Meeker, S. R., Bockstiegel, C., Coiffard, G., Dodkins, R., Szypryt, P., Davis, K. K., Daal, M., Bumble, B., Collura, G., Guyon, O., Lozi, J., Vievard, S., Jovanovic, N., Martinache, F., Currie, T., and Mazin, B. A., "The MKID Exoplanet Camera for Subaru SCExAO," Publications of the Astronomical Society of the Pacific 132, 125005 (Dec. 2020).
- [19] Walter, A. B., Bockstiegel, C., Brandt, T. D., and Mazin, B. A., "Stochastic Speckle Discrimination with Time-tagged Photon Lists: Digging below the Speckle Noise Floor," *Publications of the Astronomical Society* of the Pacific 131, 114506 (Nov. 2019).
- [20] Steiger, S., Currie, T., Brandt, T. D., Guyon, O., Kuzuhara, M., Chilcote, J., Groff, T. D., Lozi, J., Walter, A. B., Fruitwala, N., Bailey, John I., I., Zobrist, N., Swimmer, N., Lipartito, I., Smith, J. P., Bockstiegel, C., Meeker, S. R., Coiffard, G., Dodkins, R., Szypryt, P., Davis, K. K., Daal, M., Bumble, B., Vievard, S., Sahoo, A., Deo, V., Jovanovic, N., Martinache, F., Doppmann, G., Tamura, M., Kasdin, N. J., and Mazin, B. A., "SCExAO/MEC and CHARIS Discovery of a Low-mass, 6 au Separation Companion to HIP 109427 Using Stochastic Speckle Discrimination and High-contrast Spectroscopy," The Astronomical Journal 162, 44 (Aug. 2021).
- [21] Steiger, S., Brandt, T. D., Guyon, O., Swimmer, N., Walter, A. B., Bockstiegel, C., Lozi, J., Deo, V., Vievard, S., Skaf, N., Ahn, K., Jovanovic, N., Martinache, F., and Mazin, B. A., "Probing Photon Statistics in Adaptive Optics Images with SCExAO/MEC," *The Astronomical Journal* **164**, 186 (Nov. 2022).

- [22] Kueny, J. et al., "MagAO-X phase II upgrades: implementation and first on-sky results of a new post-AO 1000 actuator deformable mirror," Society of Photo-Optical Instrumentation Engineers (SPIE) Conference Series 13097 (2024).
- [23] Haffert, S. et al., "On-sky demonstration of high-order focal plane wavefront control with a second stage AO system on MagAO-X," Society of Photo-Optical Instrumentation Engineers (SPIE) Conference Series 13097 (2024).
- [24] Liberman, J. et al., "Analyzing misalignment tolerances for implicit electric field conjugation," Society of Photo-Optical Instrumentation Engineers (SPIE) Conference Series 13097 (2024).
- [25] Foster, W. B., Implementation of Phase Induced Apodization Optics on MagAO-X, Master's thesis, University of Arizona (2023). https://repository.arizona.edu/handle/10150/669737.
- [26] McLeod, A. L., Low Order Wavefront Sensing and Control on MagAO-X, Master's thesis, University of Arizona (2023). https://repository.arizona.edu/handle/10150/669618.
- [27] Singh, G., Lozi, J., Guyon, O., Baudoz, P., Jovanovic, N., Martinache, F., Kudo, T., Serabyn, E., and Kuhn, J., "On-Sky Demonstration of Low-Order Wavefront Sensing and Control with Focal Plane Phase Mask Coronagraphs," *Publications of the Astronomical Society of the Pacific* 127, 857 (Sept. 2015).
- [28] Landman, R. et al., "Closed-loop wavefront control with a neural network reconstructor for the unmodulated pyramid wavefront sensor on MagAO-X," Society of Photo-Optical Instrumentation Engineers (SPIE) Conference Series 13097 (2024).
- [29] McEwen, E. et al., "On-sky, real-time optical gain calibration on MagAO-X using incoherent speckles," Society of Photo-Optical Instrumentation Engineers (SPIE) Conference Series 13097 (2024).
- [30] Twitchell, K. et al., "Improving coronagraphic performance with active atmospheric dispersion control on MagAO-X," Society of Photo-Optical Instrumentation Engineers (SPIE) Conference Series 13097 (2024).
- [31] Long, J. et al., "More data than you want, less data than you need: machine learning approaches to starlight subtraction with MagAO-X," Society of Photo-Optical Instrumentation Engineers (SPIE) Conference Series 13097 (2024).
- [32] Demers, R. et al., "Phasing the Segmented Giant Magellan Telescope: Progress in Testbeds and Prototypes," Proc. SPIE 12185, #44 (2022).
- [33] Hedglen, A. D., Close, L. M., Bouchez, A. H., Males, J. R., Demers, R., Kautz, M., Basant, R., Parkinson, M., Gasho, V., Quirós-Pacheco, F., and Sitarski, B. N., "The Giant Magellan Telescope high contrast phasing testbed," in [Society of Photo-Optical Instrumentation Engineers (SPIE) Conference Series], Society of Photo-Optical Instrumentation Engineers (SPIE) Conference Series 11448, 114482X (Dec. 2020).
- [34] Hedglen, A. et al., "First lab results of segment/petal phasing with a pyramid wavefront sensor and a novel holographic dispersed fringe sensor (HDFS) from the Giant Magellan Telescope high contrast adaptive optics phasing testbed," *Proc. SPIE* **12185**, #42 (2022).
- [35] Kautz, A. et al., "A Novel Hexpyramid Pupil Slicer for an ExAO Parallel DM for the Giant Magellan Telescope," *Proc. SPIE* **12185**, #167 (2022).
- [36] Haffert, S. Y., Close, L. M., Hedglen, A. D., Males, J. R., Kautz, M., Bouchez, A. H., Demers, R., Quirós-Pacheco, F., Sitarski, B. N., Gorkom, K. V., Long, J. D., Guyon, O., Schatz, L., Miller, K., Lumbres, J., Rodack, A., and Knight, J. M., "Phasing the Giant Magellan Telescope with the holographic dispersed fringe sensor," Journal of Astronomical Telescopes, Instruments, and Systems 8(2), 1 21 (2022).
- [37] Hedglen, A. D., Close, L. M., Haffert, S. Y., Males, J. R., Kautz, M. Y., Bouchez, A. H., Demers, R. T., Quirós-Pacheco, F., Sitarski, B. N., Guyon, O., Gorkom, K. V., Long, J. D., Lumbres, J. R., Schatz, L. H., Miller, K. L., Rodack, A. T., and Knight, J. M., "Lab tests of segment/petal phasing with a pyramid wavefront sensor and a holographic dispersed fringe sensor in turbulence with the Giant Magellan Telescope high contrast adaptive optics phasing testbed," *Journal of Astronomical Telescopes, Instruments, and Systems* 8(2), 1 26 (2022).
- [38] Close, L. et al., "High-contrast imaging at first-light of the GMT: The PDR optical and mechanical design for the GMagAO-X ExAO system and results from the HCAT testbed with an HDFS phased parallel DM prototype," Society of Photo-Optical Instrumentation Engineers (SPIE) Conference Series 13097 (2024).
- [39] Quiros-Pacheco, F. et al., "The Giant Magellan Telescope's high contrast adaptive optics testbed: NGAO wavefront sensing and control laboratory results," Society of Photo-Optical Instrumentation Engineers (SPIE) Conference Series 13097 (2024).

- [40] Plantet, C. et al., "Integration and test of the natural guide star wavefront sensor prototype for the Giant Magellan Telescope: the pyramid sensor," Society of Photo-Optical Instrumentation Engineers (SPIE) Conference Series 13097 (2024).
- [41] Demers, R. et al., "Adaptive optics development at Giant Magellan Telescope: recent progress," Society of Photo-Optical Instrumentation Engineers (SPIE) Conference Series 13097 (2024).