

# Unlocking new dimensions in photonic computing using optical Skyrmions

An Aloysius Wang<sup>1,\*</sup>, Yifei Ma<sup>1</sup>, Yunqi Zhang<sup>1</sup>, Zimo Zhao<sup>1</sup>, Yuxi Cai<sup>1</sup>, Xuke Qiu<sup>1</sup>, Bowei Dong<sup>2</sup>, and Chao He<sup>1,\*</sup>

<sup>1</sup>Department of Engineering Science, University of Oxford, Parks Road, Oxford, OX1 3PJ, UK

<sup>2</sup>Institute of Microelectronics (IME), Agency for Science, Technology and Research (A\*STAR), 2 Fusionopolis Way, Innovis #08-02, Singapore 138634, Republic of Singapore

\*Corresponding authors: an.wang@stcatz.ox.ac.uk; chao.he@eng.ox.ac.uk

**The decline of Moore’s law coupled with the growing dominance of artificial intelligence has recently motivated research into photonic computing as a high-bandwidth, low-power strategy to accelerate digital electronics. However, modern-day photonic computing strategies are predominantly analog, making them susceptible to noise and intrinsically difficult to scale. The optical Skyrmion offers a route to overcoming these limitations through digitization in the form of a discrete topological number that can be assigned to the analog optical field. Apart from an intrinsic robustness against perturbations, optical Skyrmions represent a new dimension that has yet to be exploited for photonic computing, namely spatially varying polarization. Here, we propose a method of performing perturbation-resilient integer arithmetic with this new dimension of optical Skyrmions through passive optical components and present experimental evidence demonstrating its feasibility. To the best of our knowledge, this is the first time such discrete mathematical operations have been directly achieved using optical Skyrmions without external energy input.**

Recent developments in structured light have enabled the generation of optical Skyrmions [1–19], which are complex spatially varying polarization fields that carry information through a topological number taking values in the integers. Optical Skyrmions have three crucial properties that make them ideal candidates for high-density data transfer [15], namely the ability to interface with digital information given the discrete nature of the Skyrmion number, a hypothesized robustness to perturbations, and the potential to store arbitrarily large integers within a single localized analog optical field.

These same reasons also make the optical Skyrmion a natural candidate for computation, with its integer-valued topological number offering a route to digital photonic computing in a way that transcends the usual bitwise framework of digital electronics. Moreover, compared to existing photonic computing strategies, which predominantly modulate amplitude, phase, and wavelength, complex spatially varying polarization fields represent an untapped dimension that can be independently manipulated and, therefore, has the potential to increase bandwidth significantly.

The central reason for exploring the use of optical Skyrmions in photonic computing is, however, their hypothesized resistance to noise and perturbations which arises from the integer-valued nature of the Skyrmion number. The topological robustness of Skyrmions has already been established in various domains, including magnetic Skyrmions [20–22], and more recently, non-local quantum Skyrmions [23,24], where the idea of using Skyrmions to digitize information is developed from a different perspective. In the setting of optical Skyrmions carried through polarization fields, the study of topological robustness has also recently garnered attention [25], with a degree of protection already verified for propagation through a number of different media [10,14,26]. Robustness to noise is particularly relevant to photonic computing, which has thus far remained analog and, therefore, susceptible to noise. Take, for instance, the following three common photonic accelerators. The accumulation of random phase errors in Mach-Zehnder interferometer meshes [27,28], thermal crosstalk in microring resonator weight banks [29,30] and low optical contrast in phase-change material-based photonic crossbar arrays [31] all lead to degraded

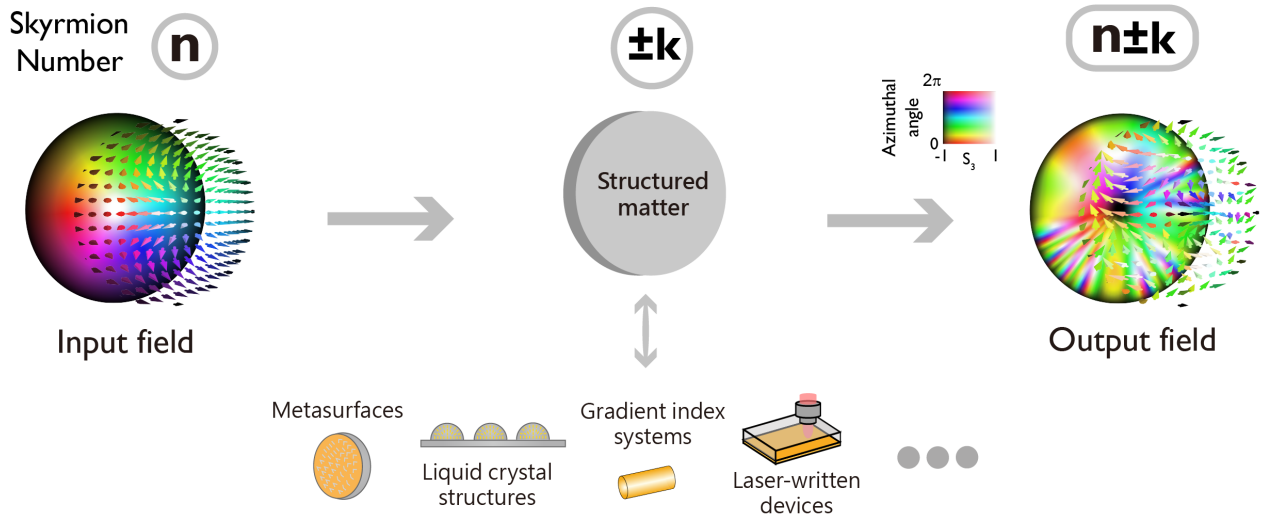


Fig. 1: **Concept.** An optical Skyrmion of arbitrary order  $n$  passing through specially designed passive structured matter can have the effect of addition or subtraction by an arbitrary integer,  $n \mapsto n \pm k$ . Note that the same medium can be used to perform both addition and subtraction. Such structured matter can be realized in many different ways including metasurfaces, inkjet printing of liquid crystal structures, gradient index systems, direct laser writing of birefringent structures in silica, and more. This figure also depicts the Stokes fields of a standard Néel-type Skyrmion passing through such a medium. Throughout this paper, color is used to represent azimuthal angle on the Poincaré sphere, and saturation to represent height (similar to [15]).

signal-to-noise ratio in large-size implementations, circumventing the scalability of these architectures. Even with progress in device innovation [32, 33], system calibration, and control algorithm optimization to minimize errors [34, 35], almost all demonstrated photonic accelerators thus far have had a size of less than 4 inputs by 4 outputs. Computing using optical Skyrmions is, therefore, a promising solution offering greater scalability through improved stability against noise.

Motivated by this possibility, we describe here a class of structured matter which, when restricted to particular types of Skyrmions, behave as adders/subtractors (Fig. 1) and provide experimental evidence supporting this fact. Note that the same medium can perform both addition and subtraction, but we adopt the term “adder” throughout this paper for brevity. We would also like to emphasize that Skyrmions are not topologically protected through the types of structured matter described in this paper, which have been specially designed to manipulate the Skyrmion number. However, the topological nature of the Skyrmion gives rise to resilience against perturbations in a different form, namely that material parameters have the flexibility to fluctuate without affecting the medium’s ability to perform arithmetic (see Methods), and this resilience of function is of key importance in photonic computing. Such structured matter can be realized using continuously varying retarders with specific structures on their boundary (Extended Fig. 1) and offer a reliable way of manipulating the Skyrmion number without external energy input. Our work opens the doors to this entirely new framework for performing photonic computing, where optical Skyrmions are used as the fundamental unit in computation.

## 1 Main

Firstly, we give a precise description of our proposed optical component before providing experimental results demonstrating its feasibility. As detailed in Methods, given a general homotopy of Skyrmions, the resulting difference in Skyrmion number is equal to the Skyrmion number of the homotopy when restricted onto the walls of the homotoping cylinder. This transformation law gives a systematic way of

engineering structured matter to perform addition.

Note our mathematical results also imply that the function of any medium designed in this way depends only on the structure of its boundary and is independent of material properties everywhere else provided they are continuous (excluding certain extreme cases; see Discussion and Methods). This is a reflection of the topological structure of the optical Skyrmion exhibited in matter. From a practical perspective, this suggests a strong robustness of any such adder to physical imperfections of the medium that implements it, which greatly eases fabrication.

To give a concrete example, consider a spatially varying retarder [36], which when restricted to its boundary, is linear and has a retardance of  $\pi$ . Let  $k$  be the number of half-revolutions made by the axis of the retarder traversing counterclockwise along its boundary. Then, with no further restrictions to material properties apart from continuity, one may show

$$\text{deg } \mathcal{S}' = \begin{cases} \text{deg } \mathcal{S} + k & \text{if } \mathcal{S} \text{ is right circularly polarized on its boundary} \\ \text{deg } \mathcal{S} - k & \text{if } \mathcal{S} \text{ is left circularly polarized on its boundary} \end{cases} \quad (1)$$

where  $\mathcal{S}$  and  $\mathcal{S}'$  are the Stokes fields before and after the medium, respectively. We call structured matter satisfying these conditions Skyrmion adders of order  $k$ .

To cascade multiple adders together, one must realign the outer boundary after each operation, which is most easily done using a homogenous waveplate. With our proposed design, this amounts to adding a half waveplate after the medium for addition and a half waveplate before for subtraction, provided we design our components for Skyrmions that are right circularly polarized on their boundary (see Extended Fig. 2a). Therefore, combining an adder with a half waveplate effectively produces a cascadable module that performs addition in one direction and subtraction in the other.

Lastly, to demonstrate the feasibility of our proposed medium, we provide experimentally measured Stokes fields of Skyrmions passing through second-order adders realized via gradient index systems in Fig. 2. We generated Skyrmions of orders ranging from  $-3$  to  $3$  using a cascade of 2 spatial light modulators [37] and passed the field through the medium with appropriate waveplates to achieve the operations  $+2 + 2$ ,  $+2 - 2$ ,  $-2 + 2$  and  $-2 - 2$  (see Extended Fig. 2b), where the output field is measured using traditional Stokes polarimetry [38]. Note the medium we used was discarded by quality assurance due to its asymmetric axis distribution, and it exhibits significant perturbations in material properties compared to the typical sample. Despite this, the numerically computed Skyrmion numbers in Fig. 2 show that our proposed adder efficiently and reliably performs the desired operations, even with imperfections in the medium.

## 2 Discussion

In this paper, we have demonstrated a method of achieving digital computing with optical Skyrmions using structured matter. In practice, adders of arbitrary orders can be fabricated through numerous techniques including laser polymerization of liquid crystals [39, 40], metasurfaces [41–48], gradient index systems [9], direct laser writing of birefringent structures in silica [49, 50], inkjet printing of liquid crystal droplets [51] and more, all of which suggest the possibility of manufacturing compact microscale devices containing such adders.

As mentioned earlier, a crucial property of any such adder is that its effect on Skyrmion fields depends only on the structure of its boundary, a reflection of the topological nature of the optical Skyrmion. From an engineering perspective, this provides clear advantages in manufacturing as the tolerable margins of error in fabrication are greatly relaxed, with no further restrictions on the medium besides the continuity of its material properties. In particular, the function of the adder is independent of perturbations to material properties away from the boundary, including spatially varying anisotropic absorptions with tolerance up to a certain diattenuation and complex spatially varying retardance such as those resulting from birefringence (see [26] for more details). We demonstrate the robustness arising from this “topological duality” between field and matter in Extended Fig. 1, which shows the invariance of the effect of our proposed adder on the Skyrmion number of optical fields to disorder in the medium.

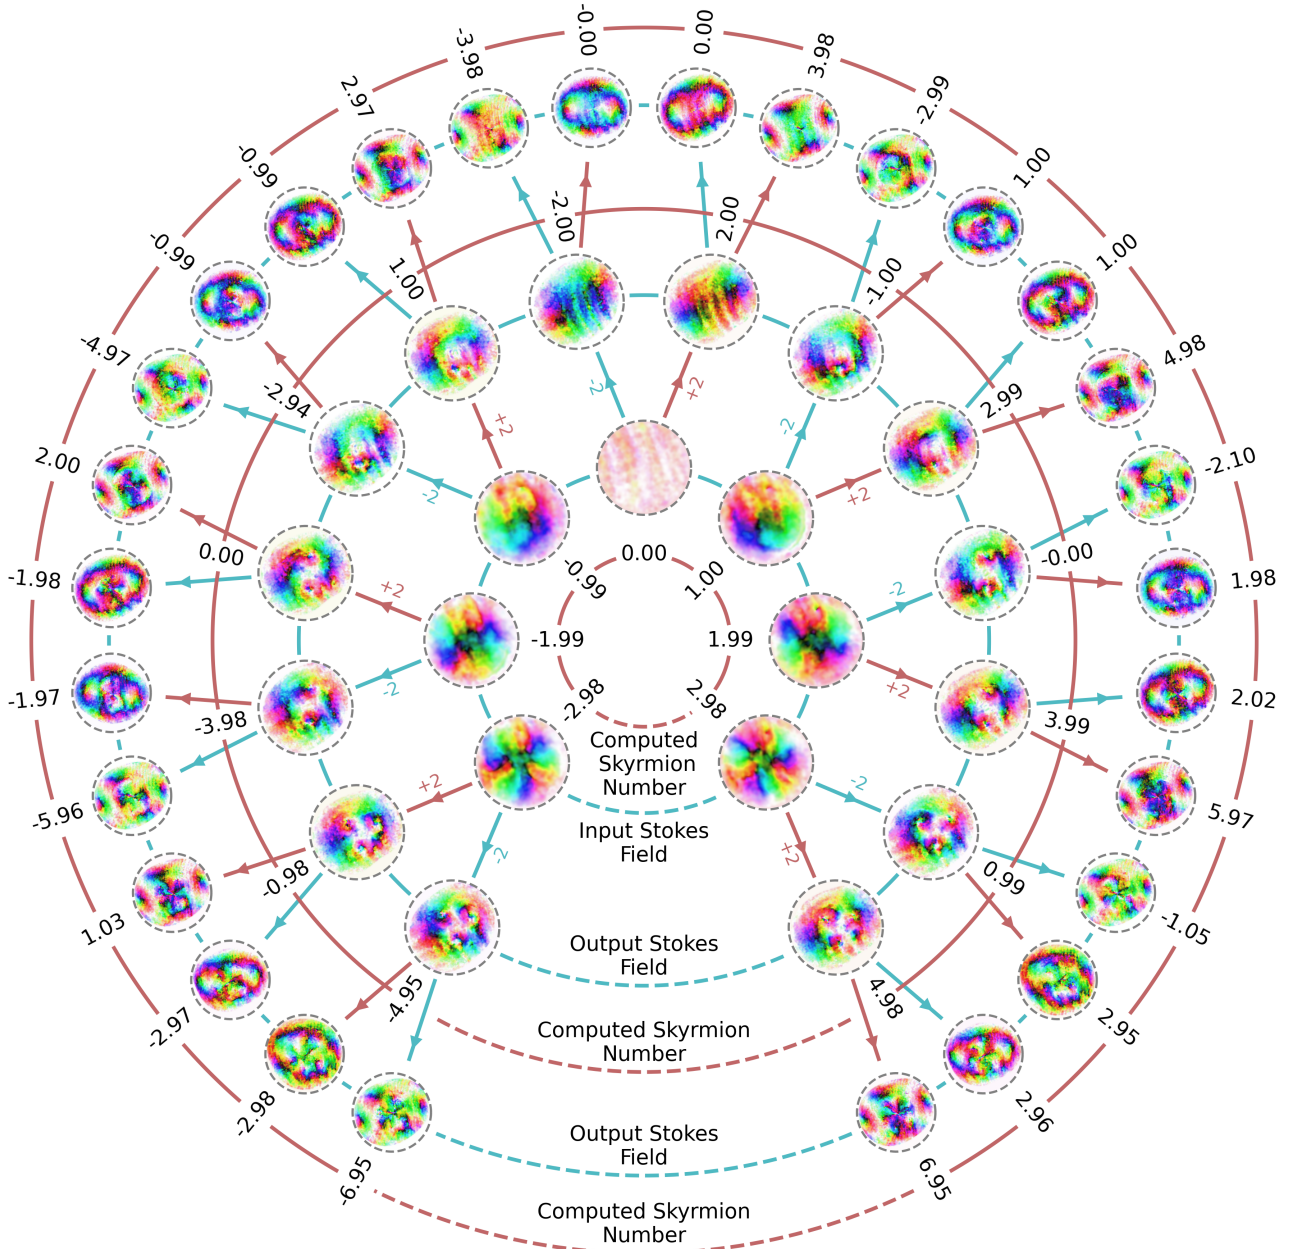


Fig. 2: **Experimental results.** Measured Stokes fields of optical Skyrmions passing through adders of order 2 realized using gradient index systems. The innermost ring shows the measured input Stokes fields, the central ring shows the measured fields after a single pass through the medium, and the outermost ring shows the measured fields after a second pass. Here, addition is indicated by red arrows and subtraction by blue ones. Numerically computed Skyrmion numbers obtained from measurements are also shown.

Despite the numerous promising properties of Skyrmions for photonic computing, achieving full Skyrmion-based computing still requires solutions to many important problems in manufacturing, architecture, and on-chip integration. Here, we outline possible solutions to some of the hurdles that may arise.

Firstly, while our proposed medium theoretically supports wavelength division multiplexing, the generally wavelength-dependent nature of retarders may limit the number of independent operations that can be carried out simultaneously. Nevertheless, with the improving quality of on-chip comb lasers [52] and broadband retarders implemented through metamaterials [41–44], such limitations are perhaps more a matter of engineering.

Secondly, understanding the non-trivial behavior of polarization fields in waveguides is of key importance for enabling small integrated devices to make use of Skyrmions. In particular, apart from fabricating the adders themselves, it is also necessary to relay polarization information between adders for any meaningful computation to be done. For a waveguide to support the propagation of complex structured fields, it must necessarily be large enough to carry multiple modes. Moreover, work will need to be done to establish the range of Skyrmion numbers that can be achieved by an arbitrary superposition of propagating modes, and the conservation of Skyrmion number in propagation. Here, we provide a heuristic argument suggesting the feasibility of topological protection. Based on the ellipticity of the Helmholtz equation, one has, in general, that the electric field develops continuously within the waveguide. This then naturally descends onto a homotopy of Stokes fields provided there are no zeros of the field. Therefore, at least for some finite distance, we expect the Skyrmion number to remain unchanged.

Thirdly, besides considerations relating to the medium, any system exploiting Skyrmions will also require auxiliary support for generating and detecting Skyrmions. On the front of generation, notice that uniform polarized light is trivially a Skyrmion of degree 0. Therefore, our proposed medium can create optical Skyrmions, where incident right circularly polarized and left circularly polarized light generate Skyrmions of degree  $\pm k$ , respectively. Regarding detection, recent developments in on-chip Stokes polarimetry [53] support the possibility of accurately measuring complex polarization fields on integrated circuits. However, extracting the topological number from polarimetric measurements should be done efficiently for a Skyrmion-based photonic adder to be feasible. Note that apart from evaluating the Skyrmion number integral, various other properties of the topological number can be used to determine the Skyrmion number such as counting strategies involving regular values [26]. An alternative way of detection is to exploit light-matter interactions modulated by Skyrmions, such as through optomechanical interactions between optical Skyrmions and topological solitons in liquid crystals [54].

Lastly, note that depending on implementation, both passive and tuneable adders can be fabricated. The best implementation will then depend on the application, with tuneable elements providing greater flexibility at the cost of greater power consumption, possible hysteresis, and greater complexity in control.

Despite the challenges presented above, we believe that photonic computing using optical Skyrmions remains an exciting avenue to explore. Given the rise of artificial intelligence and machine learning, the need for power-efficient computing technologies is more important than ever. Photonic computing has emerged as a promising solution to meet this need, and optical Skyrmions represent a way of carrying high-dimensional information within optical fields that holds great potential for enhancing information density in photonic computing without additional energy cost. With wavelength, amplitude, and phase information (including structured phase) accessible independent of spatially varying polarization and, hence, any underlying Skyrmion structure, there are certainly intriguing prospects for combining different existing architectures to exploit all these dimensions simultaneously. Moreover, our work provides a method of directly exploiting the topological and discrete nature of the Skyrmion for computations and, therefore, a route to robust digital photonic computing tolerant to perturbations and noise with strong potential for scalability. Most importantly, using optical Skyrmions as units of computation expands the traditional notion of the bit to theoretically infinite values and, therefore, has the potential to alter the binary foundations of digital computing fundamentally.

As a concluding remark, we note that with addition and subtraction possible, the remaining mathematical operations become a matter of design. However, Skyrmions also support a more natural notion of multiplication. Suppose a homogenous medium induces a mapping on the Poincaré sphere of degree  $k$ . The effect of such a medium on Skyrmions is equivalent to multiplication by  $k$ , with no other restrictions on the input field. As an example, a medium whose action on the Poincaré sphere is given by

$$(\sin \phi \cos \theta, \sin \phi \sin \theta, \cos \phi) \mapsto (\sin \phi \cos k\theta, \sin \phi \sin k\theta, \cos \phi)$$

is a Skyrmion multiplier of order  $k$ . Lastly, note that if such a multiplier can be implemented, then division is naturally also possible, where a single rational number can be represented with a pair of Skyrmions. Division can then be done with two multiplications.

## References

- [1] S. Tsesses, E. Ostrovsky, K. Cohen, B. Gjonaj, N. H. Lindner, and G. Bartal. Optical skyrmion lattice in evanescent electromagnetic fields. *Science*, 361(6406):993–996, 2018.
- [2] Y. Shen. Topological bimeronic beams. *Opt. Lett.*, 46(15):3737–3740, 2021.
- [3] C. He, Y. Shen, and A. Forbes. Towards higher-dimensional structured light. *Light: Science & Applications*, 11(1):205, 2022.
- [4] D. Sugic, R. Droop, E. Otte, D. Ehrmanntraut, F. Nori, J. Ruostekoski, C. Denz, and M. R. Dennis. Particle-like topologies in light. *Nature Communications*, 12(1):6785, 2021.
- [5] Y. Shen, E. C. Martínez, and C. Rosales-Guzmán. Generation of optical skyrmions with tunable topological textures. *ACS Photonics*, 9(1):296–303, 2022.
- [6] C. Bai, J. Chen, Y. Zhang, D. Zhang, and Q. Zhan. Dynamic tailoring of an optical skyrmion lattice in surface plasmon polaritons. *Optics Express*, 28(7):10320, 2020.
- [7] W. Lin, Y. Ota, Y. Arakawa, and S. Iwamoto. Microcavity-based generation of full poincaré beams with arbitrary skyrmion numbers. *Phys. Rev. Res.*, 3:023055, 2021.
- [8] C. Cisowski, C. Ross, and S. Franke-Arnold. Building paraxial optical skyrmions using rational maps. *Advanced Photonics Research*, 4(4):2200350, 2023.
- [9] C. He, J. Chang, Q. Hu, J. Wang, J. Antonello, H. He, S. Liu, J. Lin, B. Dai, D. S. Elson, P. Xi, H. Ma, and M. J. Booth. Complex vectorial optics through gradient index lens cascades. *Nature Communications*, 10(1):4264, 2019.
- [10] C. He, B. Chen, Z. Song, Z. Zhao, Y. Ma, H. He, L. Luo, T. Marozsak, A. Wang, R. Xu, P. Huang, X. Qiu, B. Sun, J. Cui, Y. Cai, Y. Zhang, P. Salter, J. A. J. Fells, B. Dai, S. Liu, L. Guo, H. Ma, S. J. Elston, Q. Zhan, C. Qiu, S. M. Morris, M. J. Booth, and A. Forbes. A universal optical modulator for synthetic topologically tuneable structured matter. Preprint at <https://arxiv.org/abs/2311.18148>, 2023.
- [11] L. Du, A. Yang, A. V. Zayats, and X. Yuan. Deep-subwavelength features of photonic skyrmions in a confined electromagnetic field with orbital angular momentum. *Nature Physics*, 15(7):650–654, 2019.
- [12] X. Lei, A. Yang, P. Shi, Z. Xie, L. Du, A. V. Zayats, and X. Yuan. Photonic Spin Lattices: Symmetry Constraints for Skyrmion and Meron Topologies. *Physical Review Letters*, 127(23):237403, 2021.
- [13] P. Shi, L. Du, and X. Yuan. Strong spin–orbit interaction of photonic skyrmions at the general optical interface. *Nanophotonics*, 9(15):4619–4628, 2020.
- [14] H. Teng, J. Zhong, J. Chen, X. Lei, and Q. Zhan. Physical conversion and superposition of optical skyrmion topologies. *Photonics Research*, 11(12):2042–2053, 2023.
- [15] Y. Shen, Q. Zhang, P. Shi, L. Du, X. Yuan, and A. V. Zayats. Optical skyrmions and other topological quasiparticles of light. *Nature Photonics*, 2023.
- [16] Y. Shen, Y. Hou, N. Papanikolaou, and N. I. Zheludev. Supertoroidal light pulses as electromagnetic skyrmions propagating in free space. *Nature Communications*, 12(1):5891, 2021.
- [17] S. Gao, F. C. Speirits, F. Castellucci, S. Franke-Arnold, S. M. Barnett, and J. B. Götte. Paraxial skyrmionic beams. *Phys. Rev. A*, 102:053513, 2020.

- [18] D. Marco, I. Herrera, S. Brasselet, and M. A. Alonso. Propagation-invariant optical meron lattices. Preprint at <https://arxiv.org/abs/2402.08650>, 2024.
- [19] Y. Shen, C. He, Z. Song, B. Chen, H. He, Y. Ma, J. A. J. Fells, S. J. Elston, S. M. Morris, M. J. Booth, and A. Forbes. Topologically controlled multiskyrmions in photonic gradient-index lenses. *Physical Review Applied*, 21(2):024025, 2024.
- [20] N. Nagaosa and Y. Tokura. Topological properties and dynamics of magnetic skyrmions. *Nature Nanotechnology*, 8(12):899–911, 2013.
- [21] S. Je, H. Han, S. K. Kim, S. A. Montoya, W. Chao, I. Hong, E. E. Fullerton, K. Lee, K. Lee, M. Im, and J. Hong. Direct Demonstration of Topological Stability of Magnetic Skyrmions via Topology Manipulation. *ACS Nano*, 14(3):3251–3258, 2020.
- [22] D. Cortés-Ortuño, W. Wang, M. Beg, R. A. Pepper, M. Bisotti, R. Carey, M. Vousden, T. Kluyver, O. Hovorka, and H. Fangohr. Thermal stability and topological protection of skyrmions in nanotracks. *Scientific Reports*, 7(1):4060, 2017.
- [23] P. Ornelas, I. Nape, R. de Mello Koch, and A. Forbes. Non-local skyrmions as topologically resilient quantum entangled states of light. *Nature Photonics*, 18(3):258–266, 2024.
- [24] P. Ornelas, I. Nape, R. de Mello Koch, and A. Forbes. Topological rejection of noise by non-local quantum skyrmions. Preprint at <https://arxiv.org/abs/2403.02031>, 2024.
- [25] C. Liu, S. Zhang, S. A. Maier, and H. Ren. Disorder-induced topological state transition in the optical skyrmion family. *Physical Review Letters*, 129(26):267401, 2022.
- [26] A. A. Wang, Z. Zhao, Y. Ma, Y. Cai, T. Marozsak, B. Chen, H. He, L. Luo, M. J. Booth, S. J. Elston, S. M. Morris, and C. He. Topological protection of optical skyrmions through complex media. Preprint at <https://arxiv.org/abs/2403.07837>, 2023.
- [27] Y. Shen, N. C. Harris, S. Skirlo, M. Prabhu, T. Baehr-Jones, M. Hochberg, X. Sun, S. Zhao, H. Larochelle, D. Englund, and M. Soljačić. Deep learning with coherent nanophotonic circuits. *Nature Photonics*, 11(7):441–446, 2017.
- [28] F. Shokrane, S. Geoffroy-Gagnon, M. S. Nezami, and O. Liboiron-Ladouceur. A Single Layer Neural Network Implemented by a  $4 \times 4$  MZI-Based Optical Processor. *IEEE Photonics Journal*, 11(6):1–12, 2019.
- [29] A. N. Tait, T. F. de Lima, E. Zhou, A. X. Wu, M. A. Nahmias, B. J. Shastri, and P. R. Prucnal. Neuromorphic photonic networks using silicon photonic weight banks. *Scientific Reports*, 7(1):7430, 2017.
- [30] A. N. Tait, A. X. Wu, T. F. de Lima, E. Zhou, B. J. Shastri, M. A. Nahmias, and P. R. Prucnal. Microring Weight Banks. *IEEE Journal of Selected Topics in Quantum Electronics*, 22(6):312–325, 2016.
- [31] J. Feldmann, N. Youngblood, M. Karpov, H. Gehring, X. Li, M. Stappers, M. Le Gallo, X. Fu, A. Lukashchuk, A. S. Raja, J. Liu, C. D. Wright, A. Sebastian, T. J. Kippenberg, W. H. P. Pernice, and H. Bhaskaran. Parallel convolutional processing using an integrated photonic tensor core. *Nature*, 589(7840):52–58, 2021.
- [32] W. Zhou, B. Dong, N. Farmakidis, X. Li, N. Youngblood, K. Huang, Y. He, C. David Wright, W. H. P. Pernice, and H. Bhaskaran. In-memory photonic dot-product engine with electrically programmable weight banks. *Nature Communications*, 14(1):2887, 2023.

- [33] L. Song, H. Li, and D. Dai. Mach–Zehnder silicon-photonic switch with low random phase errors. *Optics Letters*, 46(1):78–81, 2021.
- [34] C. Huang, S. Bilodeau, T. Ferreira de Lima, A. N. Tait, P. Y. Ma, E. C. Blow, A. Jha, H. Peng, B. J. Shastri, and P. R. Prucnal. Demonstration of scalable microring weight bank control for large-scale photonic integrated circuits. *APL Photonics*, 5(4):040803, 2020.
- [35] T. Komljenovic and P. Pintus. On-chip calibration and control of optical phased arrays. *Optics Express*, 26(3):3199–3210, 2018.
- [36] S. Lu and R. A. Chipman. Homogeneous and inhomogeneous Jones matrices. *Journal of the Optical Society of America A*, 11(2):766–773, 1994.
- [37] Q. Hu, Y. Dai, C. He, and M. J. Booth. Arbitrary vectorial state conversion using liquid crystal spatial light modulators. *Optics Communications*, 459:125028, 2020.
- [38] C. He, H. He, J. Chang, B. Chen, H. Ma, and M. J. Booth. Polarisation optics for biomedical and clinical applications: a review. *Light: Science & Applications*, 10(1):194, 2021.
- [39] H. Zeng, D. Martella, P. Wasylczyk, G. Cerretti, J. G. Lavocat, C. Ho, C. Parmeggiani, and D. S. Wiersma. High-resolution 3D direct laser writing for liquid-crystalline elastomer microstructures. *Advanced materials*, 26(15):2319–2322, 2014.
- [40] C. C. Tartan, J. J. Sandford O’Neill, P. S. Salter, J. Aplinc, M. J. Booth, M. Ravnik, S. M. Morris, and S. J. Elston. Read on Demand Images in Laser-Written Polymerizable Liquid Crystal Devices. *Advanced Optical Materials*, 6(20):1800515, 2018.
- [41] N. Yu, F. Aieta, P. Genevet, M. A. Kats, Z. Gaburro, and F. Capasso. A Broadband, Background-Free Quarter-Wave Plate Based on Plasmonic Metasurfaces. *Nano Letters*, 12(12):6328–6333, 2012.
- [42] M. Khorasaninejad, A. Ambrosio, P. Kanhaiya, and F. Capasso. Broadband and chiral binary dielectric meta-holograms. *Science Advances*, 2(5):e1501258, 2016.
- [43] R. C. Devlin, M. Khorasaninejad, W. T. Chen, J. Oh, and F. Capasso. Broadband high-efficiency dielectric metasurfaces for the visible spectrum. *Proceedings of the National Academy of Sciences*, 113(38):10473–10478, 2016.
- [44] D. Wen, F. Yue, G. Li, G. Zheng, K. Chan, S. Chen, M. Chen, K. F. Li, P. W. H. Wong, K. W. Cheah, E. Yue Bun Pun, S. Zhang, and X. Chen. Helicity multiplexed broadband metasurface holograms. *Nature Communications*, 6(1):8241, 2015.
- [45] N. Yu, P. Genevet, M. A. Kats, F. Aieta, J. Tetienne, F. Capasso, and Z. Gaburro. Light Propagation with Phase Discontinuities: Generalized Laws of Reflection and Refraction. *Science*, 334(6054):333–337, 2011.
- [46] J. P. Balthasar M., N. A. Rubin, R. C. Devlin, B. Groever, and F. Capasso. Metasurface Polarization Optics: Independent Phase Control of Arbitrary Orthogonal States of Polarization. *Physical Review Letters*, 118(11):113901, 2017.
- [47] P. Genevet, F. Capasso, F. Aieta, M. Khorasaninejad, and R. Devlin. Recent advances in planar optics: from plasmonic to dielectric metasurfaces. *Optica*, 4(1):139–152, 2017.
- [48] M. Ren, W. Wu, W. Cai, B. Pi, X. Zhang, and J. Xu. Reconfigurable metasurfaces that enable light polarization control by light. *Light: Science & Applications*, 6(6):e16254–e16254, 2017.
- [49] S. S. Fedotov, R. Drevinskas, S. V. Lotarev, A. S. Lipatiev, M. Beresna, A. Čerkauskaitė, V. N. Sigaev, and P. G. Kazansky. Direct writing of birefringent elements by ultrafast laser nanostructuring in multicomponent glass. *Applied Physics Letters*, 108(7):071905, 2016.



- [50] E. Bricchi, B. G. Klappauf, and P. G. Kazansky. Form birefringence and negative index change created by femtosecond direct writing in transparent materials. *Optics Letters*, 29(1):119–121, 2004.
- [51] W. Kamal, A. C.J. Orr, T. C. Sykes, A. A. Castrejón-Pita, S. J. Elston, and S. M. Morris. On-demand pitch tuning of printed chiral nematic liquid crystal droplets. *Materials Today Advances*, 19:100416, 2023.
- [52] A. L. Gaeta, M. Lipson, and T. J. Kippenberg. Photonic-chip-based frequency combs. *Nature Photonics*, 13(3):158–169, 2019.
- [53] J. Zuo, J. Bai, S. Choi, A. Basiri, X. Chen, C. Wang, and Y. Yao. Chip-integrated metasurface full-Stokes polarimetric imaging sensor. *Light: Science & Applications*, 12(1):218, 2023.
- [54] G. Poy, A. J. Hess, A. J. Seracuse, M. Paul, S. Žumer, and I. I. Smalyukh. Interaction and co-assembly of optical and topological solitons. *Nature Photonics*, 16(6):454–461, 2022.

## Methods

### 1 Structured matter design using a general transformation law of Skyrmions

Here, we derive a general transformation law of Skyrmions from which we can observe a powerful heuristic of topological duality, namely that changes to the Skyrmion number induced by a medium depend primarily on the structure of the medium on its boundary. As explained in the main text, this notion of duality has important implications for the design of structured matter to manipulate the Skyrmion number, providing a strong tolerance to perturbations of material parameters away from the boundary.

In the following, we denote by  $B_a(0)$  the ball of radius  $a$  centered at the origin. Let  $\mathcal{S}, \mathcal{S}' : \overline{B_a(0)} \rightarrow S^2$  be two different continuous polarization fields that are constant on the boundary.  $\mathcal{S}$  and  $\mathcal{S}'$  then descend onto the quotient  $\overline{B_a(0)}/\sim \cong S^2$  obtained by identifying points on  $\partial B_a(0)$ , and are therefore Skyrmions.

Suppose we can find a continuous homotopy  $F : \overline{B_a(0)} \times [0, 1] \rightarrow S^2$  from  $\mathcal{S}$  to  $\mathcal{S}'$ . Let  $S^+ = \{(s^1, s^2, s^3) \in S^2 : s^3 \geq 0\}$  and  $S^- = \{(s^1, s^2, s^3) \in S^2 : s^3 \leq 0\}$  denote the northern and southern hemispheres, respectively, and define

$$\begin{aligned} \psi_+ : \overline{B_a(0)} &\rightarrow S^+, & \psi_+(r \cos \theta, r \sin \theta) &= \left( \sqrt{1 - (r/a)^2} \cos \theta, \sqrt{1 - (r/a)^2} \sin \theta, \sqrt{1 - (r/a)^2} \right) \\ \psi_- : \overline{B_a(0)} &\rightarrow S^-, & \psi_-(r \cos \theta, r \sin \theta) &= \left( \sqrt{1 - (r/a)^2} \cos \theta, \sqrt{1 - (r/a)^2} \sin \theta, -\sqrt{1 - (r/a)^2} \right) \end{aligned}$$

so that  $\psi_+$  is an orientation preserving diffeomorphism onto its image and  $\psi_-$  an orientation reversing diffeomorphism onto its image. Now, let  $H : S^2 \times [0, 1] \rightarrow S^2$  be

$$H(s, z) = \begin{cases} F(\psi_+^{-1}(s), z), & s \in \overline{S^+} \\ F(a \cos \theta, a \sin \theta, z(1 + s_3)), & s \in \overline{S^-} \end{cases},$$

where  $s = (s_1, s_2, s_3) = (\sin \phi \cos \theta, \sin \phi \sin \theta, \cos \phi) \in S^2$ . Then  $H$  is a continuous by a gluing argument, and by the homotopy invariance of the degree, we have  $\deg H(\cdot, 0) = \deg H(\cdot, 1)$ .

It is clear that  $\deg H(\cdot, 0) = \deg \mathcal{S}$  and  $\deg H(\cdot, 1) = \deg \mathcal{S}' + \deg \partial F$  where  $\partial F : \partial B_a(0) \times [0, 1] / \sim \cong S^2 \rightarrow S^2$  with the identifications  $(x, 0) \sim (y, 0)$  and  $(x, 1) \sim (y, 1)$  for all  $x, y \in \partial B_a(0)$  and  $\partial F([x]) = F(\iota(x))$  for the trivial inclusion  $\iota : \partial B_a(0) \times [0, 1] \rightarrow \overline{B_a(0)} \times [0, 1]$ . Therefore

$$\deg \mathcal{S} = \deg \mathcal{S}' + \deg \partial F.$$

If, further,  $\partial F$  is  $C^1$ , we have the integral equation

$$\deg \mathcal{S} = \deg \mathcal{S}' + \int_{S^2} (\partial F)^* \omega$$

for every normalised  $\omega \in \Lambda^2(S^2)$ .

With this procedure on hand, we may prove the following. Consider a continuous spatially varying retarder  $J : \overline{B_a(0)} \rightarrow SU(2)$  given by the parametrization

$$J(\alpha, \delta, \Delta) = \begin{pmatrix} \cos^2(\alpha)e^{i\Delta/2} + \sin^2(\alpha)e^{-i\Delta/2} & 2i \cos(\alpha) \sin(\alpha) \sin(\Delta/2)e^{-i\delta} \\ 2i \cos(\alpha) \sin(\alpha) \sin(\Delta/2)e^{i\delta} & \sin^2(\alpha)e^{i\Delta/2} + \cos^2(\alpha)e^{-i\Delta/2} \end{pmatrix}$$

where  $Q \circ \alpha : \overline{B_a(0)} \rightarrow \mathbb{RP}^1 = \mathbb{R}/(x \sim x + \pi)$  and  $\mathcal{P} \circ \delta : \overline{B_a(0)} \rightarrow S^1 = \mathbb{R}/(x \sim x + 2\pi)$  are continuous maps defining a continuously varying fast axis  $(\cos(\alpha)e^{-i\delta/2}, \sin(\alpha)e^{i\delta/2})$ ,  $Q$  and  $\mathcal{P}$  the respective quotient maps, and  $\mathcal{P} \circ \Delta : \overline{B_a(0)} \rightarrow S^1$  the corresponding continuously varying retardance. Then the output field  $\mathcal{S}'$  is given by

$$\mathcal{S}'(x) = A^T \text{Spin}(J(\alpha(x), \delta(x), \Delta(x))) A \mathcal{S}(x)$$

where  $\text{Spin}: SU(2) \rightarrow SO(3)$  is the usual Spin map

$$\begin{pmatrix} a + bi & c + di \\ -c + di & a - bi \end{pmatrix} \mapsto \begin{pmatrix} a^2 - b^2 - c^2 + d^2 & 2ab + 2cd & -2ac + 2bd \\ -2ab + 2cd & a^2 - b^2 + c^2 - d^2 & 2ad + 2bc \\ 2ac + 2bd & 2bc - 2ad & a^2 + b^2 - c^2 - d^2 \end{pmatrix}$$

and

$$A = \begin{pmatrix} 0 & 1 & 0 \\ 0 & 0 & 1 \\ 1 & 0 & 0 \end{pmatrix}.$$

Suppose now that  $\mathcal{P} \circ \delta|_{\partial B_a(0)} = [0]$  and  $\mathcal{P} \circ \Delta|_{\partial B_a(0)} = [\pi]$ . If we further restrict to inputs that satisfy  $\mathcal{S}|_{\partial B_a(0)} = (0, 0, 1)^T$ , then  $\mathcal{S}'$  satisfies  $\mathcal{S}'|_{\partial B_a(0)} = (0, 0, -1)^T$  and is therefore a Skyrmion. Moreover, we may homotope  $\mathcal{S}$  to  $\mathcal{S}'$  by

$$F(x, z) = A^T \text{Spin}(J(\alpha(x), \delta(x), \Delta(x)z)) AS(x).$$

One can then directly compute

$$\partial F([\theta, z]) = \begin{pmatrix} -\sin(2\partial\alpha(\theta)) \sin((2n+1)\pi z) \\ \cos(2\partial\alpha(\theta)) \sin((2n+1)\pi z) \\ \cos((2n+1)\pi z) \end{pmatrix}$$

for some integer  $n \in \mathbb{Z}$  and where  $\partial\alpha := \alpha|_{\partial B_a(0)}$ . Taking  $\omega \in \Lambda^2(S^2)$  to be the standard volume form on  $S^2$  and assuming sufficient smoothness, we have

$$\begin{aligned} \deg \partial F &= \int_{S^2} (\partial F)^* \omega \\ &= \int_0^{2\pi} \int_0^1 \frac{1}{4\pi} \partial F \cdot (\partial F_\theta \times \partial F_z) dz d\theta \\ &= \int_0^{2\pi} \int_0^1 -\frac{2n+1}{2} \sin((2n+1)\pi z) \frac{d\partial\alpha}{d\theta} dz d\theta \\ &= -\frac{1}{\pi} \int_0^{2\pi} \frac{d\partial\alpha}{d\theta} d\theta \\ &= -\deg \mathcal{Q} \circ \partial\alpha \end{aligned}$$


where  $\partial F_\theta$  and  $\partial F_z$  are partial derivatives of  $\partial F$  with respect to  $\theta$  and  $z$ , respectively. Therefore

$$\deg \mathcal{S}' = \deg \mathcal{S} + \deg \mathcal{Q} \circ \partial\alpha$$


depends only on the number of revolutions made by the fast axis along the boundary of the medium. An identical proof can be used in the  $\partial\mathcal{S}|_{\partial B_a(0)} = (0, 0, -1)^T$  case to show

$$\deg \mathcal{S}' = \deg \mathcal{S} - \deg \mathcal{Q} \circ \partial\alpha.$$

Lastly, note that one can easily replicate this proof for more complicated geometries, in particular, the above carries directly over to any  $\bar{U}$  homeomorphic to  $\bar{B}_a(0)$ .

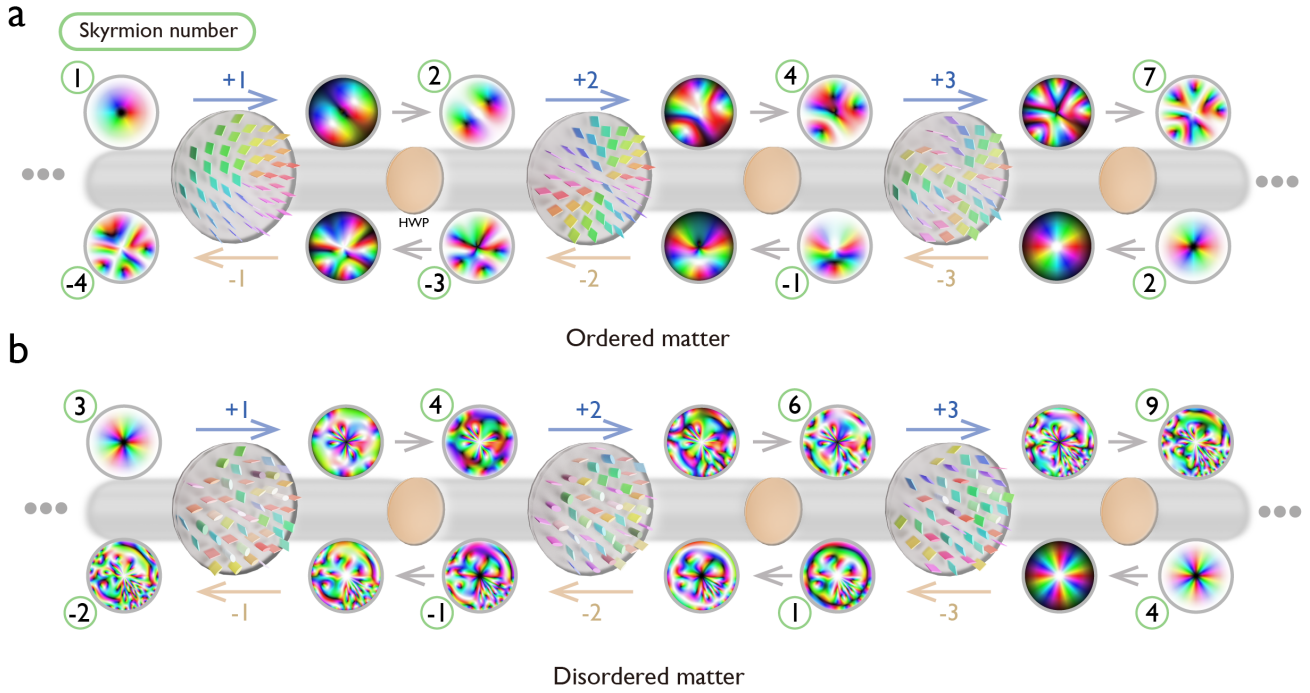

Extended Fig. 1: **Optical Skyrmions through ordered and disordered adders.** This figure depicts Stokes fields of Skyrmions passing through different adders of first, second, and third order, and their respective Skyrmion numbers. For clarity, the only material property shown explicitly is the local axis of the retarder, with lines representing a locally linear retarder and ellipses representing a locally elliptical retarder. Half waveplates that control addition and subtraction are also shown. **a**, Adders of first, second, and third order using relatively structured materials which can be realized by the different techniques stated in the paper. **b**, Adders of first, second, and third order using highly disordered materials, demonstrating the robustness of our proposed adder to imperfections of the medium.

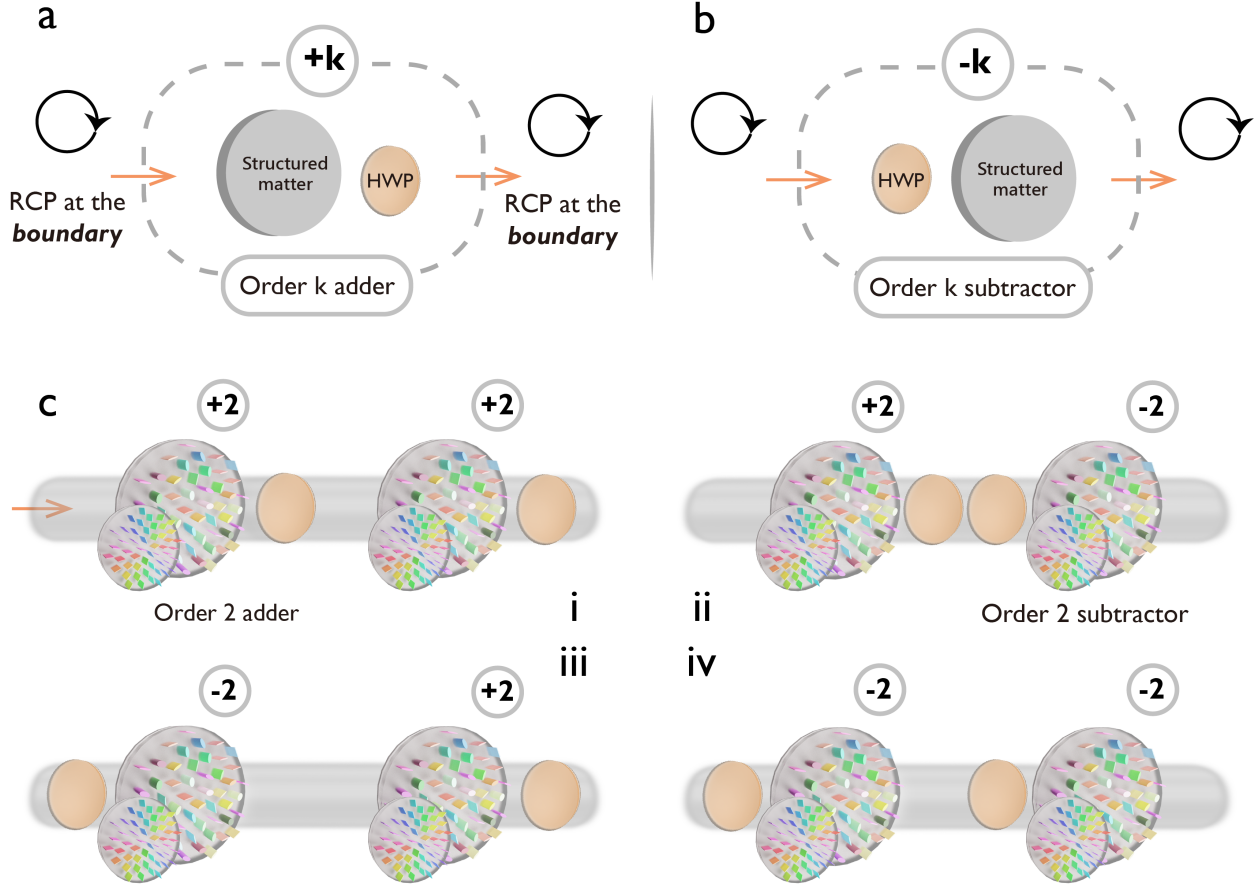

Extended Fig. 2: **Adder modules and experimental configurations.** **a**, order  $k$  adder module constructed using structured matter placed before a half waveplate. **b**, order  $k$  subtractor module constructed using structured matter placed after a half waveplate. In **a** and **b**, the addition of the half waveplates resolves incompatibilities in polarization states on the boundary, allowing for the different modules to be cascaded indefinitely. Notice also that order  $k$  adders and subtractors can be realized using the same hardware, with one direction performing addition and the other performing subtraction. **c**, Configurations of the different modules used in experiments to achieve the operations (i)  $+2+2$ , (ii)  $+2-2$ , (iii)  $-2+2$ , and (iv)  $-2-2$ . In the conducted experiments, a HeNe laser is used (Melles Griot, 05-LHP-171, 632.8 nm) as a light source, and the beam is modulated by 2 spatial light modulators (Hamamatsu, X10468-01) to form the target Skyrmion field. This is then passed into the adder/subtractor modules and analyzed by a Stokes polarimeter formed by a half-wave plate (Thorlabs, WPH10M-633), a polarizer (Thorlabs, GL10-A), and a camera (Thorlabs, DCC3240N). The associated relays are not depicted for simplicity. The figure also depicts both the idealized axis distribution of the gradient index system used as well as a disordered axis distribution to abstractly represent imperfections of the medium. Note that the function of the adder is robust to such perturbations, as explained in the main text.