

Depolarization induced by subwavelength metal hole arrays

C. Genet, E. Altewischer, M.P. van Exter and J.P. Woerdman
*Huygens Laboratory, Leiden University, P.O. Box 9504,
2300 RA Leiden, The Netherlands*

We present a symmetry-based theory of the depolarization induced by subwavelength metal hole arrays. We derive the Mueller matrices of hole arrays with various symmetries (in particular square and hexagonal) when illuminated by a finite-diameter (e.g. gaussian) beam. The depolarization is due to a combination of two factors: (i) propagation of surface plasmons along the surface of the array, (ii) a spread of wave vectors in the incident beam.

PACS numbers: 78.67.-n, 73.20.Mf, 42.25.Ja, 02.20.-a

The transmission of a metal film perforated with a two-dimensional periodic array of subwavelength holes is extraordinary large due to the resonant excitation of surface plasmons (SPs) [1]. Recently, the polarization properties of this enhanced transmission have drawn considerable attention [2, 3, 4, 5, 6, 7]. A particularly intriguing polarization property is that illuminating the array by a fully polarized beam at normal incidence leads to important reduction of the degree of polarization in transmission, corresponding to a strongly space-variant character of the polarization state of the output beam [4]. This seems in clear contrast with what could be guessed from general symmetry arguments. For plane wave illumination, a periodic structure can theoretically only transform a pure input state of polarization (SOP) to another pure output SOP (see below). Thus, the observed depolarization must be critically related to additional spatial degrees of freedom of the system. This is exactly what excitation of SPs can potentially yield since SPs propagate in distinct directions related to the symmetry of the hole array.

The aim of this Letter is to provide a proper theoretical framework describing these depolarization effects. Formally, spatial symmetries of arrays within the context of SP excitations must be confronted with photon polarization SU(2) symmetry, a context where Mueller algebra is the natural tool [8, 9]. The central issue of our work is that implementations of symmetry operations have to account for the fact that SPs are a source of effective spatial dispersion at the arrays interfaces but only so if they are excited by a finite-diameter beam (e.g. a gaussian beam). As we will discuss, it is the strong angular dependence related to such a spatially dispersive transmission that can lead to sizeable depolarization.

Any two-dimensional pattern can only match five possible lattices: the five 2D Bravais lattices [10]. In order to complete such patterns into 2D crystal structures, a primitive cell is associated with each lattice point. The required symmetry compatibility of the primitive cell and the Bravais lattice leads to the well-known seventeen 2D point groups. Here we restrict ourselves to circular holes on a Bravais lattice, in other words to the simplest primitive cell with full symmetry. Therefore, the point group

symmetry of our arrays is reduced to the spatial symmetry of the chosen Bravais lattice which is a C_{nv} group, where n denotes rotations by $2\pi/n$ radians about the origin (with $n = 1, 2, 3, 4$ or 6) and v refers to mirror symmetries (if allowed).

The optical transmission of a given array under general conditions of illumination is fully described by the transmission matrix which relates, at a specific wavelength λ , the transmitted field \mathbf{E}^{out} to the incoming field \mathbf{E}^{in} . In the paraxial approximation used throughout this Letter, far field angles (θ_x, θ_y) , collected in a 2-column vector θ , define paraxial fields as two independent complex numbers forming a spinor $\mathbf{E} = (E_1, E_2)$ in the chosen (1,2)-basis. The transmission matrix $\mathbf{t}(\lambda; \theta)$ of the zero-order diffracted beam in the far field is therefore a 2×2 matrix

$$\mathbf{E}^{\text{out}}(\lambda; \theta) = \mathbf{t}(\lambda; \theta) \mathbf{E}^{\text{in}}(\lambda; \theta). \quad (1)$$

From this input-output description, spatial symmetries of the chosen array define orthogonal transformation matrices \mathcal{B} that leave the transmission matrix unchanged via $\mathcal{B}^\dagger \mathbf{t}(\lambda; \theta) \mathcal{B} = \mathbf{t}(\lambda; \mathcal{B}\theta)$. For the case of plane wave illumination at arbitrary angle θ , spatial symmetry operations therefore merely relate transmission matrix elements with various angular arguments. It is only when one resorts to angularly integrated expressions, i.e. to illumination by a rotationally symmetric beam (as for instance a gaussian beam at normal incidence), that one recovers simple symmetry-based relations between input and output SOPs of a given beam.

Depolarization effects are generally most efficiently addressed when one resorts to the Stokes parameters (S_0, S_1, S_2, S_3) . These parameters, together with the use of the associated Mueller algebra, define the natural theoretical habitat of polarization properties in connection with symmetry arguments [8, 9]. The Stokes parameters are real-valued and represent four intensity measurements on a light beam: $S_0 = \langle I \rangle$ corresponds to the total intensity in the beam, as measured without any polarization selection, and $S_1 = \langle I_{0^\circ} - I_{90^\circ} \rangle$, $S_2 = \langle I_{45^\circ} - I_{-45^\circ} \rangle$, $S_3 = \langle I_{\sigma^+} - I_{\sigma^-} \rangle$ represent three balanced intensity measurements where $0^\circ, 90^\circ$ and $\pm 45^\circ$ refer to orientations of

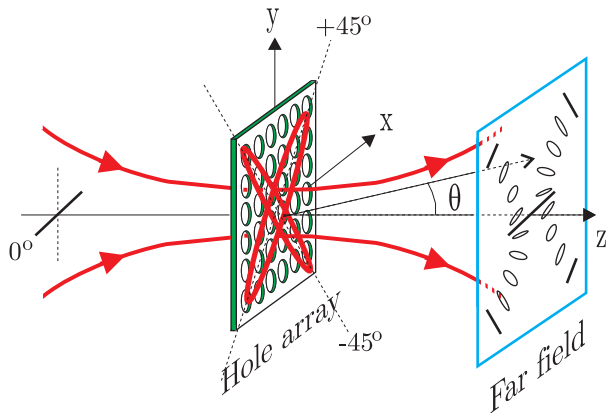


FIG. 1: Cartoon-like representation of a hole array, chosen here as a square array with circular holes, illuminated by a finite-diameter (gaussian) beam. The input beam, chosen here as a pure horizontal (0°) SOP, excites SPs along the principal diagonals of the array (note that the reciprocal lattice coincides with the direct lattice). On the backside of the array, the corresponding near field pattern is shown with SPs propagating and polarized along the $+45^\circ/-135^\circ$ and $+135^\circ/-45^\circ$ lobes, onto which the input SOP can thus be projected. The central region corresponding to the incident beam remains polarization isotropic but when moving radially outward, the input horizontal polarization is modified through elliptically polarized states towards $\pm 45^\circ$ -linear polarizations due to the longitudinal character of the SPs. As symbolized in the figure, the output SOP becomes space-variant, the variation in polarization states being parametrized by the far field angles $\theta = (\theta_x, \theta_y)$. This 2D far field pattern is Fourier related to the sketched near field pattern with polarization directions remaining unmodified. Therefore, the polarization directions observed in the far field, and more particularly at large angles, are (maybe somewhat surprisingly) associated with directions along which corresponding SPs *do not* propagate, since a wide near field corresponds to a narrow far field. The same general picture remains valid with an input circular SOP. In this case, the input SOP passes through various elliptically polarized states to reach the linear SOPs along the diagonals. Extension of this description to an hexagonal array is straightforward.

a linear analyzer and $\sigma^+(\sigma^-)$ to a right(left)-handed circular analyzer. The brackets $\langle \dots \rangle$ stand for averaging over the spread of the wave vectors of the beam, i.e. an integration over the far field angles (see Fig. 1). A similar integration in time has no effect, as the range of input frequencies is assumed to be much smaller than the SP resonance structure. The degree of polarization Π of the beam is given by $\Pi = [(S_1^2 + S_2^2 + S_3^2)/S_0^2]^{1/2}$. For unpolarized light, S_1, S_2, S_3 components are “averaged-out” by the angular integration so that $\Pi = 0$. For a fully polarized beam, $\Pi = 1$ whereas for partially polarized light, $0 < \Pi < 1$.

Collecting the Stokes parameters in a four-vector $\mathbf{S} = (S_0, S_1, S_2, S_3)$, transformation by the array from input to output Stokes vectors $\mathbf{S}^{\text{out}} = \mathbf{M}\mathbf{S}^{\text{in}}$ is given by the

4×4 real-valued Mueller matrix \mathbf{M} when assuming an arbitrary input SOP with $\Pi = 1$. This matrix completely describes all possible changes of this initially pure SOP due to transmission through the array; it is directly related to the transmission matrix \mathbf{t} appearing in Eq. (1). The global structure of the \mathbf{M} matrix can be derived after we expand input and output Stokes vectors in terms of SU(2) Pauli matrices generators $(\sigma_0, \sigma_1, \sigma_2, \sigma_3)$. This expansion fixes the SU(2) decomposition of Mueller matrix components to

$$M_{\alpha\beta} = \frac{1}{2} (\mathcal{P}_{ijkl} (\sigma_\alpha)_{ji} (\sigma_\beta)_{kl}), \quad (2)$$

where we used summation over repeated indices. This decomposition is based on the components $\mathcal{P}_{ijkl} = \langle t_{ik}(\lambda; \theta) t_{jl}^*(\lambda; \theta) \rangle$ of the 4th-rank tensor $\mathcal{P} = \langle \mathbf{t} \otimes \mathbf{t}^* \rangle$, the star symbol denoting complex conjugation and the “circled-cross” symbol a tensorial product on \mathbf{t} -matrices. Symmetry properties of the Mueller matrix will result from conjunction between spatial symmetries of the lattice, as implemented at the level of the averaged \mathcal{P} components, and the SU(2) symmetry of Pauli matrices. We assume a fully polarized input beam, i.e. $\Pi^{\text{in}} = 1$ (see below for a discussion of the general case), so that the average is performed over the far field angles present in the input beam. More precisely, this average corresponds to an intensity-weighted integration over the input angles via $\langle \dots \rangle \equiv \int d\theta \dots I^{\text{in}}(\lambda; \theta)$.

The simple case of plane wave illumination of the array at normal incidence only retains the $\theta = 0$ value in the averaging process. It is then straightforward to show that for square (C_{4v}) and hexagonal (C_{6v}) spatial symmetries, both the transmission matrix and, as immediately seen from Eq. (2), the Mueller matrix are proportional to the identity matrix. So we find, not surprisingly, perfect polarization preservation for transmission through such arrays. For rectangular (C_{2v}) symmetry, the SOP may change (corresponding to birefringence and/or dichroism) but the degree of polarization is conserved. The situation becomes fundamentally different when the array is illuminated with a finite-diameter beam and when, at the same time, SPs are excited at the array interfaces. Eq. (2) implies that these two aspects have to be *combined* in the transmission process, as we explain now.

First, the finite-diameter of the incident beam corresponds to a spread of incoming wave vectors which calls for the averaging in the definition of the Stokes parameters and the \mathcal{P} tensor. Second, SP excitations stick to preferred propagation directions on the array interfaces according to the well-known dispersion relation which restricts the propagation of SP waves on the reciprocal lattice of the array [11]. SP excitations are then possibly *de-localized* beyond the excitation spot of the incident beam, the condition being that the transverse coherence length of the input beam at the surface of the array should be smaller than the SP coherence length, which can among

others be estimated from spectral widths of transmission peaks associated to SP resonances [4]. Identifiable propagation axes for SPs induce an effective spatially dispersive response of the illuminated array; this is analogous to the occurrence of spatial dispersion in crystal optics [12], the hole array acting as a 2D crystal.

In this situation, a space-variant output SOP is readily expected. Since the SPs are dominantly longitudinal surface waves, the excited areas on the hole array extending beyond the excitation spot are mainly linearly polarized along the axes of the reciprocal lattice assigned to the excited SP mode. Polarization isotropy is found only in the excitation spot itself whereas a progressive modification of the input polarization is involved in the propagation of SPs, towards linear polarizations oriented along axes of the reciprocal lattice. In the Fourier-related far field, as sketched in Fig. (1), the output SOP contains therefore various angularly separated polarization components, i.e. it is (partly) depolarized. Most essential for our analysis is that, due to the far field angle dependence of the transmission matrix amplitudes t_{ij} , symmetry operations of the chosen array must be carried out within the angular integration, bringing forth *different* constraints on \mathcal{P} for the case of a rotationally symmetric beam versus a plane wave as input illumination.

More specifically, spatial symmetry operations are easily analyzed by referring to the circular-state basis (σ_+, σ_-) . Mirror symmetry exchanges σ_+ into σ_- and vice-versa and is directly related to complex conjugation. Rotation simply corresponds to phase factors induced on transformed elements. As a 4th-rank tensor, \mathcal{P} features in this basis *a priori* 16 independent components. Mirror symmetry in combination with angular integration reduces this to 8 independent ones and moreover implies that these 8 components are real-valued. Then, four- and six-fold rotational invariance retain only 4 independent components for the former and 3 for the latter. Restricting the \mathcal{P} tensor to these 4 and 3 components, rotational symmetries together with mirror symmetry force the σ_α and σ_β components to the tight $\delta_{\alpha\beta}$ “selection-rule”. This entails that Mueller matrices for square and hexagonal arrays must be *diagonal*, with the 4 on-diagonal elements given in the (x, y) laboratory frame as

$$\begin{aligned} M_0 &= \langle |t_{xx}|^2 + |t_{yy}|^2 + |t_{xy}|^2 + |t_{yx}|^2 \rangle \\ M_1 &= \langle |t_{xx}|^2 + |t_{yy}|^2 - |t_{xy}|^2 - |t_{yx}|^2 \rangle \\ M_2 &= 2\Re \left[\langle t_{xx}t_{yy}^* + t_{xy}t_{yx}^* \rangle \right] \\ M_3 &= 2\Re \left[\langle t_{xx}t_{yy}^* - t_{xy}t_{yx}^* \rangle \right], \end{aligned} \quad (3)$$

omitting λ and θ dependences. In practice, the transmission matrix components t_{ij} depend on the actual structure of the chosen array, in particular on the dimensions of the holes and on the permittivity of the metal used (real and imaginary parts). These param-

eters characterize in fact the SP modes on the array interfaces; their quantitative evaluation (i.e. beyond symmetry aspects) requires extensive model calculations that are outside the scope of this Letter. As special cases, we find that the Mueller matrix \mathbf{M} is proportional to the identity matrix both in the limit of zero hole size and that of highly dissipative metal permittivity (for e.g. Cr) where SPs cannot be excited.

The diagonal forms of the Mueller matrices for square and hexagonal arrays immediately reveal that there is no mixing of Stokes parameters so that the excitation does not produce any new spatially averaged polarization in the transmitted beam. With no enpolarizing capabilities [13], these arrays act as purely depolarizing optical elements. To each input Stokes parameter $i = (1, 3)$ is associated a given degree of polarization $\Pi_i^{\text{out}} = M_i/M_0 < 1$, which depends on the opening angle of the input beam. For an hexagonal array, the reduction from 4 to 3 independent \mathcal{P} components results in 3 independent elements of the Mueller matrix with $M_1 = M_2$. As a consequence, two input beams with the different pure SOPs $\mathbf{S}^{\text{in}}/S_0^{\text{in}} = (1, \pm 1, 0, 0)$ and $\mathbf{S}^{\text{in}}/S_0^{\text{in}} = (1, 0, \pm 1, 0)$ will suffer the same amount of depolarization in transmission. Due to the absence of mixing of Stokes parameters, this can be measured directly through standard crossed polarization analysis. It is easy to show that such a direct measurement of depolarization is no longer possible for a rectangular array due to the loss of the simple diagonal structure of the Mueller matrix when going to two-fold symmetry [14].

In conclusion, we have reported a symmetry-based theory of the optical polarization properties of nanofabricated metal hole arrays in the presence of SPs excited on the arrays interfaces by a finite-diameter beam. Our theory has two essential ingredients: (i) multi-plane wave illumination and (ii) spatial dispersion related to SP excitations. The former corresponds to a far field angular integration performed at the level of \mathcal{P} components, and the latter implies that this integration is done over transmission amplitudes depending actually on far field angles. A tensorial symmetry analysis shows that such arrays induce depolarization in transmission, a fundamental property which has not been addressed before. We stress that our analysis is based on the assumption of a fully polarized input SOP. If the input beam itself is already partially depolarized, that is if $\Pi^{\text{in}} < 1$, the angular integration cannot be performed separately on the Mueller matrix \mathbf{M} and on the input Stokes vector \mathbf{S}^{in} , bringing additional complexity into the problem. Additionally, and in view of the recent discovery of SP-assisted polarization entanglement [2], it would be very interesting to develop a quantum version of our approach which could be based upon *twin-photon* Stokes parameters [15].

As a further outlook, we have started a theoretical

and experimental extension of the present work to depolarization effects with non-circular holes. Also quasiperiodic structures, such as 2D Penrose quasicrystals [16], are of particular interest; there, the appearance of forbidden point group symmetries should lead to unexpected depolarization behaviours.

This work has been supported by the Stichting voor Fundamenteel Onderzoek der Materie (FOM) and by the European Union under the IST - ATESIT contract.

-
- [1] T.W. Ebbesen, H.J. Lezec, H.F. Ghaemi, T. Thio, and P.A. Wolff, *Nature* **391**, 667 (1998).
- [2] E. Altewischer, M.P. van Exter, and J.P. Woerdman, *Nature* **418**, 304 (2002).
- [3] E. Moreno, F.J. García-Vidal, D. Erni, J.I. Cirac, and L. Martín-Moreno, arXiv:quant-ph/0308075 (2003).
- [4] E. Altewischer, M.P. van Exter, and J.P. Woerdman, *J. Opt. Soc. Am. B* **20**, 1927 (2003).
- [5] A. Papakostas, A. Potts, D.M. Bagnall, S.L. Prosvirnin, H.J. Coles, and N.I. Zheludev, *Phys. Rev. Lett.* **90**, 107404 (2003).
- [6] J. Elliott, I.I. Smolyaninov, N.I. Zheludev, and A.V. Zayats, arXiv:cond-mat/031059 (2003).
- [7] M. Sarrazin and J.-P. Vigneron, arXiv:physics/0311015 (2003).
- [8] R.W. Schmieder, *J. Opt. Soc. Am.* **59**, 297 (1969).
- [9] D.S. Klinger, J.W. Lewis, and C.E. Randall, *Polarized light in optics and spectroscopy* (Academic Press, 1990).
- [10] D.R. Lovett, *Tensor properties of crystals* (Institute of Physics Publishing, 1989).
- [11] H.F. Ghaemi, T. Thio, D.E. Grupp, T.W. Ebbesen, and H.J. Lezec, *Phys. Rev. B* **58**, 6779 (1998).
- [12] L. Landau, E.M. Lifshitz, and L.P. Pitaevskii, *Landau and Lifshitz Course of Theoretical Physics: Electrodynamics in Continuous Media* (Butterworth-Heinemann, 1980).
- [13] S.-Y. Lu and R.A. Chipman, *Optics Comm.* **146**, 11 (1998).
- [14] C. Genet, E. Altewischer, M.P. van Exter, and J.P. Woerdman, in preparation.
- [15] A.F. Abouraddy, A.V. Sergienko, B.E.A. Saleh, and M.C. Teich, *Optics Comm.* **201**, 93 (2002).
- [16] P.J. Steinhardt, *Proc. Natl. Acad. Sci. USA* **93** 14267 (1996).