



Characterization of Landsat-7 to Landsat-8 reflective wavelength and normalized difference vegetation index continuity



D.P. Roy^{a,*}, V. Kovalsky^a, H.K. Zhang^a, E.F. Vermote^b, L. Yan^a, S.S. Kumar^a, A. Egorov^a

^a Geospatial Science Center of Excellence, South Dakota State University Brookings, SD 57007, USA

^b NASA Goddard Space Flight Center, Terrestrial Information Systems Branch, MD 20771, USA

ARTICLE INFO

Article history:

Received 26 May 2015

Received in revised form 4 December 2015

Accepted 17 December 2015

Available online 12 January 2016

Keywords:

Landsat
Continuity
Reflectance
Ndvi
OLI
ETM +

ABSTRACT

At over 40 years, the Landsat satellites provide the longest temporal record of space-based land surface observations, and the successful 2013 launch of the Landsat-8 is continuing this legacy. Ideally, the Landsat data record should be consistent over the Landsat sensor series. The Landsat-8 Operational Land Imager (OLI) has improved calibration, signal to noise characteristics, higher 12-bit radiometric resolution, and spectrally narrower wavebands than the previous Landsat-7 Enhanced Thematic Mapper (ETM+). Reflective wavelength differences between the two Landsat sensors depend also on the surface reflectance and atmospheric state which are difficult to model comprehensively. The orbit and sensing geometries of the Landsat-8 OLI and Landsat-7 ETM+ provide swath edge overlapping paths sensed only one day apart. The overlap regions are sensed in alternating backscatter and forward scattering orientations so Landsat bi-directional reflectance effects are evident but approximately balanced between the two sensors when large amounts of time series data are considered. Taking advantage of this configuration a total of 59 million 30 m corresponding sensor observations extracted from 6317 Landsat-7 ETM+ and Landsat-8 OLI images acquired over three winter and three summer months for all the conterminous United States (CONUS) are compared. Results considering different stages of cloud and saturation filtering, and filtering to reduce one day surface state differences, demonstrate the importance of appropriate per-pixel data screening. Top of atmosphere (TOA) and atmospherically corrected surface reflectance for the spectrally corresponding visible, near infrared and shortwave infrared bands, and derived normalized difference vegetation index (NDVI), are compared and their differences quantified. On average the OLI TOA reflectance is greater than the ETM+ TOA reflectance for all bands, with greatest differences in the near-infrared (NIR) and the shortwave infrared bands due to the quite different spectral response functions between the sensors. The atmospheric correction reduces the mean difference in the NIR and shortwave infrared but increases the mean difference in the visible bands. Regardless of whether TOA or surface reflectance are used to generate NDVI, on average, for vegetated soil and vegetation surfaces ($0 \leq \text{NDVI} \leq 1$), the OLI NDVI is greater than the ETM+ NDVI. Statistical functions to transform between the comparable sensor bands and sensor NDVI values are presented so that the user community may apply them in their own research to improve temporal continuity between the Landsat-7 ETM+ and Landsat-8 OLI sensor data. The transformation functions were developed using ordinary least squares (OLS) regression and were fit quite reliably (r^2 values > 0.7 for the reflectance data and > 0.9 for the NDVI data, p -values < 0.0001).

© 2015 The Authors. Published by Elsevier Inc. This is an open access article under the CC BY-NC-ND license (<http://creativecommons.org/licenses/by-nc-nd/4.0/>).

1. Introduction

At over 40 years, the Landsat satellites provide the longest temporal record of space-based land surface observations, and the successful 2013 launch of Landsat-8 carrying the Operational Land Imager (OLI) and the Thermal Infrared Sensor (TIRS) is continuing this legacy (Irons, Dwyer, & Barsi, 2012; Roy, Wulder, et al., 2014). Multi-temporal optical wavelength satellite data acquired under different

acquisition conditions and by different sensors may have reflectance inconsistencies introduced by factors including atmospheric and cloud contamination (Kaufman, 1987; Masek et al., 2006), variable sun-surface-sensor geometry (Roy et al., 2008; Nagol et al., 2015; Ju et al., 2010), sensor degradation and calibration changes (Markham & Helder, 2012), between sensor spectral band pass and spatial resolution differences (Steven, Malthus, Baret, Xu, & Chopping, 2003; Tucker et al., 2005), and data processing issues (Roy et al., 2002). The need for multi-year consistent data records for both research and applications is well established. For example, the global coverage Moderate Resolution Imaging Spectroradiometer (MODIS) products have been generated

* Corresponding author.

from 2000 to present (Justice et al., 1998) and have been reprocessed several times using improved calibration and geometric knowledge and refined product generation algorithms (Masuoka et al., 2011). Similarly, substantial research effort has been developed to generate global long term data records derived from coarse resolution Advanced Very High Resolution Radiometer (AVHRR) observations available since 1981, although those that are publically available are subject to scientific debate (Myneni, Tucker, Asrar, & Keeling, 1998; Pedelty et al., 2007; Beck et al., 2011; Fensholt & Proud, 2012; Pinzon & Tucker, 2014). Unlike past AVHRR sensors, which carried no onboard reflective wavelength calibration capability, the Landsat Thematic Mapper, ETM+ and OLI sensors are well calibrated (Markham & Helder, 2012) and with the free Landsat data availability the systematic generation of consistent global long-term Landsat products has been advocated (Roy, Wulder, et al., 2014).

The primary Landsat-8 mission objective is to extend the Landsat record into the future and maintain continuity of observations so that Landsat-8 data are consistent and comparable with those from the previous Landsat systems (Roy, Wulder, et al., 2014). Because of the importance of continuity, the Landsat legacy is one in which there has been relatively consistent mission objectives, but with capabilities modified by incremental improvements in satellite, sensor, transmission, reception and data processing and storage technologies (Irons & Masek, 2006; Irons et al., 2012). There is a need to define quantitative spectral reflectance transformations between all the Landsat sensors to provide consistent long term Landsat reflectance data. This paper is limited to the Landsat-7 and Landsat-8 sensors and compares their spectrally overlapping reflective wavelength bands and develops statistical functions to transform between them. In addition, between sensor transformations for the normalized difference vegetation index (NDVI) are developed as the NDVI is one of the most commonly used remote sensing indices. The transformations are developed by statistical comparison of contemporaneous sensor satellite observations which is quite a common approach (Brown, Pinzón, Didan, Morisette, & Tucker, 2006; Gallo, Ji, Reed, Eidenshink, & Dwyer, 2005; Miura, Huete, & Yoshioka, 2006). However, this is challenging for several reasons. First, spectral response differences between the sensors mean that the observed sensor radiances differ in a way that is dependent on the observed surface components (Steven et al., 2003) except when the surface reflectance changes linearly over the band passes which is not usually the case for Landsat (Miura et al., 2006; Zhang & Roy, 2015). Second, top of atmosphere (TOA) reflective wavelength differences between the sensors depend on the atmospheric state and at reflective wavelengths atmospheric effects are coupled to the surface reflectance (Tanre, Herman, & Deschamps, 1981). Third, Landsat atmospheric correction algorithms are imperfect, particularly at shorter visible wavelengths (Ju, Roy, Vermote, Masek, & Kovalskyy, 2012; Vermote, Justice, Claverie, & Franch, 2016). Fourth, despite the relatively narrow 15° Landsat sensor field of view, Landsat bi-directional reflectance effects occur (Roy et al., 2008; Li et al., 2010; Nagol et al., 2015; Gao et al., 2014) and so comparison of Landsat data with different solar and view zenith geometry may introduce differences when surfaces are non-Lambertian. Fifth, unless the sensor data are observed closely together in time, the surface state and condition may change due to anthropogenic factors (e.g., land cover change and agricultural harvesting) and natural factors (e.g., phenology, moisture changes due to precipitation, fire and wind disturbances) which can be difficult to detect reliably using Landsat data (Huang et al., 2010; Kennedy, Yang, & Cohen, 2010; Hansen et al., 2014; Zhu & Woodcock, 2014). For these reasons, reliable and representative determination of statistical functions to transform between sensor bands requires a comparison of data sensed over a wide range of surface conditions. Previous researchers have reported comparisons between Landsat-7 ETM+ and Landsat-8 OLI data but considered only a relatively small (compared to this study) amount of data in Australia (Flood, 2014) and in China and Korea (Ke, Im, Lee, Gong, & Ryu, 2015) and did not take

into account the per-pixel spectral saturation status that we show is important.

In this study, a total of 59 million 30 m corresponding sensor observations extracted from 6316 Landsat-7 ETM+ and Landsat-8 OLI images acquired over three winter and three summer months for all the conterminous United States (CONUS) are examined. Statistical calibrations are derived to document between sensor differences for TOA and also surface reflectance and derived NDVI. The transformations are provided so that the user community may apply them in their own research to improve temporal continuity of reflectance and NDVI between the Landsat OLI and ETM+ sensors. First, the Landsat data and pre-processing required to allow their meaningful comparison are described, then the analysis methodology and results are described, followed by concluding remarks with implications and recommendations.

2. Data

The Landsat-8 OLI has narrower spectral bands, improved calibration and signal to noise characteristics, higher 12-bit radiometric resolution, and more precise geometry, compared to the Landsat-7 ETM+ (Irons et al., 2012). The OLI dynamic range is improved, reducing band saturation over highly reflective surfaces, and the greater 12-bit quantization permits improved measurement of subtle variability in surface conditions (Roy, Wulder, et al., 2014). The Landsat-7 ETM+ has a 5% absolute radiometric calibration uncertainty (Markham & Helder, 2012) and the Landsat-8 OLI has a 3% absolute radiometric calibration uncertainty (Markham et al., 2014). The OLI has two new reflective wavelength bands, a shorter wavelength blue band (0.43–0.45 μm) and a shortwave infrared cirrus band (1.36–1.39 μm), but these are not considered in this study as they have no direct ETM+ equivalent. Comparison of thermal wavelength sensor data is complex because the processes controlling thermal emittance are highly variable in space and time (Moran, Clarke, Inoue, & Vidal, 1994; Norman, Divakarla, & Goel, 1995) and because of this, and the stray light contamination in one of the two TIRS bands (Montanaro, Gerace, Lunsford, & Reuter, 2014), the Landsat thermal bands are also not considered in this study.

The OLI bands are defined at 30 m like the ETM+ but are spectrally narrower and cover different spectral ranges (Fig. 1). The OLI and ETM+ spectral band passes are tabulated in Roy, Wulder, et al. (2014). The blue, green and red OLI band spectral response functions intersect with 82.76%, 71.08% and 60.63% of the corresponding ETM+ band spectral response functions. Conversely, the blue, green and red ETM+ band spectral response functions intersect with 98.83%, 98.30% and 98.90% of the corresponding OLI band spectral response functions. Notably, the OLI near-infrared (NIR) band (~0.85 μm) avoids a water absorption feature that occurs in the ETM+ NIR band (Irons et al., 2012). The OLI NIR and the shortwave infrared band (~1.16 μm and ~2.11 μm) spectral response functions fall entirely within the ETM+ spectral response functions and occupy only 23.14%, 42.22% and 66.69% of the ETM+ spectral response functions respectively.

The Landsat-8 is in the (now decommissioned) Landsat 5 orbit and so Landsat-8 and 7 have the same approximately 710 km sun-synchronous circular 98.2° inclined orbit and overpass every Earth location every 16 days but are offset from each other by 8 days (Teillet et al., 2001; Loveland & Dwyer, 2012). Both Landsat sensors have 15° fields of view and their data are available in approximately 185 km \times 180 km scenes defined in a Worldwide Reference System (WRS) of path (groundtrack parallel) and row (latitude parallel) coordinates (Arvidson, Goward, Gasch, & Williams, 2006; Loveland & Dwyer, 2012). Every daytime sunlit Landsat-7 and 8 overpass of the CONUS is ingested into the U.S. Landsat archive, located at the United States Geological Survey (USGS) Earth Resources Observation and Science (EROS), with an annual maximum of 22 or 23 acquisitions per path/row. In May 2003 the Landsat-7 ETM+ scan line

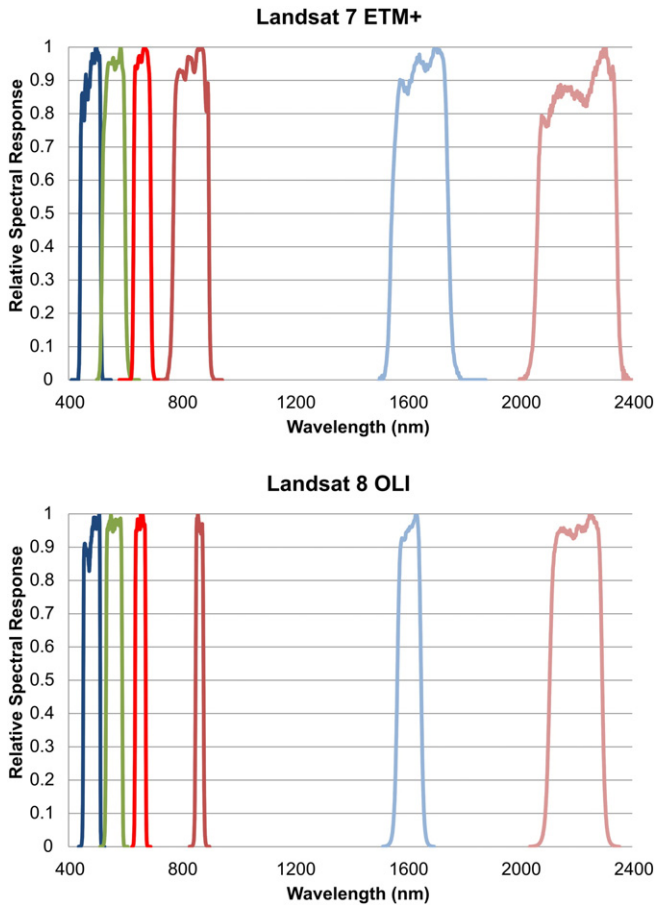


Fig. 1. Landsat-7 ETM+ and Landsat-8 OLI spectral response functions for the approximately corresponding reflectance bands used in this research (sources WWW1 and WWW2).

corrector failed, reducing the usable data in each Landsat ETM+ scene by 22% (Markham, Storey, Williams, & Irons, 2004). The Landsat-8 OLI has no such missing data issue. The Landsat-7 and 8 acquisitions are precision terrain corrected (termed Level 1T) with processing that includes radiometric correction, systematic geometric correction, precision correction using ground control, and the use of a digital elevation model to correct parallax error due to local topographic relief (Lee, Storey, Choate, & Hayes, 2004; Storey, Choate, & Lee, 2014). Certain acquisitions may not have sufficient ground control, typically due to cloud cover, and instead, the best level of correction is applied to generate systematically terrain corrected (termed L1Gt) processed acquisitions (Storey et al., 2014). Unlike previous Landsat data, the Landsat-8 Level 1 data product includes a spatially explicit 30 m quality assessment band with cloud, cirrus cloud, and snow masks (USGS, 2012, 2015). The snow mask is derived using the normalized difference snow index, defined as the green minus shortwave infrared reflectance divided by their sum (Hall, Riggs, & Salomonson, 1995), using OLI specific thresholds (USGS, 2015). The cirrus cloud mask is also new to the Landsat satellite series and provides a pixel assessment of the presence of low or high confidence cirrus found by thresholding the Landsat-8 OLI 1375 μm reflectance band (Kovalsky & Roy, 2015).

In this study, to ensure that a representative range of reflectance spectra were obtained (i.e., capturing land cover, land use, vegetation phenology and soil moisture variations), all the Landsat-7 ETM+ and Landsat-8 OLI acquisitions for three CONUS winter months (26th November 2013 to 4th March 2014) and three summer months (28th May 2013 to 2nd September 2013) were obtained from the U.S. Landsat archive. The most recent Version LPGA_2.3.0 OLI data (that were

reprocessed in February 2014 to fix a significant change in the OLI TIRS band calibration and cloud mask product) and Version LPGA_12.4.0 ETM+ data were used. Only acquisitions processed to L1T and with metadata GEOMETRIC_RMSE_MODEL values ≤ 30 m were used to ensure high geolocation accuracy needed for pixel-level Landsat-7 and 8 data comparison. In addition, only daylight acquisitions, defined as those with metadata SUN_ELEVATION values $> 5^\circ$, were used. This filtering resulted in a total of 6317 acquisitions with 4272 Landsat-8 OLI (2752 summer and 1520 winter) and 2045 Landsat-7 ETM+ (1767 summer and 278 winter) acquisitions. There were fewer ETM+ than OLI acquisitions because a greater proportion of ETM+ scenes failed the geometric filtering criteria, most likely due to the presence of ETM+ scan line corrector failure missing pixels combined with clouds (Roy et al., 2010) and because the OLI has higher geolocation accuracy than the ETM+ (Storey et al., 2014). There were fewer acquisitions for either sensor in Winter due to the greater seasonal CONUS likelihood of clouds at the time of Landsat overpass (Ju & Roy, 2008; Kovalsky & Roy, 2015).

Fig. 2 illustrates the geographic locations of a summer week of Landsat OLI (blue) and ETM+ (red) data. There is an evident cross-track overlap of each Landsat acquisition that increases further north due to the poleward convergence of the Landsat orbits. Because the OLI and ETM+ are in the same orbit offset by 8 days the western and eastern sides of a sensor acquisition are overlapped by the eastern and western sides respectively of the other sensor, and are acquired with only a one day separation. The one day separation between OLI and ETM+ is advantageous as surface changes are less likely to occur within such a short period, although atmospheric conditions may change. The solar zenith changes in one day by a negligible amount at the time of OLI and ETM+ overpass (typically less than 0.2° for the data considered in this study) and the between sensor overlap region is always acquired in the forward scattering direction from one sensor and the backward scattering direction from the other sensor. Consequently, backscatter and forward scattering effects due to the reflectance anisotropy of the land surface are present, although pronounced bi-directional reflectance “hot-spot” effects observed by MODIS from a similar orbit as Landsat (Vermote & Roy, 2002) will not occur because of the much narrower field of view of Landsat (Zhang, Roy, & Kovalsky, in press). Across the CONUS there are typically more than 20 orbits of OLI and ETM+ per week and bi-directional reflectance effects are captured by both sensors in an approximately balanced way when many months of data are considered, as in this study, due to the systematic overlapping area backward and forward scatter sensor acquisition geometry.

3. Data pre-processing

3.1. Top of atmosphere reflectance computation

The data sensed by each Landsat-7 ETM+ detector are stored in the L1T product as an 8-bit digital number (Markham, Goward, Arvidson, Barsi, & Scaramuzza, 2006) and was converted to spectral radiance using sensor calibration gain and bias coefficients derived from the L1T file metadata (Chander, Markham, & Helder, 2009). The radiance for the reflective bands was then converted to top of atmosphere (TOA) reflectance using standard formulae (Roy et al., 2010) as:

$$\rho_{\lambda}^{\text{TOA}} = \frac{\pi \cdot L_{\lambda} \cdot d^2}{\text{ESUN}_{\lambda} \cdot \cos \theta_s} \quad (1)$$

where $\rho_{\lambda}^{\text{TOA}}$ is the top of atmosphere (TOA) reflectance (unitless), sometimes termed the bi-directional reflectance factor, for ETM+ band λ , L_{λ} is the TOA spectral radiance ($\text{W m}^{-2} \text{sr}^{-1} \mu\text{m}^{-1}$), d is the Earth-Sun distance (astronomical units), ESUN_{λ} is the mean TOA solar spectral irradiance ($\text{W m}^{-2} \mu\text{m}^{-1}$), and θ_s is solar zenith angle at the center of the Landsat acquisition (radians). The quantities ESUN_{λ} and d are tabulated by Chander et al. (2009) and θ_s is calculated from the solar elevation angle stored in the L1T file metadata. The data sensed by each

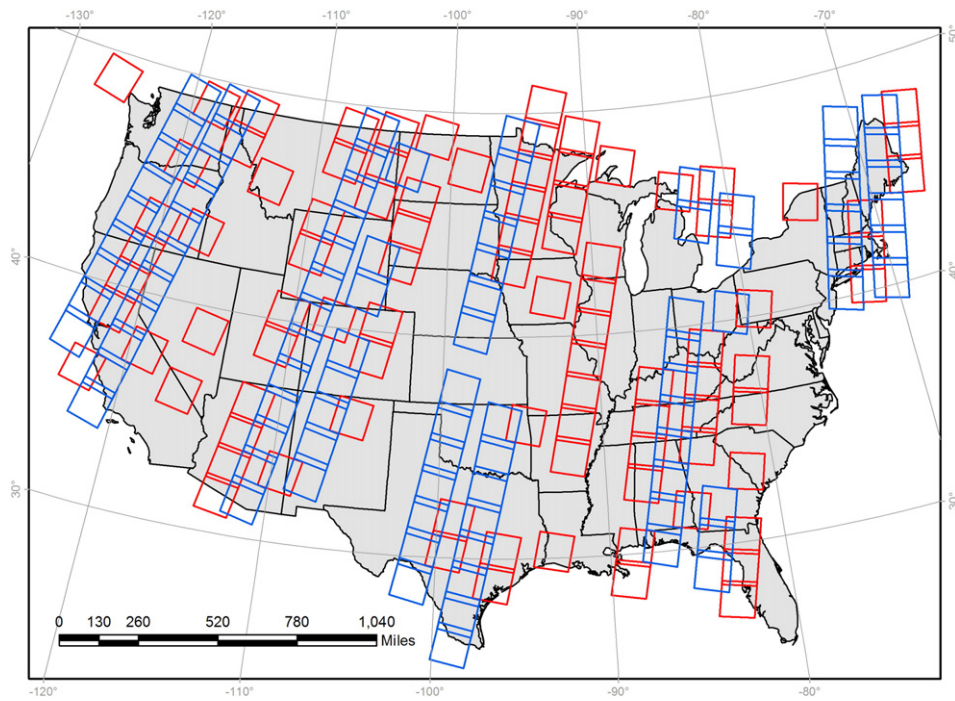


Fig. 2. Geographic locations of Landsat-8 OLI (blue) and Landsat-7 ETM+ (red) acquisitions derived from their metadata latitude and longitude scene corner coordinates for a seven day period, 28th July 2013 to 3rd August 2013, shown in the Web Enabled Landsat Data (WELD) Albers projection. See text for explanation of coverage differences.

Landsat-8 OLI detector are stored in the L1T product as a 16-bit digital number (the OLI detectors have 12-bit radiometric resolution) and were converted to TOA reflectance using the scaling factors and dividing by the cosine of the solar zenith angle that are stored in the OLI L1T metadata. The $30\text{ m } \rho_{\lambda}^{\text{TOA}}$ for each ETM+ and OLI reflective band were stored as signed 16-bit integers after being scaled by 10,000 and the TOA NDVI was computed (as the NIR minus red TOA reflectance divided by their sum) and stored as signed 16-bit integers after being scaled by 10,000.

3.2. Spectral saturation and cloud computation

Highly reflective surfaces, including snow and clouds, and sun-glint over water bodies, may saturate the reflective wavelength bands, with saturation varying spectrally and with the illumination geometry (Dowdeswell & McIntyre, 1986; Oreopoulos, Cahalan, Marshak, & Wen, 2000; Bindshadler et al., 2008; Roy et al., 2010). As the reflectance of saturated pixels is unreliable the spectral band saturation status was stored for each 30 m pixel. Saturated pixels are designated by specific ETM+ L1T digital numbers (Roy et al., 2010) and for the OLI L1T are straightforward to derive by comparison of the stored OLI digital numbers with OLI L1T metadata saturation values. The OLI data were expected to be saturated much less frequently than the ETM+ because of the greater OLI dynamic range.

Optically thick clouds preclude remote sensing of the surface at reflective wavelengths and so cloud mask results were stored for each 30 m pixel. It is well established that cloud masking is complex. For example, the boundary between defining a pixel as cloudy or clear is sometimes ambiguous, and a pixel may be partly cloudy, or a pixel may appear as cloudy at one wavelength and appear cloud-free at a different wavelength (Kaufman, 1987; Ackerman et al., 2008; Tackett & Di Girolamo, 2009; Kovalsky & Roy, 2015). In this study, the automatic cloud cover assessment algorithm (ACCA) that takes advantage of known spectral properties of clouds, snow, bright soil, vegetation, and water, and consists of twenty-six rules applied to five of the ETM+ bands (Irish, 2000; Irish, Barker, Goward, & Arvidson, 2006), and a

decision tree (DT) cloud detection algorithm based on training using approximately 13 million and 5.4 million unsaturated and saturated ETM+ training pixels (Roy et al., 2010), were applied to the ETM+ data. The ACCA and DT cloud mask algorithms provide binary cloud detection status information. The OLI already has per-pixel cloud information available in the L1T product that indicates if the 30 m pixel is either (a) high confidence cloud, (b) medium confidence cloud, (c) low confidence cloud, and if it is either (d) high confidence cirrus cloud, or (e) low confidence cirrus cloud (USGS, 2012; Kovalsky & Roy, 2015). In addition, the OLI L1T product includes a 30 m low, medium and high confidence snow flag that was also considered (USGS, 2012, 2015).

3.3. Surface reflectance computation

Surface reflectance, i.e., TOA reflectance corrected for atmospheric effects, is needed because atmospheric gases and aerosols are variable in space and time and may have significant impacts on Landsat data (Ouaidrari & Vermote, 1999; Masek et al., 2006; Roy, Qin, et al., 2014). In this study the Landsat Ecosystem Disturbance Adaptive Processing System (LEDAPS) atmospheric correction algorithm (Masek et al., 2006) was used as it is developed for both ETM+ and OLI application, and explicitly models their spectral response functions (Vermote et al., 2016). The 30 m surface reflectance for each ETM+ and OLI reflective band, and the surface NDVI derived from the surface reflectance NIR and red bands, were stored as signed 16-bit integers after being scaled by 10,000.

The LEDAPS uses the 6SV radiative transfer code (Vermote, Tanré, Deuze, Herman, & Morcette, 1997; Kotchenova, Vermote, Matarrese, & Klemm, 2006) with aerosol characterizations derived independently from each Landsat acquisition, and assumes a fixed continental aerosol type and uses ancillary water vapor. Recently, Landsat-7 ETM+ LEDAPS atmospherically corrected data were validated by comparison with independent 6SV atmospherically corrected ETM+ data using AERONET (Aerosol Robotic Network) atmospheric characterizations at 95 $10\text{ km} \times 10\text{ km}$ 30 m subsets located across the CONUS (Ju et al., 2012). The reported 30 m mean reflectance normalized residual for the

LEDAPS atmospherically corrected ETM+ data was 11.8% (blue band), 5.7% (green band), 5.9% (red band), 4.8% (NIR band), and 1.0% to 2.0% for the two short wave infrared bands. Other LEDAPS assessment studies have been undertaken (Maiersperger et al., 2013; Feng et al., 2013). Validation of Landsat-8 LEDAPS atmospheric correction is underway and is more accurate than for ETM+ because of the improved OLI sensor characteristics (Vermote et al., 2016). A minority of atmospherically corrected pixels may have values outside their theoretical limits, i.e., $\rho_{\lambda}^{surface} < 0$ or $\rho_{\lambda}^{surface} > 1$, due primarily to “over correction” by the atmospheric correction algorithm (Roy, Qin, et al., 2014). Therefore as these out of range surface reflectance values are unreliable they were removed from the analysis.

3.4. Reprojection and gridding

The Landsat TOA and surface reflectance data and cloud and saturation data were reprojected and gridded for the ETM+ and OLI independently. Fig. 2 illustrates that at CONUS latitudes over a 7-day period only the edges of the OLI and ETM+ acquisitions overlap. Therefore the ETM+ and OLI data acquired in the same consecutive weekly (7-day) period were reprojected independently. The data were reprojected into the Albers equal area projection with nearest neighbor resampling into fixed 5000×5000 30 m pixel tiles using the Web Enabled Landsat Data (WELD) processing software (Roy et al., 2010). In this way a tile of ETM+ data and a tile of OLI data was generated for each week at each WELD tile location.

3.5. Data sampling

To generate data for the analysis, pixels were sampled systematically in the row and column directions across each weekly OLI and ETM+ CONUS WELD tile. Pixel locations where there were corresponding ETM+ and OLI data were extracted and by definition occurred in the sensor acquisition overlap and were sensed one day apart. A sampling density of every 20th pixel (i.e., every 600 m) across the CONUS was used to ensure a very large systematically collected sample of corresponding OLI and ETM+ pixel values.

4. Data analysis

Spectral scatter plots of the OLI versus ETM+ TOA reflectance, and also for the surface reflectance, were generated considering all six months of weekly sample data for each of the comparable OLI and ETM+ reflective wavelength bands. Similarly, scatterplots for the TOA and surface NDVI data were generated.

The correspondence between the comparable sensor bands and sensor NDVI values was first examined using reduced major axis (RMA) regression. The RMA regression results are symmetric so that a single line defines the bivariate relationship, regardless of which variable is the dependent (i.e., OLI or ETM+ data) and which is the independent variable (Smith, 2009). The RMA regression allows for both the dependent and independent variables to have error (Cohen, Maiersperger, Gower, & Turner, 2003, Smith, 2009) which is useful because of the sensor calibration uncertainty and because the TOA and surface sensor reflectance data have non-negligible atmospheric effects and residual atmospheric correction errors respectively. Statistical functions to transform between the comparable sensor bands and sensor NDVI values were then developed using ordinary least squares (OLS) regression. The OLS regression results are asymmetric, so that the slope and resulting interpretation of the data are changed when the variables assigned to the dependent and independent variables are reversed. The OLS regressions were derived for OLI versus ETM+ data, and conversely for ETM+ versus OLI data, to provide transformation functions from OLI to ETM+ and from ETM+ to OLI. The goodness of fit of the OLS regressions were defined by the coefficient of determination (r^2) and the significance of the OLS

regressions was defined by examination of the regression overall F-statistic p-value.

To provide simple overall measures of similarity, the mean difference, the root mean square deviation, and the mean relative difference, between the OLI and ETM+ data were derived as:

$$\bar{\Delta} = \frac{\sum_i^n v_i^{OLI} - v_i^{ETM+}}{n} \quad (2)$$

$$RMSD = \sqrt{\frac{\sum_i^n (v_i^{OLI} - v_i^{ETM+})^2}{n}} \quad (3)$$

$$\bar{\Delta}^* = \frac{\sum_i^n \left((v_i^{OLI} - v_i^{ETM+}) / 0.5(v_i^{OLI} + v_i^{ETM+}) \right)}{n} 100 \quad (4)$$

where $\bar{\Delta}$, RMSD, and $\bar{\Delta}^*$ are the mean difference, the root mean square deviation, and the mean relative difference respectively between corresponding Landsat-8 OLI (v_i^{OLI}) and Landsat-7 ETM+ (v_i^{ETM+}) values (TOA or surface spectral reflectance or NDVI) for n pixel values. The mean relative difference values are easier to compare between spectral bands as they are normalized for spectral reflectance differences, whereby, for example, healthy vegetation has low red reflectance but high near-infrared reflectance.

Scatterplots considering different levels of filtering, including removal of the saturated and the cloudy pixel values, were generated to provide insights into the impacts of the per-pixel data screening. The ETM+ and OLI spectral band saturation information was used to discard pixel values if either sensor values were saturated for the spectral band considered. Saturated red or NIR band pixel values were used to discard saturated NDVI values. The ETM+ and OLI cloud masks were used to discard pixel values if either sensor value was flagged as cloudy. Landsat-7 ETM+ pixels were considered cloudy if they were labeled as cloudy in either the ACCA or the decision tree cloud masks. This ensured a generous cloud definition (Roy et al., 2010) but meant that cloud-free pixels were sometimes flagged as cloudy and discarded. Similarly, a generous Landsat-8 OLI cloud pixel definition was used and OLI pixels were considered cloudy if they were labeled as high or medium confidence cloud, or as high confidence cirrus cloud. The OLI cirrus cloud status was included because a recent study reported for a year of CONUS Landsat-8 data that about 7% of pixels were detected as high confidence cirrus but low confidence cloud (Kovalsky & Roy, 2015). The Landsat-8 OLI snow pixel state was also used to remove corresponding OLI and ETM+ pixel values that were labeled by the OLI as high or medium confidence snow.

To remove land cover and surface condition changes that may have occurred in the one day difference between OLI and ETM+ pixel observation, a filter was applied to the TOA reflectance data:

$$\frac{|\rho_{blue}^{TOA,ETM+} - \rho_{blue}^{TOA,OLI}|}{0.5 |\rho_{blue}^{TOA,ETM+} + \rho_{blue}^{TOA,OLI}|} > 1.0 \quad (5)$$

where $\rho_{blue}^{TOA,ETM+}$ and $\rho_{blue}^{TOA,OLI}$ are the TOA blue reflectance for the ETM+ (band 1: 0.45–0.52 μm) and the OLI (band 2: 0.45–0.51 μm) respectively. Thus, only corresponding ETM+ and OLI values sensed one day part that had a blue TOA reflectance difference greater than 100% of their average were discarded. The blue band is the shortest wavelength ETM+ band and is the most sensitive of the ETM+ bands to atmospheric effects. In a recent study considering approximately 53 million 30 m pixel locations sampled systematically across the CONUS for 12 months, the mean absolute difference between the surface and TOA blue band ETM+ reflectance expressed as a percentage of the surface reflectance was 45% (Roy, Qin, et al., 2014). Consequently, the filter

[5] only rejects pixel values where the relative change between the ETM+ and OLI blue reflectance in one day was more than twice the average effect of the atmosphere, i.e., only pixel values with significant surface change will be removed. In addition, as cloud and snow have much higher blue reflectance than soil and vegetated surfaces (Dozier, 1984; Ustin et al., 1998; Painter et al., 2009), the filter may remove pixel values where either (but not both) of the OLI or the ETM+ observations was cloud or snow contaminated.

5. Results

A total of 59,490,068 30 m pixel values for each spectral band was extracted from the six months of CONUS overlapping sensor data. Fig. 3 shows ρ_N^{TOA} scatter plots for the six comparable OLI and ETM+ reflective bands. No filtering was applied to the data, but regardless, the higher dynamic range of the OLI (y-axis) compared to the ETM+ (x-axis) is evident in the greater dispersion of the OLI TOA reflectance compared to the ETM+ TOA reflectance. The anomalously high frequency of ETM+ visible band reflectance values at around 0.35 and 0.55 is due to sensor saturation. Fig. 4 shows the same data as Fig. 3 but discarding pixel values that were saturated (see Section 3.2) and these features are gone. Of the 59,490,068 values only a very small minority of the OLI values (1289) were saturated in any of the six reflective bands compared to the ETM+ (8,210,656). The small incidence of saturated OLI data has been documented previously (Morfitt et al., 2015). The ETM+ shorter wavelength visible bands were more frequently saturated (12.1% of the blue band and 11.0% of the red band values were saturated) compared to the longer wavelength bands and the NIR band was the least saturated (1.4% of the NIR values were saturated). Comparison of Figs. 3 and 4 indicate that the saturated ETM+ pixels have a wide

range of TOA reflectance values and not just high values. Initially this seemed counter-intuitive. However, from [1] it is clear that large (i.e., saturated) radiance values may have reduced ρ_N^{TOA} when observed with lower solar zenith angles (i.e., when the sun is higher in the sky), and this effect has been documented previously (Dozier, 1984; Karnieli, Ben-Dor, Bayarjargal, & Lugasi, 2004). Inspection of all the ETM+ L1T acquisition metadata used in this study revealed that (i) there were only two sets of digital number to radiance calibration coefficients, and (ii) the solar zenith angles for the study data ranged from 20.85° to 74.76°. These two sets of calibration coefficients combined with the solar zenith angle variations resulted in the apparent “folding” of the saturated ETM+ reflectance values. For example, in the ETM+ blue band, which was the most sensitive to saturation, the first and second saturation peaks appear close to 0.35 and 0.55 reflectance (Fig. 3) and correspond to calibration gain and offset coefficients of 0.779 and -6.97874 and of 1.181 and -7.38071 respectively. These results highlight the need to take into account the reflective wavelength saturation status when analyzing Landsat data. In particular, comparison of Landsat-8 OLI and Landsat-7 ETM+ reflectance will be quite imbalanced if the saturation status is not taken into consideration due to the improved radiometric resolution of the OLI sensor.

Fig. 5 illustrates the impact of removing cloudy and snow covered pixel values. Clouds and snow typically have relatively high visible and NIR reflectance compared to vegetation and soil and more similar reflectance in the Landsat shortwave bands (Dozier, 1984; Ustin et al., 1998; Painter et al., 2009). Evidently, from comparison of Figs. 5 and 4, the filtering resulted in the removal of some non-cloudy and non-snow contaminated data. However, given the large amount of Landsat data considered and the study goals this is preferable to retaining cloud and snow contaminated pixel values. A minority (less than

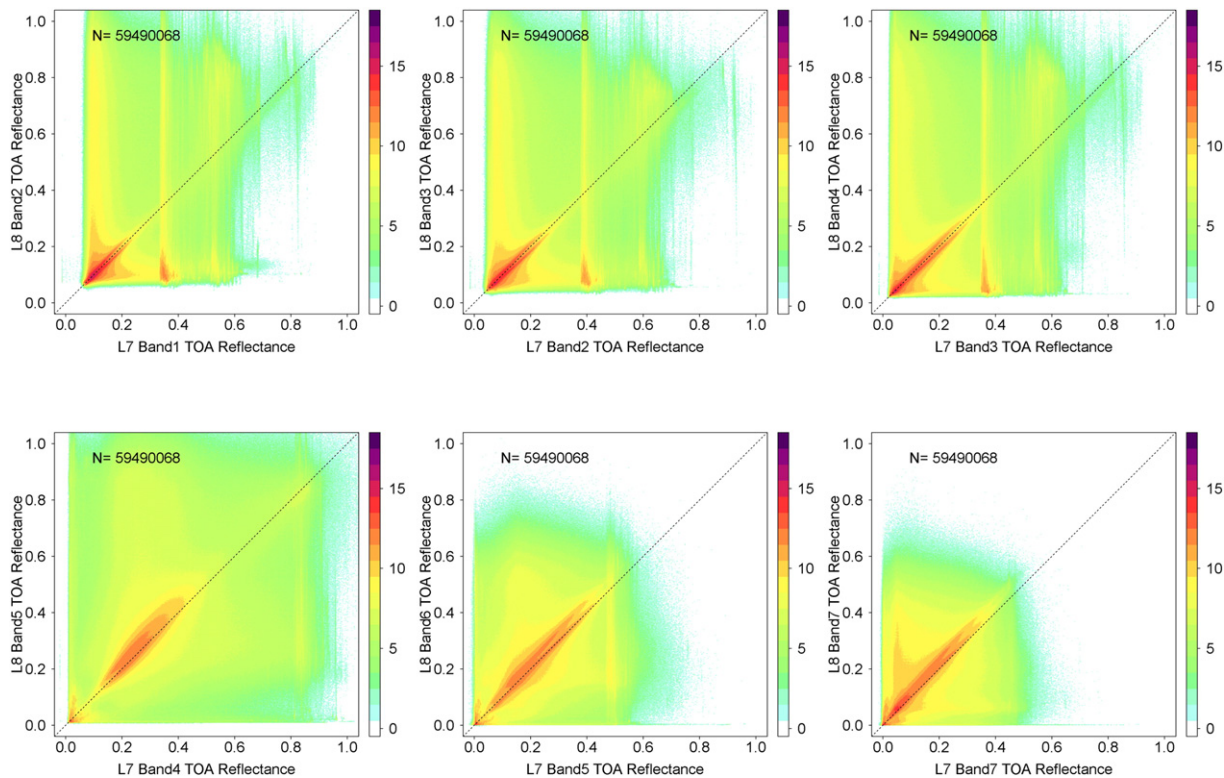


Fig. 3. Spectral scatterplots of Landsat-8 OLI top of atmosphere (TOA) spectral reflectance plotted against comparable Landsat-7 ETM+ TOA spectral reflectance bands. Data extracted from three winter and three summer months of overlapping OLI and ETM+ 30 m pixel locations sampled systematically every 600 m across the CONUS. Only reflectance values in the range 0.0 to 1.0 are illustrated. The six comparable reflective wavelength bands are illustrated, OLI bands 2 (blue: 0.45–0.51 μm), 3 (green: 0.53–0.59 μm), 4 (red: 0.64–0.67 μm), 5 (near infrared: 0.85–0.88 μm), 6 (shortwave infrared 1.57–1.65 μm), and 7 (shortwave infrared: 2.11–2.29 μm) plotted against ETM+ TOA bands 1 (0.45–0.52 μm), 2 (0.52–0.60 μm), 3 (0.63–0.69 μm), 4 (0.77–0.90 μm), 5 (1.55–1.75 μm) and 7 (2.09–2.35 μm) respectively. The dotted lines are 1:1 lines superimposed for reference. The frequency of occurrence of pixels with the same reflectance is illustrated by colors shaded with a \log_2 scale from 0 (white), 60 (green, $\log_2(6) = 2^6 = 64$), 4000 (orange, $2^{12} = 4096$), >250,000 (purple, $2^{18} = 262,144$).

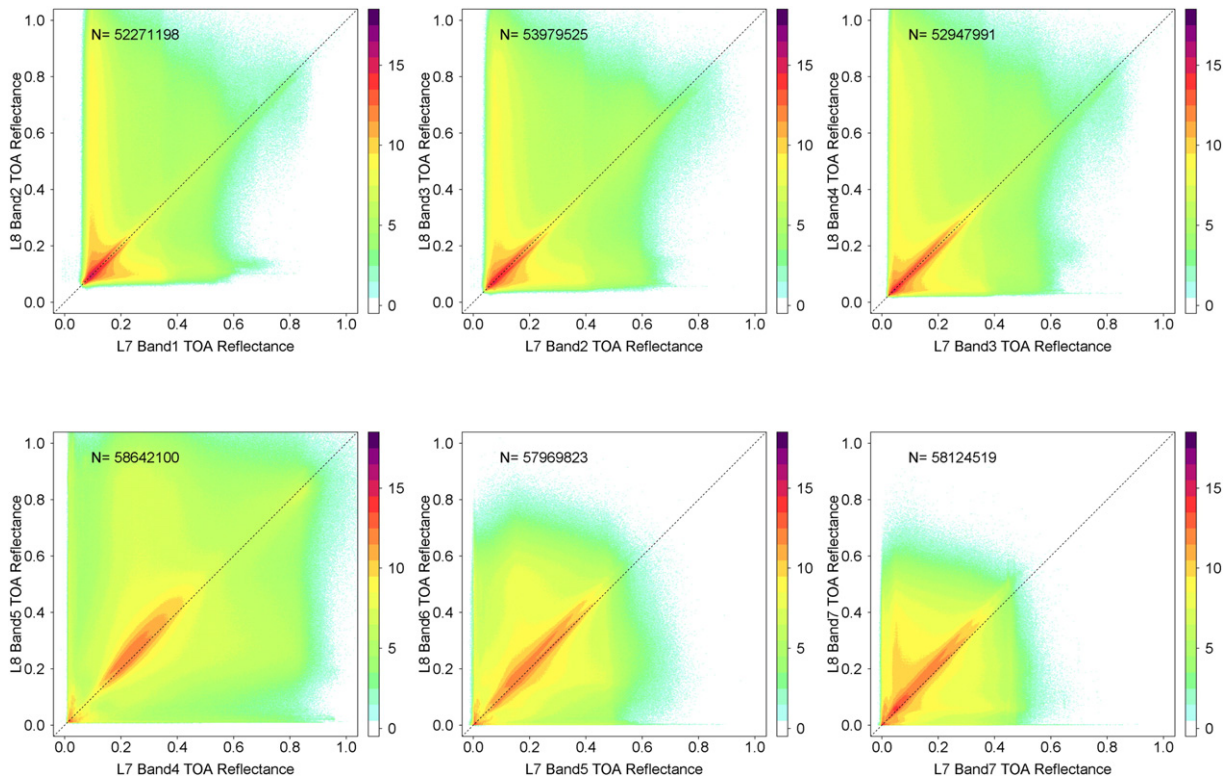


Fig. 4. TOA spectral reflectance as Fig. 3 but after discarding saturated OLI and ETM+ pixel values.

0.5%) of the pixels values illustrated in Fig. 5 have OLI visible and NIR reflectance values greater than approximately 0.6. A previous OLI cloud study, that evaluated a year of CONUS OLI data, found a minority of systematic cloud detection commission errors over highly reflective

exposed soils/sands in New Mexico and Utah but did not examine cloud omission errors (Kovalskyy & Roy, 2015). Detailed examination of the OLI L1T images used in this study where the OLI visible and NIR reflectance values were greater than 0.6 revealed rare but unambiguous

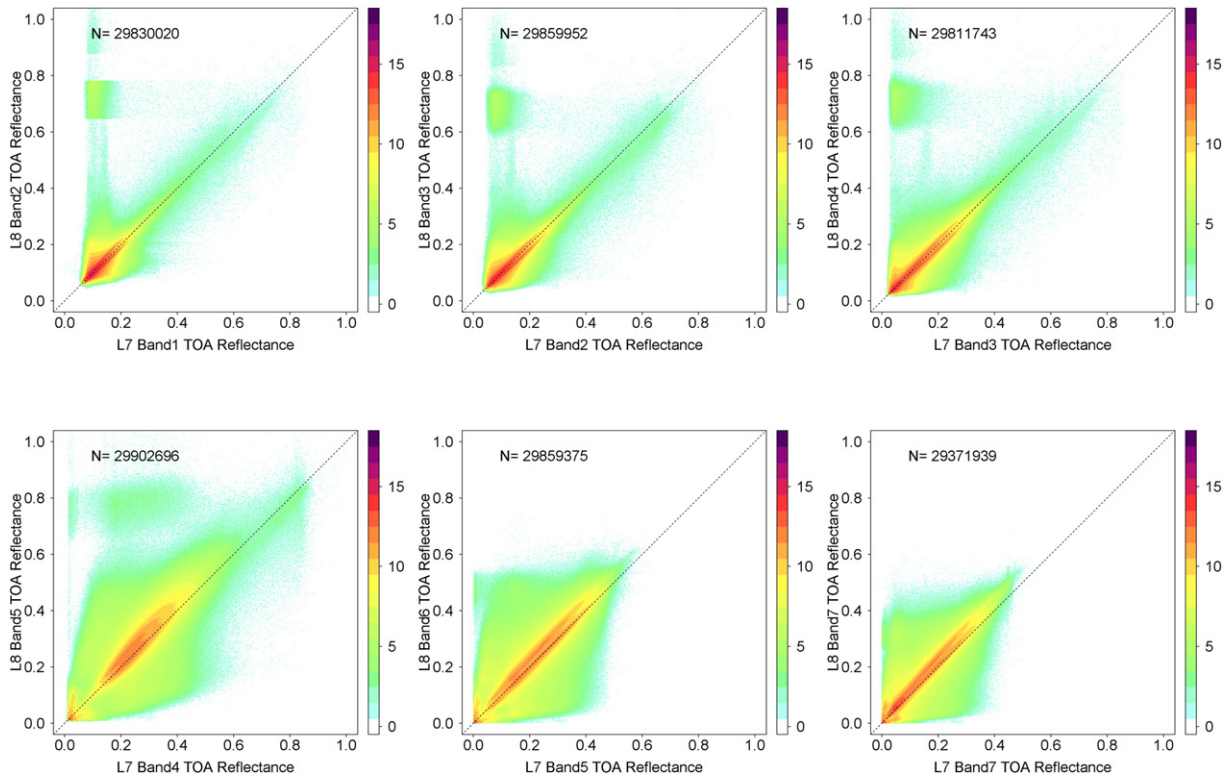


Fig. 5. TOA unsaturated spectral reflectance as Fig. 4 but after discarding cloudy ETM+ pixel values and discarding cloudy and snow OLI pixels.

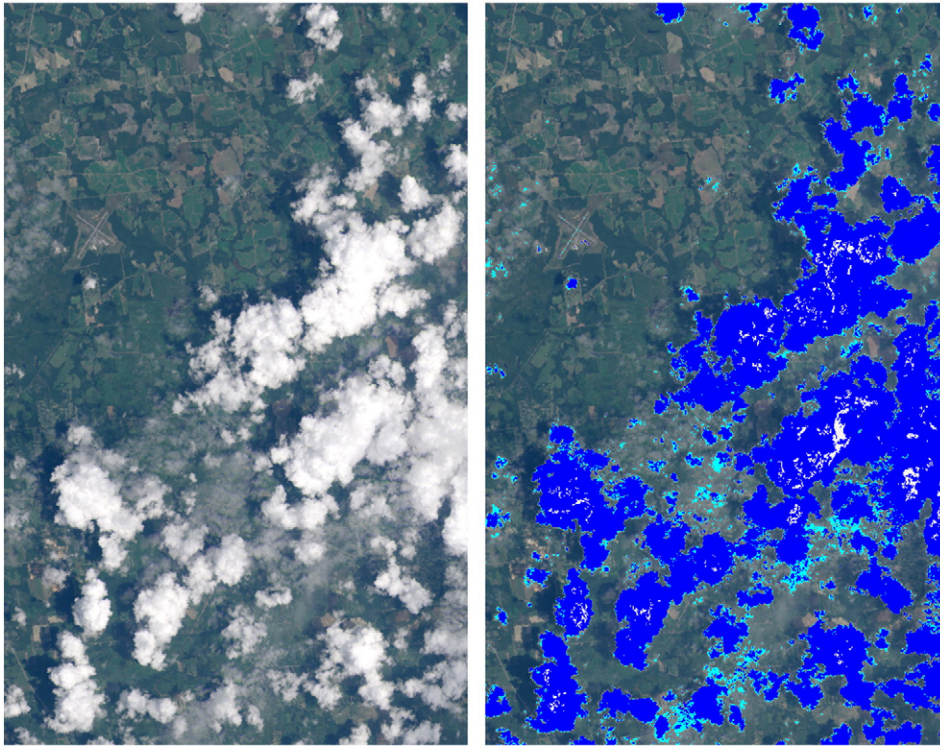


Fig. 6. Illustration of Landsat-8 OLI cloud mask omission for a 500×800 pixel subset of an OLI image: (Left) TOA true color reflectance; (right) the same TOA true color reflectance image with the high confidence cloud (blue) and medium confidence cloud (light blue) detections overlain. A minority of unambiguous interior cloud pixels are undetected by the OLI cloud mask. OLI image sensed 31st July 2013 over Southern Georgia (WRS-2 path 18 and row 39).

OLI cloud detection omission errors, typified by the example shown in Fig. 6.

Fig. 7 shows the unsaturated cloud- and snow-free TOA reflectance ($\rho_{\lambda}^{\text{TOA}}$) scatterplots with the filtering (Eq. (5)) to remove pixel values where the relative one day change between the ETM+ and OLI blue reflectance was more than twice the average effect of the atmosphere. The filtering removed the OLI omission errors evident in Fig. 5. Approximately 29.7 million pairs of Landsat 8 OLI and Landsat 7 ETM+ reflectance values are plotted (Table 1). The range of the OLI and ETM+ $\rho_{\lambda}^{\text{TOA}}$ values corresponds spectrally to a great variation in surface types and conditions. Of the plotted data 11% were from the winter months and the remainder was from the summer months. This is because, as noted in Section 2, there were fewer winter acquisitions used for either sensor due to the greater seasonal incidence of clouds at the time of Landsat overpass. In addition, in the winter the CONUS is more snow covered (Sheng et al., 2015) and this has been observed in CONUS coverage Landsat 5 and 7 data sets (Roy et al., 2016).

The solid lines in Fig. 7 show RMA (black) and OLS (colored) regression fits that are summarized in Table 1. If the OLI and ETM+ sensors were identical and sensed at the same time then all the data in each Fig. 7 scatterplot would reside on the 1:1 line and the regression fits would have zero intercepts and slopes of unity. Departures from the 1:1 line are due to the factors described in the introduction, namely (a) spectral response differences between the sensors, (b) surface and atmospheric changes over the one day OLI and ETM+ acquisition difference, and (c) bi-directional reflectance effects. Surface changes due to the one day sensor acquisition difference are assumed to be removed by the application of [5]. In addition, bi-directional reflectance effects can be largely discounted. This is because, as explained in Section 2, the sensor overlap region (Fig. 2) is always acquired in the forward scattering direction from one sensor and the backward scattering direction from the other sensor. Bi-directional effects are typified by higher reflectance in the backscatter direction than in forward scatter direction due to shadow hiding (except for specular reflectance in the forward

scattering direction) (Roujean, Leroy, & Deschamps, 1992; Roberts, 2001; Kokhanovsky & Breon, 2012). These effects are apparent in the scatterplots, with lobes of frequently occurring $\rho_{\lambda}^{\text{TOA}}$ values (red tones) that occur symmetrically around the RMA regression lines because the forward and backscatter viewing geometry is approximately balanced between the sensors. However, because of the bi-directional effects the OLS r^2 are likely decreased and the mean difference values inflated (Table 1).

Among the six TOA reflectance bands there is a clear pattern (Fig. 7) which is most easily summarized by consideration of the RMA regression fits. The RMA regression intercepts are close to zero for all the bands. However, the RMA slopes are close to unity for the visible wavelength bands and further from unity for the NIR and the two shortwave infrared bands (Table 1, Fig. 7). This is likely due to the spectral response differences between the OLI and ETM+ sensors. In particular, the NIR and then the two shortwave infrared bands have RMA slopes furthest from unity because their spectral response functions are the most different (Fig. 1). On average the OLI TOA reflectance is greater than the ETM+ TOA reflectance for all bands, with positive but small mean differences from 0.0001 to 0.0013 for the visible bands, the greatest positive difference for the NIR band (0.0194), and intermediate mean differences of 0.0137 and 0.0180 for the shortwave infrared (SWIR) bands. The RMSD differences show similar pattern with smaller values for the visible than the NIR and SWIR bands. The mean relative difference values are easier to compare between Landsat bands as they are normalized for spectral reflectance differences [4]. The mean relative difference values increase almost monotonically with wavelength from 0.69% (blue band) to 13.59% ($\sim 2.21 \mu\text{m}$ band).

The OLS regression results provide between sensor spectral transformations of the form $\rho_{\lambda}^{\text{TOA, OLI}} = \text{offset} + \text{slope} \rho_{\lambda}^{\text{TOA, ETM+}}$ (blue lines, Fig. 7) and $\rho_{\lambda}^{\text{TOA, ETM+}} = \text{offset} + \text{slope} \rho_{\lambda}^{\text{TOA, OLI}}$ (green lines, Fig. 7). The OLS regression lines fall symmetrically around the RMA regression lines and they intersect at the mean of the plotted variable values, which is expected from statistical theory (Smith, 2009). The

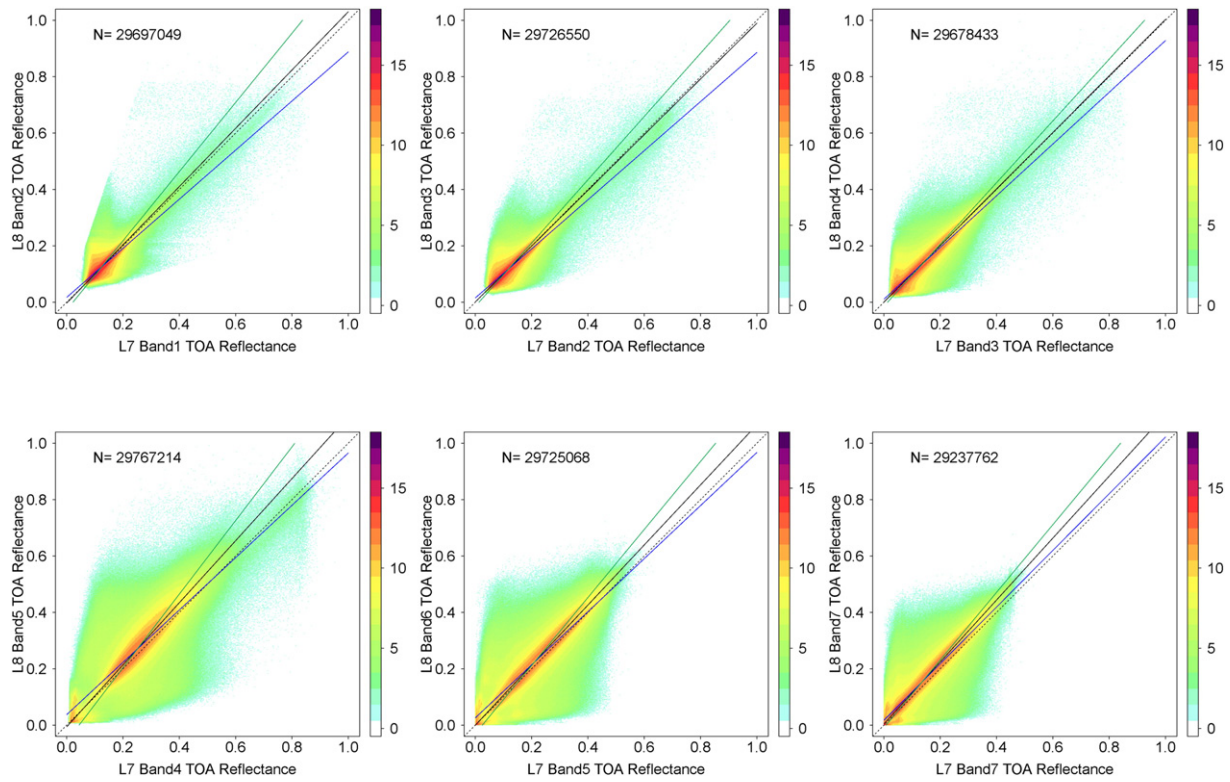


Fig. 7. TOA spectral reflectance as Fig. 3 but after discarding saturated OLI and ETM + pixel values, cloudy ETM +, cloudy and snow OLI pixels (Fig. 5) and filtering as Eq. (5). The solid black lines show reduced major axis (RMA) regression fits of these data, the blue lines show ordinary least squares (OLS) regression of the OLI against the ETM + data, and the green line shows OLS regression of the ETM + data against the OLI data. The dotted lines are 1:1 lines superimposed for reference.

OLS r^2 values are all greater than 0.7 and the regressions are all highly significant with p-values < 0.0001, indicating that the between sensor spectral transformations (Table 1) can be applied to transform ETM + TOA reflectance from OLI TOA reflectance or vice versa.

Fig. 8 and Table 2 show the surface reflectance results. The impact of the atmospheric correction is clearly evident, acting to increase the range of the surface reflectance (Fig. 8) relative to the TOA reflectance (Fig. 7). This occurs primarily because Rayleigh and aerosol backscatter into the sensor adds to the TOA signal at low surface reflectance and

aerosol absorption attenuates the TOA signal at higher surface reflectance (Tanre et al., 1981; Ouaidrari & Vermote, 1999). Most evidently, the frequently occurring surface reflectance values (red tones, top row) are shifted to lower reflectance values compared to the TOA reflectance values. This pattern was also observed in a previous study that considered CONUS Landsat ETM + data (Roy, Qin, et al., 2014). There were about 1% fewer surface reflectance than TOA reflectance pixel values for each band (see n values in Tables 1 and 2). This is because out of range surface reflectance values, i.e. $\rho_{\lambda}^{surface} < 0$ or $\rho_{\lambda}^{surface} > 1$,

Table 1

Top of atmosphere reflectance sensor transformation functions (ETM + to OLI and OLI to ETM +) derived by ordinary least squares (OLS) regression of the data illustrated in Fig. 7, reduced major axis (RMA) regression coefficients, the number of 30 m pixel values considered (n), the OLS regression coefficient of determination (r^2), the OLS regression F-test p-value, the mean difference [2], the mean relative difference [4], and the root mean square deviation [3], between the OLI and ETM + TOA reflectance data.

	Regression type	Between sensor OLS transformation functions and RMA regression coefficients	n	OLS r^2 (p-value)	Mean difference OLI-ETM + (reflectance)	Mean relative difference OLI-ETM + (%)	Root mean square deviation (reflectance)
Blue λ (~0.48 μm)	RMA	OLI = -0.0029 + 1.0333 ETM +	29,697,049	0.710 (<0.0001)	0.0013	0.69	0.0259
	OLS	OLI = 0.0173 + 0.8707 ETM +					
	OLS	ETM + = 0.0219 + 0.8155 OLI					
Green λ (~0.56 μm)	RMA	OLI = 0.0014 + 0.9885 ETM +	29,726,550	0.776 (<0.0001)	0.0001	0.11	0.0272
	OLS	OLI = 0.0153 + 0.8707 ETM +					
	OLS	ETM + = 0.0128 + 0.8911 OLI					
Red λ (~0.66 μm)	RMA	OLI = 0.0009 + 1.0026 ETM +	29,678,433	0.838 (<0.0001)	0.0012	1.13	0.0302
	OLS	OLI = 0.0107 + 0.9175 ETM +					
	OLS	ETM + = 0.0128 + 0.9129 OLI					
Near infrared λ (~0.85 μm)	RMA	OLI = -0.0058 + 1.1007 ETM +	29,767,214	0.711 (<0.0001)	0.0194	6.45	0.0637
	OLS	OLI = 0.0374 + 0.9281 ETM +					
	OLS	ETM + = 0.0438 + 0.7660 OLI					
Shortwave infrared λ (~1.61 μm)	RMA	OLI = -0.0001 + 1.0659 ETM +	29,725,068	0.780 (<0.0001)	0.0137	6.41	0.0543
	OLS	OLI = 0.0260 + 0.9414 ETM +					
	OLS	ETM + = 0.0246 + 0.8286 OLI					
Shortwave infrared λ (~2.21 μm)	RMA	OLI = 0.0048 + 1.0983 ETM +	29,237,762	0.837 (<0.0001)	0.0180	13.59	0.0441
	OLS	OLI = 0.0490 + 0.9352 ETM +					
	OLS	ETM + = 0.0075 + 0.8329 OLI					

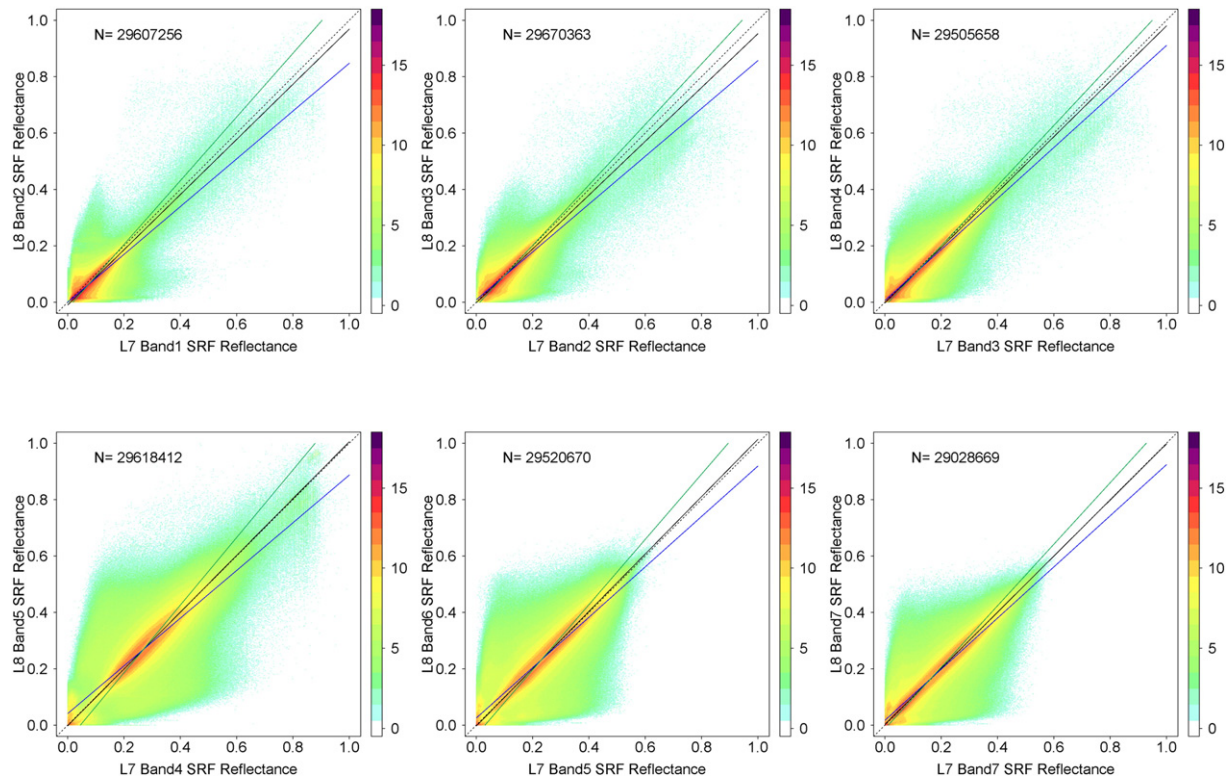


Fig. 8. Atmospherically corrected surface spectral reflectance equivalent of results shown in Fig. 7. Only surface reflectance values in the range 0.0 to 1.0 are illustrated. The solid black lines show reduced major axis (RMA) regression fits of these data, the blue lines show ordinary least squares (OLS) regression of the OLI against the ETM+ data, and the green line shows OLS regression of the ETM+ data against the OLI data. The dotted lines are 1:1 lines superimposed for reference.

that occurred due to “over correction” by the atmospheric correction algorithm were removed as they are unreliable. The bi-directional reflectance pattern, i.e., lobes of frequently occurring reflectance values (red tones) that occur symmetrically around the RMA regression lines, remains apparent in the atmospherically corrected data. The OLS r^2 values for the surface reflectance bands are all greater than 0.7, and similar to the TOA reflectance r^2 values, and the regressions are all highly significant with p-values <0.0001 indicating that the between sensor spectral transformations (Table 2) can be applied to

transform ETM+ surface reflectance from OLI surface reflectance or vice versa.

The RMSD difference between the OLI and ETM surface reflectance is comparable for the visible bands, is greater in the SWIR bands and the greatest for the NIR band (Table 2). On average the OLI surface reflectance is smaller than the ETM+ surface reflectance in the visible and NIR bands, with negative but small mean differences from -0.0110 (blue) to -0.0002 (NIR). Conversely, the OLI surface reflectance is greater than the ETM+ surface reflectance for the two shortwave

Table 2
Surface reflectance sensor transformation functions (ETM+ to OLI and OLI to ETM+) derived by ordinary least squares (OLS) regression of the data illustrated in Fig. 8, reduced major axis (RMA) regression coefficients, the number of 30 m pixel values considered (n), the OLS regression coefficient of determination (r^2), the OLS regression F-test p-value, the mean difference [2], the mean relative difference [4], and the root mean square deviation [3], between the OLI and ETM+ surface reflectance data.

	Regression type	Between sensor OLS transformation functions and RMA regression coefficients	n	OLS r^2 (p-value)	Mean difference OLI-ETM+ (reflectance)	Mean relative difference OLI-ETM+ (%)	Root mean square deviation (reflectance)
Blue λ (~0.48 μm)	RMA	OLI = $-0.0095 + 0.9785$ ETM	29,607,256	0.750 (<0.0001)	-0.0110	-22.32	0.0313
	OLS	OLI = $0.0003 + 0.8474$ ETM+					
	OLS	ETM+ = $0.0183 + 0.8850$ OLI					
Green λ (~0.56 μm)	RMA	OLI = $-0.0016 + 0.9542$ ETM	29,670,363	0.790 (<0.0001)	-0.0060	-7.34	0.0317
	OLS	OLI = $0.0088 + 0.8483$ ETM+					
	OLS	ETM+ = $0.0123 + 0.9317$ OLI					
Red λ (~0.66 μm)	RMA	OLI = $-0.0022 + 0.9825$ ETM	29,505,658	0.848 (<0.0001)	-0.0041	-5.12	0.0333
	OLS	OLI = $0.0061 + 0.9047$ ETM+					
	OLS	ETM+ = $0.0123 + 0.9372$ OLI					
Near infrared λ (~0.85 μm)	RMA	OLI = $-0.0021 + 1.0073$ ETM	29,618,412	0.706 (<0.0001)	-0.0002	-0.19	0.0644
	OLS	OLI = $0.0412 + 0.8462$ ETM+					
	OLS	ETM+ = $0.0448 + 0.8339$ OLI					
Shortwave infrared λ (~1.61 μm)	RMA	OLI = $-0.0030 + 1.0171$ ETM	29,520,670	0.772 (<0.0001)	0.0009	0.03	0.0562
	OLS	OLI = $0.0254 + 0.8937$ ETM+					
	OLS	ETM+ = $0.0306 + 0.8639$ OLI					
Shortwave infrared λ (~2.21 μm)	RMA	OLI = $0.0029 + 0.9949$ ETM	29,028,669	0.831 (<0.0001)	0.0021	1.52	0.0453
	OLS	OLI = $0.0172 + 0.9071$ ETM+					
	OLS	ETM+ = $0.0116 + 0.9165$ OLI					

infrared bands with small positive mean surface reflectance differences of 0.0009 and 0.0021. The mean relative surface reflectance difference values increase monotonically with wavelength, like the TOA reflectance relative differences (Table 1), but from -22.32% (blue band) to 1.52% (~2.21 μm band).

The magnitude of the surface reflectance mean difference values (Table 2) is greater than the TOA equivalents (Table 1) for the visible bands and smaller for the NIR and shortwave infrared bands. The visible band surface RMSD values are also greater than the TOA RMSD values, but the NIR and SWIR RMSD values are comparable. This spectral pattern is apparent in the RMA regression fits. The NIR and the two shortwave infrared bands have RMA slopes closer to unity (Fig. 8, Table 2) than the TOA reflectance slopes (Fig. 7, Table 1). Evidently, the impact of atmospheric effects over the quite different NIR and shortwave

infrared band spectral response functions is reduced by the atmospheric correction. The red band TOA and surface reflectance RMA fits are similar. However, the green and blue band surface reflectance RMA fits are further from unity than the TOA equivalents. This is likely because the ETM + atmospheric correction is less accurate than the OLI atmospheric correction for these bands (Vermote et al., 2016). As has been noted previously the accuracy of the blue and green surface reflectance is lower than in the longer wavelengths, and these bands should be used with caution (Vermote & Kotchenova, 2008, Ju et al., 2012, Roy, Wulder, et al., 2014).

Fig. 9 and Table 3 summarize the results for TOA and surface NDVI. There were different numbers of TOA and surface NDVI values because they were derived independently from the TOA and the surface red and NIR reflectance and any NDVI values less than zero were discarded. By

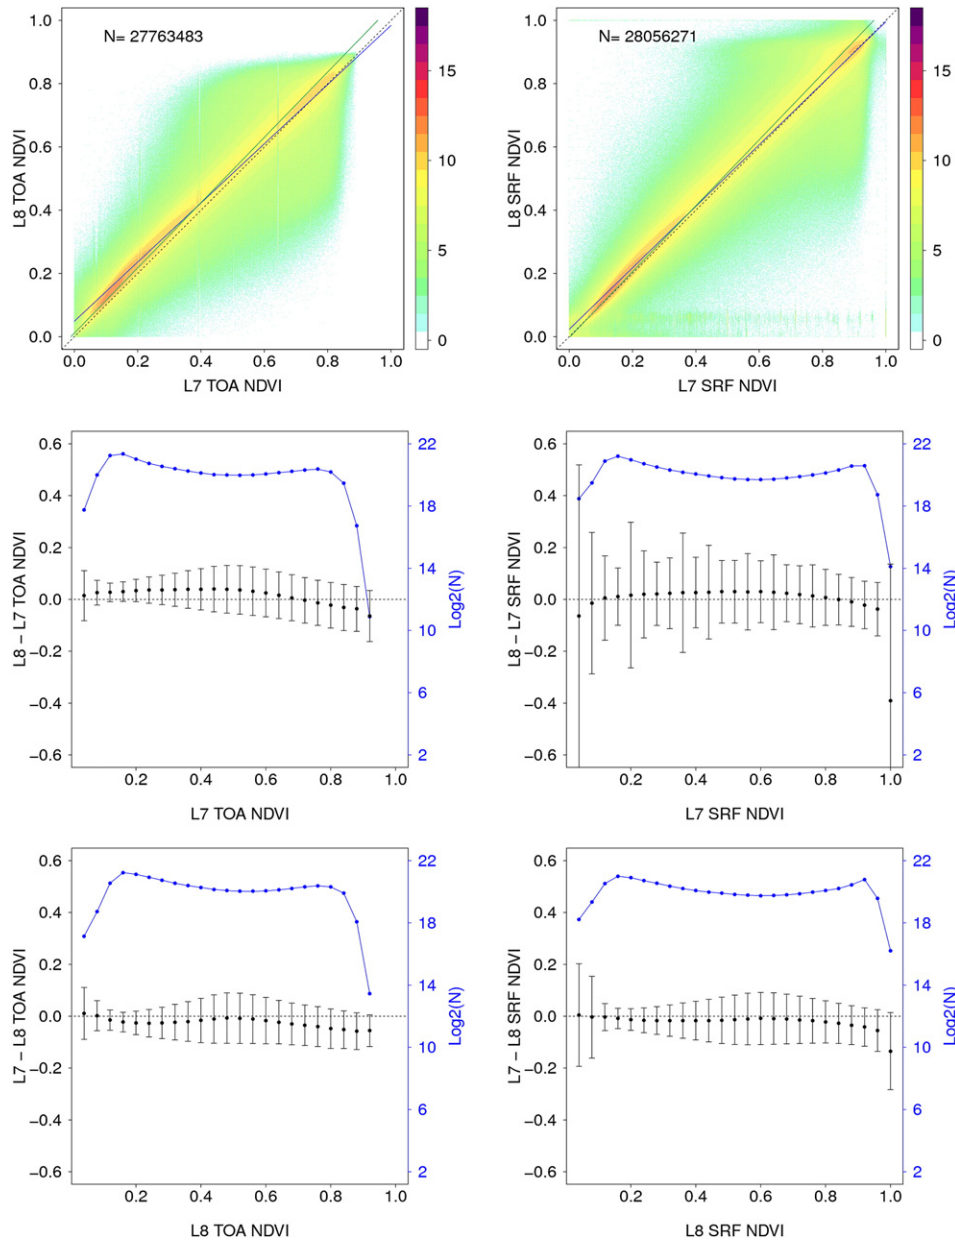


Fig. 9. TOA (left) and surface (right) NDVI comparisons derived from the filtered results shown in Figs. 7 and 8 respectively. *Top row:* sensor NDVI scatterplots considering NDVI values in the range 0 to 1; the blue lines show ordinary least squares (OLS) regression of the OLI against the ETM + data, the green lines shows OLS regression of the ETM + data against the OLI data, and the dotted lines are 1:1 lines superimposed for reference. *Middle and Bottom rows:* mean (black solid circles) ± one standard deviation (black vertical lines) sensor NDVI differences for contiguous 0.04 NDVI ranges. The number of NDVI values considered (\log_2 scale) is shown in blue (right Y-axis).

Table 3
Top of atmosphere and surface NDVI sensor transformation functions (ETM + to OLI and OLI to ETM +) derived by ordinary least squares (OLS) regression of the data illustrated in Fig. 9, reduced major axis (RMA) regression coefficients, the number of 30 m pixel values considered (n), the OLS regression coefficient of determination (r^2), the OLS regression F-test p -value, and the mean difference [2], mean relative difference [4], and the root mean square deviation [3], between the OLI and ETM + NDVI data.

	Regression type	Between sensor OLS transformation functions and RMA regression coefficients	n	OLS r^2 (p -value)	Mean difference OLI–ETM + (reflectance)	Mean relative difference OLI–ETM + (%)	Root mean square deviation (reflectance)
TOA NDVI	RMA	OLI = 0.0306 + 0.9824 ETM	27,763,483	0.906 (<0.0001)	0.0238	9.88	0.0765
	OLS	OLI = 0.0490 + 0.9352 ETM +					
	OLS	ETM + = - 0.0110 + 0.9690 OLI					
Surface NDVI	RMA	OLI = 0.0149 + 1.0035 ETM	28,056,271	0.926 (<0.0001)	0.0165	4.86	0.0779
	OLS	OLI = 0.0235 + 0.9723 ETM +					
	OLS	ETM + = 0.0029 + 0.9589 OLI					

restricting the NDVI from 0 to 1 the results reflect typical vegetated soil and vegetation surfaces. The impact of the atmospheric correction is to increase the range of the surface NDVI relative to the TOA NDVI (Fig. 9). In particular, the surface NDVI has generally higher values than the TOA NDVI. This pattern was also observed in a previous study that considered CONUS Landsat-7 ETM + data (Roy, Qin, et al., 2014) and it is well established that the atmosphere acts to depress NDVI values over land (Holben, 1986; Liu & Huete, 1995; McDonald, Gemmell, & Lewis, 1998; Roy, 1997).

On average the OLI NDVI is greater than the ETM + NDVI by 0.0238 (TOA NDVI) and by 0.0165 (surface NDVI) with comparable RMSD values (Table 3). The mean relative sensor NDVI differences are 9.88% (TOA NDVI) and 4.86% (surface NDVI) respectfully. Although not insignificant, these between sensor NDVI differences are considerably smaller than the CONUS average 0.1 and 28% relative impact of the atmosphere on Landsat ETM + NDVI over vegetated surfaces reported by Roy, Qin, et al. (2014). The RMA intercepts and slopes are closer to zero and unity respectively for the surface NDVI than the TOA NDVI (Table 3). This is expected given that the atmospheric correction also similarly improved the RMA regression fit for the NIR reflectance and made relatively little difference to the red reflectance (Tables 1 and 2).

The middle and bottom rows of Fig. 9 illustrate the mean and standard deviation of the difference between sensor NDVI defined over 25 contiguous NDVI ranging from 0 to 1. The number of pixels in each 0.04 NDVI range is also illustrated (blue) and in each range there are typically one to four million values, although for low and high NDVI ranges fewer values are available. The bottom row of Fig. 9 illustrates that for a given OLI NDVI value the ETM + NDVI is lower usually than the OLI NDVI except for near zero OLI NDVI values. The middle row of Fig. 9 illustrates that for a given ETM + NDVI the OLI NDVI is usually greater for ETM + NDVI values from 0 to about 0.7 (TOA) and from 0 to about 0.8 (surface). The reasons for these differences are complex being dependent on the sensor differences in the red and NIR reflectance used to derive the NDVI, and influenced by NDVI saturation whereby NDVI values become similar over increasingly vegetated (higher biomass, leaf area index, ground cover) surfaces (Huete et al., 2002). The standard deviations of the surface NDVI differences vary with respect to NDVI (Fig. 9 right column) in a more complex manner than the TOA results (Fig. 9 left column) reflecting the different sensor impacts of the LEDAPS atmospheric correction on the red and NIR bands. We note that despite the apparent curvilinear pattern in the mean NDVI sensor differences with respect to NDVI (black dots, middle and bottom rows of Fig. 9) OLS regression of these data, similar to Trishchenko, Cihlar, and Li (2002), provided insignificant first and second order regressions (r^2 values less than 0.07). Considering all the NDVI data in the 0 to 1 range (Fig. 9, top row) provided highly significant OLS regressions (r^2 values > 0.9, p -values < 0.0001) for TOA and surface NDVI (Table 3). The NDVI ratio formulation to first order reduces bi-directional reflectance effects (Gao, Jin, Xiaowen, Schaaf, & Strahler, 2002). This is perhaps one reason why the NDVI OLS r^2 values are greater than the r^2 values for the red and NIR reflectance bands. The OLS results indicate that the NDVI between sensor spectral transformations

(Table 3) can be reliably applied to transform ETM + NDVI from OLI NDVI or vice versa.

6. Conclusion

Continuity between Landsat sensors is required so that long time series multi-sensor analyses can be undertaken in an unbiased way. The multi-decadal continuity of the Landsat program, with consecutive, temporally overlapping Landsat observatories and cross-sensor calibration, is a key reason the Landsat program has value for climate and global change studies (Trenberth et al., 2013; Roy, Wulder, et al., 2014). The Landsat-8 OLI and Landsat-7 ETM + sensors are well characterized but reflectance differences imposed by their different specifications will also depend on the surface reflectance and atmospheric state that are difficult to model comprehensively. Consequently, in this study a statistical analysis of a very large sample of corresponding OLI and ETM + 30 m observations extracted systematically across the conterminous United States (CONUS) from six months of weekly independently gridded sensor observations was conducted.

A key requirement for this sensor comparison study was to capture sensor differences and not differences due to surface and atmospheric changes. The importance of appropriate data screening for analysis of Landsat data was very evident when the spectral scatter plots of the OLI versus ETM + reflectance with different levels of per-pixel screening were compared. Notably, although the OLI was very infrequently saturated the ETM + bands were frequently saturated, particularly in the shorter wavelength visible bands. Similarly, the impact of cloud masks on both sensor data was evident and necessitated the generous removal of cloudy pixels and all saturated pixels before meaningful statistical comparison of the OLI and ETM + sensor data could be undertaken. To remove any land cover and surface condition changes that may have occurred in the one day difference between OLI and ETM + pixel observation, and to remove residual clouds particularly due to an infrequent OLI cloud commission error (affecting less than 0.5% of the OLI data), a filter was applied to the TOA reflectance data. The filter rejected pixel values when the relative change between the ETM + and OLI blue reflectance was more than twice the average effect of the atmosphere quantified in a previous CONUS study (Roy, Qin, et al., 2014).

On average, considering all six months of CONUS data, the OLI TOA reflectance was greater than the ETM + TOA reflectance, with positive but small mean differences for the visible bands, the greatest positive difference for the near-infrared (NIR) band, and intermediate mean differences for the shortwave infrared bands. Reduced major axis (RMA) of the sensor data captured this spectral pattern. The NIR, and then the two shortwave infrared bands, had RMA slopes furthest from unity and the visible bands had slopes close to unity. This is due to spectral response functions differences between the sensors which are most different in the NIR and then the shortwave infrared bands. The impact of the LEDAPS OLI and ETM + atmospheric correction was clearly evident, acting to increase the range of the surface reflectance and NDVI. The atmospheric correction increased the magnitude of the mean between sensor reflectance differences in the visible bands and decreased the

differences in the NIR and shortwave infrared bands. This spectral pattern was apparent in the RMA regression fits, the NIR and the two shortwave infrared bands had RMA slopes closer to unity than the TOA reflectance slopes, the red band RMA slopes were similar, and the green and blue band surface reflectance RMA fits were further from unity than the TOA equivalents. This is likely because at shorter visible wavelengths the atmospheric correction is less reliable, and because the ETM + atmospheric correction is less accurate than the OLI atmospheric correction for the shorter wavelength green and blue bands (Vermote et al., 2016). The NDVI data were compared over the range 0 to 1 to reflect typical vegetated soil and vegetation surfaces. Regardless of whether TOA or surface red and NIR reflectance were used to generate the NDVI, on average the OLI NDVI was greater than the ETM + NDVI, and the RMA intercepts and slopes were closer to zero and unity respectively for the surface NDVI than the TOA NDVI.

Ordinary least squares regressions (OLS) were used to quantify linear differences between the two Landsat sensors and the regression coefficients provided so that the user community may apply them in their own research. The TOA and surface reflectance OLS regressions had good fits for all bands (r^2 values > 0.7, p-values < 0.0001) indicating that the between sensor spectral transformations can be applied to broadly normalize the reflectance of one sensor to the other. The OLS NDVI regressions had better fits (r^2 > 0.9, p-values < 0.0001), indicating that the NDVI between sensor spectral transformations can be reliably applied to transform ETM + NDVI from OLI NDVI or vice versa. Although sensor differences are quite small they may have significant impact depending on the Landsat data application.

Acknowledgments

This research was funded by the U.S. Department of Interior, U.S. Geological Survey (USGS), under grant G12PC00069 and also by the NASA Making Earth System Data Records for Use in Research Environments (MEaSUREs) program under Cooperative Agreement NNX13AJ24A. The U.S. Landsat project management and staff at USGS Earth Resources Observation and Science (EROS) Center, Sioux Falls, South Dakota, are thanked for provision of the Landsat data used in this study. The anonymous reviewers are thanked for their comments which helped to improve this paper.

References

- Ackerman, S., Holz, R., Frey, R., Eloranta, E., Maddux, B., & McGill, M. (2008). Cloud detection with MODIS. Part II: Validation. *Journal of Atmospheric and Oceanic Technology*, 25, 1073–1086.
- Arvidson, T., Goward, S., Gasch, J., & Williams, D. (2006). Landsat-7 long-term acquisition plan. *Photogrammetric Engineering & Remote Sensing*, 72, 1137–1146.
- Beck, H. E., McVicar, T. R., van Dijk, A. I., Schellekens, J., de Jeu, R. A., & Bruijnzeel, L. A. (2011). Global evaluation of four AVHRR–NDVI data sets: Intercomparison and assessment against Landsat imagery. *Remote Sensing of Environment*, 115, 2547–2563.
- Bindschadler, R., Vornberger, P., Fleming, A., Fox, A., Mullins, J., Binnie, D., ... Gorodetzky, D. (2008). The Landsat image mosaic of Antarctica. *Remote Sensing of Environment*, 112, 4214–4226.
- Brown, M. E., Pinzón, J. E., Didan, K., Morissette, J. T., & Tucker, C. J. (2006). Evaluation of the consistency of long-term NDVI time series derived from AVHRR, SPOT-vegetation, SeaWiFS, MODIS, and Landsat ETM+ sensors. *IEEE Transactions on Geoscience and Remote Sensing*, 44, 1787–1793.
- Chander, G., Markham, B. L., & Helder, D. L. (2009). Summary of current radiometric calibration coefficients for Landsat MSS, TM, ETM+, and EO-1 ALI sensors. *Remote Sensing of Environment*, 113, 893–903.
- Cohen, W. B., Maersperger, T. K., Gower, S. T., & Turner, D. P. (2003). An improved strategy for regression of biophysical variables and Landsat ETM+ data. *Remote Sensing of Environment*, 84, 561–571.
- Dowdeswell, J. A., & McIntyre, N. F. (1986). The saturation of Landsat MSS detectors over large ice masses. *International Journal of Remote Sensing*, 7, 151–164.
- Dozier, J. (1984). Snow reflectance from Landsat-4 thematic mapper. *IEEE Transactions on Geoscience and Remote Sensing*, 323–328.
- Feng, M., Sexton, J. O., Huang, C., Masek, J. G., Vermote, E. F., Gao, F., ... Townshend, J. R. (2013). Global surface reflectance products from Landsat: Assessment using coincident MODIS observations. *Remote Sensing of Environment*, 134, 276–293.
- Fensholt, R., & Proud, S. R. (2012). Evaluation of earth observation based global long term vegetation trends—Comparing GIMMS and MODIS global NDVI time series. *Remote Sensing of Environment*, 119, 131–147.
- Flood, N. (2014). Continuity of reflectance data between landsat-7 ETM+ and landsat-8 OLI, for both top-of-atmosphere and surface reflectance: A study in the Australian landscape. *Remote Sensing*, 6, 7952–7970.
- Gallo, K. J., Li, L., Reed, B., Eidenshink, J., & Dwyer, J. (2005). Multi-platform comparisons of MODIS and AVHRR normalized difference vegetation index data. *Remote Sensing of Environment*, 99, 221–231.
- Gao, F., Jin, Y., Xiaowen, L., Schaaf, C. B., & Strahler, A. H. (2002). Bidirectional NDVI and atmospherically resistant BRDF inversion for vegetation canopy. *IEEE Transactions on Geoscience and Remote Sensing*, 40, 1269–1278.
- Gao, F., He, T., Masek, J. G., Shuai, Y., Schaaf, C. B., & Wang, Z. (2014). Angular effects and correction for medium resolution sensors to support crop monitoring. *IEEE Journal of Selected Topics in Applied Earth Observations and Remote Sensing*, 7, 4480–4489.
- Hall, D. K., Riggs, G. A., & Salomonson, V. V. (1995). Development of methods for mapping global snow cover using moderate resolution imaging spectroradiometer data. *Remote Sensing of Environment*, 54(2), 127–140.
- Hansen, M., Egorov, A., Potapov, P., Stehman, S., Tyukavina, A., Turubanova, S., ... Ju, J. (2014). Monitoring conterminous United States (CONUS) land cover change with web-enabled Landsat data (WELD). *Remote Sensing of Environment*, 140, 466–484.
- Holben, B. N. (1986). Characteristics of maximum-value composite images from temporal AVHRR data. *International Journal of Remote Sensing*, 7, 1417–1434.
- Huang, C., Goward, S. N., Masek, J. G., Thomas, N., Zhu, Z., & Vogelmann, J. E. (2010). An automated approach for reconstructing recent forest disturbance history using dense Landsat time series stacks. *Remote Sensing of Environment*, 114, 183–198.
- Huete, A., Didan, K., Miura, T., Rodriguez, E. P., Gao, X., & Ferreira, L. G. (2002). Overview of the radiometric and biophysical performance of the MODIS vegetation indices. *Remote Sensing of Environment*, 83(1), 195–213.
- Irish, R. R. (2000). Landsat 7 automatic cloud cover assessment. In S. S. Shen, & M. R. Descour (Eds.), *Proc. SPIE 4049, algorithms for multispectral, hyperspectral, and ultraspectral imagery VI* (pp. 348–355). FL: Orlando.
- Irish, R. R., Barker, J. L., Goward, S. N., & Arvidson, T. (2006). Characterization of the Landsat-7 ETM+ automated cloud-cover assessment (ACCA) algorithm. *Photogrammetric Engineering & Remote Sensing*, 72, 1179–1188.
- Irons, J. R., & Masek, J. G. (2006). Requirements for a Landsat data continuity mission. *Photogrammetric Engineering and Remote Sensing*, 72, 1102–1108.
- Irons, J. R., Dwyer, J. L., & Barsi, J. A. (2012). The next Landsat satellite: The Landsat data continuity mission. *Remote Sensing of Environment*, 122, 11–21.
- Ju, J., & Roy, D. P. (2008). The availability of cloud-free Landsat ETM+ data over the conterminous United States and globally. *Remote Sensing of Environment*, 112, 1196–1211.
- Ju, J., Roy, D. P., Shuai, Y., & Schaaf, C. (2010). Development of an approach for generation of temporally complete daily nadir MODIS reflectance time series. *Remote Sensing of Environment*, 114, 1–20.
- Ju, J., Roy, D. P., Vermote, E., Masek, J., & Kovalsky, V. (2012). Continental-scale validation of MODIS-based and LEDAPS Landsat ETM+ atmospheric correction methods. *Remote Sensing of Environment*, 122, 175–184.
- Justice, C. O., Vermote, E., Townshend, J. R., Defries, R., Roy, D. P., Hall, D. K., ... Strahler, A. (1998). The moderate resolution imaging spectroradiometer (MODIS): Land remote sensing for global change research. *IEEE Transactions on Geoscience and Remote Sensing*, 36, 1228–1249.
- Karnieli, A., Ben-Dor, E., Bayarjargal, Y., & Lugasi, R. (2004). Radiometric saturation of Landsat-7 ETM+ data over the Negev Desert (Israel): Problems and solutions. *International Journal of Applied Earth Observation and Geoinformation*, 5(3), 219–237.
- Kaufman, Y. J. (1987). The effect of subpixel clouds on remote sensing. *International Journal of Remote Sensing*, 8, 839–857.
- Ke, Y., Im, J., Lee, J., Gong, H., & Ryu, Y. (2015). Characteristics of Landsat 8 OLI-derived NDVI by comparison with multiple satellite sensors and in-situ observations. *Remote Sensing of Environment*, 164, 298–313.
- Kennedy, R. E., Yang, Z., & Cohen, W. B. (2010). Detecting trends in forest disturbance and recovery using yearly Landsat time series: 1. LandTrendr—Temporal segmentation algorithms. *Remote Sensing of Environment*, 114, 2897–2910.
- Kokhanovsky, A. A., & Breon, F. M. (2012). Validation of an analytical snow BRDF model using PARASOL multi-angular and multispectral observations. *IEEE Geoscience and Remote Sensing Letters*, 9, 928–932.
- Kotchenova, S. Y., Vermote, E. F., Matarrese, R., & Klemm, F. J., Jr. (2006). Validation of a vector version of the 6S radiative transfer code for atmospheric correction of satellite data. Part I: Path radiance. *Applied Optics*, 45, 6762–6774.
- Kovalsky, V., & Roy, D. P. (2015). A one year Landsat 8 conterminous United States study of cirrus and non-cirrus clouds. *Remote Sensing*, 7, 564–578.
- Lee, D. S., Storey, J. C., Choate, M. J., & Hayes, R. W. (2004). Four years of Landsat-7 on-orbit geometric calibration and performance. *IEEE Transactions on Geoscience and Remote Sensing*, 42, 2786–2795.
- Li, F., Jupp, D. L., Reddy, S., Lymburner, L., Mueller, N., Tan, P., & Islam, A. (2010). An evaluation of the use of atmospheric and BRDF correction to standardize Landsat data. *IEEE Journal of Selected Topics in Applied Earth Observations and Remote Sensing*, 3, 257–270.
- Liu, Q., & Huete, A. (1995). A feedback based modification of the NDVI to minimize canopy background and atmospheric noise. *IEEE Transactions on Geoscience and Remote Sensing*, 33(2), 457–465.
- Loveland, T. R., & Dwyer, J. L. (2012). Landsat: Building a strong future. *Remote Sensing of Environment*, 122, 22–29.
- Maersperger, T. K., Scaramuzza, P. L., Leigh, L., Shrestha, S., Gallo, K. P., Jenkerson, C. B., & Dwyer, J. L. (2013). Characterizing LEDAPS surface reflectance products by comparisons with AERONET, field spectrometer, and MODIS data. *Remote Sensing of Environment*, 136, 1–13.

- Markham, B. L., & Helder, D. L. (2012). Forty-year calibrated record of earth-reflected radiance from Landsat: A review. *Remote Sensing of Environment*, 122, 30–40.
- Markham, B. L., Storey, J. C., Williams, D. L., & Irons, J. R. (2004). Landsat sensor performance: History and current status. *IEEE Transactions on Geoscience and Remote Sensing*, 42, 2691–2694.
- Markham, B., Goward, S., Arvidson, T., Barsi, J., & Scaramuzza, P. (2006). Landsat-7 long-term acquisition plan radiometry-evolution over time. *Photogrammetric Engineering & Remote Sensing*, 72, 1129–1135.
- Markham, B., Barsi, J., Kvaran, G., Ong, L., Kaita, E., Biggar, S., ... Helder, D. (2014). Landsat-8 Operational Land Imager radiometric calibration and stability. *Remote Sensing*, 6, 12275–12308.
- Masek, J. G., Vermote, E. F., Saleous, N. E., Wolfe, R., Hall, F. G., Huemmrich, K. F., ... Lim, T. -K. (2006). A Landsat surface reflectance dataset for North America, 1990–2000. *IEEE Geoscience and Remote Sensing Letters*, 3, 68–72.
- Masuoka, E., Roy, D., Wolfe, R., Morisette, J., Sinno, S., Teague, M., ... Nickeson, J. (2011). MODIS land data products: Generation, quality assurance and validation. In B. Ramachandran, C. O. Justice, & M. J. Abrams (Eds.), *Land remote sensing and global environmental change* (pp. 509–531). New York: Springer.
- McDonald, A. J., Gemmill, F. M., & Lewis, P. E. (1998). Investigation of the utility of spectral vegetation indices for determining information on coniferous forest. *Remote Sensing of Environment*, 66, 250–272.
- Miura, T., Huete, A., & Yoshioka, H. (2006). An empirical investigation of cross-sensor relationships of NDVI and red/near-infrared reflectance using EO-1 Hyperion data. *Remote Sensing of Environment*, 100, 223–236.
- Montanaro, M., Gerace, A., Lunsford, A., & Reuter, D. (2014). Stray light artifacts in imagery from the Landsat 8 thermal infrared sensor. *Remote Sensing*, 6, 10435–10456.
- Moran, M., Clarke, T., Inoue, Y., & Vidal, A. (1994). Estimating crop water deficit using the relation between surface-air temperature and spectral vegetation index. *Remote Sensing of Environment*, 49, 246–263.
- Morfitt, R., Barsi, J., Levy, R., Markham, B., Micijevic, E., Ong, L., ... Vanderwerff, K. (2015). Landsat-8 operational land imager (OLI) radiometric performance on-orbit. *Remote Sensing*, 7(2), 2208–2237.
- Myneni, R., Tucker, C., Asrar, G., & Keeling, C. (1998). Interannual variations in satellite-sensed vegetation index data from 1981 to 1991. *Journal of Geophysical Research: Atmospheres* (1984–2012), 103, 6145–6160.
- Nagol, J. R., Sexton, J. O., Kim, D. -H., Anand, A., Morton, D., Vermote, E., & Townshend, J. R. (2015). Bidirectional effects in Landsat reflectance estimates: Is there a problem to solve? *ISPRS Journal of Photogrammetry and Remote Sensing*, 103, 129–135.
- Norman, J. M., Divakarla, M., & Goel, N. S. (1995). Algorithms for extracting information from remote thermal-IR observations of the earth's surface. *Remote Sensing of Environment*, 51, 157–168.
- Oreopoulos, L., Cahalan, R. F., Marshak, A., & Wen, G. (2000). A new normalized difference cloud retrieval technique applied to Landsat radiances over the Oklahoma ARM site. *Journal of Applied Meteorology*, 39, 2305–2321.
- Ouaidrari, H., & Vermote, E. F. (1999). Operational atmospheric correction of Landsat TM data. *Remote Sensing of Environment*, 70, 4–15.
- Painter, T. H., Rittger, K., McKenzie, C., Slaughter, P., Davis, R. E., & Dozier, J. (2009). Retrieval of subpixel snow covered area, grain size, and albedo from MODIS. *Remote Sensing of Environment*, 113, 868–879.
- Pedelt, J., Devadiga, S., Masuoka, E., Brown, M., Pinzon, J., Tucker, C., Roy, D., Ju, J., Vermote, E., et al. (2007). Generating a long-term land data record from the AVHRR and MODIS instruments. *Geoscience and remote sensing symposium, 2007. IGARSS 2007, Barcelona* (pp. 1021–1025).
- Pinzon, J. E., & Tucker, C. J. (2014). A non-stationary 1981–2012 AVHRR NDVI3g time series. *Remote Sensing*, 6, 6929–6960.
- Roberts, G. (2001). A review of the application of BRDF models to infer land cover parameters at regional and global scales. *Progress in Physical Geography*, 25, 483–511.
- Roujean, J. -L., Leroy, M., & Deschamps, P. -Y. (1992). A bidirectional reflectance model of the earth's surface for the correction of remote sensing data. *Journal of Geophysical Research-Atmospheres*, 97, 20455–20468.
- Roy, D. P. (1997). Investigation of the maximum normalized difference vegetation index (NDVI) and the maximum surface temperature (Ts) AVHRR compositing procedures for the extraction of NDVI and Ts over forest. *International Journal of Remote Sensing*, 18, 2383–2401.
- Roy, D. P., Borak, J., Devadiga, S., Wolfe, R., Zheng, M., & Desclotres, J. (2002). The MODIS land product quality assessment approach. *Remote Sensing of Environment*, 83, 62–76.
- Roy, D. P., Ju, J., Lewis, P., Schaaf, C., Gao, F., Hansen, M., & Lindquist, E. (2008). Multi-temporal MODIS-Landsat data fusion for relative radiometric normalization, gap filling, and prediction of Landsat data. *Remote Sensing of Environment*, 112, 3112–3130.
- Roy, D. P., Ju, J., Kline, K., Scaramuzza, P. L., Kovalsky, V., Hansen, M., ... Zhang, C. (2010). Web-enabled Landsat data (WELD): Landsat ETM+ composited mosaics of the conterminous United States. *Remote Sensing of Environment*, 114, 35–49.
- Roy, D. P., Wulder, M., Loveland, T., Woodcock, C., Allen, R., Anderson, M., ... Zhu, Z. (2014a). Landsat-8: Science and product vision for terrestrial global change research. *Remote Sensing of Environment*, 145, 154–172.
- Roy, D. P., Qin, Y., Kovalsky, V., Vermote, E., Ju, J., Egorov, A., ... Yan, L. (2014b). Conterminous United States demonstration and characterization of MODIS-based Landsat ETM+ atmospheric correction. *Remote Sensing of Environment*, 140, 433–449.
- Roy, D. P., Zhang, H. K., Ju, J., Gomez-Dans, J. L., Lewis, P. E., Schaaf, C. B., ... Kovalsky, V. (April 2016). A general method to normalize Landsat reflectance data to nadir BRDF adjusted reflectance. *Remote Sensing of Environment*, 176, 255–271.
- Sheng, C., Jian, Z., Mullens, E., Yang, H., Behrangi, A., Yudong, T., ... Xinhua, Z. (2015). Mapping the precipitation type distribution over the contiguous United States using NOAA/NSSL national multi-sensor mosaic QPE. *IEEE Transactions on Geoscience and Remote Sensing*, 53, 4434–4443.
- Smith, R. J. (2009). Use and misuse of the reduced major axis for line-fitting. *American Journal of Physical Anthropology*, 140, 476–486.
- Steven, M. D., Malthus, T. J., Baret, F., Xu, H., & Chopping, M. J. (2003). Intercalibration of vegetation indices from different sensor systems. *Remote Sensing of Environment*, 88, 412–422.
- Storey, J., Choate, M., & Lee, K. (2014). Landsat 8 operational land imager on-orbit geometric calibration and performance. *Remote Sensing*, 6, 11127–11152.
- Tackett, J. L., & Di Girolamo, L. (2009). Enhanced aerosol backscatter adjacent to tropical trade wind clouds revealed by satellite-based Lidar. *Geophysical Research Letters*, 36.
- Tanre, D., Herman, M., & Deschamps, P. (1981). Influence of the background contribution upon space measurements of ground reflectance. *Applied Optics*, 20, 3676–3684.
- Teillet, P., Barker, J., Markham, B., Irish, R., Fedosejevs, G., & Storey, J. (2001). Radiometric cross-calibration of the Landsat-7 ETM+ and Landsat-5 TM sensors based on tandem data sets. *Remote Sensing of Environment*, 78, 39–54.
- Trenberth, K. E., Anthes, R. A., Belward, A., Brown, O., Habermann, T., Karl, T. R., ... Wielicki, B. (2013). Challenges of a sustained climate observing system in "climate science for serving society: Research. In G. R. Asrar, & J. W. Hurrell (Eds.), *Modeling and prediction priorities*. Springer (484 pp.).
- Trishchenko, A. P., Cihlar, J., & Li, Z. (2002). Effects of spectral response function on surface reflectance and NDVI measured with moderate resolution satellite sensors. *Remote Sensing of Environment*, 81(1), 1–18.
- Tucker, C. J., Pinzon, J. E., Brown, M. E., Slayback, D. A., Pak, E. W., Mahoney, R., ... El Saleous, N. (2005). An extended AVHRR 8-km NDVI dataset compatible with MODIS and SPOT vegetation NDVI data. *International Journal of Remote Sensing*, 26, 4485–4498.
- USGS (2012). *Landsat data continuity mission level 1 (L1) data format control book (DFCB), LDCM-DFCB-004, version 6.0*. Sioux Falls, USA: USGS EROS (url: <http://landsat.usgs.gov/documents/LDCM-DFCB-004.pdf>).
- USGS (2015). *Landsat 8 (L8) Data Users Handbook, 2015, L8DS-1574, version 1.0*. Sioux Falls, USA: USGS EROS (url: <https://landsat.usgs.gov/documents/Landsat8DataUsersHandbook.pdf>).
- Ustin, S. L., Roberts, D. A., Pinzon, J., Jacquemoud, S., Gardner, M., Scheer, G., ... Palacios-Orueta, A. (1998). Estimating canopy water content of chaparral shrubs using optical methods. *Remote Sensing of Environment*, 65, 280–291.
- Vermote, E. F., & Kotchenova, S. (2008). Atmospheric correction for the monitoring of land surfaces. *Journal of Geophysical Research*, 113, D23S90.
- Vermote, E. F., & Roy, D. P. (2002). Land surface hot-spot observed by MODIS over central Africa. *International Journal of Remote Sensing*, 23, 2141–2143.
- Vermote, E. F., Tanré, D., Deuze, J. -L., Herman, M., & Morcrette, J. -J. (1997). Second simulation of the satellite signal in the solar spectrum, 6S: An overview. *IEEE Transactions on Geoscience and Remote Sensing*, 35, 675–686.
- Vermote, E. F., Justice, C. O., Claverie, M., & Franch, B. (2016). Analysis of the performance of the Landsat 8/OLI land surface reflectance product. *Remote Sensing of Environment*, 185, 46–56.
- WWW1, http://landsathandbook.gsfc.nasa.gov/inst_cal/prog Sect8_2.html, Landsat 7 Science Data User Handbook, chapter 8 pre-launch. (Last accessed May 4th 2015).
- WWW2, <http://landsat.gsfc.nasa.gov/?p=5779>, Landsat 8 pre-launch OLI performance. (Last accessed May 4th 2015).
- Zhang, H. K., & Roy, D. P. (2015). *Computationally inexpensive Landsat 8 operational land imager (OLI) pansharpening*. Remote Sensing (submitted for publication).
- Zhang, H. K., Roy, D. P., & Kovalsky, V. (2015). Optimal solar geometry definition for global Landsat time series bi-directional reflectance normalization. *IEEE Transactions on Geoscience and Remote Sensing* (in press).
- Zhu, Z., & Woodcock, C. E. (2014). Continuous change detection and classification of land cover using all available Landsat data. *Remote Sensing of Environment*, 144, 152–171.