

Tight Analysis of Shortest Path Convergecast in Wireless Sensor Networks

John Augustine¹

Qi Han²

Philip Loden²

Sachin Lodha³

Sasanka Roy⁴

¹ School of Physical and Mathematical Sciences,
Nanyang Technological University, Singapore 637371,
Email: jea@ics.uci.edu

² Dept. of Math and Computer Sciences,
Colorado School of Mines, Golden, CO 80401,
Email: qhan@mines.edu, ploden@mines.edu

³ Tata Research Development and Design Centre,
54B, Hadapsar Industrial Estate, Hadapsar, Pune, India 411013,
Email: sachin.lodha@tcs.com

⁴ Chennai Mathematical Institute,
Chennai, India 603103,
Email: sasanka.ro@gmail.com

Abstract

We consider the convergecast problem in wireless sensor networks where readings generated by each sensor node are to reach the sink. Since a sensor reading can usually be encoded in a few bytes, more than one reading can readily fit into a standard transmission packet. We assume that any such packet consumes one unit of energy every time it hops from a node to a neighbor regardless of the total size of the readings in it. Our objective is to minimize the total energy consumed to send all the readings to the sink. Consequently, we ask the question: can we pack the readings in common routes to minimize the number of hops? It is quite elementary to see that this problem is NP-hard when the size of the readings are arbitrary via reductions from bin packing or set partition.

We study the simple version with readings normalized to 1 byte in length. However, we make no assumptions on the underlying graph. We show this to be NP-hard by way of a reduction from Set Cover. We study a class SPEP of distributed algorithms that is completely defined by two properties. Firstly, the packets hop along some shortest path to the sink. Secondly, given all the readings that enter into a node, it sends out as many fully packed packets as possible followed by at most one partial packet — the elementary packing property. We show that any algorithm in this class is $(2 - \frac{3}{2k})$ -approximate where $k \geq 2$ is the size of a data packet in bytes. We additionally show that this class is optimal when the underlying sensor network is a tree or grid topology. Our main technical contribution is a lower bound. We show that no algorithm that either follows the shortest path or packs in an elementary manner is a $(2 - \epsilon)$ -approximation, for any fixed $\epsilon > 0$.

This work was done when the first and fifth author were affiliated with Tata Research Development and Design Centre, Pune, India. The experiments were conducted when the first author was visiting the Institute of Mathematical Sciences, Chennai, India. The second author is supported in part by the National Science Foundation under grant CNS-0720875.

Copyright ©2011, Australian Computer Society, Inc. This paper appeared at the 17th Computing: The Australasian Theory Symposium (CATS 2011), Perth, Australia, January 2011. Conferences in Research and Practice in Information Technology (CRPIT), Vol. 119, Alex Potanin and Taso Viglas, Ed. Reproduction for academic, not-for profit purposes permitted provided this text is included.

1 Introduction

The convergecast problem has obtained prominence among sensor networks researchers because it fits well with the goal of sensor networks, which is to monitor and collect data about an environment. The focus has been to either minimize the time, the energy, or the dual-criteria of both time and energy required to complete the convergecast (Gandham et al. 2007, Hohlt et al. 2004, Kesselman & Kowalski 2006, Lindsey et al. 2002, Lu et al. 2007, Pan & Tseng 2008, Paradis & Han 2009, Yu & Prasanna 2005, Upadhyayula & Gupta 2007, Zhang et al. 2007). Researchers have also exploited spatial locality in many real-life convergecast scenarios by aggregating the data and transmitting the representative values for sub-regions within the region being sensed (Intanagonwiwat et al. 2000, Madden et al. 2002, Goel & Estrin 2003, Krishnamachari et al. 2002).

Convergecast typically works as follows in sensor networks. The sensor nodes need to send sensed data to a centralized sink via multiple hops. A sensor reading can usually be encoded in a few bytes, so more than one reading can fit into a standard transmission packet, but there is a limit on the total number of bytes that each packet can carry. Each reading has to stay intact along the way. This is different from sensor data aggregation where a function is performed over several sensor readings to, typically, generate one single representative value for each region being sensed (Goel & Estrin 2003). While data aggregation is agreeable in many situations, under certain scenarios, applications would rather desire the collected data to be exact. This requirement is common in scientific data gathering as indicated in (Deshpande & Madden 2006, Porta et al. 2009). We have a cost associated with each hop, which is independent of the number of readings in it. This is an acceptable assumption commonly used in the sensor network community, although more realistic radio model indicates that packet size does matter (Heinzelman et al. 2000). Consequently, we ask the question: can we pack the readings in common routes to minimize the number of hops?

More formally, we are given a connected graph $G = (V \cup \{\text{sink}\}, E)$ that is both undirected and unweighted. An edge $e = (u, v) \in E$ implies that u can communicate with v and vice versa. Each ver-

text v has a single reading of integral number of bytes $s(v)$ that has to be reported to the appropriately denoted vertex **sink**. These readings must travel to the **sink** in packets that have a capacity of k bytes. Since the readings have to fit in the packets, $\forall v \in V$, $s(v) \leq k$. A packet consumes 1 unit of energy every time it hops from a vertex to a neighbor regardless of the total size of the readings in it. Our objective is to minimize the total energy consumed to send all the readings to the **sink**. We primarily seek distributed routing algorithms in which the individual nodes are unaware of the entire graph; they are only aware of their immediate neighbors. We call this the **Convergecast Problem** or the **CCP**. Since convergecast is often repeated several times (like hourly temperature collection), our focus is on minimizing the total energy in this repeated operation. Therefore, we allow a one-time preprocessing phase. This can be used for constructing distributed data structures like shortest path trees.

The **CCP** combines aspects of both bin-packing and routing. In Theorem 2.1, we show that it is NP-hard even when the underlying graphs are restricted to a line or a tree of depth greater than 1. These are simple reductions from set partition. So, we limit our study to a simplification in which the size of each reading is exactly 1 byte. We call this the **Unit Convergecast Problem** or the **UCCP**. In practice, many wireless sensor applications such as room temperature monitoring for energy conservation only need to deploy simple sensors with one single sensing attribute. These sensors then report small constant-sized readings as directed. In our formulation, we normalize it to one byte. More importantly, **UCCP** helps us gain insight into the problem when the effect of bin-packing is minimal because up to k single-byte-sized readings can be trivially placed into a packet. Interestingly, we show that even **UCCP** is NP-hard.

We study a class of algorithms for **UCCP** called Shortest Path Elementary Packing (**SPEP**) algorithms. The members of this class are all valid algorithm for **UCCP** that have the following properties.

Shortest Path Property: An algorithm for **CCP** or **UCCP** is said to follow the shortest path property if every packet hop always moves the packet along some shortest path to the **sink**. We refer to algorithms that have this property as shortest path algorithms. Because we are concerned with the convergecast problem, this property, when present, will make the solution more intuitive. This is essentially geographic routing with greedy forwarding often used in wireless sensor networks (Akkaya & Younis 2005). Note also that even distributed networks, with a little preprocessing, can easily establish a shortest path tree as long as the graph is connected.

Elementary Packing Property: An algorithm for **UCCP** is said to have the elementary packing property if each vertex communicates at most one partial packet and all the other packets, if any, are full. Such algorithms are called elementary algorithms. An elementary algorithm ensures that each node repackages the readings in the most straightforward manner. It also ensures that communication overhead in the entire network is minimized. This is because minimal number of packets will be used, leading to minimal total number of bytes in all the packets is minimal, since each packet has a constant-size packet header.

In Section 2, we prove that **CCP** is NP-hard even when the underlying graph is very simple. We then shift our attention to **UCCP** and prove that it is also NP-hard. In Section 3, we prove that all algorithms in **SPEP** are $(2 - \frac{3}{2k})$ -approximate algorithm for **UCCP** (for $k \geq 2$). In Section 4, we prove a somewhat counterintuitive result. We show that any algorithm that

either follows the shortest path property or the elementary packing property cannot guarantee a $(2 - \epsilon)$ -approximation for **UCCP**. In Section 5, we explore the performance of **SPT** when the underlying graph is either a tree or a grid and show that it is optimal in the former case and asymptotically optimal in the latter case. To complement our theoretical analysis, we analyzed **SPT** experimentally. We discuss our experimental results in Section 6. Finally, we provide some concluding remarks.

2 Preliminary Hardness Results

It is quite straightforward to see that both **CCP** and **UCCP** are NP-hard. **CCP** is NP-hard even for some of the simplest trees via a reduction from **SET-PARTITION** to **CCP**. This result is formalized in Theorem 2.1. Although the proof is rather straightforward, we include it for the sake of completeness.

Theorem 2.1. *CCP is NP-hard even if the underlying graph G is a straight line or a tree of depth at least 2.*

Proof. Recall that in **SET-PARTITION**, we are given a set $U = \{x_1, x_2, \dots, x_n\}$ of integers. The question we ask is whether U can be partitioned into two subsets such that the sums of the elements in either subsets are equal. **SET-PARTITION** is known to be NP-complete (Garey & Johnson 1979).

We can reduce an instance of **SET-PARTITION** to **CCP** in two very simple ways as shown in Figure 1, which illustrates the case when the instance of **SET-PARTITION** has 8 elements. We assume, without loss of generality, that the elements of **SET-PARTITION** are integral values between 1 and k and add up to $2k$. To reduce from **SET-PARTITION** to **CCP**, we form an instance of **CCP** in which each element of U forms a reading in **CCP** and is assigned to a node in **CCP**.

In the case of the tree of depth 2, we include a “neck” vertex which is assigned a reading of size k . The other nodes with readings assigned to them from **SET-PARTITION** are of degree 1 and are connected to the neck. The neck is connected to the **sink**. The number of hops from the *neck* into the **sink** vertex will depend on whether the **SET-PARTITION** instance can be partitioned into two subsets.

Similarly, in the case of the line, the nodes form a linear chain with one end connected to the **sink**. Starting from the node farthest away from the **sink**, the readings travel toward the **sink**. At some point, there will be enough readings to require exactly 2 packets for any reasonable algorithm. Note that the **sink** has exactly one neighbour. Once all the readings reach that neighbour, we will need either 2 or 3 packets to hop into the **sink** depending on whether we can partition the set U or not. \square

We now turn our attention to **UCCP**. We show that even **UCCP** is NP-hard by reducing the set cover problem to it. In the classic Set Cover Problem, we are given a ground set $U = \{x_1, x_2, \dots, x_n\}$ and a family of subsets $S = \{S_1, S_2, \dots, S_m\}$, $S_i \subseteq U$ for $i = 1, 2, \dots, m$. $C \subseteq S$ is a cover if the union of elements in C is U . In the decision version of the problem, we are given a positive integer $K_{sc} < |S|$ and asked whether there is a subset of S with cardinality K_{sc} that covers U . It is well-known that Set Cover Problem is NP-complete (Garey & Johnson 1979).

Given an instance of the set cover problem, we construct a sensor network T consisting of vertices arranged in three levels as follows (refer Figure 2). Level 1 consists of only the **sink** node. Level 2 nodes correspond to the sets $S_i \in S$ for $i = 1, 2, \dots, m$. There is an edge from each S_i to **sink**. We slightly abuse

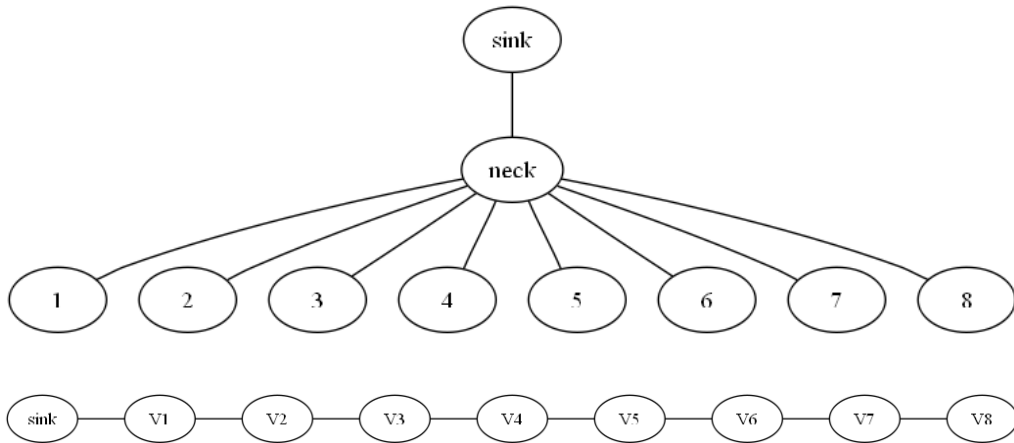


Figure 1: The two figures illustrate the reductions from SET-PARTITION to CCP.

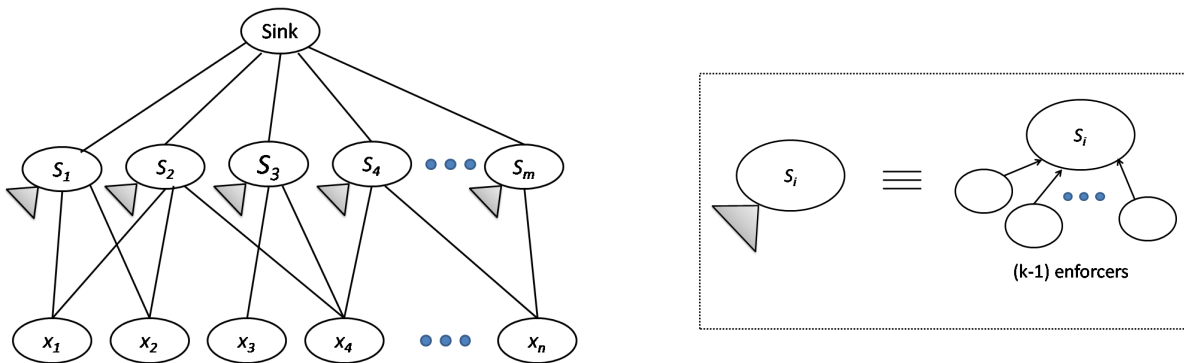


Figure 2: Reducing the Set Cover problem to the UCCP. The enforcers are depicted as a triangular pictorial gadget; the actual construction of the enforcers is shown in the box.

notation and use S_i to also refer to the corresponding vertex. Level 3 consists of nodes that correspond to $\{x_1, x_2, \dots, x_n\}$ which are the elements of set U . Like level 2 nodes, we use x_j to refer to a level 3 vertex. Each node x_j is connected by an edge to S_i iff the element $x_j \in S_i$ in the Set Cover instance.

We set the size of a packet to $k = \max_i |S_i|$ bytes. We also add another $k - 1$ leaf nodes, which we call enforcers, to each S_i . In Figure 2, the enforcers are depicted by a triangular pictorial gadget. Our objective is to solve the convergecast problem for this setup of sensor networks. i.e. each non-sink node (including the nodes in levels 2 and 3 and all the enforcers) have a reading of 1 byte and we must pass each reading to the **sink** using minimum number of packet hops.

For $K > 0$, we can show that $n + mk + K$ hops suffice to route each reading to the **sink** iff there exists a set cover of size less than or equal to K in the set cover problem. Each level 3 vertex has to send a packet to **sink** through a level 2 vertex. Note that at least n packets must hop out of the level 3 vertices for any solution (optimal or suboptimal). Consider the portion of the graph consisting of a single level 2 node S_i , its $k - 1$ enforcers and **sink**. Regardless of the activity outside this portion, any solution requires k hops because the $k - 1$ enforcers must communicate to S_i and we need a packet from S_i to the **sink**. Since there are m such level 2 vertices, the number of hops is at least mk . If at least one reading from level 3 vertex will hop through S_i , it will force S_i to send one more packet, which we call a *critical hop*. If $K \leq K_{sc}$ is the number of critical hops, then we can cover the ground set by selecting the subsets corresponding to

each of the K chosen subsets. Therefore, the following theorem follows.

Theorem 2.2. *UCCP is NP-hard.*

3 The Shortest Path Elementary Packing Algorithms

While the focus of this section is the entire class of algorithms (SPEP) for solving UCCP, we pick a canonical example from SPEP, the shortest path tree algorithm, or SPT, to prove our results. Corollary 3.4 extends the results to all algorithms in SPEP.

The steps in the SPT algorithm are as follows. In the preprocessing phase, we construct a shortest path tree T of graph G rooted at **sink**¹. As a consequence, each node is aware of its parent and children. Subsequently, each vertex waits till it has received all packets from its children in T . Full packets are sent to its parent as is. All the partial packets are re-packaged into the maximum number of full packets and at most one partial packet and all these packets are sent to the parent.

Let OPT and \mathcal{A} be the number of hops taken by the optimum solution and SPT, respectively, in solving an instance of the UCCP. We show that $\mathcal{A} \leq (2 - \frac{3}{2k})\text{OPT}$, where $k \geq 2$.

The maximum number of readings that can be packed in a packet is k . If a packet contains k readings then we call it a *full packet*; otherwise, it is a

¹We do not delve into the details of this construction as it has been studied in various contexts in the past. For example, see the work by Chandy & Misra (1982).

partial packet. If a full packet hops from a node a to a neighbouring node b then we will term this as *full hop*. A partial hop is defined likewise. We split \mathbf{OPT} into \mathbf{OPT}^f and \mathbf{OPT}^p such that they are the number of full and partial hops, respectively. We define \mathcal{A}^f and \mathcal{A}^p in like manner. Naturally,

$$\mathbf{OPT} = \mathbf{OPT}^f + \mathbf{OPT}^p \quad (3.1)$$

$$\mathcal{A} = \mathcal{A}^f + \mathcal{A}^p. \quad (3.2)$$

Let us define the depth $d(v)$ of a node v as the shortest distance of a node v from \mathbf{sink} in T , i.e., the minimum number of hops required for a reading to reach \mathbf{sink} from v . The following lemma holds for any algorithm that has the elementary packing property.

Lemma 3.1. *For any instance of the UCCP, $\mathcal{A}^p \leq 2 \cdot \mathbf{OPT}^p$.*

Proof. Consider the packets that flow through a single vertex v according to any algorithm regardless of optimality. There is at least one partial hop either out of v or into v . We can prove this by contradiction. Suppose there were no partial hops into v , but ℓ full hops into v . Then, $k \cdot \ell + 1$ readings would have to hop out of v , which requires at least one partial hop. This implies that at least $n/2$ hops are partial even for an optimal algorithm. Therefore,

$$\mathbf{OPT}^p \geq n/2. \quad (3.3)$$

According to the SPT algorithm, each vertex waits for all its children to communicate their packets and reorganizes the readings such that at most one packet is not full. Therefore, $\mathcal{A}^p \leq n$, which, along with Equation 3.3, completes the proof. \square

Before we proceed into proving our theorem, we point out an obvious property (formalized in Lemma 3.2) of any algorithm that obeys the shortest path property, the SPT being one such algorithm. The reading corresponding to each vertex v travels a distance of exactly $d(v)$, which is the shortest distance to reach the \mathbf{sink} . Therefore, the sum of all the distances traveled taken over all *readings* (not packets) by SPT is less than or equal to that of any other algorithm. That sum is at least $\mathcal{A}^p + k\mathcal{A}^f$ for SPT; we pessimistically account only one reading to have hopped in each partial packet. Similarly, the sum of the distance moved by *readings* according to an optimal algorithm is at most $(k-1)\mathbf{OPT}^p + k\mathbf{OPT}^f$; we liberally account for $k-1$ readings in each partial hop. Therefore, we can state the property as follows:

Lemma 3.2. *For any instance of the SPT, $\mathcal{A}^p + k\mathcal{A}^f \leq (k-1)\mathbf{OPT}^p + k\mathbf{OPT}^f$.*

Theorem 3.3. *For any instance of UCCP, $\mathcal{A} \leq (2 - \frac{3}{2k})\mathbf{OPT}$.*

Proof. Using Equations 3.1 and 3.2, we rewrite the equation in Lemma 3.2 as

$$\begin{aligned} k\mathcal{A} &\leq (k-1)\mathbf{OPT} + \mathbf{OPT}^f + (k-1)\mathcal{A}^p \\ &\leq (k-1)\mathbf{OPT} + \mathbf{OPT}^f + \mathbf{OPT}^p + \\ &\quad (k-1)\mathcal{A}^p - \mathcal{A}^p/2 \quad (\text{using Lemma 3.1}) \\ &= k \cdot \mathbf{OPT} + (k-3/2)\mathcal{A}^p. \end{aligned}$$

Recall that $\mathcal{A}^p \leq n$. Hence, we can replace \mathcal{A}^p with \mathbf{OPT} because \mathbf{OPT} is at least n ; every vertex has to send out at least one packet. Further, dividing by k on both sides, we get $\mathcal{A} \leq (2 - \frac{3}{2k})\mathbf{OPT}$. \square

Theorem 3.3 proves the upper-bound for SPT, but the underlying lemmas, Lemma 3.1 and Lemma 3.2, are true for all algorithms in SPEP. Lemma 3.1 hold for any algorithm that packs its readings in an elementary manner and Lemma 3.2 is true for any algorithm that respects the shortest path property. Therefore we can state:

Corollary 3.4. *The approximation ratio of any algorithm in SPEP for UCCP is at most $(2 - \frac{3}{2k})$, where $k \geq 2$, and SPT is optimum when $k = 1$.*

Note that in SPT, each node sends its packets to one of its parents. In practice, we might not want to burden one parent. This can be alleviated by choosing a parent randomly. Alternatively, the node can also choose a parent in a round-robin fashion. Corollary 3.4 ensures that such variants will not incur a higher hop-count than SPT. This can be of use to systems designers who are interested in balancing the network overhead across the network without compromising the hop-count.

4 Lower Bounds on Approximating UCCP

Given the upper-bound on the approximation ratio of SPEP in Corollary 3.4, a natural question we ask is whether the analysis can be tightened. We are, however, interested in algorithms that use shortest paths and/or employ elementary packing. In this subsection, we discuss the inapproximability of UCCP when either one of those two properties must be respected.

We begin by describing the construction of an instance $\mathcal{E}_{\{\ell\}}$ of the UCCP, where ℓ is a positive integer. This instance is constructed with one bad path (called the shortest path corridor or SPC) to the \mathbf{sink} such that an optimal algorithm can avoid it to minimize the number of hops. However, in the construction, we ensure that an algorithm that does not compromise on either the shortest path property or the elementary packing property cannot avoid the SPC and therefore must hop more.

The instance $\mathcal{E}_{\{\ell\}}$ will consist of ℓ gadgets (shown in Figure 3). The gadgets are indexed by i , $1 \leq i \leq \ell$. Gadget 1 is farthest away from the \mathbf{sink} and gadget ℓ is closest to it. Figure 4 depicts the detailed construction of a single gadget. Two consecutive gadgets will be connected as shown in Figure 5. Note that gadget ℓ connects to the \mathbf{sink} (see Figure 3). The position of the \mathbf{sink} and the orientation of the instance depicted in Figure 3 indicates that the packets move “upward.”

Given the value of ℓ , we define the size of each packet to be $k = \ell!$. We first describe a generic gadget that is used in constructing each of the ℓ gadgets. Figure 4 depicts the construction of a gadget i ; the figure shows the actual construction and a schematic representation, which will be used subsequently. A gadget is defined by parameters i , its gadget index, and k , the capacity of the packets. It consists of ik parallel paths that are disconnected from each other (except for some special edges called off-ramps described later). Each of these ik paths consists of k/i nodes; note that k/i is an integer because $k = \ell!$ and $i \leq \ell$. Therefore, each gadget has k^2 nodes. The two end nodes in each of the paths is designated either as a head node or the tail node depending on whether it is closer to or farther away from the \mathbf{sink} , respectively. Furthermore, one of the ik paths is a special path that is called a “segment of the shortest path corridor” and is shown by thick triple lines in the schematic. When the gadgets are put together to form the entire instance, these segments will join to form a sequence of segments from the farthest gadget

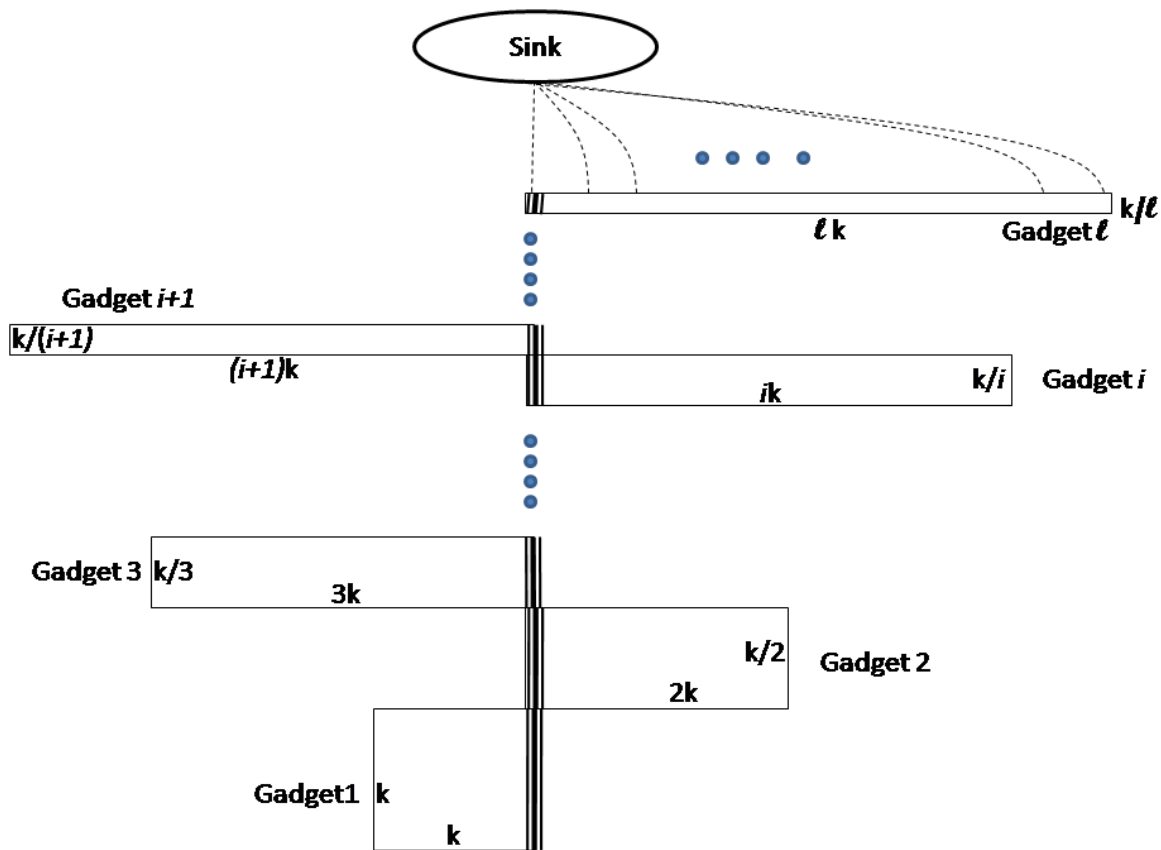


Figure 3: The construction of an instance of UCCP used to prove Theorem 4.5 and Theorem 4.6. Note that the boxes are gadgets shown in Figure 4.

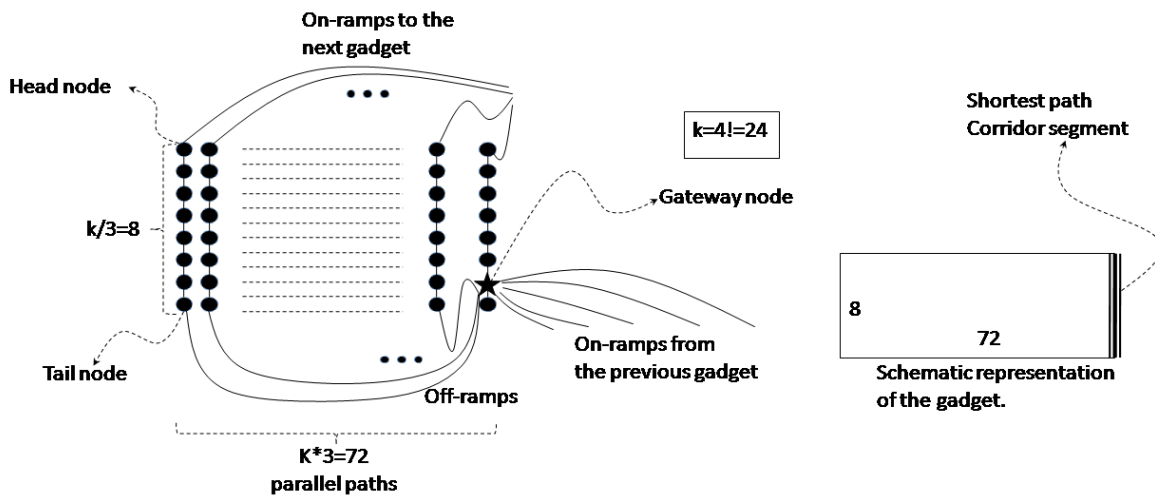


Figure 4: A gadget for constructing the instance \mathcal{E}_{ℓ} of UCCP. The schematic representation of the actual gadget is also provided in the bottom right.

(away from the **sink**) all the way to the **sink**. This sequence of segments form the shortest path corridor or SPC.

In each gadget, the node connected to the tail node of the segment of the SPC plays a special role; in Figures 4 and 5, they are depicted as star shaped nodes. We call them gateway nodes because all packets enter a gadget through its gateway node. Borrowing from the terminology used in highways in the United States, the $(i - 1)k$ edges coming into the gateway node from gadget $i - 1$ are called on-ramps. There are $ik - 1$ edges going from the gateway node to the

tails in the gadget (except for the tail of the segment of the SPC). These edges are called off-ramps. See Figure 5 for a depiction of two consecutive gadgets along with how they are connected; again, the schematic representation is also provided. To construct the entire instance, the gadgets are placed one on top of the other such that their individual segments of the shortest path corridor align and form the full shortest path corridor that extends from gadget 1 all the way to gadget ℓ and then connects to the **sink**. This construction of the entire instance is depicted in Figure 3.

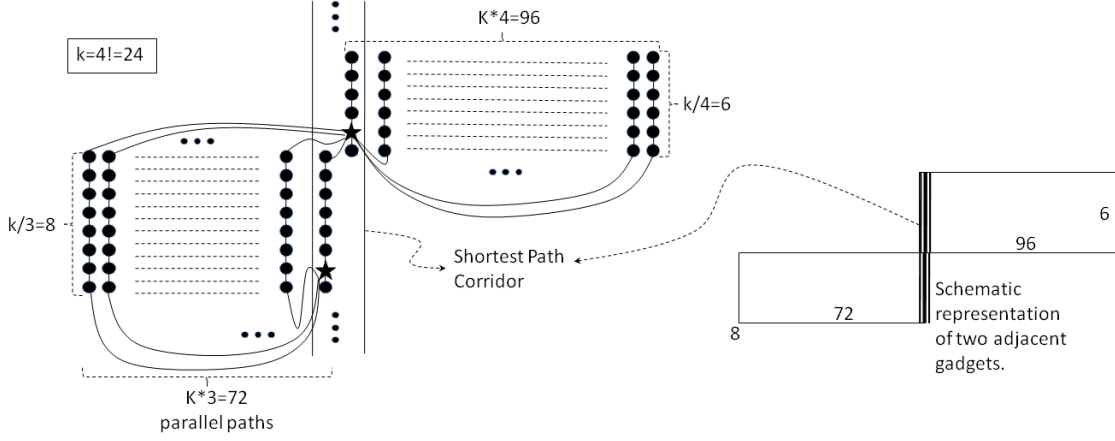


Figure 5: Connecting two gadgets in adjacent gadgets. The box figure on the bottom right is the schematic representation for the actual construction in the top left.

Lemma 4.1. *There is a solution to the convergecast problem on the instance depicted in Figure 3 that hops at most $k^2\ell + k\ell^2$ times.*

Proof. The solution works as follows. Each gadget has k^2 nodes. Therefore, gadgets 1 to i have ik^2 readings that enter the gateway of gadget $i+1$. Then the gateway node, instead of sending them up the SPC, redistributes these packets to each of the $(i+1)k$ lanes in the gadget at level $i+1$. Therefore, each lane gets a packet that contains $\frac{i}{i+1}k$ readings that travel up each lane collecting the $k/(i+1)$ readings in that lane. Therefore, at the top of each lane in gadget $i+1$, the number of readings is $\frac{i}{i+1}k + \frac{k}{i+1} = k$, hence forming a full packet. These $(i+1)k$ full packets hop into the gateway at gadget $(i+2)$ and proceed toward the sink in like manner (i.e., avoiding the SPC and taking the lanes). Note that at gadget i , the following hop types occur. Firstly, the gateway node at gadget i feeds $(i-1)k$ packets (that it received from gadget $i-1$) via the off-ramps to the tail nodes in gadget i . This takes $ik-1$ hops; although there are ik paths, there is no need for a hop from the gateway to the segment of the SPC. Secondly, the ik packets travel up the lanes costing k/i hops per lane. This adds up to k^2 hops. Note that this includes the on-ramp hops that will carry the packets from gadget i into the gateway of gadget $i+1$. Therefore, at each level i , we incur a cost of $k^2 + ik - 1$. Considering this over all ℓ levels, the total cost is at most $k^2\ell + \sum_{i=1}^{\ell} (ik - 1) \leq k^2\ell + k\ell^2$. \square

Note that the cost incurred by the solution described in Lemma 4.1 hinges on the ability of the gateway nodes to pack in a non-elementary fashion. Hence it is not elementary in nature. Also, since it uses the off-ramps, it is not a shortest path solution either. We shift our concern to solutions that either use the shortest path or are elementary in nature. The key intuition here is that such solutions will transmit all the readings entering the gadget at level i only through the SPC. While the solution in Lemma 4.1 was able to split the $k(i-1)$ full packets into ik partial packets and ride up the gadget (in some sense, for free), the restricted solution will have to pay for these packet hops up the SPC. We dissect this cost in Lemma 4.3 and Lemma 4.4. Before that, we state Lemma 4.2, a simple observation about the instance $\mathcal{E}_{\{\ell\}}$.

Lemma 4.2. *The tail nodes (except those of the SPC segments) have exactly two shortest paths to the sink. All other nodes (including the tail nodes of*

SPC segments) have exactly one shortest path to the sink.

Proof. The tail nodes that are not in the SPC segments can go through the gadget in two ways. They can either go via the off-ramps into the SPC, or go through the paths for which they are the tails. All other nodes, it is easy to see, have just one choice. \square

The SPT incurs a higher hop count than the algorithm described in the proof of Lemma 4.1. Lemmas 4.3 and 4.4 formalize this limitation of SPT. The proofs of either lemmas show that their respective assumptions (namely, shortest path and elementary packing) force packets to take the SPC, which in turn forces them to hop at least $2k^2\ell - k^2 \log \ell$ times.

Lemma 4.3. *Any shortest path solution to the instance $\mathcal{E}_{\{\ell\}}$ depicted in Figure 3 requires at least $2k^2\ell - k^2 \log \ell$ hops. This holds regardless of whether the shortest path solution is deterministic or randomized.*

Proof. Each gadget produces k^2 readings because that many nodes are present in the gadget at that level. This has two consequences. Firstly, the number of hops within a gadget, not counting the hops of packets entering the gadget but counting the off-ramp hops, is at least k^2 . The total number of such hops over all ℓ gadgets is $k^2\ell$. Secondly, the k^2 readings originating in gadget i must each travel a distance of $(k/(i+1) + k/(i+2) + \dots + k/\ell)$, where each term accounts for the height of gadget $i+1$ up to gadget ℓ . We call these the SPC hops because these readings must travel up the SPC. Any alternate routing will violate the shortest path property. Hence, we can argue (in similar lines as in Theorem 3.3) that any optimal shortest path solution will form k full packets at the gateway node of gadget $i+1$. Hence, the total number of packet hops will be $k[(k/(i+1) + k/(i+2) + \dots + k/\ell)]$. The total number of SPC hops originating over all ℓ gadgets is

$$\begin{aligned}
& k^2 \left[(1/2 + 1/3 + 1/4 + \dots + 1/\ell) + \right. \\
& \quad \left. (1/3 + 1/4 + \dots + 1/\ell) + \dots + (1/\ell) \right] \\
& = k^2 \left[\left(\sum_{i=2}^{\ell} \frac{i-1}{i} \right) \right] \cong k^2 [\ell - \log \ell].
\end{aligned}$$

Therefore, the total number of hops is at least $k^2\ell + k^2[\ell - \log \ell] = 2k^2\ell - k^2 \log \ell$.

We note here that a randomized shortest path solution does not have much flexibility because of Lemma 4.2. The readings from the tail nodes have two choices. However, any tail node that takes the off-ramp into the SPC will contribute to the two types of hops mentioned regardless of the choice it makes. If it goes through the SPC, it might contribute to more. Therefore, they are better off traveling through their individual paths. Hence randomization does not help in decreasing the number of hops. \square

Lemma 4.4. *Any elementary solution to the problem instance $\mathcal{E}_{\{\ell\}}$ requires at least $2k^2\ell - k^2 \log \ell$ hops. This holds regardless of whether the shortest path solution is deterministic or randomized.*

Proof. To prove this, all we need is to show that the “best” elementary solution will essentially route packets to the **sink** in the same manner as described in Lemma 4.3. In other words, we need to show that all packets entering a gadget through the gateway node must travel through the SPC to the **sink**. The instance $\mathcal{E}_{\{\ell\}}$ is constructed such that only the gateway nodes have degree greater than 2. Therefore, to ensure that an algorithm for $\mathcal{E}_{\{\ell\}}$ is elementary, we only need to ensure that gateway nodes observe the elementary packing property.

Consider the gateway node in gadget $i + 1$. The readings routed through this gateway can be subdivided into those readings that *must* be routed through the gateway and those that have an alternate route. We first consider the readings that have an alternate route and show that, for the purpose of analysis, they can be assumed to take the alternate route rather than through the SPC. The reading that have an alternate route are the readings that originate from nodes in gadget $i + 1$ itself, but not in the segment of the SPC in that gadget. Consider all the readings from non-SPC paths in gadget $i + 1$. They form $(i + 1)k - 1$ paths and each path is of length $\frac{k}{i+1}$. If these readings moved in the tail-to-head direction along the path they were in (instead of using the SPC), they would require exactly $\frac{k}{i+1}((i + 1)k - 1)$ hops, which equals the number of non-SPC nodes in gadget $i + 1$. This implies that exactly one hop must be accounted for each node’s reading. Since each node requires at least one hop, routing this readings in any other way will not improve the hop count. Further, this tail-to-head routing does not violate the elementary packing principle. Hence, for any elementary solution, we can always construct another solution in which the readings from nodes not in the SPC don’t use the segment of the SPC in their gadget.

The readings that must go through the gateway node are as follows.

1. It will receive ik^2 readings from gadgets 1 through i .
2. It has its own reading, and
3. it also receives 1 reading from the tail node in the segment of the SPC in gadget $i + 1$.

The elementary packing property therefore requires that exactly 1 partial packet (containing exactly 2 readings) will hop out of the gateway node. Quite obviously, all the full packets (in any reasonable elementary algorithm) will follow the SPC. The partial packet will also move up the SPC because if it were to take the off-ramp and go up the gadget through any other path, it will only incur extra hops.

Now that we have shown that the elementary packing property forces the routing to be similar to the one shown in Lemma 4.3, we can invoke the mathematical machinery in that lemma to conclude the proof. \square

Theorem 4.5. *For any fixed $\epsilon > 0$, there is no $(2 - \epsilon)$ -approximation algorithm for UCCP that follows the shortest path property. This holds even if randomization is permitted.*

Proof. Using the number of hops counted in Lemmas 4.1 and 4.3 in the asymptotic sense, the approximation ratio for any shortest path algorithm is at least

$$\begin{aligned} \lim_{\ell \rightarrow \infty} \frac{2k^2\ell - k^2 \log \ell}{k^2\ell + k\ell^2} &= \lim_{\ell \rightarrow \infty} \frac{2k^2(\ell - \frac{\log \ell}{2})}{k^2(\ell + \frac{\ell^2}{k})} \\ &\approx \lim_{\ell \rightarrow \infty} \frac{2(\ell - \frac{\log \ell}{2})}{\ell} \\ &\quad (\text{since } k \gg \ell) \\ &= \lim_{\ell \rightarrow \infty} (2 - \frac{\log \ell}{\ell}) \\ &= 2. \end{aligned}$$

Since the limit reaches 2 from below, the theorem holds. \square

The following theorem also follows similarly except that we must use Lemma 4.4 instead of Lemma 4.3.

Theorem 4.6. *For any fixed $\epsilon > 0$, there is no $(2 - \epsilon)$ -approximation algorithm for UCCP that respects the elementary packing property. This holds even if randomization is permitted.*

5 SPT on Tree and Grid Networks

We now turn our attention to the performance of SPT on special cases based on the graph G .

Theorem 5.1. *SPT is optimal for UCCP when the underlying graph G is a tree.*

Proof. Since G is a tree, all the readings from the descendants of any vertex v (including v ’s reading) will have to pass through v . Suppose there are R_v such readings. Then any algorithm will have to transmit at least $\lfloor \frac{R_v}{k} \rfloor + \lceil \frac{R_v \bmod k}{k} \rceil$, which is precisely the number of packet transmissions out of v in SPT. Therefore, SPT is optimal with respect to the number of packet hops. \square

Suppose the graph G is a grid with m rows and n columns and the **sink** is the vertex at $(1, 1)$, i.e. at row 1 and column 1. Since we are interested in the asymptotic behavior, we assume that m and n are $\omega(k)$. Furthermore, without loss of generality, we assume that m and n are multiples of k . We show that SPT-G, an implementation of SPT with a specific underlying shortest path tree designed for grids, is asymptotically optimal. Whether all underlying shortest path trees lead to asymptotic optimality remains open.

The specific shortest path tree for SPT-G on an $(m \times n)$ grid is as follows: we designate each edge in G to be “vertical” (resp. “horizontal”) if it connects vertices from the same column (resp. same row). All vertical edges are included in the SPT tree; horizontal edges are included iff they are from row 1. Intuitively, the packets move up the columns until they reach the first row. Once they reach the first row, they move towards the **sink** along the first row. Note that in keeping with our definition of SPT, once a packet becomes full, it does not split. We formalize the performance of SPT-G in Theorem 5.2.

Theorem 5.2. *SPT-G is asymptotically optimal for UCCP when the underlying graph G is an $m \times n$ grid, provided m and n are in $\omega(k)$.*

Proof. We begin by evaluating h_{LB} , the lower bound on number of hops required by any algorithm. Consider a horizontal cut in G between rows i and $i+1$. There are $(m-i)n$ readings below this cut. All these readings must pass through this cut. Assume that they pass through in full packets. Therefore at least $(m-i)n/k$ hops will pass through the cut. Considering all such horizontal cuts, the number of hops crossing these cuts must be at least $\sum_{i=1}^m (m-i)n/k = \frac{mn(m-1)}{2k}$. Similarly, we can also construct vertical cuts which induce at least $\frac{mn(n-1)}{2k}$ row-wise hops. Therefore, any algorithms will require at least h_{LB} hops given by

$$h_{LB} = \frac{mn(m-1)}{2k} + \frac{mn(n-1)}{2k} = \frac{mn(m+n-2)}{2k}. \quad (5.1)$$

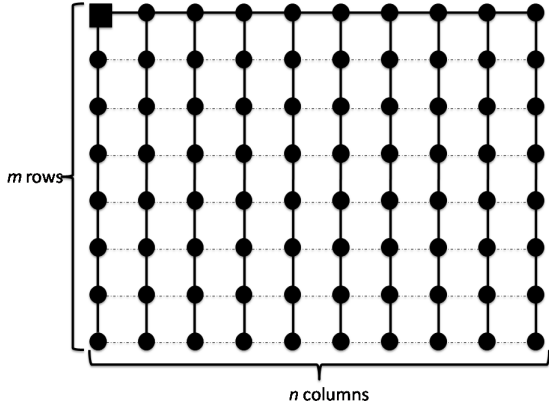


Figure 6: SPT-G on grid. The square vertex is the **sink**. The full edges form the shortest path tree, while the dotted edges are discarded.

SPT-G starts with moving the packets up along columns. Once all the readings in a column are collected on the first row, the packets then move along the row to the **sink**. In each column, as the packets move upward, a new full packet is formed every k vertices. If we count all the partial hops in a single column, they are at most $m-1 \leq m$. Since there are n columns, there are at most mn partial hops. Since the lower bound on the number of hops (from Equation 5.1) is $O(mn(m+n))$, the partial hops don't have any bearing on the asymptotic approximation ratio. Therefore, we are interested in evaluating h^\uparrow and h^\leftarrow , which are the number of full packet hops up (along columns) and left (along rows) respectively.

There are at most $m/k - 1 \leq m/k$ full packets formed in each column. The first full packet is formed at row $m-k$ and full packets are formed regularly at an interval of k packets. From the vertex at which a full packet is formed, it will have to travel up to row 1. Therefore, the number of full packet hops in each column is at most

$$\begin{aligned} (m-k) + (m-2k) + \dots + (m-(m/k)k) \\ &\leq (m^2/k) - k(1+2+\dots+m/k) \\ &\leq (m^2/k) - k \frac{(m/k)^2}{2} \\ &= \frac{m^2}{2k}. \end{aligned}$$

Since there are n columns in total, the number of hops up the columns, h^\uparrow , is at most

$$h^\uparrow = \frac{nm^2}{2k}. \quad (5.2)$$

Once the full packets reach the first row, they hop along the row towards the **sink**. Each column generates at most m/k full packets. Therefore, the total number of horizontal hops, h^\leftarrow is given by:

$$\begin{aligned} h^\leftarrow &= (m/k)(1+2+\dots+n-1) \\ &= (m/k)(n-1)(n)/2 \\ &\leq \frac{mn^2}{2k}. \end{aligned}$$

Therefore, the total number of full hops for SPT-G is at most

$$h^\uparrow + h^\leftarrow = \frac{mn(m+n)}{2k}. \quad (5.3)$$

From Equations 5.1 and 5.3, it is clear that the upper bound and the lower bound converge asymptotically. \square

6 Experimental Study

The lower bound for SPT is derived from pathological problem instances. It is quite likely that it actually does much better in practice. We would like to show this via experimentation. For this purpose, we used JAVA to implement SPT. To objectively compare SPT, we computed three lower bounds on the number of hops for each input instance. They are:

LB1: The number of non-**sink** vertices $|V|$,

LB2: $\sum_{v \in V} d(v)/k$, where $d(v)$ is the shortest distance between v and the **sink**, and

LB3: $\sum_{i=1}^D n_i/k$, where $D = \max_{v \in V} d(v)$ and $n_i = |\{v : d(v) \geq i\}|$.

Each input instance was generated as follows. We defined an $N \times N$ euclidean region and placed nodes uniformly at random in this region. We normalized the radio frequency range to be 1. Therefore, a single hop link exists between two nodes that are within an euclidean distance 1 from each other. We deployed enough sensors such that the set of nodes and links formed a connected graph. We varied the value of N from 3 to 15 and for each value of N , we generated 50 input instances. We fixed $k = 5$. For each input instance I , we calculated the ratio, $r(I)$, of the number of hops in SPT over the largest of the three lower bounds. Figure 6 depicts the results of this experiment.

Based on the experimental results, we make a few observations. Firstly, the number of times the $r(I)$ values exceed 1.6 is very low. Secondly, such high values of $r(I)$ only occur in the relatively smaller instances. As the size of I is increased, $r(I)$ is lower with values around 1.3. Finally, We also note that the standard deviation of the larger input instances are lower implying that the $r(I)$ values in practice become stable as the input size increases. These observations clearly validate our claim that SPT requires few hops in more realistic input instances.

7 Conclusion and Future Work

Routing in sensor networks is quite complex owing to various constraints encountered in real instances. Our focus, therefore, was on a broad class of natural algorithms. This allows a network designer to construct specific algorithms within this class that fit her requirements. While algorithms in SPEP are at least 2-approximate (asymptotically), our experimental results indicate that they do quite well in

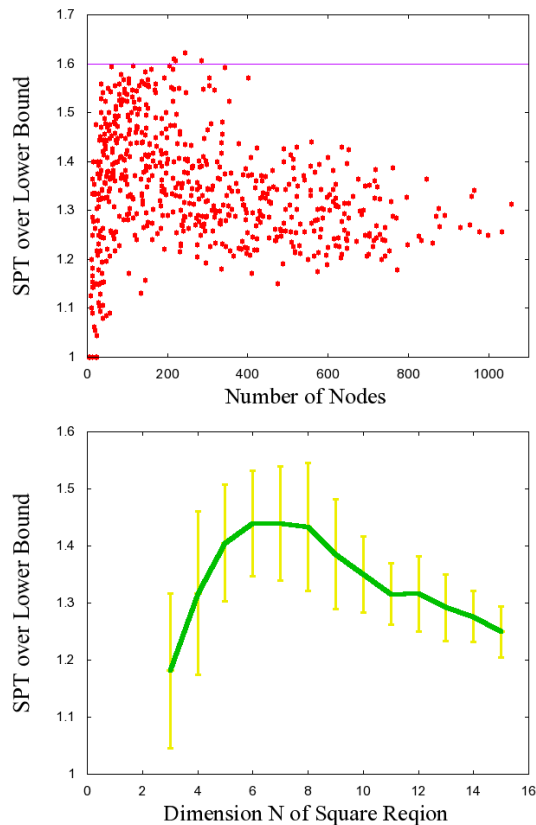


Figure 7: The first graph is the plot of the $r(I)$ values against their corresponding number of nodes n . For the second graph, we generate 50 test instances for each value of N . The plot shows the average $r(I)$ values for each N . Additionally, we provide the standard deviation error bars.

practice. This leaves us with two questions for future work. Firstly, is there an algorithm that is indeed a $(2 - \epsilon)$ -approximation for UCCP? More interestingly, is it an algorithm that is intuitive, easy to implement and maintain, and worthy of competing with SPEP algorithms in practice?

References

- Akkaya, K. & Younis, M. (2005), ‘A survey of routing protocols for wireless sensor networks’, *Elsevier Ad Hoc Network Journal* **3**(3), 325–349.
- Chandy, K. M. & Misra, J. (1982), ‘Distributed computation on graphs: shortest path algorithms’, *Commun. ACM* **25**(11), 833–837.
- Deshpande, A. & Madden, S. (2006), Mauvedb: Supporting model-based user views in database systems, in ‘Proceedings of ACM International Conference on Management of Data (SIGMOD)’.
- Gandham, S. R., Zhang, Y. & Huang, Q. (2007), *Method and apparatus for optimizing convergecast operations in a wireless sensor network*, U. S. Patent Office. U.S. Patent Application Number 20070140149.
- Garey, M. R. & Johnson, D. S. (1979), *Computers and intractability*, Freeman.
- Goel, A. & Estrin, D. (2003), Simultaneous optimization for concave costs: single sink aggregation or single source buy-at-bulk, in ‘Proceedings of ACM-SIAM Symposium on Discrete Algorithms (SODA)’.
- Heinzelman, W. R., Chandrakasan, A. & Balakrishnan, H. (2000), Energy-efficient communication protocol for wireless microsensor networks, in ‘Proceedings of Hawaii International Conference on System Sciences (HICSS)’.
- Hohlt, B., Doherty, L. & Brewer, E. (2004), Flexible power scheduling for sensor networks, in ‘IPSN ’04: Proceedings of the 3rd international symposium on Information processing in sensor networks’, ACM, New York, NY, USA, pp. 205–214.
- Intanagonwiwat, C., Govindan, R. & Estrin, D. (2000), Directed diffusion: A scalable and robust communication paradigm for sensor networks, in ‘MOBICOM’.
- Kesselman, A. & Kowalski, D. R. (2006), ‘Fast distributed algorithm for convergecast in ad hoc geometric radio networks’, *J. Parallel Distrib. Comput.* **66**(4), 578–585.
- Krishnamachari, B., Estrin, D. & Wicker, S. B. (2002), The impact of data aggregation in wireless sensor networks, in ‘ICDCSW ’02: Proceedings of the 22nd International Conference on Distributed Computing Systems’, IEEE Computer Society, Washington, DC, USA, pp. 575–578.
- Lindsey, S., Raghavendra, C. & Sivalingam, K. M. (2002), ‘Data gathering algorithms in sensor networks using energy metrics’, *IEEE Trans. Parallel Distrib. Syst.* **13**(9), 924–935.
- Lu, G., Krishnamachari, B. & Raghavendra, C. S. (2007), ‘An adaptive energy-efficient and low-latency mac for tree-based data gathering in sensor networks: Research articles’, *Wirel. Commun. Mob. Comput.* **7**(7), 863–875.
- Madden, S., Franklin, M. J., Hellerstein, J. M. & Hong, W. (2002), Tag: a tiny aggregation service for ad-hoc sensor networks, in ‘Proceedings of USENIX Symposium on Operating Systems Design and Implementation (OSDI)’.
- Pan, M. & Tseng, Y. (2008), ‘Quick convergecast in zigbee beacon-enabled tree-based wireless sensor networks’, *Comput. Commun.* **31**(5), 999–1011.
- Paradis, L. & Han, Q. (2009), ‘A data collection protocol for real-time sensor applications’, *Pervasive and Mobile Computing (PMC)* **5**(1).
- Porta, L., Illangasekare, T. H., Loden, P., Han, Q. & Jayasumana, A. P. (2009), ‘Continuous plume monitoring using wireless sensors: Proof of concept in intermediate scale tank’, *ASCE’s Journal of Environmental Engineering* **135**(3).
- Upadhyayula, S. & Gupta, S. K. S. (2007), ‘Spanning tree based algorithms for low latency and energy efficient data aggregation enhanced convergecast (dac) in wireless sensor networks’, *Ad Hoc Netw.* **5**(5), 626–648.
- Yu, Y. & Prasanna, V. K. (2005), ‘Energy-balanced task allocation for collaborative processing in wireless sensor networks’, *Mob. Netw. Appl.* **10**(1-2), 115–131.
- Zhang, Y., Gandham, S. & Huang, Q. (2007), ‘Distributed minimal time convergecast scheduling for small or sparse data sources’, *Real-Time Systems Symposium, IEEE International* **0**, 301–310.