

Document downloaded from:

<http://hdl.handle.net/10251/52676>

This paper must be cited as:

SARA PERALES MOMPALER; Hernández Crespo, C.; Vallés Morán, FJ.; Martín Moneris, M.; Andrés Doménech, I.; Andreu Álvarez, J.; Jefferies, C. (2014). SuDS efficiency during the start-up period under Mediterranean climatic conditions. *CLEAN - Soil, Air, Water*. 42(2):178-186. doi:10.1002/clen.201300164.



The final publication is available at

<http://dx.doi.org/10.1002/clen.201300164>

Copyright Wiley

1
2
3 **SuDS efficiency during the start-up period under Mediterranean**
4 **climatic conditions**
5
6
7
8

9 Sara Perales-Momparler⁽¹⁾, Carmen Hernández-Crespo⁽²⁾, Francisco Vallés-Morán⁽²⁾, Miguel
10 Martín⁽²⁾, Ignacio Andrés-Doménech⁽²⁾, Joaquín Andreu Álvarez⁽²⁾, Chris Jefferies⁽³⁾
11

12 ⁽¹⁾PMEnginyeria. Avda. del Puerto, 180- 1B. 46023 Valencia. Spain.
13

14 ⁽²⁾Instituto Universitario de Ingeniería del Agua y Medio Ambiente (IIAMA). Universitat
15 Politècnica de València. Cno. de Vera s/n. 46022. Valencia. Spain.
16

17 ⁽³⁾ University of Abertay Dundee. Bell Street. Dundee DD1 1HG. Scotland. UK.
18
19
20
21

22 **Correspondence:** Ignacio Andrés-Doménech. Instituto Universitario de Ingeniería del Agua y
23 Medio Ambiente (IIAMA). Universitat Politècnica de València. Cno. de Vera s/n. 46022.
24 Valencia. Spain. E-mail: igando@hma.upv.es
25
26
27

28 **Abbreviations:** **BMP**, Best management practice; **BOD₅**, Five day biological oxygen demand;
29 **COD**, Chemical oxygen demand; **DO**, Dissolved oxygen; **HRT**, Hydraulic retention time; **SuDS**,
30 Sustainable drainage systems; **TN**, Total nitrogen; **TP**, Total phosphorus; **TSS**, Total suspended
31 solids; **VSS**, Volatile suspended solids.
32
33
34
35

36 **Keywords:** Mediterranean climate, start-up period, sustainable drainage systems, wash-off,
37 water quality.
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60

1
2
3 **Abstract**
4

5 This paper presents the performance of a number of sustainable drainage systems (SuDS) in
6 the city of Xàtiva in the Valencia Region of Spain relatively soon after their construction. The
7 systems studied comprise two roadside swales, one detention basin receiving runoff from one
8 of the swales and one green roof to a school. The SuDS were installed under an EU LIFE+
9 project intended to demonstrate their practicability, application and behaviour under
10 Mediterranean rainfall conditions. Most of the systems installed were in new developments
11 but the green roof was retrofitted to a school within Xàtiva which is a dense urban area. Full
12 flow monitoring was undertaken and spot samples were taken to give a preliminary
13 assessment of water quality performance. The early results presented in the paper
14 demonstrate the effectiveness of the systems under typical Mediterranean conditions which
15 comprise intense rainfall from September to December and little or no precipitation at other
16 times of the year. It is concluded that SuDS can be effectively introduced in the Mediterranean
17 region of Spain.
18
19
20

21
22 **1 Introduction**
23

24 Sustainable drainage systems (SuDS) were introduced in Northern Europe and the United
25 States to address deteriorating water qualities in lakes, rivers and groundwater caused
26 principally by urban and related developments. Notable applications in the USA, where they
27 are termed structural stormwater BMPs, are to be found in Florida (lake and groundwater
28 quality), Maryland (water quality in Chesapeake Bay) and Colorado (preservation of flows in
29 small streams). In Germany many regions require SuDS on new developments and highways to
30 protect groundwater quality, while in Sweden and Scotland, the driver for SuDS is the quality
31 of rivers and lakes [1, 2].
32
33

34 A wide range of types of SuDS are available to the city and water planner. Some are easier to
35 locate close to buildings and roads (Higher up the treatment train), others provide greater
36 amounts of treatment and storage while others fit better into local landscapes, providing more
37 habitat. The SuDS triangle (quantity/quality/amenity) is used to illustrate the balance that
38 must be met [1].
39
40

41 It is not appropriate to provide an exhaustive list of SuDS in this paper, but source control
42 systems include green roofs, soakaways, permeable paving systems and roadside swales; site
43 controls include detention basins and infiltration systems, and regional controls comprise
44 ponds and wetlands.
45
46

47 It is now realised that SuDS address several agendas in addition to that of receiving water
48 quality. Increasing knowledge of climate change has sharpened concerns that rainfall may
49 change both in terms of average rainfall, with effects on water resources, and rainfall
50 intensities which may cause greater amounts of flooding. Since the philosophy of SuDS is to
51 provide space for surplus water within the urban area, additional resilience to floods and
52 droughts can thus be built automatically into SuDS. The storage gives a measure of protection
53 against flooding through attenuation but it also can provide a source of water for re-use within
54 the city. A further issue is the amount of energy used in the water and drainage sector, and by
55
56
57
58
59
60

1
2
3 preventing rainwater from flowing into the drains, there will be less pumping and less
4 treatment to provide water for irrigation and toilet flushing.
5

6 In a scientific and engineering sense, the performance of a SuDS component depends on a
7 range of local conditions such as the construction of the component, soil types and rainfall
8 regime and depends on the local climate. However, to operate in the long term, SuDS must be
9 fully integrated into the city framework and local operational practices and the arrangements
10 for SuDS in a very dense Spanish city will be very different from those in a city with less
11 impermeable area and different operational practices.
12
13

14 Transposition of the EU Water Framework Directive [3] to the Spanish regulatory framework
15 has introduced the principle of achieving a good ecological status to River Basin Management
16 Plans highlighting a lack of regulation, amongst others, in relation to combined sewer
17 overflows (CSOs). A recent legislative instrument [4] establishes new procedures for obtaining
18 or maintaining discharge permits for both stormwater and combined sewer systems. Even
19 though best available (and affordable) practices and technical knowledge are specified, the
20 legislation requires future technical rules to be developed. Nevertheless, article 259 of [4]
21 indicates that new urban developments should incorporate measures to reduce runoff
22 entering the drainage system. It would be desirable that the technical rules should also
23 embody recent European Commission guidelines for water management which promote the
24 use of SuDS [5].
25
26
27
28

29 This paper focuses on three types of SuDS: a green roof, two roadside swales and an
30 infiltration basin. By covering roof areas with soil and vegetation, green roofs can achieve
31 numerous benefits. Stormwater runoff can be reduced and attenuated so that the urban water
32 balance approaches a natural state [6]. Moreover, there are other collateral benefits including
33 thermal improvements, indoor noise, air pollution reduction and social and amenity benefits.
34 By using swales, the total runoff volume is reduced through infiltration and storage; peak flows
35 are lowered also through infiltration and the flow is retarded by increased channel roughness
36 [7]. The performance of detention basins is also improved when located on a soil where
37 infiltration is possible.
38
39
40

41 Two matters are of specific interest in this work: (i) the adequacy of SuDS in the
42 Mediterranean context, and (ii) their performance during the start-up period, i.e., during the
43 months just after their construction. In contrast to Northern Europe, experience of SuDS in
44 Mediterranean regions over the last decade is still poor [2, 8]. Recently in Spain real effort
45 has been put in to develop expertise and guidelines [9, 10, 11] and some sites have already been
46 implemented mainly in the northern coastal region [12] but also in Barcelona, Madrid and the
47 Valencia region [13]. The transition to this new approach to manage urban stormwater has
48 been started in Spain but water planners and stakeholders are still reluctant to incorporate
49 these solutions because their hydraulic and quality performances are still not well
50 demonstrated locally, highlighting the need for experiments and monitoring under
51 Mediterranean climatic conditions.
52
53
54

55 The influence of the start-up period on the hydraulic performance of green roofs is poorly
56 addressed in the reviewed literature and this paper analyses the response of SuDS during their
57
58
59
60

1
2
3 implementation period. However, since both the vegetation and the substrate undergo major
4 changes with time, it can be expected that the age of the infrastructure will influence the
5 runoff dynamics [6]. The same *a priori* conclusions must apply to swales and infiltration basins
6 since the age of vegetation also influences the soil infiltration capacity.
7

8
9 In addition to their ability to retain water and the corresponding benefits to drainage
10 management, green roofs have the ability to remove pollutants; however, the evidence for the
11 effectiveness of pollutant removal is mixed [6]. The use of fertilizers, the composition of the
12 soil, type of vegetation, pollutants, atmospheric pollution, among others, are all factors, some
13 extremely site specific, that affect the quality of runoff from green roofs [14].
14

15
16 Sedimentation in grass swales is the principal treatment mechanism with filtration playing a
17 minor but highly effective role [15] in reducing total suspended solids [16]. In this type of
18 study, analysis of nutrients is also important due to the importance of nutrient control for
19 many water bodies. Frequently, depending on the rainfall intensity, flooding from sewers
20 occurs and significant nutrients loads are discharged into receiving water bodies. High
21 variability in nutrient removal is observed in field studies for this type of SuDS [16].
22
23

24 It has also been shown that the pollutant mass washed off the surface of the contributing
25 catchment during a storm event depends on the number of antecedent dry days [17] whilst
26 others have found that the maximum rainfall intensity significantly affected pollutant
27 concentrations [18]. Low correlation coefficients have been found between rainfall, rainfall
28 intensity, temperature, and antecedent dry period with particulate pollutants, whereas the
29 coefficient between rainfall duration and particulate pollutants was positive and relatively
30 large [19].
31
32

33 During this start-up period, the vegetation is establishing and soils are still not well-compacted
34 so the quality performance is not what is to be expected in the long term. The next section
35 describes the overall framework of the AQUAVAL project in which this research was
36 developed. The pilot sites in Xàtiva are then described as well as the quantity and quality
37 monitoring programme. Section 3 deals in detail with the results, analyzing the performance
38 achieved in each pilot during the start-up period. Concluding remarks are finally drawn in
39 section 4.
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60

2 Materials and Methods

2.1 The AQUAVAL project

AQUAVAL (“The efficient management of rain water in urban environments”) is a project funded by the EU LIFE+ Community Initiative whose main target is to find, implement and promote innovative solutions to decrease the impacts of developments on quantity and quality of urban runoff (e.g. flooding, CSOs, pollution, drought, etc.) within the Valencia Region of Spain. The project started on 1st January 2010, and is due to conclude by the end of September 2013. The project comprises the construction and monitoring of pilot SuDS as an important step towards the required change of paradigm. The scope of the project includes production of sustainable urban stormwater management plans and policies with the aim of making drainage infrastructure versatile and able to cope with the effects of climate change.

The municipality of Xàtiva is a municipal member of the AQUAVAL project in which the guiding principle is to ensure that rainwater management is included in water and land use planning, making the best use of landscape and morphology in order to integrate water infrastructure using SuDS, adding social and environmental values. Pilot SuDS locations in Xàtiva were chosen in places that have the ability to alleviate current problems of frequent flooding and CSO discharge, are typical of the Mediterranean region with its characteristic long hot droughts broken by high intensity storms, and is a dense and highly impermeable city with a combined sewer system.

2.2 Site descriptions

Xàtiva is located in the western Mediterranean on the Spanish coast. Its climate is Mediterranean, mild and semi-arid. The average temperature is around 16°C, (10°C in January and 27°C in August) with extreme maxima which can reach 47 °C in summer. The average annual rainfall is close to 690 mm, with very strong seasonality (Spanish Meteorological Agency, AEMET). Rain storms are usually concentrated in autumn, typically with very high peak intensities. This climate regime differs significantly from that of more northern and temperate climates where SuDS originated, justifying the value of properly monitored pilot projects.

Two of the new SuDS were in a new urban area to the north of Xàtiva and one was in the city centre. Site 1 (38°59'47.13"N 0°31'53.67"W) provides a 170 m³ storage volume (Figure 1). This volume manages runoff from 1900 m² of the adjacent road pavement and around 11100 m² from the Sports City (a new sports complex). It comprises a 1.1 m wide (on average), 75 m long swale which is linked to an infiltration basin (50 m² base area), both retrofitted within the Sports City. Overflows occur to a nearby stormwater pipe.

Site 2 (38°59'25.21"N 0°32'04.80"W) is located between a new urban development and a section of a ring road that had no drainage infrastructure and contributed to flooding of an industrial area downhill (Figure 2). A 1.7 m wide swale has been constructed in the verge of the road, replacing the flat green area that was in the original plans. Four pedestrian crossings and 5 transverse structures act as barriers of low permeability to slow the flow. The swale is divided in two sections of 275 m and 95 m length respectively, and there are two emergency spillways to direct overflow to a stormwater pipe nearby. The monitoring focused on the

1
2
3 longest section with a total catchment area of 7000 m² (both public and private road
4 pavement) and a storage volume of 218 m³.
5

6 The Gonzalbes Vera Public School, located in the heart of the city of Xàtiva (38°59'26.80"N
7 0°31'04.31"W), was chosen as site 3 (Figure 3). 475 m² of the roof has been retrofitted with a
8 green roof and the playground has been re-paved with porous concrete. The substrate of the
9 vegetated roof has a density of 1060 kg m⁻³ and is rich in organic matter (29%), total nitrogen
10 (0.27%) and phosphorus (0.57% as P₂O₅). The depth of substrate is 10 cm and it is planted with
11 a variety of *Sedum*. Monitoring activities reported here comprised water quantity and quality
12 measurements from a section of the new green roof (218 m²) as well as runoff from the
13 remainder of the conventional roof which was untouched (107 m²).
14
15

16
17 The three SuDS systems were commissioned in August 2012, and the monitoring equipment
18 was installed the following month.
19

20 **2.3 Monitoring of quantity and quality variables**

21

22 From a quantitative point of view, the main hydraulic variable of interest is the rate of
23 overflow spills from each of the SuDS into the receiving sewer. This flow was measured with
24 different equipment, depending on the type of SuDS and on the installation characteristics.
25 Discharges from the infiltration basin and from the roadside swale were measured with V-
26 notch weirs (90°), the hydraulic head over the vertex being recorded by means of a level probe.
27 Sewer flows were measured with ultrasonic flow meters that record both depth and flow
28 velocity in the sewer. Finally, the flow rate through the downpipes of the green roof was
29 monitored with tipping bucket flow gauges. In this case, every time the bucket tips, an
30 electrical pulse is recorded. All this equipment was calibrated in the laboratory, especially the
31 tipping buckets to know accurately the volume of water causing each tip. Finally, dataloggers
32 recorded the outputs from the level sensors, ultrasonic flow meters and tipping buckets.
33
34
35

36 Level probes at 1 and 2 were Mercoid SBLT2-5-40-ETFE submersible level transmitters with a
37 measuring range up to 3.5 m (±9 mm). Each transmitter was connected to a Lufft OPUS 20
38 LF8120.30 datalogger with external sensors (temperature, humidity and analog input 4/20
39 mA). Bühler Montec Xytec7050 free surface ultrasonic flow monitors devices with dataloggers
40 were also located at 1 and 2.
41
42

43 A digital output signal is activated if the monitored variable exceeds a defined threshold. When
44 this occurs the device sends an alert SMS to selected cellular phones. A minimum number of
45 tips for the tipping bucket in the conventional roof downpipe was defined as the threshold so
46 that the related rainfall depth produced runoff in the system. Water quality samples were
47 generated by the trigger and had to be collected. Finally, hourly rainfall data in Xàtiva was
48 collected by the Spanish Meteorological Agency (AEMET). Table 1 summarises the equipment
49 installed and the monitoring periods. Quantity sampling points are indicated in Figures 1, 2 and
50 3.
51
52
53

54 A total of nine water sampling points were used (Figures 1, 2 and 3). There were three
55 sampling points at sites 1 and 2 corresponding to the two inputs and the output from the
56 swales to the sewer system. For site 1 (Figure 1) they were from the Sports City (11) and the
57
58
59
60

1
2
3 adjacent roadway (12). For the North Ring Road (Figure 2) the inflows were from the
4 residential area (21) and the adjacent North Ring Road itself (22). In both systems the water
5 was collected using two litre plastic bottles with one bottle per sampling point per event. The
6 bottles were filled at the beginning of each rain event. Accordingly, the water quality
7 corresponded to the first wash off. The output bottles (13 and 23) were filled only if there
8 were discharges and, consequently, the water quality was the result of all the processes
9 (sedimentation of total suspended solids, sorption, biodegradation, volatilization) that
10 occurred inside the swales during the event, whose performance depends on hydraulic
11 retention time (HRT) and other environmental factors. However, when HRT is low, the output
12 is mainly related to the input pollutograph as there is no time for treatment other than
13 sedimentation.
14
15
16

17 Samples from both parts of the school roof, vegetated (31) and conventional (32), were
18 collected in four bottles linked to the tipping buckets (two bottles per tipping bucket). The
19 boxes where the buckets were placed were designed to allow the bottles to be filled
20 consecutively at the start of the rain event and thus, there were a total of four samples per
21 event. Finally, one bottle was located on the roof to collect rain water and atmospheric
22 deposition (33).
23
24

25 Water samples were analysed for organic matter, nutrients and solids. Chemical oxygen
26 demand (COD), total nitrogen (TN) and total phosphorus (TP) were analysed using a
27 Spectroquant® Analysis System by Merck. Five day biological oxygen demand (BOD₅) was
28 measured using OxiTop®. Total suspended solids (TSS) and volatile suspended solids (VSS)
29 were determined according to the Standard Method for Examination for Water and
30 Wastewater [20]. Turbidity was measured with a turbidimeter TN100-Eutech Instruments. In
31 addition, the following were measured in situ: water temperature, pH, conductivity and
32 dissolved oxygen (DO) all with WTW® probes. The events monitored for water quality are
33 indicated in Table 2.
34
35
36

37 **3 Results and discussion**

38 **3.1 Rainfall pattern during the start-up period**

39
40
41 Monitoring began at the end of September 2012 with the most torrential event recorded
42 during the autumn of 2012 (event 1 in Table 2) and it was the first significant period of rainfall
43 following the construction of the SuDS. This meant that the start-up period began with
44 relatively extreme heavy rainfall conditions: 92 mm in 3 days; with approximately 50 % of this
45 amount falling between 12:00 and 14:00 on September 28. The previous dry period was close
46 to one month so that pollutant accumulation on the contributing surfaces was likely to be
47 significant. After this torrential event, 8 additional episodes were recorded during the
48 following three months. Table 2 summarizes key features of each event recorded: starting and
49 ending dates, previous dry inter-event time, duration and rainfall depth.
50
51
52
53
54
55
56
57
58
59
60

3.2 Hydraulic performance

Several variables relating to the hydraulic performance of each SuDS have been deduced for each pilot. For sites 1 and 2, overflows from the basin to the receiving sewer were characterized by the spill volume and peak flow. Hydrographs in the receiving sewer were monitored so that they could be compared with the swale overflows to assess differences between peak flows and their time of occurrence. Finally, runoff volumes and peak flows at site 3 were obtained for both the conventional roof and the green roof. The hydrograph of the receiving sewer to which both downpipes were connected was also monitored. A summary of all these results is shown in Table 3. Results for the green roof 3 were only obtained for event 8 and 9 as the reed switch of the tipping bucket was initially unreliable, although it was possible to collect water quality samples.

Runoff volumes entering the corresponding SuDS were calculated for each site and each event, runoff volumes being deduced from rainfall event depths, tributary areas and averaged runoff coefficients (Table 3). All flow during events 3, 4, 5, 7 and 8 was retained at sites 1 and 2 which both incorporate SuDS with both storage and infiltration capacity. It is concluded that runoff produced by rainfall events of depth up to 23.8 mm are completely retained at both locations. Event 2, with a rainfall depth of 35.4 mm produced overflow at both sites. Without the SuDS, the threshold before runoff occurred would be around 1-2 mm rainfall (corresponding to the paved areas close to 1 and 2). For the green roof, results shown in Table 3 highlight that the runoff threshold in this case is much lower (events 8 and 9 overflowed with 9.4 and 4.6 mm of rainfall respectively), as the storage capacity of this site is very low.

Hydrographs and water levels monitored at 1 and 2 show in detail the hydraulic performance of these SuDS. Figure 4 represents the hydraulic behavior of site 1 during event 2. This event was chosen among the huge amount of data collected and processed during the project, because it highlights properly the conclusions reached. Overflow occurs when the water level upstream exceeds the weir vertex level. Figure 5 shows results for the same event at the Ring Road site. Since the receiving sewer hydrograph was also monitored at this location, the results are more conclusive. It will be observed that each time the swale overflows (twice in event 2), the peak flow of the spill flow occurs later than the sewer peak flow. This highlights the attenuating effect produced by the swale. Spill volumes during event 2 can also be calculated: 54.1 m³ for 1 and 33.4 m³ for 2. The spill volumes were compared with the infrastructure storage volumes (170 m³ and 218 m³ respectively). The result shows that spill volumes were smaller than those detained.

The contributing area infiltration basin 1 (including the swale and the basin) is 13000 m² and its averaged runoff coefficient (ratio between rainfall volume and runoff volume finally produced, related to soil type and land use) 0.76; the side roadway and the swale area that contribute to 2 runoff is 7000 m² with an averaged runoff coefficient 0.93; the conventional roof is 107 m² while the green roof is 218 m². In both cases in 3, the runoff coefficient must be set to 1 as the tributary area is exactly the same as the roof area.

The volumetric efficiency (VE) was calculated as

1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60

$$VE = [1 - SV/RV] \times 100$$

where SV is the spill volume and RV the runoff volume. VE shows the ratio between the runoff managed by the infrastructure (either detained or infiltrated or both) and the total runoff produced by the contributing area. Thus, a VE of 80% means that only 20% of the event runoff volume produced overflow. The results are summarized in Table 4 where the efficiencies obtained are always greater than 63% for 1 and 2. For events 3, 4, 5, 7, 8 and 9, the overall runoff was managed by the infrastructure giving efficiencies of 100%.

The efficiency for the first result for the green roof (event 8) was poor (52%). This result is directly related to the start-up conditions with vegetation still not well developed, causing the retention capacity of the green roof not to be fully available. Moreover, the substrate was saturated as there had been two events following the long event of mid-November (event 6). The volumetric efficiency for the green roof increased to 73% for the last recorded episode (event 9). The main reason for this significant increase may be the preceding dry period of one month which was conducive to vegetation grow and soil drying. The performance of the green and conventional roofs was only measurable for events 8 and 9 due to the unreliability of some of the equipment. For event 8, the overflow volume for the conventional roof was 5.33 mm while for the green roof only 4.50 mm overflowed (16% less). For event 9, the figures were 3.18 mm and 1.24 respectively (61% less). These results show that the hydraulic performance of a green roof can increase significantly with a longer inter-event time.

3.3 Runoff water quality and SuDS response

There were two different inputs to the grass swale-infiltration basin system at the Sports City (1): one from the Sports City itself (11) and the other from the adjacent roadway (12) resulting in different rates and qualities of runoff (Figure 6). In most cases observed to date, 12 is the more contaminated of the two runoff inlets, as explained below.

Water quality samples from a total of five storm events were analysed (Table 2). Three events stand out as being very intense (events 1, 2 and 6), the most intense being the first, giving rise to extreme concentrations of TSS ($3083 \text{ mg}\cdot\text{L}^{-1}$) and COD ($1600 \text{ mg}\cdot\text{L}^{-1}$) in the wash off of the adjacent roadway (12). These concentrations were very high compared with typical wastewater and are related to the storm intensity and the long antecedent dry period. In this regard, Sansalone et al. [21] showed that annual loads of TSS and COD transported in stormwater runoff from interstate and arterial roadways were approximately equivalent to that from untreated domestic wastewater generated by the population in the same urban area. Sansalone et al. [22] measured high concentrations of suspended solids in runoff from small impervious watersheds, even higher than that measured here. In the subsequent events, input concentrations were noticeably lower, indicating that sediment on the roadway had already been washed off. The values monitored for the later events are compared with values reported for highways runoff by other authors [17]. Relationships BOD_5/COD were relatively low for every sampling point with mean values of 0.15, 0.09 and 0.16 for 11, 12 and 13 respectively, indicating the low biodegradability of organic matter present in the runoff. In site 1, the average proportion of VSS to TSS was about 15% showing that the major fraction of solids was inorganic.

1
2
3 In the two first storm events, the grass swale in site 1 had a small treatment effect, the output
4 sample producing higher TSS concentration than the inputs. This finding can be explained by
5 the extreme intensity of these events which produced soil erosion in the areas surrounding the
6 grass swale and the limited establishment of the vegetation at start-up. In the subsequent
7 events, which were less intense, the output concentrations were lower than inputs. In the last,
8 much smaller, event 9, the swale retained the overall pollution load because the spill volume
9 was zero (Table 3).
10
11

12 At the North Ring Road swale (site 2) the runoff from sampling point 2 produced generally
13 higher concentrations of pollutants than the second inlet (21) (Figure 7). A similar result was
14 also obtained in pilot zone 1 (Sports City).
15
16

17 As in zone 1, COD and TSS concentrations measured in the roadway inlet (22) in events 1 and 2
18 were very high. The explanation for these results is again related to the intensity of the storm
19 events and the long antecedent dry period for event 1. The influence of these factors has been
20 observed by other authors [17, 18]. In addition, these high loads are also influenced by
21 residues from the construction processes around, recently ended. In the subsequent events,
22 the concentrations of COD and TSS in runoff were much lower.
23
24

25 Data from sampling points 21 and 23 (Figure 7) were scarcer than from 22 principally because
26 the bottles were not filled. This was due to the lower runoff rate to 21 from the residential
27 area. BOD₅ analyses for site 2 produced similar results to site 1 with relatively low BOD₅/COD
28 ratios giving mean values of 0.15, 0.08 and 0.17 for 21, 22 and 23 respectively.
29
30

31 The relationship between turbidity and TSS was similar in both zones 1 and 2, giving a good
32 linear correlation ($r^2 > 0.9$) and similar turbidity/TSS relationships: around 0.6 for inlet points
33 and 0.9 for the output samples. The study of these types of relationship is useful when
34 considering whether turbidity probes might be installed as complementary devices to monitor
35 pollutographs with fewer samples. The correlations obtained to date are promising in this
36 sense. In site 2, the proportion of VSS to TSS was around 13% showing that the major solids
37 fraction is inorganic.
38
39

40 Events, 2, 3 and 6 (Table 2) were monitored for water quality at the school roof (3). Only 3
41 events were monitored as stated in the planning of the water quality campaign for this period.
42 Runoff quality from both conventional and green roofs was poorer than the rain water (Table
43 5). The water from the vegetated roof was highly brown in colour but clear (turbidity lesser
44 than 20 NTU). All the measured concentrations were higher, and specially COD much higher,
45 than those for the conventional roof. The organic fraction was very high but was not easily
46 biodegradable: the relationship between BOD₅ and COD, a good estimator of biodegradation,
47 was only 0.05. The presence of organic matter is related to the substrate characteristics.
48 Nutrient concentrations also increased by a factor of 9 for total nitrogen and 15 for total
49 phosphorus after passing through the vegetated layer. However, in the case of total nitrogen,
50 the increase cannot be assigned exclusively to the soil because the concentration of TN also
51 increased by 4 from the conventional roof. Dry deposition of atmospheric nitrogen due to the
52 proximity to a park with a very high birdlife is likely to be responsible for a significant load of
53 TN. These results are similar to those obtained in other studies [23, 24], where increases of TP
54
55
56
57
58
59
60

1
2
3 concentration were as high as observed here, whereas nitrogen concentrations decreased or,
4 sometimes, increased slightly. The concentrations of suspended solids were also higher than
5 for the rain water.
6

7
8 To date, there have been no significant differences between events because the start-up phase
9 is still ongoing. Additionally, a slow change of concentration over time was observed for event
10 6: after 100 hours from the first sample, the COD, TN, and conductivity halved but TP increased
11 by 70%. Consequently, during the start-up phase, the vegetated roof increased pollutant
12 concentrations, but when vegetation is well established, they should decrease over time as
13 some references suggest [14].
14
15

16 17 18 **4 Conclusions**

19
20 Three SuDS sites have been constructed and monitored for the first time in the Mediterranean
21 part of Spain. Two of the sites are new build swales and an infiltration basin and one is a
22 retrofit green roof on an existing school. The hydrological and water quality results for swales
23 and the basin clearly show significant attenuation of flows, volumes and concentrations.
24 Outflow from the swales only occurred during three out of the nine events monitored and the
25 spill events included an event with a maximum rainfall intensity of 45 mm in a two hour
26 period. Extremely high pollutant concentrations (and by inference, loads) were observed
27 during the first rain event after commissioning. The high loads were believed to be due to a
28 combination of residues from the construction process and from the very long antecedent dry
29 period before the first event observed. Moreover, high rain intensities made this situation
30 even worse because of a more powerful wash-off, although these data are believed to be
31 typical of the Mediterranean climate. To date, water quality from the green roof has been
32 worse than from the conventional roof owing to the high organic matter and nutrients in the
33 substrate. However, when the vegetation matures, these results are expected to be better.
34 Finally, the AQUAVAL project is also producing social benefits since local authorities are
35 confident of their results and they are even considering retrofitting more SuDS infrastructure.
36
37
38
39
40
41
42

43 **Acknowledgements**

44
45 The research described in this paper has been carried out under the Life+ programme research
46 project "AQUAVAL Sustainable Urban Water Management Plans, promoting SUDS and
47 considering climate change, in the province of Valencia" (Life08ENV/E/000099), supported by
48 ERDF funding of the European Union.
49

50 *The authors have declared no conflict of interest.*
51
52
53
54
55
56
57
58
59
60

References

- [1] B. Woods-Ballard, R. Kellagher, P. Martin, C. Jefferies, R. Bray and P. Shaffer. The SUDS Manual. CIRIA C697, London. **2007**.
- [2] J. C. Deutsch, M. Revitt, B. Ellis and L. Scholes. Review of the Use of Stormwater BMPs in Europe. *DAYWATER, Report 5.1*. **2003**.
- [3] Directive 2000/60/EC of the European Parliament and of the Council establishing a framework for the Community action in the field of water policy, *Official Journal (OJ L 327)*. **2000**.
- [4] Real Decreto 1290/2012, de 7 de septiembre, por el que se modifica el Reglamento del Dominio Público Hidráulico, aprobado por el Real Decreto 849/1986, de 11 de abril, y el Real Decreto 509/1996, de 15 de marzo, de desarrollo del Real Decreto-ley, de 28 de diciembre, por el que se establecen las normas aplicables al tratamiento de las aguas residuales urbanas. *BOE* nº 227. **2012**.
- [5] European Commission. Guidelines on best practices to limit, mitigate or compensate soil sealing, *SWD(2012) 101 final*. **2012**.
- [6] J. Czemieli Berndtsson. Green Roof Performance towards Management of Runoff Water Quantity and Quality: A Review. *Ecol Eng.* **2010**, 36 (4), 351-360.
- [7] A. P. Davis, J.H. Stagge, , E. Jamil, H. Kim, Hydraulic performance of grass swales for managing highway runoff, *Wat. Res.* **2012**, 46, 6775-6786.
- [8] S. Perales and I. Andrés-Doménech. Los sistemas urbanos de drenaje sostenible: una alternativa a la gestión del agua de lluvia, *Revista Técnica de Medio Ambiente C&M Publicaciones*. **2008**, 124 (Enero – Febrero 2008), p. 92–104.
- [9] A. Casal-Campos, C. Jefferies and S. Perales-Momparler. Selecting SUDS in the Valencian Region of Spain, *Wat. Pract. & Tech.* **2012**, 7 (1). doi:10.2166/wpt.2012.001.
- [10] J. Puertas Agudo, J. Suárez López, J. Anta Álvarez. Gestión de las aguas pluviales: implicaciones en el diseño de los sistemas de saneamiento y drenaje urbano, *Ministerio de Fomento, CEDEX, Centro de Estudios Hidrográficos, Monografías; M-98*. **2008**, ISBN 978-84-7790-475-5.
- [11] J. J. Rodríguez Sánchez, A. Díaz Martínez. Guía técnica de diseño y gestión de balsas y otros dispositivos de retención de contaminantes en carreteras, *Centro de Publicaciones, Ministerio de Fomento, CEDEX, Centro de Estudios de Técnicas Aplicadas. Manuales y recomendaciones; R-18*. **2009**, ISBN 978-84-7790-486-1.
- [12] E. Gomez-Ullate, E. Castillo-Lopez, D. Castro-Fresno and J.R. Bayon, Analysis and Contrast of Different Pervious Pavements for Management of Storm-Water in a Parking Area in Northern Spain, *Water Resources Management*. **2011** , 25 (6), 1525-1535.

- 1
2
3 [13] D. Castro-Fresno, V. C. Andrés-Valeri, L. A. Sañudo-Fontaneda, Rodríguez-Hernandez, J.
4 Sustainable Drainage Practices in Spain, Specially Focused on Pervious Pavements. *Water* 5,
5 **2013** (1), 67-93. <http://www.mdpi.com/2073-4441/5/1/67>.
6
7 [14] D. B. Rowe. Green roofs as a means of pollution abatement. *Environ. Pollut.* **2011**, 159,
8 2100-2110.
9
10 [15] A. Deletic, Modelling of Water and Sediment Transport over Grassed Areas, *J. Hydrol.*
11 **2001**, 248, 168-182.
12
13 [16] J. H. Stagge, A. P. Davis, E. Jamil, H. Kim Performance of grass swales for improving water
14 quality from highway runoff, *Wat. Res.* **2012**, 46, 6731-6742
15
16 [17] L.H. Kim, K. D. Zoh, S. M. Jeong, M. Kayhanian, M. K. Stenstrom, Estimating Pollutant Mass
17 Accumulation on Highways during Dry Periods, *J. Environ. Eng.* **2006**, 132, 985-993.
18
19 [18] I. M. Broodie, P. K. Dunn, Commonality of Rainfall Variables Influencing Suspended Solids
20 Concentrations in Storm Runoff from Three Different Urban Impervious Surfaces, *J. Hydrol.*
21 **2010**, 387, 202-211.
22
23 [19] X. J. Zuo, D. F. Fu, H. Li, R. P. Singh, Distribution Characteristics of Pollutants and Their
24 Mutual Influence in Highway Runoff, *Clean-Soil Air Water*, **2011**, 39 (10), 956-963.
25
26 [20] APHA, Standard methods for the examination of water and wastewater, 17th ed.,
27 American Publish Health Associaton. Washington, DC (USA). **1991**.
28
29 [21] J. J. Sansalone, J. M. Koran, J.A. Smithson, S. G. Buchberger, Physical Characteristics of
30 Urban Roadway Solids Transported during Rain Events, *J. Environ. Eng.* **1998**, 125 (5), 427-440.
31
32 [22] J. J. Sansalone, M. C. Chad, Fisrt Flush Concepts for Suspended and Dissolved Solids in
33 Small Impervious Watersheds, *J. Environ. Eng.* **2004**, 130, 1301-1314.
34
35 [23] J. Czemieli Berndtsson, T. Emilsson, L. Bengtsson, The Influence of Extensive Vegetated
36 Roofs on Runoff Water Quality. *Sci. Tot. Environ.* **2006**, 355, 48-63
37
38 [24] K. Vijayaraghavan, U.M. Joshi, R. Balasubramanian, A field study to evaluate runoff quality
39 from green roofs. *Wat. Res.* **2012**, 46, 1337-1345.
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60

1
2
3 **Figure legends**
4
5
6

7 **Figure 1.** Site 1. Infiltration basin. Photo (left) and monitoring points scheme (right).
8
9

10
11 **Figure 2.** Site 2. Roadside swale. Photo (left) and monitoring points scheme (right).
12
13

14
15 **Figure 3.** Site 3. Green roof. Photo (left) and monitoring points scheme (right).
16
17

18
19 **Figure 4.** Hydraulic performance for site 1 during event 2.
20
21

22
23 **Figure 5.** Hydraulic performance for site 2 during event 2.
24
25

26
27 **Figure 6.** Results of quality variables for monitored rainfall events in Sports City green swale
28 (11: Sports City runoff, 12: roadway runoff, 13: green swale output). Columns indicate all
29 rainfall events. The X-axis is time scaled.
30
31

32
33
34 **Figure 7.** Results of quality variables for monitored rainfall events in the North Ring Road grass
35 swale (21: residential area runoff, 22: roadway runoff, 23: grass swale output). Columns
36 indicate all rainfall events. The X-axis is time scaled.
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60

Table 1. Monitoring of quantity variables.

Zone	1		2		3	
Devices	Double V Notch weir + level sensor	V Notch weir + level sensor	Ultrasonic flow meter	Tipping bucket	Tipping bucket	Ultrasonic flow meter
Monitored variable	Level over the weir	Level over the weir	Level + flow velocity	Tipping pulses	Tipping pulses	Level + flow velocity
Output results	Flow discharge from the infiltration basin	Flow discharge from the roadside swale	Sewer flow	Flow discharge from the existing roof	Flow discharge from the green roof	Sewer flow
Monitoring starting date	27/09/2012	19/09/2012	19/09/2012	18/10/2012	18/10/2012	18/10/2012

Table 2. Key features for rainfall recorded events.

Event	Start date / time	End date / time	Previous dry inter-event time (days)	Event duration (h)	Event rainfall depth (mm)	Water Quality Monitoring		
1	27/09/2012 12:00	30/09/2012 12:00	28.50	72	92.0	1	2	
2	12/10/2012 17:00	13/10/2012 00:00	12.75	7	35.4	1	2	3
3	19/10/2012 21:00	21/10/2012 12:00	6.87	39	23.8	1	2	3
4	25/10/2012 05:00	25/10/2012 19:00	3.71	14	5.4			
5	30/10/2012 13:00	31/10/2012 06:00	4.75	17	5.4			
6	09/11/2012 06:00	15/11/2012 17:00	9.00	155	199.6	1	2	3
7	17/11/2012 21:00	19/11/2012 03:00	2.17	30	8.0			
8	26/11/2012 20:00	27/11/2012 16:00	7.71	20	9.4			
9	25/12/2012 23:00	26/12/2012 06:00	28.29	7	4.6	1	2	

Table 3. Hydraulic variables of each pilot performance for each recorded event.

Site	1		2		2	3		3	3	3
	Spill volume	Spill peak flow	Spill volume	Spill peak flow	Sewer peak flow	Conv. Roof peak flow	Conv. Roof spill volume	Green Roof peak flow	Green Roof spill volume	Sewer peak flow
Event	(m ³)	(l/s)	(m ³)	(l/s)	(l/s)	(l/s)	(m ³)	(l/s)	(m ³)	(l/s)
1	195.66	83.75	114.92	48.53	24.56	-	-	-	-	-
2	54.11	42.36	33.39	8.14	26.19	-	-	-	-	-
3	0	0	0	0	2.41	0.25	2.17	-	-	9.58
4	0	0	0	0	0.82	0.06	0.46	-	-	1.01
5	0	0	0	0	0	0.06	0.32	-	-	0.18
6	433.77	28.78	131.7	9.46	8.21	0.50	18.33	-	-	32.40
7	0	0	17.93	3.90	-	0.08	0.50	-	-	1.95
8	0	0	0	0	0.84	0.08	0.57	0.20	0.98	1.28
9	0	0	0	0	0	0.06	0.34	0.06	0.27	0.55


Table 4. Volumetric efficiencies of each pilot SuDS.

Event	1			2			3			
	Rainfall depth (mm)	Runoff volume (m ³)	Spill volume (m ³)	Volumetric efficiency	Runoff volume (m ³)	Spill volume (m ³)	Volumetric efficiency	Runoff volume (m ³)	Spill volume (m ³)	Volumetric efficiency
1	92.0	909.0	195.7	78%	598.9	114.9	81%	20.1	-	-
2	35.4	349.8	54.1	85%	230.5	33.4	86%	7.7	-	-
3	23.8	235.1	0.0	100%	154.9	0.0	100%	5.2	-	-
4	5.4	53.4	0.0	100%	35.2	0.0	100%	1.2	-	-
5	5.4	53.4	0.0	100%	35.2	0.0	100%	1.2	-	-
6	119.6	1181.6	433.8	63%	778.6	131.7	83%	26.1	-	-
7	8.0	79.0	0.0	100%	52.1	17.9	66%	1.7	-	-
8	9.4	92.9	0.0	100%	61.2	0.0	100%	2.0	1.0	52%
9	4.6	45.4	0.0	100%	29.9	0.0	100%	1.0	0.3	73%

Table 5. Mean and standard deviation of quality variables at (31: green roof, 32: conventional roof, 33: rainfall).

Quality variable	31		32		33	
COD (mg·L ⁻¹)	292	± 54	35	± 12	11	± 5
BOD (mg·L ⁻¹)	16	± 3	10	± 2	5	± 2
TN (mg·L ⁻¹)	7.74	± 1.41	3.08	± 1.26	0.86	± 0.53
TP (mg·L ⁻¹)	1.84	± 0.61	0.10	± 0.03	0.12	± 0.12
TSS (mg·L ⁻¹)	26	± 24	9	± 4	6	± 7
VSS (mg·L ⁻¹)	17	± 22	3	± 3	3	± 3
Turbidity (NTU)	18.3	± 10.5	12.1	± 4.4	3.8	± 3.5
Conductivity (μS·cm ⁻¹)	696	± 131	218	± 19	17	± 5
Temperature (°C)	21.9	± 2.5	22.1	± 2.3	8.6	± 8.4
pH	7.92	± 0.27	7.57	± 0.45	7.01	± 0.79
DO (mg·L ⁻¹)	5.72	± 1.26	8.29	± 0.49	9.81	± 1.56
% Sat DO	66%	± 16%	95%	± 9%	99%	± 2%

1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60

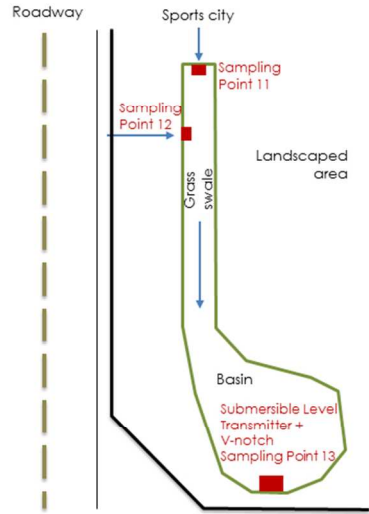


Site 1. Infiltration basin. Photo (left) and monitoring points scheme (right).
254x190mm (96 x 96 DPI)

1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60




Site 2. Roadside swale. Photo (left) and monitoring points scheme (right).
254x190mm (96 x 96 DPI)

1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60

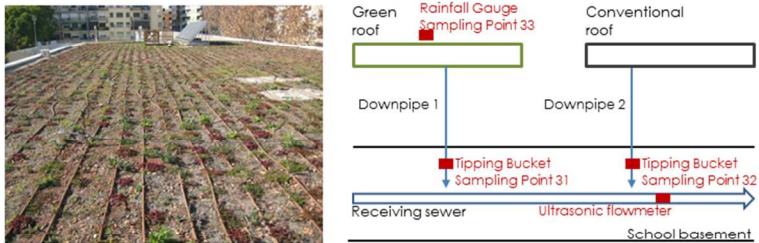


Site 3. Green roof. Photo (left) and monitoring points scheme (right).
254x190mm (96 x 96 DPI)

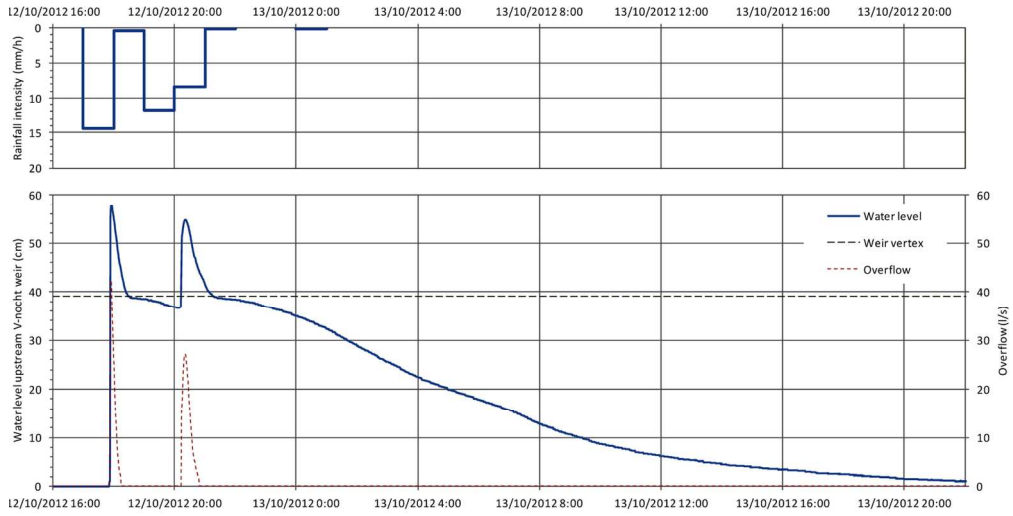

Hydraulic performance for site X1 during event 2.
69x35mm (600 x 600 DPI)


1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60

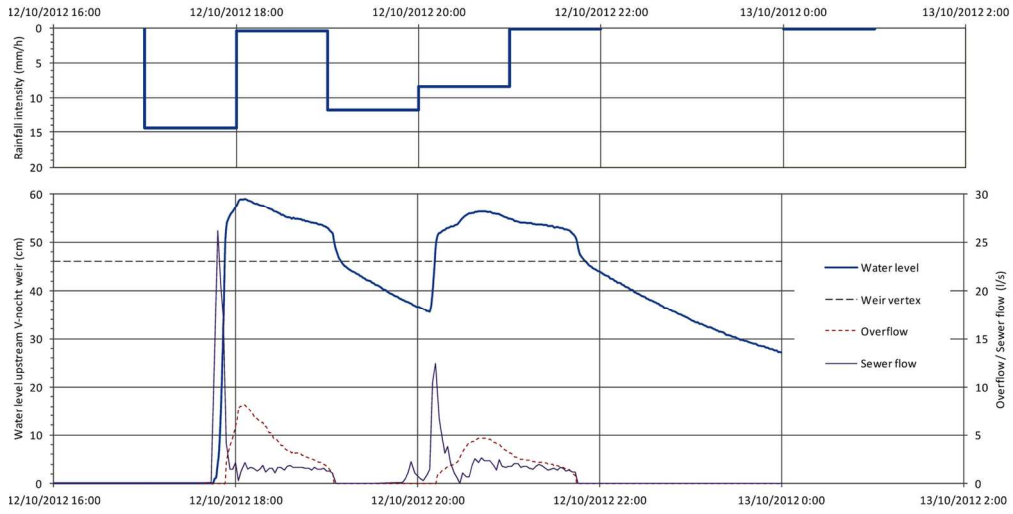

Hydraulic performance for site X1 during event 2.
68x34mm (600 x 600 DPI)


1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60

1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60

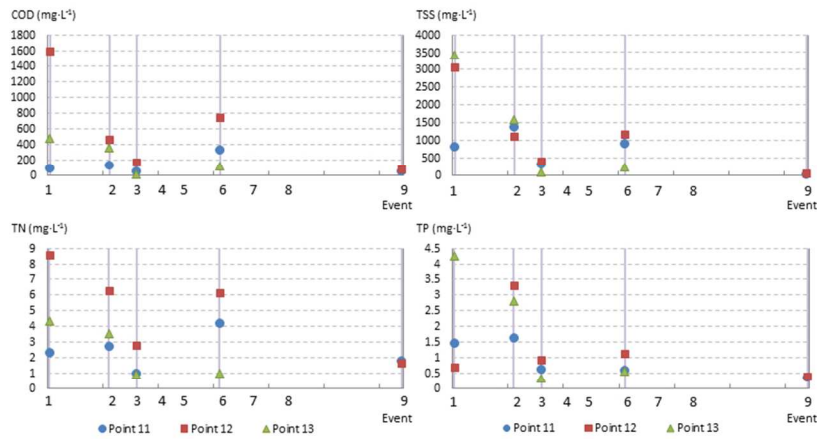

Results of quality variables for monitored rainfall events in Sports City green swale (11: Sports City runoff, 12: roadway runoff, 13: green swale output). Columns indicate all rainfall events. The X-axis is time scaled. 254x190mm (96 x 96 DPI)

1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60

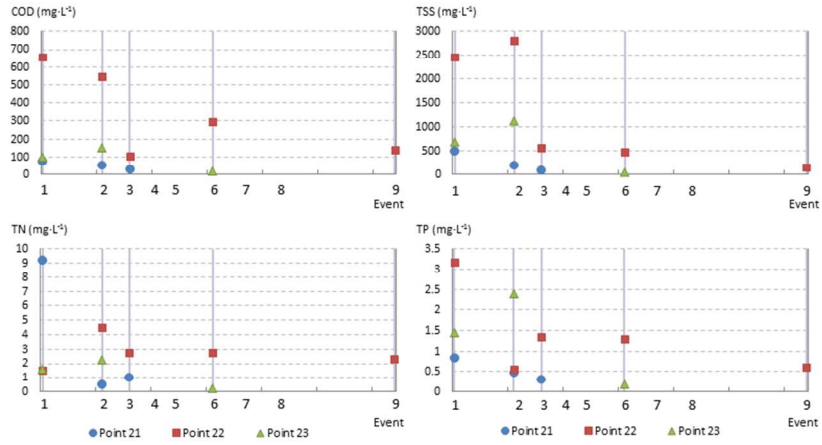

Results of quality variables for monitored rainfall events in the North Ring Road grass swale (21: residential area runoff, 22: roadway runoff, 23: grass swale output). Columns indicate all rainfall events. The X-axis is time scaled.
254x190mm (96 x 96 DPI)