



LUND UNIVERSITY

Observer-Based Strictly Positive Real (SPR) Variable Structure Output Feedback Control

Johansson, Rolf; Robertsson, Anders; Shiriaev, Anton

Published in:

2012 12th International Workshop on Variable Structure Systems (VSS)

DOI:

[10.1109/VSS.2012.6163544](https://doi.org/10.1109/VSS.2012.6163544)

2012

[Link to publication](#)

Citation for published version (APA):

Johansson, R., Robertsson, A., & Shiriaev, A. (2012). Observer-Based Strictly Positive Real (SPR) Variable Structure Output Feedback Control. In *2012 12th International Workshop on Variable Structure Systems (VSS)* (pp. 452-457). IEEE - Institute of Electrical and Electronics Engineers Inc..
<https://doi.org/10.1109/VSS.2012.6163544>

Total number of authors:

3

General rights

Unless other specific re-use rights are stated the following general rights apply:

Copyright and moral rights for the publications made accessible in the public portal are retained by the authors and/or other copyright owners and it is a condition of accessing publications that users recognise and abide by the legal requirements associated with these rights.

- Users may download and print one copy of any publication from the public portal for the purpose of private study or research.
- You may not further distribute the material or use it for any profit-making activity or commercial gain
- You may freely distribute the URL identifying the publication in the public portal

Read more about Creative commons licenses: <https://creativecommons.org/licenses/>

Take down policy

If you believe that this document breaches copyright please contact us providing details, and we will remove access to the work immediately and investigate your claim.

LUND UNIVERSITY

PO Box 117
221 00 Lund
+46 46-222 00 00

Observer-Based Strictly Positive Real (SPR) Variable Structure Output Feedback Control

Rolf Johansson¹ Anders Robertsson¹ Anton Shiriaev²

¹Department of Automatic Control, Lund University

P. O. Box 118, SE-221 00 Lund, Sweden

E-mail Rolf.Johansson@control.lth.se, Anders.Robertsson@control.lth.se

²Dept. Engineering Cybernetics, NTNU, NO-7491 Trondheim, Norway

E-mail Anton.Shiriaev@itk.ntnu.no

Abstract: This paper considers switching output feedback control of linear systems and variable-structure systems. Theory for stability analysis and design for a class of observer-based feedback control systems is presented. A circle-criterion approach can be used to design an observer-based state feedback control which yields a closed-loop system with specified robustness characteristics. The approach is relevant for variable structure system design with preservation of stability when switching feedback control or sliding mode control is introduced in the feedback loop. It is shown that there exists a Lyapunov function valid over the total operating range and this Lyapunov function has also interpretation as a storage function of passivity-based control. The Lyapunov function can be found by solving a Lyapunov equation, which also generates variable structure switching surfaces. Important applications are to be found in variable structure systems with high robustness requirements.

INTRODUCTION

For switching output feedback control in variable structure systems [1], [2], the high-gain feedback implies a challenge to stability and a variety of techniques have been considered—*e.g.*, high-gain observers [3], [4], state observer [2], [5], or other dynamic feedback [6], [7], [8], [9]. Some research on static output feedback control with geometric conditions on sliding mode and control design were presented by Žak and Hui [11], Yan and Dai [12] and Edwards *et al.* [13], [14]. Dynamic output feedback was employed in the contribution of Kwan *et al.* [15], Yan *et al.* [16] who also pointed out limitations with the static feedback approaches.

Outside the field of variable-structure systems, the qualitative analysis of transfer-function properties and its relationship to stability analysis has a long history back to [17]. As for the absolute stability problem of nonlinear feedback systems, the starting

point is the Lur'e problem described by [17], [18], [19], [20], [21], [22]. Kalman demonstrated that linear-quadratic regulators satisfy a certain frequency domain inequality with a certain degree of robustness [20]. Molander and Willems introduced a synthesis of state feedback control laws with a specified gain and phase margin [23], later extended to dynamic output feedback [24], [25]. In the context of hybrid control, a related result was presented [26].

From a stability point of view, there are important differences among static output feedback and dynamic output feedback. A non-trivial problem in variable structure system is to apply the inherently high-gain feedback to systems without access to full state measurement. A drawback of solutions based on state estimation is that the separation principle is not longer true for nonlinear systems [27]. Variable structure systems using sliding-mode control are prone to stability problems related to the usage of high-gain feedback and limitations of strictly positive realness. A theoretical challenge is to single out classes of systems for which the separation principle holds—*i.e.*, where substitution of state feedback by feedback of estimated states can be done without impending instability [27]. This paper deals with application and extension of such observer-based control to variable structure systems with high-gain feedback.

Problem Formulation

Consider a linear time-invariant finite-dimensional system and a time-variant nonlinear feedback

$$\dot{x} = Ax + Bu, \quad x \in \mathbb{R}^n, \quad u \in \mathbb{R}^m \quad (1)$$

$$z = Sx, \quad u = -\psi(z, t), \quad z \in \mathbb{R}^m \quad (2)$$

with (A, B) controllable. These authors showed that the closed-loop system is stable for certain combinations of the matrix S and a condition of a cone-bounded function $\psi(\cdot, \cdot)$. Kokotović and Sussman [28] introduced the notion of feedback positive real (FPR) transfer functions with properties similar to those of Molander and Willems [23] with a global stabilizability condition formulated for (A, B) controllable

The work was partly supported by the Swedish Research Council under the grant No. VR 2009-3178.

It is sufficient to make the matrix W positive definite so that stability can be guaranteed by making the derivative dV/dt negative definite—*i.e.*,

$$\frac{dV}{dt} = - \begin{bmatrix} x \\ \psi(\sigma, t) \end{bmatrix}^T W \begin{bmatrix} x \\ \psi(\sigma, t) \end{bmatrix} < 0, \quad \|x\| \neq 0 \quad (14)$$

The circle criterion assures an asymptotically stable solution for the time-varying case under the assumption that $\psi(\cdot, t)$ belongs to the cone $[0, \infty)$ and that $\inf_{\omega} \operatorname{Re} G(j\omega) > 0$. As guaranteed by the Yakubovich-Kalman-Popov (YKP) lemma, the existence of $W > 0$ leading to the stability condition $\dot{V} \leq 0$ holds under the fairly restrictive strictly positive real (SPR) [18], [19], [20]. Then, the system will be asymptotically stable and \mathcal{L}_2 -stable as

$$0 \leq \int_0^T \epsilon x^T P x \leq \int_0^T -\dot{V}(x, t) dt \quad (15)$$

$$= V(x(0), 0) - V(x(T), T) \quad (16)$$

When SPR (relative degree) and measurement conditions of some output $y = Cx$ prevent realization of $u = -Sx$, approximate control can be made with $u = -S\hat{x}$ for some state estimate \hat{x} . As $\hat{x} \neq x$, it is necessary to investigate whether some degradation in performance and stability may occur. To that purpose, introduce a full-order observer for the state vector x so that

$$\frac{d\hat{x}}{dt} = A\hat{x} + Bu + K(y - C\hat{x}) \quad (17)$$

where $K \in \mathbb{R}^{n \times m}$ is an observer-gain matrix that multiplies the estimation error. By substitution of actual, unmeasured states x by estimated states \hat{x} in the feedback, the system dynamics will be

$$\frac{d}{dt} \begin{bmatrix} x \\ \hat{x} \end{bmatrix} = \begin{bmatrix} A & 0 \\ KC & A - KC \end{bmatrix} \begin{bmatrix} x \\ \hat{x} \end{bmatrix} + \begin{bmatrix} B \\ B \end{bmatrix} u \quad (18)$$

$$y = Cx, \quad \hat{\sigma} = S\hat{x}, \quad (19)$$

$$u = -\psi(\hat{\sigma}, t) = -\psi(S\hat{x}, t) \quad (20)$$

As the augmented system of control object and observer of Eqs. (18-20) will not be controllable—*i.e.*, the estimation error $\tilde{x} = \hat{x} - x$ will not be controllable from u . Thus, attempts of application of the Molander-Willems result to the observer-supported system (18-20) will fail due to violation of the controllability condition.

We will show that there exist Lyapunov functions that assure asymptotic stability for the closed-loop system of Eqs. (18-20).

Lyapunov Design for Nonlinear Observer Feedback

To the purpose of stability analysis, equip the state-space system with a new output z formed by means of a full-order observer.

Proposition 1 (Dynamic Feedback Circle Theorem):
For a nonlinear function $\psi(\cdot, \cdot)$ fulfilling the sector

condition $\psi^T(\sigma, t)(\psi(\sigma, t) - \kappa\sigma) \leq 0$, $\kappa > 0$ and a linear time-invariant system $\dot{x} = Ax + Bu, y = Cx$ such that (A, B) is controllable and (A, C) is observable, there exist a full-order observer with observer gain K and an observer state feedback $\hat{\sigma} = S\hat{x}$ with gain S such that the closed-loop system

$$\frac{d}{dt} \begin{bmatrix} x \\ \hat{x} \end{bmatrix} = \begin{bmatrix} A & 0 \\ KC & A - KC \end{bmatrix} \begin{bmatrix} x \\ \hat{x} \end{bmatrix} + \begin{bmatrix} B \\ B \end{bmatrix} u \quad (21)$$

$$y = Cx, \quad \hat{\sigma} = S\hat{x}, \quad (22)$$

$$u = -\psi(\hat{\sigma}, t) = -\psi(S\hat{x}, t) \quad (23)$$

is asymptotically stable. For this system, there exist matrices $P = P^T > 0$, $Q = Q^T > 0$ and a Lyapunov function

$$V(\xi) = \xi^T P_0 \xi, \quad \xi = \begin{bmatrix} x \\ \hat{x} - x \end{bmatrix} \quad (24)$$

$$\frac{dV}{dt} = - \begin{bmatrix} \xi \\ S\hat{x} - \psi(\hat{\sigma}, t) \end{bmatrix}^T Q_0 \begin{bmatrix} \xi \\ S\hat{x} - \psi(\hat{\sigma}, t) \end{bmatrix} < 0, \quad \|x\| \neq 0 \quad (25)$$

Proof: —See [25]

Recently, it was shown that for $Q_0 > 0$ there exist solution $P_0 > 0$ and a constructive procedure was provided [25]. Actually, a solution satisfying the Yakubovich-Kalman-Popov may be obtained [31]. If P is a solution to the Molander-Willems equation and P_K is a weighting matrix for the Lyapunov function of the observer error dynamics $\dot{\tilde{x}} = (A - KC)\tilde{x}$, then P_0 may be composed as

$$P_0 = \begin{bmatrix} P & P \\ P & \mu P_K \end{bmatrix}, \quad (26)$$

$$Q_0 = \begin{bmatrix} Q + S^T R S & Q + P K C + S^T R S \\ Q + C^T K^T P + S^T R S & \mu Q_K \end{bmatrix}$$

for $\mu > 0$ and sufficiently large in magnitude where

$$-Q_K = P_K(A - KC) + (A - KC)^T P_K \quad (27)$$

Moreover, P_0 satisfies Eq. (5) with the Yakubovich-Kalman-Popov equations

$$P_0 A_0 + A_0^T P_0 = -Q_0, \quad P_0 B_0 = C_0^T \quad (28)$$

for the system matrices

$$A_0 = \begin{bmatrix} A - BS & -BS \\ 0 & A - KC \end{bmatrix}, \quad B_0 = \begin{bmatrix} B \\ 0 \end{bmatrix} \quad (29)$$

$$C_0 = \begin{bmatrix} C & C \end{bmatrix} \quad (30)$$

Note that there exist solutions $P_0 > 0$ also for (A_0, B_0) not controllable. Thus, assume

$$V(\xi) = \xi^T P_0 \xi \quad (31)$$

$$\frac{dV}{dt} = \frac{\partial V}{\partial \xi} \dot{\xi} = 2\xi^T P_0 (A_0 \xi + B_0 u) \quad (32)$$

$$u = -R^{-1} \operatorname{sgn} \left(\frac{\partial V}{\partial \xi} \right) = -R^{-1} \operatorname{sgn}(\hat{\sigma}) \quad (33)$$

$$\hat{\sigma} = S\hat{x} = B^T P \hat{x} \quad (34)$$

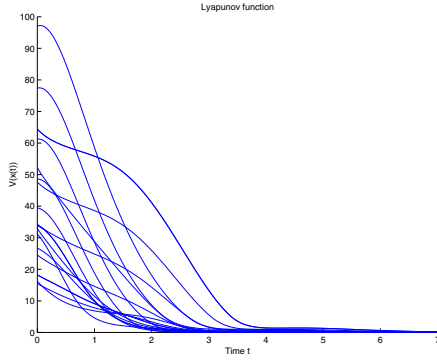


Fig. 3. Lyapunov function trajectories from switching output feedback control of double integrator dynamics.

for P solving the Riccati equation

$$PA + A^T P + Q - PBR^{-1}B^T P = 0 \quad (35)$$

The closed-loop system will satisfy

$$\frac{dV}{dt} = 2\xi^T P_0(A_0\xi + B_0u) \quad (36)$$

$$= \xi^T (P_0A_0 + A_0P_0)\xi^T \quad (37)$$

$$- 2\xi^T P_0B_0R^{-1}\text{sgn}(B_0^T P_0\xi) \quad (38)$$

which permits asymptotically stable switching output feedback control.

EXAMPLE 1

Consider observer-based feedback control of a system with the double integrator dynamics

$$\dot{x} = \begin{bmatrix} 0 & 0 \\ 1 & 0 \end{bmatrix} x + \begin{bmatrix} 1 \\ 0 \end{bmatrix} u \quad (39)$$

$$\dot{\hat{x}} = \begin{bmatrix} 0 & 0 \\ 1 & 0 \end{bmatrix} \hat{x} + \begin{bmatrix} 1 \\ 0 \end{bmatrix} u + K(y - C\hat{x}), \quad K = \begin{bmatrix} 1 \\ 1 \end{bmatrix} \quad (40)$$

$$y = Cx = \begin{bmatrix} 0 & 2 \end{bmatrix} x \quad (41)$$

$$u = -\text{sgn}(S\hat{x}), \quad S = \begin{bmatrix} 1.7321 & 1.000 \end{bmatrix} \quad (42)$$

where $S = B^T P$ has been calculated based on the weighting matrices

$$Q = Q_K = I_2, \quad R = 1, \quad \mu = 100 \quad (43)$$

$$P = \begin{bmatrix} 1.732 & 1.000 \\ 1.000 & 1.732 \end{bmatrix}, \quad P_K = \begin{bmatrix} 0.875 & -0.500 \\ -0.500 & 0.750 \end{bmatrix}$$

$$P_0 = \begin{bmatrix} 1.732 & 1.000 & 1.732 & 1.000 \\ 1.000 & 1.732 & 1.000 & 1.732 \\ 1.732 & 1.000 & 87.5 & -50.0 \\ 1.000 & 1.732 & -50.0 & 75.0 \end{bmatrix} \quad (44)$$

$$Q_0 = \begin{bmatrix} 4.000 & 1.732 & 4.000 & 7.196 \\ 1.732 & 2.000 & 1.732 & 7.464 \\ 4.000 & 1.732 & 106.00 & 3.464 \\ 7.196 & 7.464 & 3.464 & 102.0 \end{bmatrix} \quad (45)$$

$$V(\xi) = \xi^T P \xi \quad (46)$$

$$P_0 B_0 = \begin{bmatrix} S^T \\ S^T \end{bmatrix}, \quad P_0 A_0 + A_0^T P_0 = -Q_0, \quad (47)$$

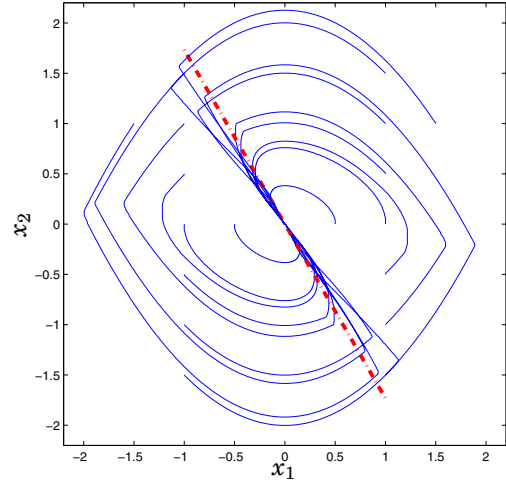


Fig. 4. Phase portrait of states x_1 and x_2 in Example 1 under closed-loop control using state estimation. The switching surface $\sigma = Sx$ is indicated (dash-dot red). As the state-space dimension is greater than two, the trajectories may exhibit intersections.

Figures 3-5 demonstrate the asymptotic stability achieved for observer-supported high-gain feedback.

DISSIPATIVITY AND PASSIVITY

Following [32] and [33], a dynamical system is said to be dissipative if there exists a nonnegative function $V : \mathbb{R}^n \rightarrow \mathbb{R}^+$, called a storage function such that for all $t_0, t_1, x \in \mathbb{R}^n$ and $u \in \mathbb{U}, y \in \mathbb{Y}, t_1 \geq t_0$ satisfying the inequality

$$V(x(t_0)) + \int_{t_0}^{t_1} w(u, y) dt \geq V(x(t_1)) \quad (48)$$

where $w(u, y)$ is a real-valued function called the supply rate—*i.e.*, $w : \mathbb{U} \times \mathbb{Y} \rightarrow \mathbb{R}$. Strict dissipativity holds if the inequality (48) is a strict inequality. For $V(x) = x^T P x$, $P = P^T > 0$ and

$$w(u, z) = \begin{bmatrix} z \\ u \end{bmatrix}^T \begin{bmatrix} Q_{11} & Q_{12} \\ Q_{12}^T & Q_{22} \end{bmatrix} \begin{bmatrix} z \\ u \end{bmatrix} \quad (49)$$

with derivative

$$\frac{dV(x)}{dt} = \begin{bmatrix} x \\ u \end{bmatrix}^T \begin{bmatrix} PA + A^T P & PB \\ B^T P & 0 \end{bmatrix} \begin{bmatrix} x \\ u \end{bmatrix} \quad (50)$$

the system is dissipative with respect to the supply rate $w(u, z)$ if

$$\frac{dV}{dt} \leq -w(u, z) = - \begin{bmatrix} z \\ u \end{bmatrix}^T \begin{bmatrix} Q_{11} & Q_{12} \\ Q_{12}^T & Q_{22} \end{bmatrix} \begin{bmatrix} z \\ u \end{bmatrix}$$

$$\int_{t_0}^{t_1} w(u, z) dt \geq V(x(t_1)) - V(x(t_0)) \quad (51)$$

Moreover, the system is said to be passive if there is storage function V and coefficients $\epsilon \geq 0, \delta \geq 0, \rho \geq 0$ and supply rate $w = u^T z$ satisfying

$$u^T z \geq \frac{\partial V}{\partial x} \frac{dx}{dt} + \epsilon u^T u + \delta z^T z + \rho x^T x, \quad (52)$$

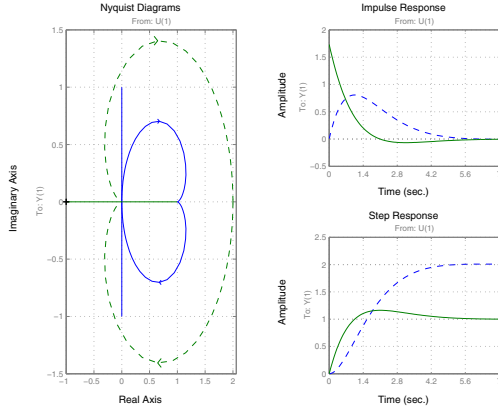


Fig. 5. Nyquist diagram of Example 1 depicting $G_0(s) = C(sI - (A - BS))^{-1}B$ (dashed line) and loop transfer function $H_0(s) = S(sI - (A - BS))^{-1}B$ (solid line) of observer-based feedback with SPR property.

The system is input strictly passive if $\epsilon > 0$, output strictly passive if $\delta > 0$ and state strictly passive if $\rho > 0$. For $V(x) = x^T P x$ and the system

$$\frac{d}{dt} \begin{bmatrix} x \\ \hat{x} \end{bmatrix} = \begin{bmatrix} A & 0 \\ KC & A - KC \end{bmatrix} \begin{bmatrix} x \\ \hat{x} \end{bmatrix} + \begin{bmatrix} B \\ B \end{bmatrix} u \quad (53)$$

$$y = Cx, \quad \hat{\sigma} = S\hat{x}, \quad u = -\psi(\hat{\sigma}, t) \quad (54)$$

we have for the input-output map from u to σ that

$$\begin{aligned} 2u^T \hat{\sigma} - \frac{\partial V}{\partial x} \frac{dx}{dt} &= - \begin{bmatrix} x \\ u \end{bmatrix}^T [\mathcal{P}\mathcal{A} + \mathcal{A}^T \mathcal{P}] \begin{bmatrix} x \\ u \end{bmatrix} \quad (55) \\ &= \begin{bmatrix} x \\ u \end{bmatrix}^T Q \begin{bmatrix} x \\ u \end{bmatrix} \geq 0 \text{ for } Q > 0 \end{aligned}$$

and

$$\int_{t_0}^{t_1} 2u^T z dt = \int_{t_0}^{t_1} \dot{V}(x(t)) dt + \int_{t_0}^{t_1} \begin{bmatrix} x \\ u \end{bmatrix}^T Q \begin{bmatrix} x \\ u \end{bmatrix} dt$$

Thus, the dissipative properties of the observer-based systems appear to be formally similar to those of state-feedback control.

DISCUSSION

Doyle and Stein [34] have pointed out the brittle robustness of a state-feedback control design modified by replacement of state feedback by observer feedback. Here, the stability and robustness results have been extended to class of variable structure control based on state estimation. The algorithmic approach is a sequential design of weighting matrices for Lyapunov functions for the SPR/FPR feedback control and for the observer design. The stability analysis and Lyapunov designs apply with or without the Lur'e term added as required in the Popov criterion and the circle criterion, respectively. Moreover, the nominal pole assignment for control and for observer dynamics can be made independently—a property similar to that of the separation principle.

The approach to modification of the relative-degree and SPR properties is related to the ‘parallel feedforward’ as proposed in the context of adaptive control [35]. Another related idea is passification by means of shunting introduced by Fradkov [36]. All these approaches represent derivation of a loop-transfer function with SPR properties for a control object without SPR properties by means of dynamic extensions or observers. Arcak and Kokotović made observer design for systems with monotone sector nonlinearities in the unmeasured states [37]. Interconnection of a multivariable sector nonlinearity and a linear system was made so that observer matrices could be calculated to satisfy the circle criterion. Subsequent control design was made by backstepping design.

Apart from its relevance to observer-based feedback control, we expect that the method will have application to hybrid systems with switching feedback control and to high-gain feedback systems controlled by logic-based switching devices. The circle criterion design provides implicit choices of switching surfaces

$$\hat{\sigma}(\hat{x}) = S\hat{x} \quad (56)$$

In many cases, by ‘inverse optimality’ it is also possible to choose other switching surfaces corresponding to the solution of some Riccati equation provided that the SPR condition be satisfied in the transfer function from u to $S\hat{x}$ (though without SPR requirement on the transfer function from u to y). An example is given in Fig. 6 where observer-based VSS control trajectories are shown for a switching surface $\hat{\sigma}(\hat{x}) = S\hat{x}$.

CONCLUSIONS

In this paper, some results on asymptotic stability of variable structure systems using dynamic output feedback and state estimation were established. The results extend previous results on dynamic output feedback for variable structure systems [6], [4], [7], [8], [15], [9], [16], [13]. Moreover, separation-like properties hold. The stability and robustness results of [23], [25] and [28] have been extended to a case with observer-based feedback control with resulting non-minimal loop transfer functions. A design procedure to find full-state observers and Lyapunov functions is provided. A new feature for switching output feedback is that one Lyapunov function serves for stability analysis for all switching modes.

REFERENCES

- [1] V. I. Utkin, *Sliding Modes in Control and Optimization*. Springer-Verlag, 1992.
- [2] S. V. Emelyanov, A. K. Korovin, A. L. Nersisian, and Y. E. Nisezon, “Output feedback stabilization of uncertain plants—A variable structure systems approach,” *Int. J. Control*, vol. 55, pp. 61–68, 1992.
- [3] A. G. Bondarev, S. A. Bondareva, N. E. Kostyleva, and V. I. Utkin, “Sliding modes in systems with asymptotic state observers,” *Automation and Remote Control*, vol. 46, pp. 679–684, 1985.

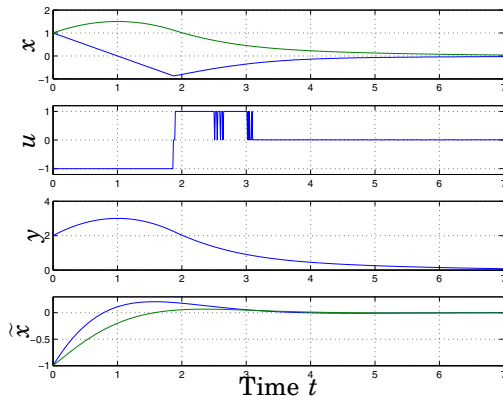


Fig. 6. VSS control trajectories of a double integrator using an observer-based switching surface $\sigma(\hat{x}) = S\hat{x}$. State trajectories x , input u , output y and state-estimation errors $\tilde{x} = \hat{x} - x$ vs. time.

- [4] S. Oh and H. K. Khalil, "Output feedback stabilization using variable structure control," in *Proc. IEEE Conf. Decision and Control (CDC92)*, 1992, pp. 401–406.
- [5] S. V. Emelyanov and A. K. Korovin, "Theory of nonlinear feedback under uncertainty," *Computers Math. Applic.*, vol. 34, no. 2-4, pp. 273–323, 1997.
- [6] B. M. Diong and J. V. Medanic, "Dynamic output feedback variable structure control for system stabilization," *Int. J. Control*, vol. 56, no. 3, pp. 607–630, 1992.
- [7] C. Edwards and S. K. Spurgeon, "Sliding mode stabilization of uncertain systems using only output information," *Int. J. Control*, vol. 62, pp. 1129–1144, 1995.
- [8] Y. A. Jiang, T. Hesketh, and D. J. Clements, "Output feedback sliding-mode control of linear systems," in *Proc. Am. Control. Conf. (ACC97)*, Albuquerque, NM, 1997, pp. 2145–2149.
- [9] K. Nonaka, "Youla parametrization of output feedback sliding mode controller: Internal stability and disturbance rejection," in *Proc. IEEE Conf. Decision and Control (CDC99)*, San Diego, CA, 1999, pp. 535–539.
- [10] B. R. Andrievsky, A. L. Fradkov, and A. A. Stotsky, "Shunt compensation for indirect sliding-mode adaptive control," in *Proc. IFAC World Congress*, San Francisco, CA, 1996, pp. 193–198.
- [11] S. H. Žak and S. Hui, "Output feedback variable structure controllers and state estimators for uncertain/Nonlinear dynamic systems," *IEE Proc. Part D: Control Theory Appl.*, vol. 149, pp. 41–50, 1993.
- [12] X. G. Yan and G. Z. Dai, "Decentralized output feedback controllers for mismatched uncertain variable structure systems," *Automatica*, vol. 34, pp. 1469–1472, 1998.
- [13] C. Edwards and S. K. Spurgeon, "Sliding-mode output feedback controller," *IEEE Trans. Automatic Control*, vol. 46, pp. 115–119, 2001.
- [14] X.-G. Yan, S. K. Spurgeon, and C. Edwards, "Robust static output feedback variable structure control for nonlinear systems," *IMA J. Mathematical Control and Information*, vol. 22, pp. 321–333, 2005.
- [15] C. M. Kwan, "On variable structure output feedback controllers," *IEEE Trans. Automatic Control*, vol. 41, pp. 1691–1693, 1996.
- [16] X. G. Yan, J. Lam, H. S. Li, and I. M. Chen, "Decentralized control of nonlinear large-scale systems using dynamic output feedback," *J. Optim. Theory Appl.*, vol. 104, pp. 459–475, 2000.
- [17] A. I. Lur'e and V. N. Postnikov, "К Теории Устойчивости Регулируемых Систем (On the theory of stability of regulation system)," *Prikladnaya Matematika i Mekhanika*, vol. VIII, pp. 246–248, 1944.
- [18] V. M. Popov, "Absolute stability of nonlinear systems of automatic control," *Avtomatika i Telemekhanika*, vol. 22, no. 8, 1961.
- [19] V. A. Yakubovich, "Решение Некоторых Матричных Неравенств Встречающихся в Теории Автоматического Регулирования (Solution of certain matrix inequalities occurring in the theory of automatic control)," *Doklady Akademii Nauk SSSR*, vol. 143, no. 6, pp. 1304–1307, 1962.
- [20] R. E. Kalman, "Lyapunov functions for the problem of Lur'e in automatic control," *Proc. Nat. Acad. Sci.*, vol. 49, no. 2, 1963.
- [21] A. K. Gelig, G. A. Leonov, and V. A. Yakubovich, Устойчивость Нелинейных Систем с Неединственным Состоянием Равновесия (*Stability of Nonlinear Systems with Non-Unique State of Equilibrium*). Moscow: Moskva Nauka, 1978.
- [22] H. K. Khalil, *Nonlinear Systems (2nd. ed.)*. Upper Saddle River, NJ: Prentice Hall, 1996.
- [23] P. Molander and J. C. Willems, "Synthesis of state feedback control laws with a specified gain and phase margin," *IEEE Trans. Automatic Control*, vol. AC-25, no. 5, pp. 928–931, 1980.
- [24] R. Johansson and A. Robertsson, "Extension of the Yakubovich-Kalman-Popov lemma for stability analysis of dynamic output feedback systems," in *IFAC World Congress (IFAC'99)*, vol. F, Beijing, July 1999, pp. 393–398.
- [25] —, "Observer-based strict positive real (SPR) feedback control system design," *Automatica*, vol. 38, pp. 1557–1564, 2002.
- [26] R. Johansson, A. Robertsson, and A. Shiriaev, "Observer-based strict positive real (SPR) switching output feedback control," in *Proc. 43rd IEEE Conf. Decision and Control*, Atlantis, Bahamas, Dec. 14-17, 2004 2004, pp. 2811–2816.
- [27] A. Shiriaev, R. Johansson, A. Robertsson, and L. Freidovich, "Separation principle for a class of nonlinear feedback systems augmented with observers," in *Proc. 17th IFAC2008 World Congress*, Seoul, Korea, July 6-11 2008, pp. 6196–6201.
- [28] P. V. Kokotović and H. J. Sussman, "A positive real condition for global stabilization of nonlinear systems," *Systems and Control Letters*, vol. 13, pp. 125–133, 1989.
- [29] J. Collado, R. Lozano, and R. Johansson, "On the Kalman-Yakubovich-Popov lemma for stabilizable systems," *IEEE Trans. Automatic Control*, vol. 46, no. 7, pp. 1089–1093, 2001.
- [30] —, "Using an observer to transform linear systems into strictly positive real systems," *IEEE Trans. Automatic Control*, vol. 52, no. 6, pp. 1082–1088, 2007.
- [31] —, "Strictly positive real problem with observers," in *Proc. Eur. Control Conf. 2003 (ECC03)*, Cambridge, UK, Sept. 1-4 2003.
- [32] J. C. Willems, "Dissipative dynamical systems, Part I: General theory; Part II: Linear systems with quadratic supply rate," *Arch. Rat. Mech. An.*, vol. 45, pp. 321–351, 352–393, 1972.
- [33] D. J. Hill and P. J. Moylan, "Stability results for nonlinear feedback systems," *Automatica*, vol. 13, pp. 377–382, 1977.
- [34] J. Doyle and G. Stein, "Robustness with observers," *IEEE Trans. Automatic Control*, vol. 24, no. 4, pp. 607–611, 1979.
- [35] I. Bar-Kana, "Parallel feedforward and simplified adaptive control," *Int. J. Adaptive Control and Signal Processing*, vol. 1, pp. 95–109, 1987.
- [36] A. Fradkov, "Nonlinear feedback control: Regulation, tracking, oscillations," in *1st IFAC Workshop on New Trends in Control Systems Design*, Smolenice, 1994, pp. 426–431.
- [37] M. Arcak and P. V. Kokotović, "Observer-based stabilization of systems with monotonic nonlinearities," *Asian J. Control*, vol. 1, pp. 42–48, 1999.
- [38] A. N. Atassi and H. K. Khalil, "A separation principle for the stabilization of a class of nonlinear systems," *IEEE Trans. Automatic Control*, vol. 44, pp. 1672–1687, 1999.
- [39] K. R. Meyer, "On the existence of Lyapunov functions for the problem of Lur'e," *SIAM J. Control*, vol. 3, no. 3, 1966.
- [40] G. Zames, "On the input-output stability of time-varying nonlinear feedback systems," *IEEE Trans. Automatic Control*, vol. AC-11, no. 2 (Part I), 3 (Part II), 1966.
- [41] A. M. Lyapunov, *Общая Задача об Устойчивости Движения (The general problem of the stability of motion)*. Kharkov, Russia: Kharkov Mathematical Society, 1892.
- [42] S. Boyd, L. El Ghaoui, E. Feron, and V. Balakrishnan, *Linear Matrix Inequalities in System and Control Theory*. Philadelphia, PA: SIAM, 1994, vol. 15.