



# Coseismic displacements of the 14 November 2016 Mw7.8 Kaikoura, New Zealand, earthquake using an optical cubesat constellation

Andreas Kääh<sup>1</sup>, Bas Altena<sup>1</sup>, Joseph Mascaro<sup>2</sup>

<sup>1</sup>Department of Geosciences, University of Oslo, Oslo, 0316, Norway

5 <sup>2</sup>Planet, San Francisco, postal code 94103, USA

*Correspondence to:* Andreas Kääh (kaeaeb@geo.uio.no)

**Abstract.** Satellite measurements of coseismic displacements are typically based on Synthetic Aperture Radar (SAR) interferometry or amplitude tracking, or based on optical data such as from Landsat, Sentinel-2, SPOT, ASTER, very-high resolution satellites, or airphotos. Here, we evaluate a new class of optical satellite images for this purpose – data from cubesats. More specific, we investigate the PlanetScope cubesat constellation for horizontal surface displacements by the 14 November 2016 Mw7.8 Kaikoura, New Zealand, earthquake. Single PlanetScope scenes are 2-4 m resolution visible and near-infrared frame images of approximately 20-30 km × 9-15 km in size, acquired in continuous sequence along an orbit of approximately 375-475 km height. From single scenes or mosaics from before and after the earthquake we observe surface displacements of up to almost 10 m and estimate a matching accuracy from PlanetScope data of up to ±0.2 pixels (~ ±0.6 m). This accuracy, the daily revisit anticipated for the PlanetScope constellation for the entire land surface of Earth, and a number of other features, together offer new possibilities for investigating coseismic and other Earth surface displacements and managing related hazards and disasters, and complement existing SAR and optical methods. For comparison and for a better regional overview we also match the coseismic displacements by the 2016 Kaikoura earthquake using Landsat8 and Sentinel-2 data.

## 1 Introduction

Coseismic displacements are typically measured from satellite synthetic aperture radar (SAR) data using radar interferometry or radar tracking techniques (Massonnet and Feigl, 1998; Michel et al., 1999; Avouac et al., 2015; Kargel et al., 2016, and many others). These data and methods have the advantage to cover large areas at once (for instance, Sentinel-1 swath width ~250 km for interferometric wide swath mode), independent of cloud cover and solar illumination, and enable displacement accuracies in the range of centimetres if interferometric phase coherence is preserved. The interferometric measurements reveal the displacement component in line-of-sight from the radar satellites. Radar tracking methods measure the azimuth (flight direction of satellite) and range (line-of-sight) components of the displacements with, roughly, metre-accuracy (e.g.,



Michel et al., 1999). Both methods can be combined (e.g., Fialko et al., 2001). Typical revisit times for current radar satellites are on the order of a few days to weeks (e.g., 6 days for the Sentinel-1 constellation of two satellites; 14 days for ALOS-2 PALSAR; 11 days for TerraSAR-X; 24 days for Radarsat-2).

Repeat optical satellite data are significantly less used for matching coseismic displacements, among others due to their sensitivity to cloud cover and their reduced accuracy compared to radar interferometry. If suitable data are available, though, optical images can typically be matched with higher accuracy than radar data of similar spatial resolution because SAR data are affected by speckle noise, which is more sensitive to ground changes than repeat optical data. Furthermore, optical data can be a more independent displacement measurement, as radar interferometry involves phase ambiguity that can be difficult to solve when displacement gradients are large or complex.

Coseismic displacements have, for instance, been measured on repeat data from Landsat (Liu et al., 2006; Avouac et al., 2014; Barnhart et al., 2014), ASTER (Avouac et al., 2006), SPOT (Dominguez et al., 2003; Leprince et al., 2007; Konca et al., 2010), very high resolution optical satellites (Barnhart et al., 2015; Zhou et al., 2015), or air photos (Michel and Avouac, 2006; Ayoub et al., 2009). Coseismic displacements from Sentinel-2 data have to our best knowledge not yet been published in peer-reviewed journal publications, but are used by operational services (COMET, 2016). Landsat (16 day repeat orbit, 15-30 m resolution), ASTER (16 day repeat orbit, 15 m Visible and Near Infrared, VNIR, resolution) and Sentinel-2 (10 day repeat orbit, 5 day repeat orbit once the Sentinel-2A and 2B constellation is complete, 10-20 m resolution depending on band) are useful for regional displacement-fields and provide approximately the horizontal motion components due to their nadir-looking geometry (only ASTER is occasionally pointed in cross-track direction). Landsat and Sentinel-2 data are provided only as orthorectified version (ASTER optionally) so that positions in these orthoimages are potentially contaminated by cross-track distortions that propagated from errors in the DEM used for orthorectification (Kääb et al., 2016). Avouac et al. (2006) and Girod et al. (2015) demonstrated refined sensor models for ASTER that reduce georeference noise significantly, and Avouac et al. (2006) developed this approach further to enable measurement of coseismic displacements from ASTER data with an accuracy of few metres.

Due to their high spatial resolution of up to 30 cm, repeat data from very high resolution optical satellites such as the WorldView series or Pleiades can be used to measure coseismic displacements with centimetre to decimetre accuracy (Barnhart et al., 2015; Zhou et al., 2015). Typically, however, these satellites provide no regular acquisitions, and tasked acquisitions can be quite oblique.

In this contribution we evaluate a new class of optical satellite data to estimate coseismic displacements – optical cubesats. As a test case we investigate lateral ground displacements associated with the 14 November 2016 New Zealand earthquake. This magnitude 7.8 Mw earthquake occurred in the first few minutes of 14 November 2016 at a depth of approximately 15 km in the northeast of the South Island of New Zealand, near the town of Kaikoura, and was in terms of magnitude the second strongest earthquake in New Zealand since European settlement (GeoNET, 2016; USGS, 2016). Surface motion happened mainly at the Kekerengu Fault, Papatea/Waipapa Bay Fault, Hundalee Fault and Hope Fault, which all are part of a fault system between the Australian and Pacific Plates (GeoNET, 2016) (Fig. 1). Media images from after the earthquake



show significant surface ruptures at the above faults with vertical and horizontal motion clearly visible (GeoNET, 2016). A number of landslides were obviously triggered by the earthquake, and in some areas the sea bed was lifted several meters (GeoNET, 2016; Sciencealert, 2016).

In this paper we assess the potential and limitations of optical cubesats and investigate to which extent they can complement the above-mentioned established radar and optical data and methods. For this purpose we focus in particular on the cubesat constellation by the company Planet. First, we describe the Planet cubesat constellation and details of the image matching methods used in this study. Next, we present the results and discuss their performance and characteristics in order to evaluate the usefulness for coseismic displacements. In the final conclusions we try to answer the research questions raised at the start of this paragraph.

## 10 **2 The Planet cubesat constellation**

The Planet cubesats (cubesats are sometimes also referred to as nanosatellites), called PlanetScope or more popular ‘doves’ and with single cubesat series called ‘Flocks’, have a size of about 10 cm x 10 cm x 30 cm, i.e. are 3-unit cubesats (one cubesat unit is 10 cm x 10 cm x 10 cm). Their main component is a telescope and CCD area array sensor, complemented by solar panels for power generation, a GNSS receiver for satellite position, a startracker for satellite orientation, reaction wheels for attitude control and stabilisation, an antenna for down- and uplink, batteries and on-board storage. One half of the 6600 × 4400 pixel CCD array acquires red-green-blue data and the other half NIR, both in 12 bit radiometric resolution. The PlanetScope satellites provide images of about 2-4 m spatial resolution, and a size of individual scenes of roughly 20-30 km × 9-15 km (Planet Team, 2016). Ground resolution and scene size vary with flying height and satellite version. While most other optical Earth observation instruments in space deliver images in pushbroom geometry (i.e. linear sensor arrays scanning the swath width in orbit direction), the data from the Planet satellites are frame images – an important detail with respect to systematic distortions within the image product. That is, each complete scene is taken at one single point in time, has one single acquisition position and one single bundle of projection rays. For comparison, pushbroom sensors integrate an image over a certain time interval so that acquisition time, position and attitude angles vary throughout an image, which may lead to higher-order image distortions (Nuth and Käab, 2011; Käab et al., 2013; Girod et al., 2015) .

In its final stage, the Planet cubesat constellation will consist of around 120 cubesats following each other in one near-polar orbit of 96 degree inclination and an altitude of about 475 km (Fig. 2). The distance of the cubesats to each other in this orbit is designed in a way so that the longitudinal progression between them over the rotating Earth leads to a void-less scan of the surface (except the polar hole) and the full constellation provides sun-synchronous coverage of the entire Earth with daily resolution (Fig. 1). At the time of writing about 60 Planet cubesats were in space, with the majority of them not yet in a final near-polar orbit but in an International Space Station (ISS) orbit of 52 degrees inclination and ~375 km height. As one consequence for this study, the constellation did not yet provide daily global coverage and the images are taken at varying times of the day and with varying azimuths.



For image matching purposes the geometric characteristics of repeat imagery is of particular interest and will thus be discussed in more detail in the following. PlanetScope images are available in different processing versions, and here we use ‘unrectified’ and ‘analytic’ data. ‘Unrectified’ data come with minimal radiometric processing and are in the original frame geometry, i.e. central projection. ‘Analytic’ data are radiometrically processed and orthorectified. The image orientation parameters from on-board measurements are refined by matching the scenes onto a Landsat mosaic and the images are orthoprojected using a DEM. As for all orthoprojected satellite data, vertical errors in the orthorectification DEM lead to lateral distortions in the resulting PlanetScope orthoimages, the size of which is proportional to the DEM error and the off-nadir viewing angle. For instance, for an orbit height of 400 km and a perfect nadir image of 20 km swath width (typical parameters for PlanetScope images), i.e. a maximum off-nadir distance of 10 km, a DEM error of 15 m (a typical accuracy for the SRTM DEM) (Nuth and Kääb, 2011) will translate to a maximum orthorectification distortion at the image margins of 38 cm. The Planet cubesats are controlled to acquire data within an off-nadir angle of  $\pm 2^\circ$ , which translates for an orbit height of 400 km to a maximum off-nadir offset on the ground of 14 km in image centre and 24 km at its margin. For this maximum off-nadir viewing the orthorectification offsets resulting from a vertical DEM error of 15 m are 52 cm in the image centre and 90 cm at the image margin. For an orbit height of 475 km and a scene width of 30 km the latter offset numbers get 44 cm in the scene centre and 94 cm. Both these scenarios represent the worst case for the propagation of orthorectification DEM errors into lateral distortions in PlanetScope images.

These expected orthorectification distortions are likely smaller than potential georeferencing errors from imperfect satellite positions and attitude angles, and their refinement from registering the images to reference images. However, distortions between unrectified frame images due to errors in image orientations are a standard problem in stereo-photogrammetry, called relative orientation. Such distortions are of analytical nature and can thus in principle be modelled and removed – in contrast to distortions from orthorectification DEM errors that are largely of unpredictable nature, depending on DEM errors. The fact that Planet images are frame images and are also available in unrectified form opens therefore in theory possibilities for own orthorectification or modelling of georeferencing errors to increase the accuracy of displacements matched from repeat images.

It should also be noted that orthorectification DEMs (or DEMs for topographic phase removal within SAR interferometry) are by necessity outdated unless acquired simultaneously with image acquisition. Any orthorectification, no matter how accurate in space, is therefore temporally corrupted by the fact that the ground is a moving target, always changing in time. Typically, ground changes will be small enough to not have significant effect on orthorectification, but for instance for landslides, major earthquakes, or glaciers resulting offsets are an inherent problem of orthorectification of monoscopic data (Kääb et al., 2016). The small field of view of PlanetScope cubesats and the resulting small sensitivity to topographic distortions, the frame geometry of the PlanetScope cameras, and the accessibility of unrectified images all contribute to minimize and potentially remove topographic distortions.



### 3 Data and methods

To investigate coseismic displacements from repeat optical data we match images from before and after the 14 November 2016 earthquake over the north-eastern section of the southern island of New Zealand. In order to get a regional overview of displacements we first match Sentinel-2 data of 3 October and 5 December 2016 (NIR band 8, 10 m resolution; 63 days),  
5 and the closest suitable Landsat 8 data around the earthquake date from 12 October and 15 December 2016 (pan band 8, 15 m resolution; 64 days; Fig. 1). For detailed displacements over main ruptures we select PlanetScope images of 27 October, 21 November and 28 November 2016 (i.e. 25 and 32-day pairs; Fig. 1). A number of other suitable Sentinel-2 and PlanetScope images are available, too, but the selected ones seemed best to us in terms of illumination, cloud cover and proximity to the earthquake date.

10 In order to cross-check the potential displacement accuracy from PlanetScope data, we also measured displacements from two PlanetScope scenes of 20 and 25 November 2016 just southwest outside of the section shown in Fig. 1. These images stem from a sun-synchronous near-polar repeat orbit such as to be expected as standard from the final Planet constellation – and occasionally already provided at the time of writing from the preparatory constellation. No such type of scenes was available over the section of Fig. 1 around the earthquake date. Daily MODIS data around the earthquake date show suitable  
15 imaging conditions on 1, 3, 8 and then again on 15, 18, 19 and 21 November etc. so that a test with 5 days interval between scenes seems representative.

For matching the repeat Sentinel-2 and PlanetScope data we use standard normalized cross-correlation (NCC), solving the cross-correlation in the spatial domain and reaching sub-pixel accuracy by interpolation of the image (Kääb and Vollmer, 2000; Debella-Gilo and Kääb, 2011a; Kääb, 2014). The matching window sizes used for the Sentinel-2 data were 20×20  
20 pixels (200 m), for Landsat 8 15×15 pixels (225 m), and for PlanetScope 20×20 pixels (60 m). Tests with different window sizes are not the focus of this study (Debella-Gilo and Kääb, 2011b). Measurements with a correlation coefficient smaller 0.7 are removed and no other post-processing is applied.

Preservation of absolute georeference over the earthquake is tricky as we cannot be sure about a change in position of the plates involved from our satellite data alone. The pointing accuracy of the satellites used is not accurate enough for that  
25 purpose and co-registration steps are involved in the processing of the Landsat and PlanetScope data anyway. The focus of our evaluation lies therefore on relative displacements between scene zones. Such strain maps are also produced when (In)SAR techniques are used. Absolute georeference problems could be reduced by co-registering PlanetScope data to selected images and image sections of, for instance, Landsat or Sentinel-2 data, or airphoto orthoimage mosaics. Also GNSS measurements of coseismic displacements could be used fit PlanetScope-derived displacements onto.



## 4 Results and discussion

### 4.1 Sentinel-2 and Landsat

Figure 1 shows the horizontal coseismic displacements from the Sentinel-2 data of 3 October and 5 December (Fig. 1, upper row), and from the Landsat 8 data of 12 October and 15 December 2016 (middle row). The main rupture by the earthquake along the Kekerengu fault has an azimuth of very roughly  $45^\circ$  and we thus transform the measured displacements to a Cartesian coordinate system rotated by  $45^\circ$ , i.e. we show the SW-NE (Fig. 1, left column) and NW-SE (right column) displacement components instead of W-E and S-N. From the repeat Sentinel-2 and Landsat 8 data the main rupture is along a sharp line over the Kekerengu fault. There, we find relative displacements of around 9 m with an azimuth of roughly  $65^\circ$ . At the Papatea fault we obtain relative displacements of around 6.5 m with an azimuth of roughly  $130^\circ$ . In general, the Landsat 8 and Sentinel-2 results are similar. Also for a number of details in the displacement field both agree, but there are also some minor differences. The latter could easily be due to imperfect co-registration within the matching pairs, or deviations of absolute georeference between the matching pairs (see end of Sections 2 and 3). Overall, the displacement field from the Sentinel-2 data seems slightly sharper and with less outliers compared to Landsat 8, as expected for the higher image resolution of Sentinel-2. For optimal ground conditions (e.g. flat desert) repeat Sentinel-2 data can be matched with an accuracy of up to 0.1-0.2 pixels (1-2 m) for single displacements (Kääb et al., 2016). From the standard deviation of displacements over homogeneously displacing image sections we estimate a relative accuracy for individual displacements of about  $\pm 0.4$  pixels (4 m) for Sentinel-2 and for the matching window sizes, ground conditions and time interval specific to our study.

### 4.2 Planet data

To evaluate PlanetScope data we match a two-scene mosaic of 28 November 2016 with a mosaic of four scenes of 27 October over parts of the Kekerengu and Papatea fault ruptures (Fig. 1, rectangle A) and show the W-E and S-N components of the displacements obtained (Fig. 3). The measured displacements show a sharp rupture over the Kekerengu fault of around 6 m with a rupture azimuth aligning well with the azimuth of the displacement. Over the Papatea fault the rupture is less straight and rather oblique to the horizontal displacement of about 5.5 m. The latter displacement agrees well within the errors bounds with the Sentinel-2 results. The displacement field derived from the PlanetScope data is very dense and shows details that become not obvious from Sentinel-2 and Landsat 8, for instance the higher W-E displacements in the southernmost zone of the section in Fig. 3. Between the Kekerengu and Papatea fault ruptures in Fig. 3 we observe gradients in both the W-E and S-N displacement components resulting from an increase of displacement magnitude towards the Papatea fault rupture accompanied by a slight rotation of the displacement field towards south closer to the rupture.

Over another section at the Kerengu fault rupture (Fig. 1, rectangle B) we match a PlanetScope scene of 21 November with the 27 October mosaic (Fig. 4). Only the W-E components of displacements are shown as the S-N ones look very similar. The measurements show a sharp displacement over the rupture of around 8.5 m with an azimuth slightly oblique to the



rupture. Again, the displacement from PlanetScope data agrees well within error bounds with the Sentinel-2 results of 9 m. Over the Clarence River flood plain no measurements are possible.

From the standard deviation of displacements over homogeneously moving sections of the scenes used here, we estimate a relative accuracy of individual displacements of about  $\pm 0.7$  pixels (2 m) for the PlanetScope data and the matching window sizes, ground conditions and time intervals specific to our study.

Figure 5 shows a small detail of Fig. 3 with the 27 October – 28 November 2016 PlanetScope-derived displacements, once with the 27 October, once with the 28 November image in the background. At this location, the seabed was lifted up by roughly two meters, east of the rupture that is also well visible in the 28 November image (GeoNET, 2016; Sciencealert, 2016). The main rupture from displacements is offset from the seabed rupture visible.

Figure 6 shows a small detail of Fig. 4 with the PlanetScope image of 21 November in the background (location C in Fig. 4). Matches did not achieve correlation coefficients larger than 0.7 over the rupture itself due to high deformations and surface destruction, and are thus removed. At these places the rupture is visible in the underlying Planet image, confirming the accurate delineation of the rupture by the derived displacements.

Figure 7 (location D in Fig. 4) shows a detail of Fig. 4 with the PlanetScope images from 27 October and 21 November behind the displacements. Here, presumable vertical uplift of the terrain to the southeast, accompanying the horizontal displacements by the rupture, have dammed up Clarence River and changed its course as visible in the PlanetScope images.

Figure 8 (location E in Fig. 4) illustrates landslides due to the 14 November earthquake close to the Kekerengu fault rupture in order to give an impression of the visual characteristics of the PlanetScope data and other uses of the data related to earthquake disaster management. To the southeast of the figure, the rupture is well visible as a bright line.

### 4.3 Stable ground test

As the Planet constellation was not yet final at the time of the 2016 New Zealand earthquake no images were available from the sun-synchronous near-polar orbit close to the earthquake date. To simulate displacement measurements based on PlanetScope data of this final constellation we match the overlap of PlanetScope images near our study site from 20 and 25 November 2016. Both scenes come from the sun-synchronous near-polar orbit (Fig. 9). The type of terrain and land cover over these scenes is very similar to the ones applied over the ruptures. We perform three assessments:

Figure 9b: Matching the orthorectified versions of both images shows a mean offset of only 0.25 m, i.e. less than 0.1 pixels. The standard deviation of this offset, that is the variability of the individual displacements, is around 1.9 m, and the mean magnitude of the individual displacements is 1.6 m. This indicates an accuracy of individual displacements of about  $\pm 0.5$  pixels.

Figure 9c: We use the unrectified versions of the two scenes, co-register them using a 1<sup>st</sup>-order polynomial (i.e. removing a global shift and approximately a rotation), and match them. Over most of the overlap we obtain a standard deviation of displacements of around 0.2-0.3 pixels ( $\sim 0.75$  m). Towards the left and right margins we see distortions between the scenes of up to 5-6 pixels. These are due to the superposition of the lens and image distortions of both images, distortions that are



not corrected for in the unrectified data version and not sufficiently reduced by our simple 1<sup>st</sup>-order polynomial co-registration. Comparison with the matching based on the orthorectified images versions (Fig. 9b) shows that these effects are efficiently removed during the processing steps towards orthorectified data.

Figure 9d: We use the same procedure as for the results Fig. 9c, but use a 2<sup>nd</sup>-order polynomial, i.e. including quadratic terms in the co-registration. Now, the distortions to the right and left margins are mostly removed and a pattern of undulations of  $\pm 0.1$  pixel in amplitude becomes visible. This pattern is also present in the test Fig. 9c but difficult to visualize there due to the overlying and much larger global scene distortion. We assume this pattern is a superposition of higher-order distortions in the individual images. Again, we cannot find such pattern anymore between the orthorectified scenes. Like in the test Fig. 9c, also in Fig. 9d the standard deviation of individual displacements is on the order of 0.2-0.3 pixels.

Remarkably, neither in the matching between the orthorectified scenes nor between the unrectified scenes notable topographic effects become visible. This confirms that, due to the small field of view of the Planet satellites and their nadir looking, the image geometry is quite robust against orthorectification DEM errors or topographic distortions, respectively. In consequence, unrectified PlanetScope scenes could in a number of applications be used directly for displacement measurement without applying any topographic correction or DEM-based orthorectification, respectively.

Overall, our measurement of coseismic displacements using Planet data (section 4.2) and the above test over stable ground suggest a relative accuracy of around  $\pm 0.6 - 2.0$  m (0.2 - 0.7 pixels; 1 standard deviation) for individual displacements. Important, when averaging such displacements over entire zones, as one would typically do for investigating coseismic displacements, the accuracy (standard error) of a resulting mean zonal displacement will be significantly better, depending on the number of displacements averaged and their dependency to each other.

## 5 Conclusions and perspectives

We demonstrate horizontal coseismic displacements of the 14 November 2016 Kaikoura, New Zealand, earthquake from repeat Sentinel-2, Landsat 8 and PlanetScope data. Over the two faults investigated we find horizontal surface slip of around 6-9 m. The main goal of this study was to assess the potential of PlanetScope data for this purpose.

The main limitation of optical data in general is their dependency on cloud-free conditions and solar illumination, in contrast to SAR acquisitions. Also, due to their nadir-viewing geometry most optical data give no access to the vertical component of coseismic (and other) terrain displacements. Where phase coherence is preserved within SAR radar data, displacement can through interferometry be measured by a precision that can seldom be matched by optical remote sensing data. However, where this phase coherence is not given, optical data can be a valuable alternative to radar data for coseismic (and other Earth surface) displacement measurements.

One of the main advantages of PlanetScope data for coseismic displacements is their anticipated daily repeat. This maximizes the chances to receive cloud-free images and to cover unexpected events such as earthquakes. The according small time periods of a few days that form the image matching pairs and the related small changes in ground and





illumination conditions, together with the frame geometry of the PlanetScope images, enables relative measurement accuracies of as low as  $\pm 0.2$  pixels ( $\sim \pm 0.6$  m) for individual displacements, and potentially much better for zonal averages. In combination with the high spatial image resolution of around 3 m, details in the displacement field can thus become apparent that are not detected in Sentinel-2 or Landsat 8 data. The envisaged daily repeat by PlanetScope data will further  
5 improve the above displacement accuracy by enabling to measure displacements in several image pair combinations and thus exploiting a temporal stack of images and displacements (Dehecq et al., 2015; Kääh et al., 2016; Stumpf et al., 2017).

The estimated displacements can be of help to better unwrap SAR interferometry data. When the gradient of the strain increases too much, the interferometric phase fringes are difficult to follow (unwrap). However, displacements from image matching are not ambiguous so that two-dimensional integration is not needed.

10 In comparison to Sentinel-2 and Landsat 8, a main limitation of PlanetScope scenes can be their small extent of only a few  $100 \text{ km}^2$ . Precise georeferencing between data before and after large-scale coseismic displacements can thus be difficult as all terrain covered by a scene might have been displaced or deformed in some way. In such cases, the data provide relative displacements over smaller areas or well-defined ruptures, i.e. strong gradients in a displacement field. Long-wavelength variations or low gradients in a displacement field will be more complicated to measure as these cannot easily be  
15 discriminated from distortions in the repeat images or their co-registration. The above problems can be in parts reduced by mosaicking longer stripes of scenes instead of using single scenes, as demonstrated in our study for the 27 October and 28 November data. Finally, the above matching accuracy of on the order of  $\pm 1$  m will prevent detecting small (coseismic) displacements.

Though listed above as disadvantage, the small PlanetScope scene size and the connected small field-of-view, together with  
20 their nadir acquisition, have on the other hand the advantage that topographic distortions in PlanetScope data are small and the resulting orthoimages quite robust against vertical errors in the DEM used for orthorectification. This effect contributes also to the good matching results above.

Finally, even if not the focus of this study on coseismic displacements, the visual information provided by the high resolution, daily repeat PlanetScope data can be very valuable for mapping and managing the impacts of earthquakes, such  
25 as ruptures, landslides, damming of rivers, damaged infrastructure, etc. Because the downlink network of the Planet constellation has an extensive coverage, consequently availability of PlanetScope imagery can be on the order of only several minutes, with 75% of imagery collected available within 24 hours. The speed of image availability can aid first responders, given that the first 24 hours after a disaster are the most critical for saving lives.

To summarize, we find that PlanetScope data will seldom be able to completely replace more traditional satellite data for  
30 mapping coseismic displacements such as synthetic aperture radar (SAR), Landsat and Sentinel-2, or very high resolution optical satellites, but rather complement these by filling a gap related to temporal and spatial resolution.



## 6 Code availability

The image matching code used for this study (Correlation Image Analysis, CIAS) is available from <http://www.mn.uio.no/icemass>.

## 7 Data availability

- 5 Sentinel-2 data are freely available from the ESA/EC Copernicus Sentinels Scientific Data Hub at <https://scihub.copernicus.eu/>, Landsat 8 data from USGS at <http://earthexplorer.usgs.gov/>. Planet data are not openly available as Planet is a commercial company. However, scientific access schemes to these data exist.

## 8 Author contribution

- A.K. developed the study, did most of the analyses and wrote the paper. B.A. supported the analyses and edited the paper.  
10 J.M. helped with data acquisition, technical details to the Planet constellation and data, and edited the paper.

## 9 Competing interests

A.K. and B.A. declare no competing interests. J.M. is Program Manager for Impact Initiatives at Planet. He did in no manner influence the results or conclusions of the study.

## 10 Acknowledgements

- 15 We are grateful to the providers of satellite data for this study; Planet for their cubesat data via Planet's Ambassadors Program, ESA/Copernicus for Sentinel-2 data, and USGS for Landsat 8 data. The work was funded by the European Research Council under the European Union's Seventh Framework Programme (FP/2007-2013) / ERC grant agreement no. 320816 and the ESA project Glaciers\_cci (4000109873/14/I-NB).



Figures

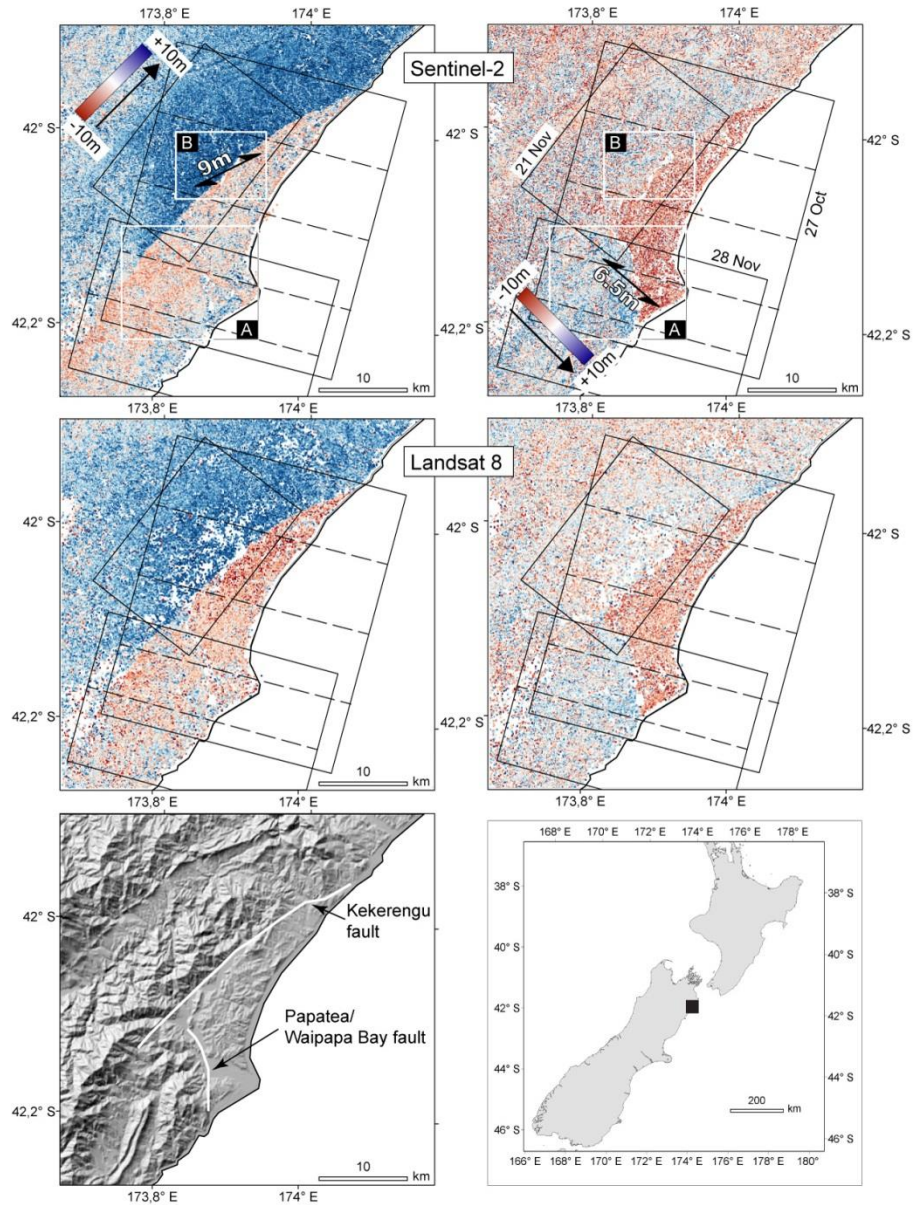
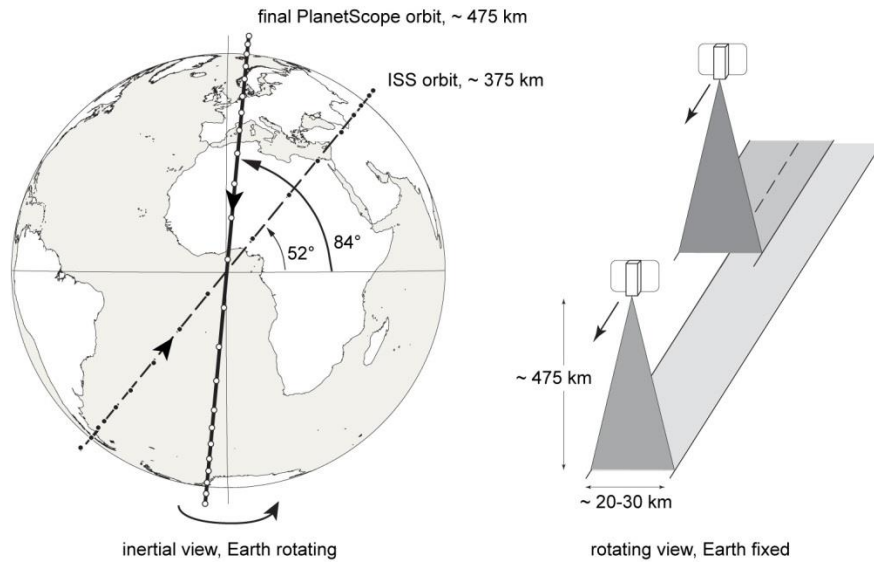
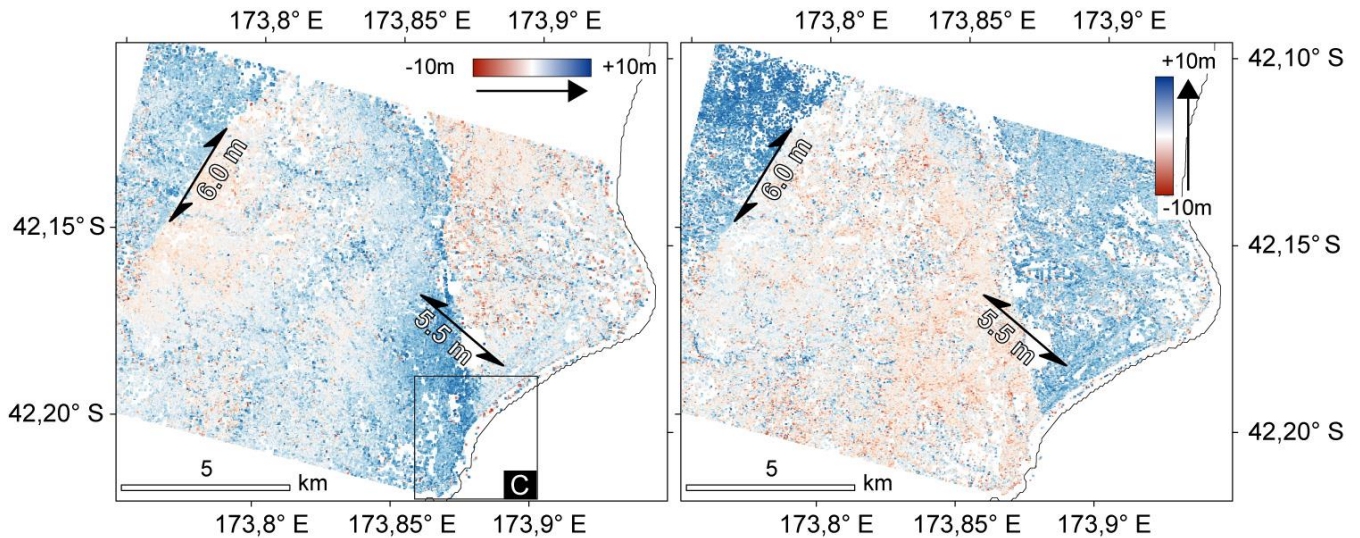


Figure 1: Sentinel 2 (3 Oct-5 Dec 2016, top row) and Landsat 8 (12 Oct-15 Dec 2016, middle row) horizontal coseismic displacements of the 14 November 2016 Kaipura, New Zealand, earthquake. Left row: SW-NE displacement component, right row: NW-SE component. Lower row, left: hillshade from the Shuttle Radar Topography Mission (SRTM); white lines schematically indicate surface ruptures from the above displacement field. Lower row, right: location of study site in New Zealand. The oblique rectangles in the upper two rows indicate the footprints of the PlanetScope images used with according dates given in the upper left panel. Inset A: Fig. 3, inset B: Fig. 4.



**Figure 2:** left panel: Final PlanetScope orbit and ISS test-bed orbit. Cubesat positions (white and black dots on the orbit) are only schematically indicated. The final PlanetScope orbit is planned to host over 100 cubesats. Right panel: scheme of complete scan of the Earth surface by successive PlanetScope cubesats in the same orbit.

5



**Figure 3:** Horizontal surface displacements from PlanetScope images of 27 October – 28 November 2016. Left: W-E component, right: S-N component. Location: A in Fig. 2. The double arrows indicate the approximate direction and the according numbers the approximate magnitude of relative displacement over ruptures. Inset C: Fig. 5.

10

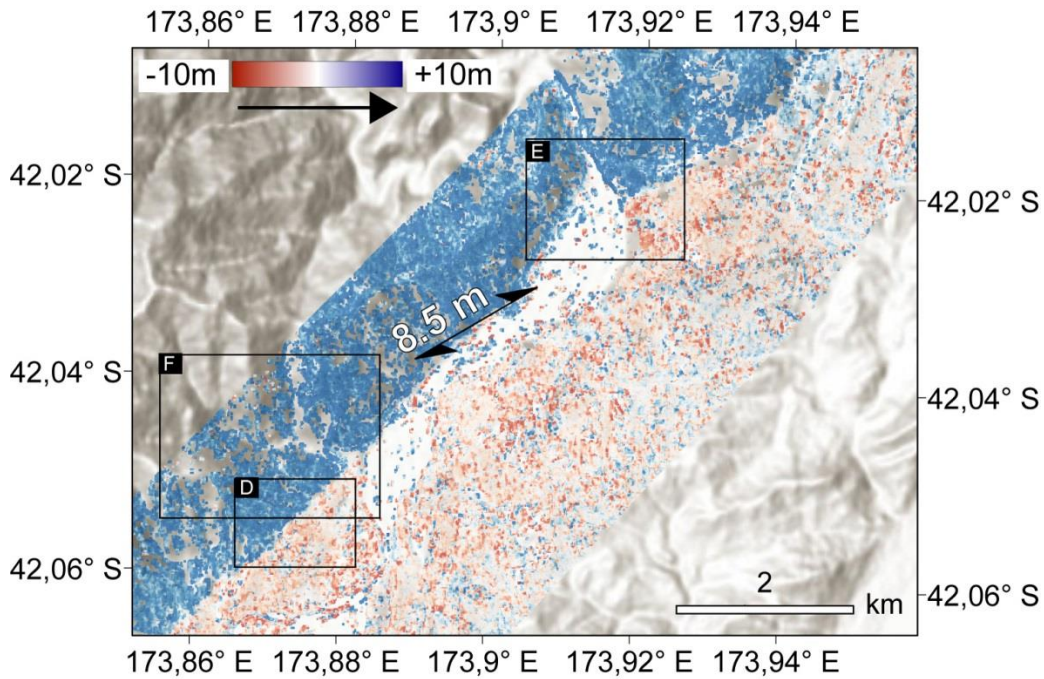


Figure 4: Horizontal surface displacements from PlanetScope images of 27 October – 21 November 2016, W-E component (S–N component is very similar). The double arrow indicates the approximate direction and the according number the approximate magnitude of relative displacement over the main rupture. Location: B in Fig. 2. Inset C: Fig. 6, inset D: Fig. 7, inset E: Fig. 8.

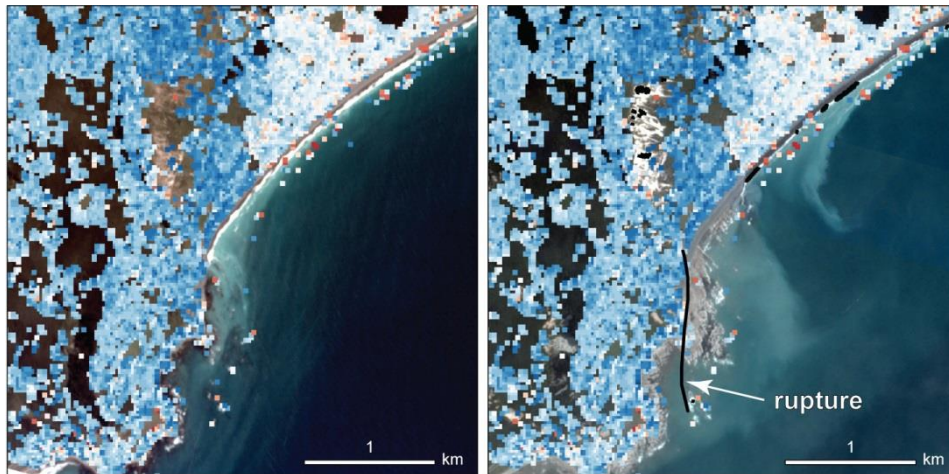


Figure 5: Horizontal surface displacements from PlanetScope images of 27 October – 21 November 2016, W-E component. Colorscale see Fig. 3. Left background: PlanetScope image of 27 October, right background 21 November 2016. The section of uplifted seabed (right of the rupture) and the according rupture are well visible in the PlanetScope images; the rupture is indicated by a black line that was digitized from the images. Location: C in Fig. 3.



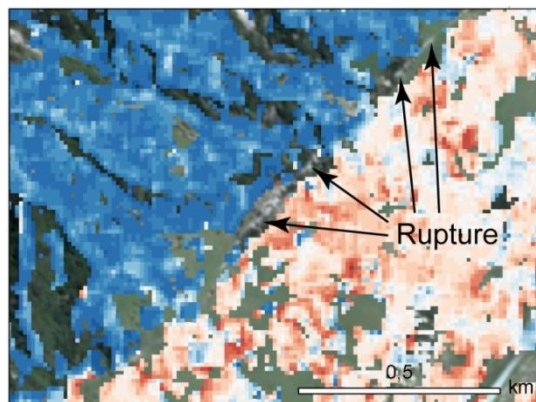



Figure 6: Horizontal surface displacements from PlanetScope images of 27 October – 21 November 2016, W-E component. Background: PlanetScope image of 21 November with the surface rupture well visible. Location: inset D of Fig. 4.

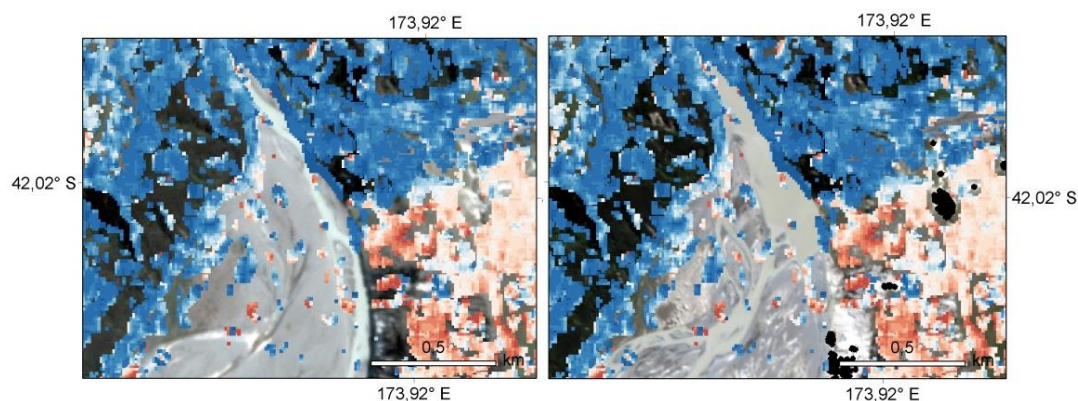

5 Figure 7: Horizontal surface displacements from PlanetScope images of 27 October – 21 November 2016, W-E component. Background: PlanetScope images of 27 October (left) and 21 November (right). Clarence River was dammed up by the rupture and its course diverted. Location: inset E of Fig. 4.

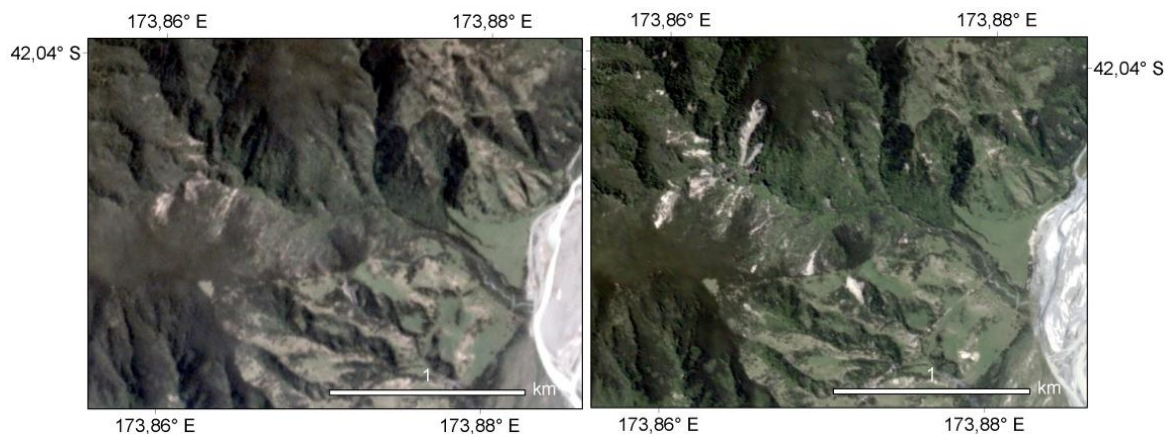

10 Figure 8: PlanetScope images, left 27 October, right 21 November 2016, showing landslides by the 14 November 2016 Kaikoura earthquake. To the lower right, also the surface rupture is well visible. Location: inset F in Fig. 4.

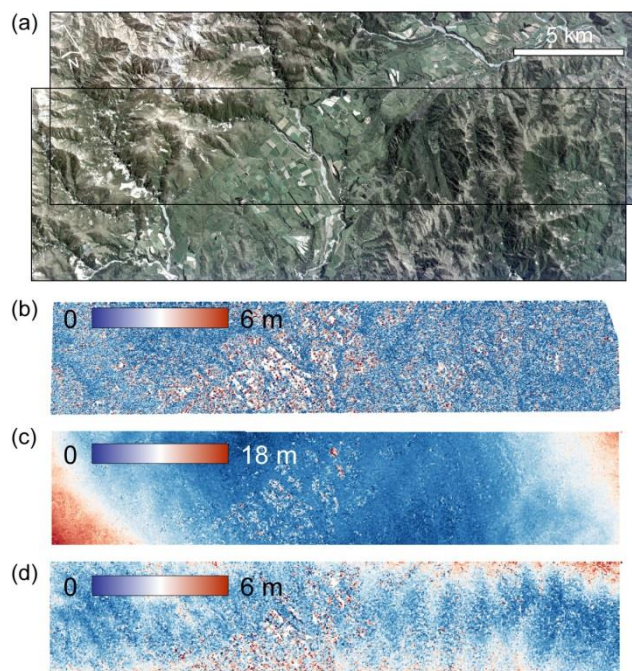

5 **Figure 9: Horizontal surface displacements from PlanetScope images of 20 – 25 November 2016 without surface motion expected; total magnitude of displacement. (a) the two scenes and their overlap matched in panels (b)-(d). (b) displacements between orthorectified versions. (c) displacements between the unrectified versions, when co-registered by a 1<sup>st</sup>-order polynomial. (d) like (c) but co-registered by 2<sup>nd</sup>-order polynomial.**



## 11 References

- 5 Avouac, J. P., Ayoub, F., Leprince, S., Konca, O., and Helmberger, D. V.: The 2005, M-w 7.6 Kashmir earthquake: Sub-pixel correlation of ASTER images and seismic waveforms analysis, *Earth Planet Sc Lett*, 249, 514-528, DOI 10.1016/j.epsl.2006.06.025, 2006.
- Avouac, J. P., Ayoub, F., Wei, S. J., Ampuero, J. P., Meng, L. S., Leprince, S., Jolivet, R., Duputel, Z., and Helmberger, D.: The 2013, Mw 7.7 Balochistan earthquake, energetic strike-slip reactivation of a thrust fault, *Earth Planet Sc Lett*, 391, 128-134, 10.1016/j.epsl.2014.01.036, 2014.
- 10 Avouac, J. P., Meng, L. S., Wei, S. J., Wang, T., and Ampuero, J. P.: Lower edge of locked Main Himalayan Thrust unzipped by the 2015 Gorkha earthquake, *Nat Geosci*, 8, 708+, 10.1038/NGEO2518, 2015.
- Ayoub, F., Leprince, S., and Avouac, J. P.: Co-registration and correlation of aerial photographs for ground deformation measurements, *Isprs J Photogramm*, 64, 551-560, DOI 10.1016/j.isprsjprs.2009.03.005, 2009.
- 15 Barnhart, W. D., Hayes, G. P., Briggs, R. W., Gold, R. D., and Bilham, R.: Ball-and-socket tectonic rotation during the 2013 M(w)7.7 Balochistan earthquake, *Earth Planet Sc Lett*, 403, 210-216, 10.1016/j.epsl.2014.07.001, 2014.
- Barnhart, W. D., Briggs, R. W., Reitman, N. G., Gold, R. D., and Hayes, G. P.: Evidence for slip partitioning and bimodal slip behavior on a single fault: Surface slip characteristics of the 2013 Mw7.7 Balochistan, Pakistan earthquake, *Earth Planet Sc Lett*, 420, 1-11, 10.1016/j.epsl.2015.03.027, 2015.
- COMET. New Zealand earthquake, Centre for Observation and Modelling of Earthquakes, Volcanoes and Tectonics, <http://comet.nerc.ac.uk>. Last visited 20.1.2017, 2016.
- 20 Debella-Gilo, M., and Kääh, A.: Sub-pixel precision image matching for measuring surface displacements on mass movements using normalized cross-correlation, *Remote Sens Environ*, 115, 130-142, DOI 10.1016/j.rse.2010.08.012, 2011a.
- 25 Debella-Gilo, M., and Kääh, A.: Locally adaptive template sizes in matching repeat images of Earth surface mass movements, *ISPRS J Photogramm*, 69, 10-28, DOI 10.1016/j.rse.2010.08.012, 2011b.
- Dehecq, A., Gourmelen, N., and Trouve, E.: Deriving large-scale glacier velocities from a complete satellite archive: Application to the Pamir-Karakoram-Himalaya, *Remote Sens Environ*, 162, 55-66, 10.1016/j.rse.2015.01.031, 2015.
- 30 Dominguez, S., Avouac, J. P., and Michel, R.: Horizontal coseismic deformation of the 1999 Chi-Chi earthquake measured from SPOT satellite images: Implications for the seismic cycle along the western foothills of central Taiwan, *J Geophys Res-Sol Ea*, 108, Artn 2083, 10.1029/2001jb000951, 2003.
- Fialko, Y., Simons, M., and Agnew, D.: The complete (3-D) surface displacement field in the epicentral area of the 1999 M(w)7.1 Hector Mine earthquake, California, from space geodetic observations, *Geophys Res Lett*, 28, 3063-3066, Doi 10.1029/2001gl013174, 2001.
- 35 GeoNET. New Zealand Earthquake Commission and GNS Science, <http://info.geonet.org.nz/blog/quake>, last visted 20.1.2017, 2016.
- Girod, L., Nuth, C., and Kääh, A.: Improvement of DEM generation from ASTER images using satellite jitter estimation and open source implementation The International Archives of the Photogrammetry, Remote Sensing and Spatial Information Sciences, XL-1/W5, 2015.





- 5 Kargel, J. S., Leonard, G. J., Shugar, D. H., Haritashya, U. K., Bevington, A., Fielding, E. J., Fujita, K., Geertsema, M., Miles, E. S., Steiner, J., Anderson, E., Bajracharya, S., Bawden, G. W., Breashears, D. F., Byers, A., Collins, B., Dhital, M. R., Donnellan, A., Evans, T. L., Geai, M. L., Glasscoe, M. T., Green, D., Gurung, D. R., Heijnen, R., Hilborn, A., Hudnut, K., Huyck, C., Immerzeel, W. W., Jiang, L. M., Jibson, R., Kaab, A., Khanal, N. R., Kirschbaum, D., Kraaijenbrink, P. D. A., Lamsal, D., Liu, S. Y., Lv, M. Y., McKinney, D., Nahirnick, N. K., Nan, Z. T., Ojha, S., Olsenholler, J., Painter, T. H., Pleasants, M., Pratima, K. C., Yuan, Q. I., Raup, B. H., Regmi, D., Rounce, D. R., Sakai, A., Donghui, S., Shea, J. M., Shrestha, A. B., Shukla, A., Stumm, D., van der Kooij, M., Voss, K., Xin, W., Weihs, B., Wolfe, D., Wu, L. Z., Yao, X. J., Yoder, M. R., and Young, N.: Geomorphic and geologic controls of geohazards induced by Nepal's 2015 Gorkha earthquake, *Science*, 351, 140+, 10.1126/science.aac8353, 2016.
- 10 Konca, A. O., Leprince, S., Avouac, J. P., and Helmberger, D. V.: Rupture Process of the 1999 M-w 7.1 Duzce Earthquake from Joint Analysis of SPOT, GPS, InSAR, Strong-Motion, and Teleseismic Data: A Supershear Rupture with Variable Rupture Velocity, *B Seismol Soc Am*, 100, 267-288, Doi 10.1785/0120090072, 2010.
- Kääb, A., and Vollmer, M.: Surface geometry, thickness changes and flow fields on creeping mountain permafrost: automatic extraction by digital image analysis, *Permafrost Periglac* 11, 315-326, 2000.
- 15 Kääb, A., Lamare, M., and Abrams, M.: River ice flux and water velocities along a 600 km-long reach of Lena River, Siberia, from satellite stereo, *Hydrol Earth Syst Sc*, 17, 4671-4683, DOI 10.5194/hess-17-4671-2013, 2013.
- Kääb, A., Correlation Image Analysis software (CIAS), <http://www.mn.uio.no/icemass>, last visited 20.1.2017, 2014.
- Kääb, A., Winsvold, S. H., Altena, B., Nuth, C., Nagler, T., and Wuite, J.: Glacier Remote Sensing Using Sentinel-2. Part I: Radiometric and Geometric Performance, and Application to Ice Velocity, *Remote Sensing*, 8, 598, 2016.
- 20 Leprince, S., Barbot, S., Ayoub, F., and Avouac, J. P.: Automatic and precise orthorectification, coregistration, and subpixel correlation of satellite images, application to ground deformation measurements, *IEEE T Geosci Remote*, 45, 1529-1558, Doi 10.1109/Tgrs.2006.888937, 2007.
- Liu, J. G., Mason, P. J., and Ma, J. M.: Measurement of the left-lateral displacement of Ms 8.1 Kunlun earthquake on 14 November 2001 using Landsat-7 ETM + imagery, *Int J Remote Sens*, 27, 1875-1891, 10.1080/01431160500292023, 2006.
- 25 Massonnet, D., and Feigl, K. L.: Radar interferometry and its application to changes in the earth's surface, *Rev Geophys*, 36, 441-500, Doi 10.1029/97rg03139, 1998.
- Michel, R., Avouac, J. P., and Taboury, J.: Measuring ground displacements from SAR amplitude images: application to the Landers earthquake, *Geophys Res Lett*, 26, 875-878, Doi 10.1029/1999gl900138, 1999.
- 30 Michel, R., and Avouac, J. P.: Coseismic surface deformation from air photos: The Kickapoo step over in the 1992 Landers rupture, *J Geophys Res-Sol Ea*, 111, Artn B03408, 10.1029/2005jb003776, 2006.
- Nuth, C., and Kääb, A.: Co-registration and bias corrections of satellite elevation data sets for quantifying glacier thickness change, *Cryosphere*, 5, 271-290, 2011.
- Sciencealert. New Zealand's earthquake was so intense, it lifted the sea bed 2 metres above ground, <http://www.sciencealert.com/new-zealand-s-earthquake-was-so-powerful-it-dragged-the-sea-bed-2-metres-above-ground>, last visited 20.1.2017, 2016.
- 35 Stumpf, A., Malet, J.-P., and Delacourt, C.: Correlation of satellite image time-series for the detection and monitoring of slow-moving landslides, 189, 40-55, <http://dx.doi.org/10.1016/j.rse.2016.11.007>, 2017.
- Planet Team. Planet Data Application. Program Interface: In Space for Life on Earth. San Francisco, CA. <https://api.planet.com/data/v1/>. last visited 20.1.2017, 2016.
- 40 USGS Earthquake Hazard Program: M 7.8 - 54km NNE of Amberley, New Zealand, <http://earthquake.usgs.gov/earthquakes/>, last visited 20.1.2017, 2016.



Zhou, Y., Parsons, B., Elliott, J. R., Barisin, I., and Walker, R. T.: Assessing the ability of Pleiades stereo imagery to determine height changes in earthquakes: A case study for the El Mayor-Cucapah epicentral area, *J Geophys Res-Sol Ea*, 120, 8793-8808, 10.1002/2015JB012358, 2015.