



Operation status for the asteroid explorer, Hayabusa2, in the vicinity of Ryugu

September 5, 2018

JAXA Hayabusa2 Project



Topics



Regarding Hayabusa2:

- Current status
- Astrodynamics
- MINERVA- II



Contents



- 0. Hayabusa2 & mission flow outline
- 1. Project status & overall schedule
- 2. Box-B operation
- 3. Small Monitoring Camera (CAM-H)
- 4. Astrodynamics
- 5. MINERVA- II
- 6. Operation schedule
- 7. Future plans



Overview of Hayabusa2



Objective

We will explore and sample the C-type asteroid Ryugu, which is a more primitive type than the S-type asteroid Itokawa that Hayabusa explored, and elucidate interactions between minerals, water, and organic matter in the primitive solar system. By doing so, we will learn about the origin and evolution of Earth, the oceans, and life, and maintain and develop the technologies for deep-space return exploration (as demonstrated with Hayabusa), a field in which Japan leads the world.

Expected results and effects


- •By exploring a C-type asteroid, which is rich in water and organic materials, we will clarify interactions between the building blocks of Earth and the evolution of its oceans and life, thereby developing solar system science.
- Japan will further its worldwide lead in this field by taking on the new challenge of obtaining samples from a crater produced by an impacting device.
- •We will establish stable technologies for return exploration of solar-system bodies.

Features:

- •World's first sample return mission to a C-type asteroid.
- •World's first attempt at a rendezvous with an asteroid and performance of observation before and after projectile impact from an impactor.
- •Comparison with results from Hayabusa will allow deeper understanding of the distribution, origins, and evolution of materials in the solar system.

International positioning:

- Japan is a leader in the field of primitive body exploration, and visiting a type-C asteroid marks a new accomplishment.
- •This mission builds on the originality and successes of the Hayabusa mission. In addition to developing planetary science and solar system exploration technologies in Japan, this mission develops new frontiers in exploration of primitive heavenly bodies.
- •NASA too is conducting an asteroid sample return mission, OSIRIS-REx (launch: 2016; asteroid arrival: 2018; Earth return: 2023). We will exchange samples and otherwise promote scientific exchange, and expect further scientific findings through comparison and investigation of the results from both missions.

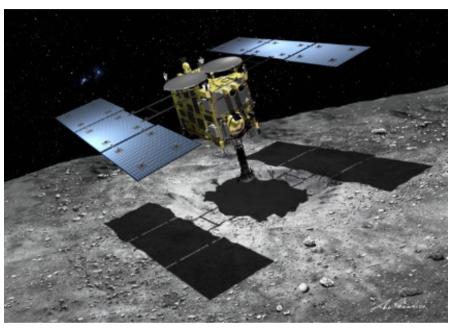

(Illustration: Akihiro Ikeshita)

Havabusa 2 primary specifications

MassApprox. 609 kgLaunch3 Dec 2014MissionAsteroid returnArrival27 June 2018

Earth return 2020

Stay at asteroid Approx. 18 months

Target body Near-Earth asteroid Ryugu

Primary instruments

Sampling mechanism, re-entry capsule, optical cameras, laser range-finder, scientific observation equipment (near-infrared, thermal infrared), impactor, miniature rovers.



Mission flow



Launch 3 Dec 2014 Jur


Arrival at asteroid > June 27, 2018



Earth swing-by 3 Dec 2015



Examine the asteroid by remote sensing observations. Next, release a small lander and rover and also obtain samples from the surface.



Earth return late 2020



Sample analysis

Depart asteroid Nov-Dec 2019



After confirming safety, touchdown within the crater and obtain subsurface samples



Use an impactor to create an artificial crater on the asteroid's surface






Points to note




Pay attention to the orientation of the asteroid !

Ryugu images show the northern direction of Ryugu pointing upwards.

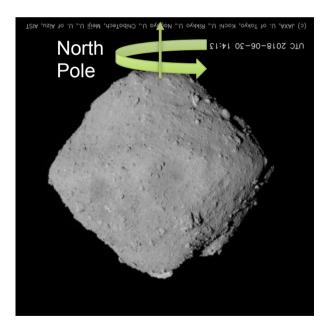

(©JAXA, U. of Aizu et al.)

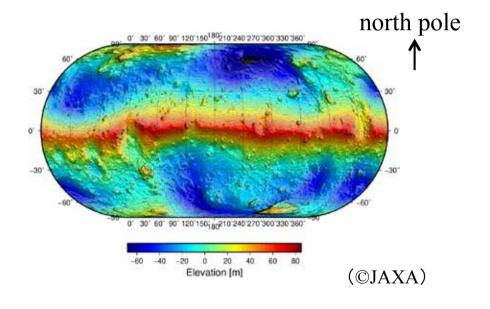

Example of a Ryugu "map"




1. Current project status & schedule overview



Current status:

- Box-B operations began on August 18. On August 24, the spacecraft reached 9km in the +y direction, followed by 9km in the -x direction on August 31. Purpose of the operation was to image Ryugu around the south pole and evening side.
- Preparation for the approach operations to be carried out in September and October.
- Rehearsal 1 for the touchdown operation is scheduled from September, 11-12.


Schedule overview:

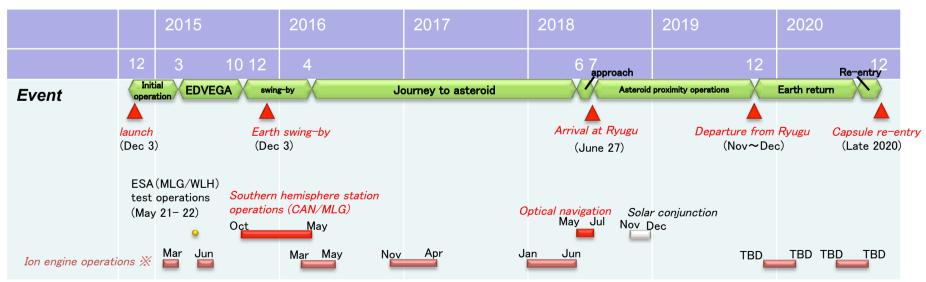



2. Box-B Operation



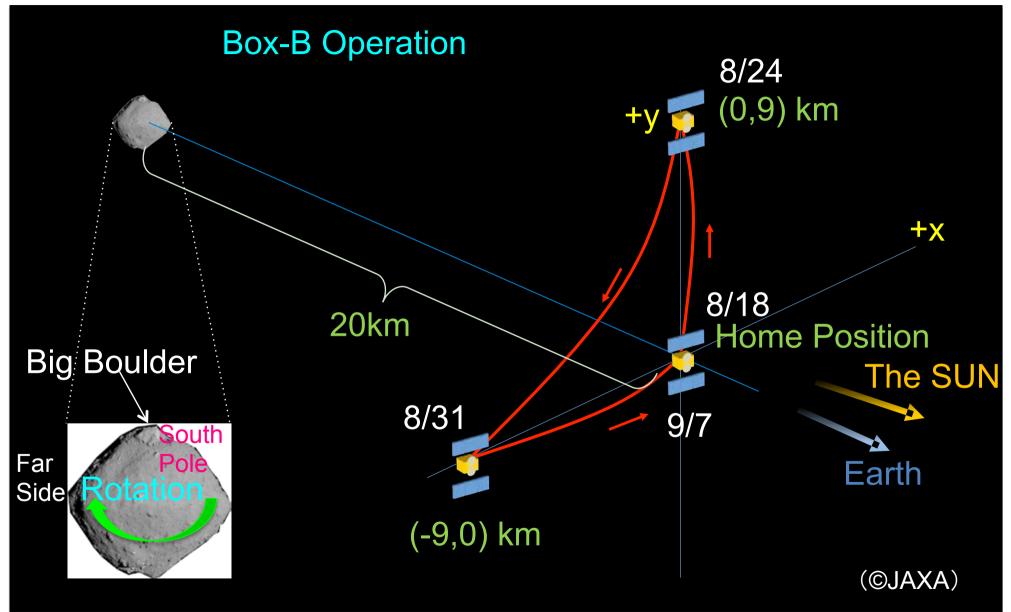



2. Box-B Operation



Ryugu imaged during Box-B operations

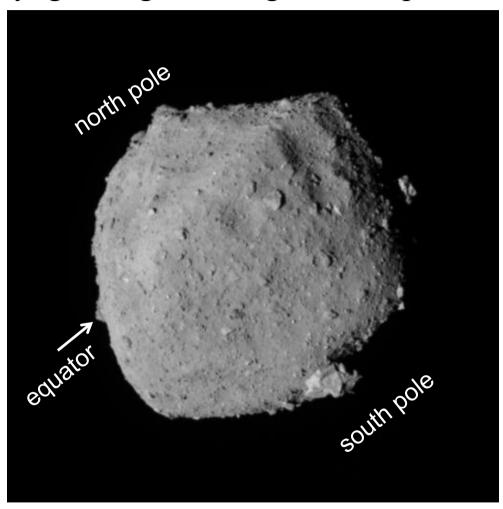


Image captured with the Optical Navigation Camera – Telescopic (ONC-T) on August 24 at around 17:00 JST. Image taken from +y = about 9km. The distance to Ryugu is about 22 km. Image credit: JAXA, U. of Tokyo, Kochi U, Rikkyo U, Nagoya U, Chiba Institute of Technology, Meiji U, U of Aizu, AIST.




3. Small Monitor Camera (CAM-H)



- Camera built & mounted from donation funds.
- View down sampler horn.



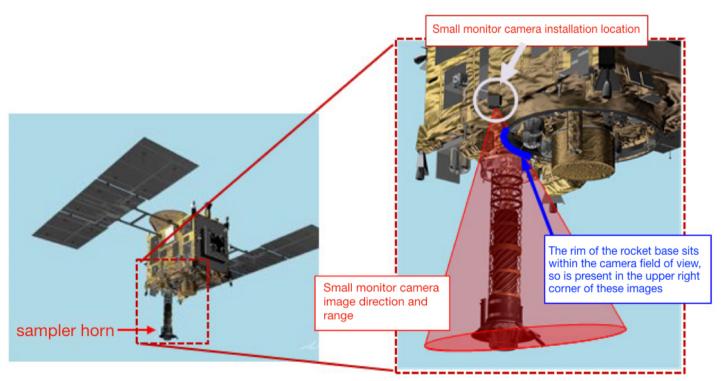


(©JAXA)



3. Small Monitor Camera (CAM-H)



Current appearance of sampler horn

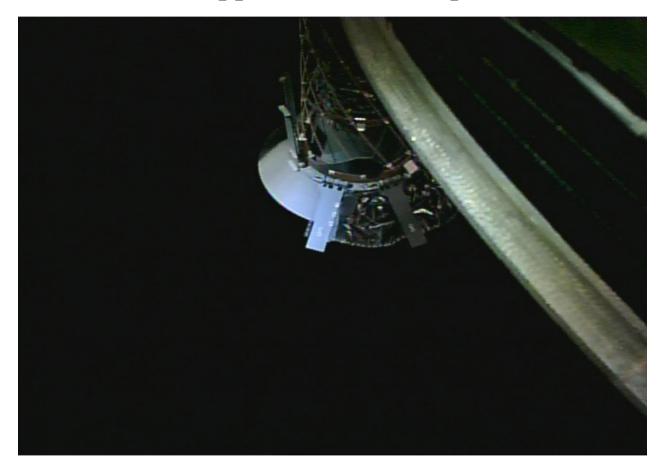


Sampler horn imaged by the Small Monitor Camera (CAM-H) on August 14, 2018



3. Small Monitor Camera (CAM-H)



Reference

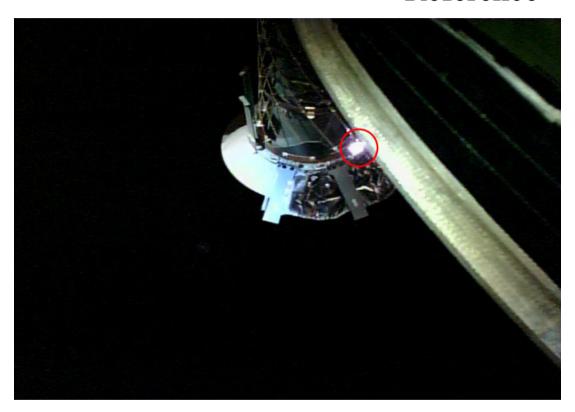

Sampler horn test photograph captured by the Small Monitor Camera (CAM-H) on April 16, 2018. The shiny surface in the red circle is the target plate of the sampler horn irradiated with the LRF-S2 laser.



Sampler horn test photograph by the Small Monitor Camera (CAM-H) on December 5, 2014.

(©JAXA)





- What is astrodynamics?
 - General flight dynamics handled in space engineering.
 - Orbital and attitude motion, navigation, guidance, control etc.
- Hayabusa2 astrodynamics team activities
 - Orbit estimation of the Hayabusa2 probe and asteroid Ryugu.
 - Creation and evaluation of the gravitational field model of asteroid Ryugu.
 - Evaluation of orbital motion in the vicinity of the asteroid.
 - Estimation of asteroid parameters used for exploratory operations and influence the actual operation system.
- What we learned from previous observations:
 - Gravity of the asteroid (mass)
 - Dynamical environment near the asteroid

– Dynamical environment near the asteroid– Asteroid's orbit

Topics for today






Analysis method

- By simultaneously using radio observation data (range, range-rate etc) of the spacecraft acquired by the ground stations, relative observational data of the asteroid acquired by the onboard instruments (laser altimeter & camera images), the precise orbit of the probe and the gravitational acceleration from asteroid Ryugu were estimated.
- The gravity estimate for asteroid Ryugu was carried out using data acquired during the Gravity Measurement Descent Operation (performed 8/6-7). Combined with the volume information calculated from the shape model, it is possible to estimate the bulk density of the asteroid.


- The dynamic environment near asteroid Ryugu could then be evaluated, using the estimated gravity information.

Planets, Moon.

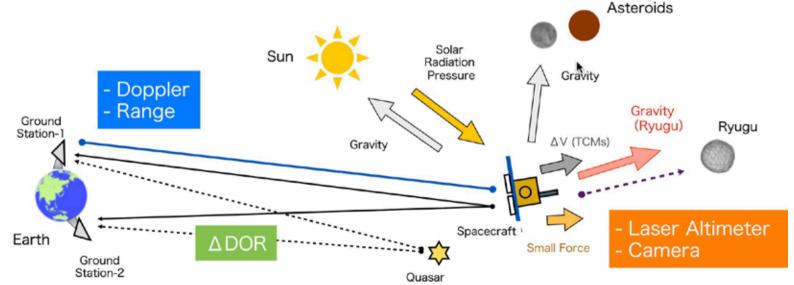






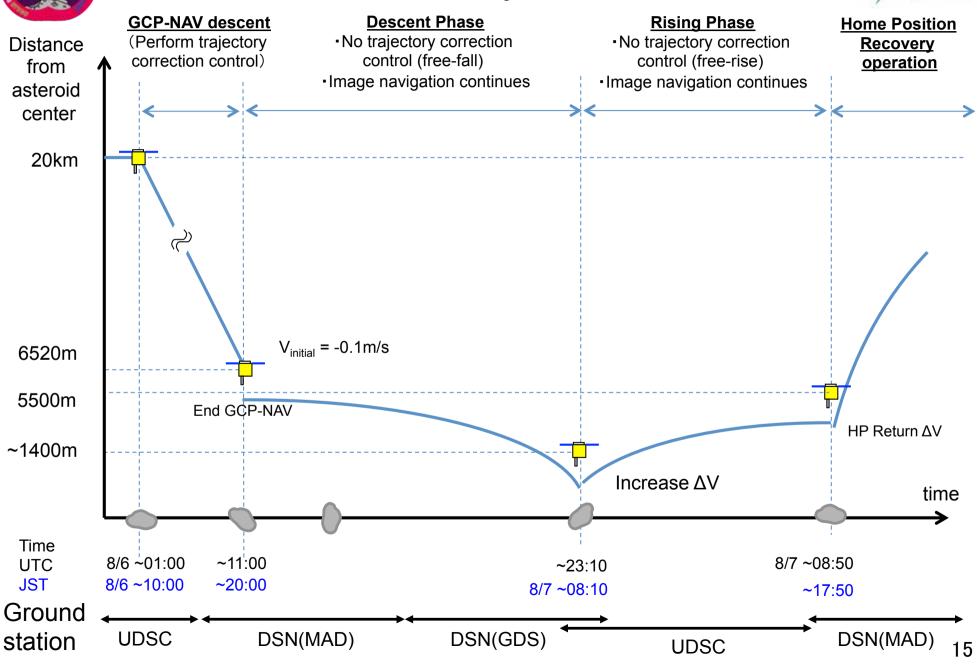





- Descent phase began from ~6,500m altitude, continuing with free-fall motion for about 12 hours.
- Performed trajectory control
 ΔV at the lowest point (altitude
 ~850m) and changed to rising
 phase.
- Relative to the orientation of the rotation of the asteroid, in the asteroid fixed coordinate system, the orbit approached and ascended at the equatorial plane (XY plane) of the asteroid.
- GM (G: gravitational constant, M: mass) obtained during the Gravity Measurement Descent Operation is:

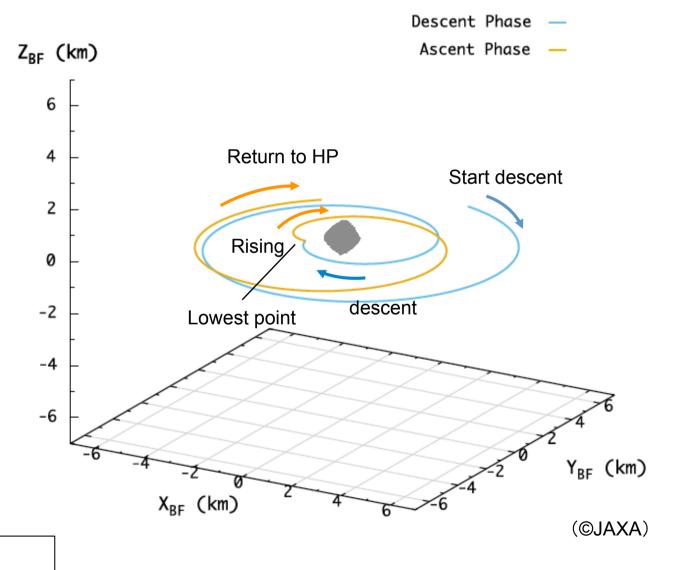

 $GM=~30 (m^3/s^2)$


→ Mass:~450 million tons

Orbit trajectory in the roid fixed coordinate system





- Evaluation of the acceleration environment on the asteroid surface from the estimated gravitational information.
- The acceleration information in the vicinity of the asteroid will be used for future touchdown operations etc.

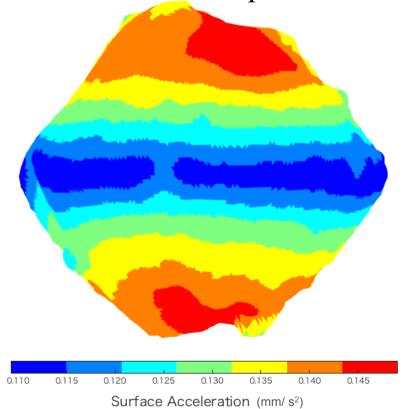

- ✓ The surface acceleration variation is of the order of $0.11 \sim 0.15$ [mm/s²]
- ✓ The acceleration near the poles is large, and small in the vicinity of the equator.
- ✓ Gravity at the equator is
 - Approx. 1/80,000 the Earth.
 - Several times Itokawa.

Acceleration on the surface of Ryugu


(©JAXA)



5. Asteroid Exploration Rover MINERVA- II 1



MINERVA-II is the successor of MINERVA installed in Hayabusa spacecraft.

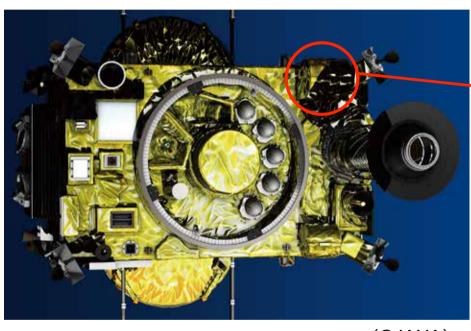

MINERVA-II1(Rover-1A, Rover-1B)



Produced at JAXA

(©JAXA)

< Cooperation makers, universities, groups, etc.> Aichi University of Technology, University of Aizu, Addnics corp., Antenna Giken Co., Ltd., ELNA, CesiaTechno, The University of Tokyo, Tokyo Denki University, Digital Spice Corp., Nittoh Inc., Maxon Japan, DLR, ZARM

- Weight (including deployment)
- MIMERVA-II1 :2.5kg
- MINERVA-II1

Twin rovers



5. Asteroid Exploration Rover MINERVA- II 1



Micro Nano Experimental Robot Vehicle for Asteroid the Second Generation

- New hopping mobility
- Adaptation with AI
- Small, light-weight,
- Low power consumption
- Autonomous behavior



(©JAXA)

• Scientific observation (stereo sensing, thermometer)



5. Asteroid Exploration Rover MINERVA- II 1




body size	Cylinder (hexadecagonal pole) Diameter: f180[mm] Height: 70[mm]
weight	1A:1151[g], 1B:1129[g]
actuators	DC motor
sensors	4 cameras(1A), 3 cameras(1B) photodiodes, accelermeter thermometers, gyro
com.	32k[bps](max)



5. Operation Sequence



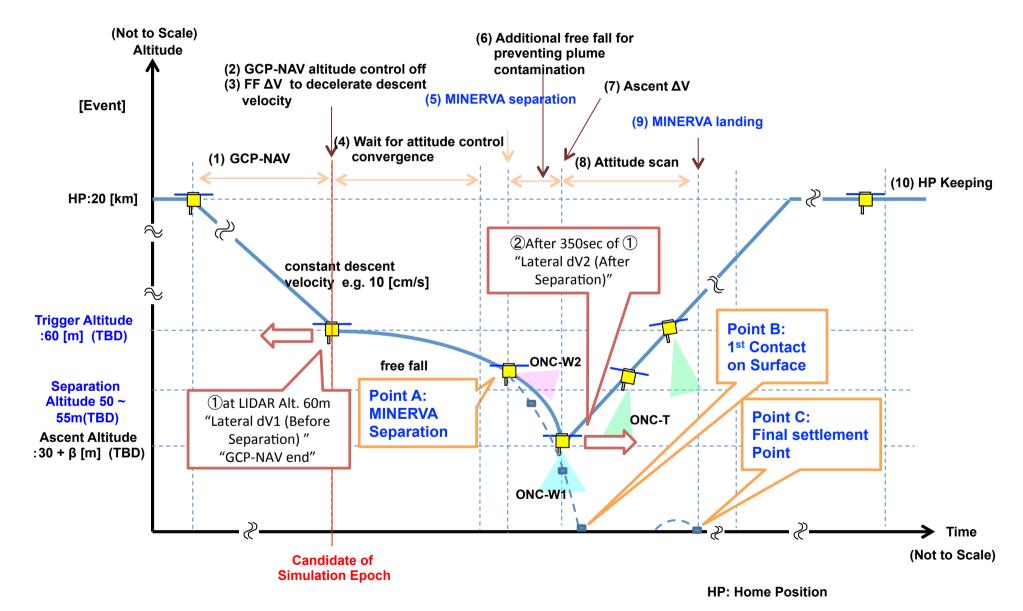



6. Operation Schedule



Operation Schedule

Touchdown 1 rehearsal 1: September $11 \sim 12$

(Arrival at lowest altitude : September 12)

MINERVA-II-1 operation: September $20 \sim 21$

(MINERVA-II-1 separation: September 21)

MASCOT operation: October $2 \sim 4$

(MASCOT separation: October 3)

Touchdown 1 rehearsal 2: mid-October

Touchdown 1: late-October

Note: date of operations may be changed.




6. Rehearsal 1 for Touchdown 1



Outline:

Touchdown rehearsal for information collection and abortion strategy development.

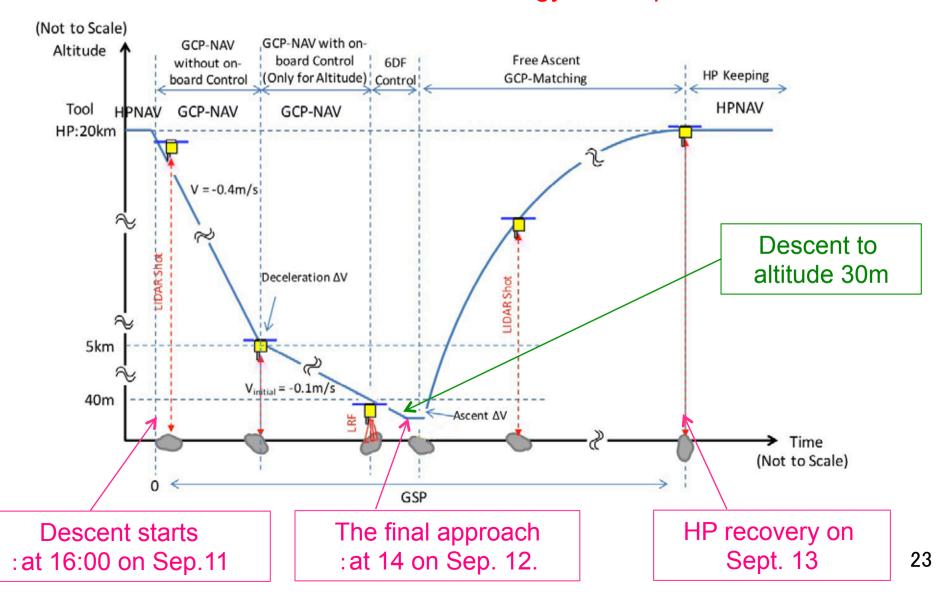



7. Future Plans



- ■Schedule for press briefings
 - Sept. 27 (Thursday) 15:30~16:30
 - Oct. 11 (Thursday) 15:30~16:30 (TBD)
- ■Press Center (Sagamihara)
 - Sept. 21 (Friday): MINERVA-II Operation
 - Oct. 3 (Wednesday): MASCOT Operation






Reference



Home Position Coordinate System 🥠




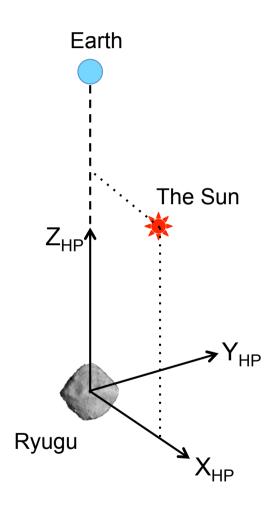



BOX definition



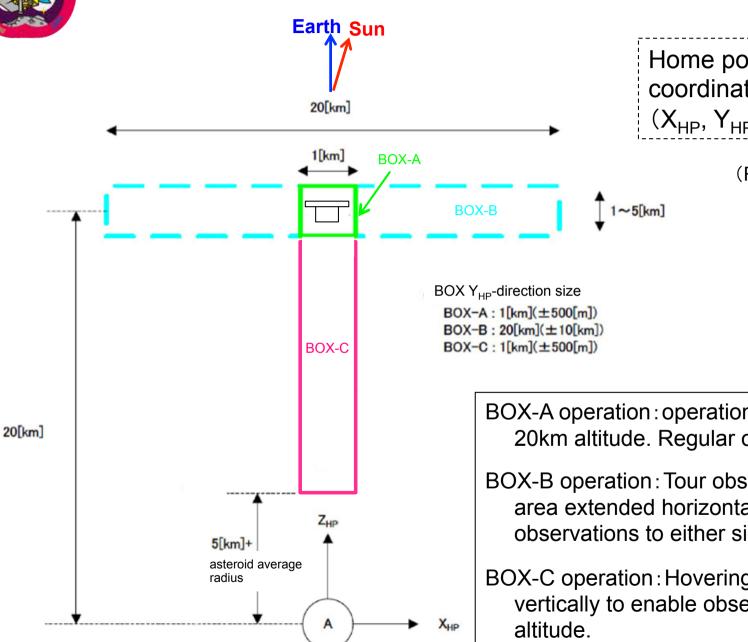

Home position coordinate system

 (X_{HP}, Y_{HP}, Z_{HP})

(Reference material)

BOX-A operation: operations while hovering at 20km altitude. Regular operation standard.

BOX-B operation: Tour observation. Hovering area extended horizontally to enable observations to either side of the asteroid.

BOX-C operation: Hovering area extended vertically to enable observations at low



Selection of landing site candidates for MINERVA- II



Conditions for MINERVA-II landing site selection:


- ☐ Landing site does not overlap with spacecraft touchdown candidates.
- ☐ Landing site does not overlap with MASCOT landing site candidates.
- ☐ The altitude of the spacecraft after separation must not be lower than 30m.
- Ensure communication with ground station.
- Ensure communication with Hayabusa2 spacecraft.
- Not high temperature region, and fewer parts in shadow

• Due to the equatorial ridge, separation near the equator results in widely spaced landing points to the north and south.

• Separating in the southern hemisphere may result in a spacecraft altitude below 30m.



• Separate in northern hemisphere, more than 100m north of the equator.

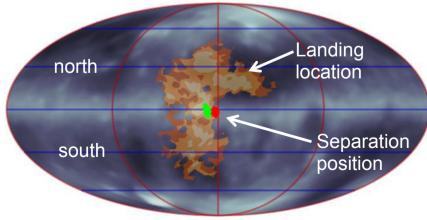

(©JAXA) W


When separating near the equator, the landing position spread north and south.



Selection of landing site candidates for MINERVA-II



Landing site candidates for MINERVA-II: northern hemisphere

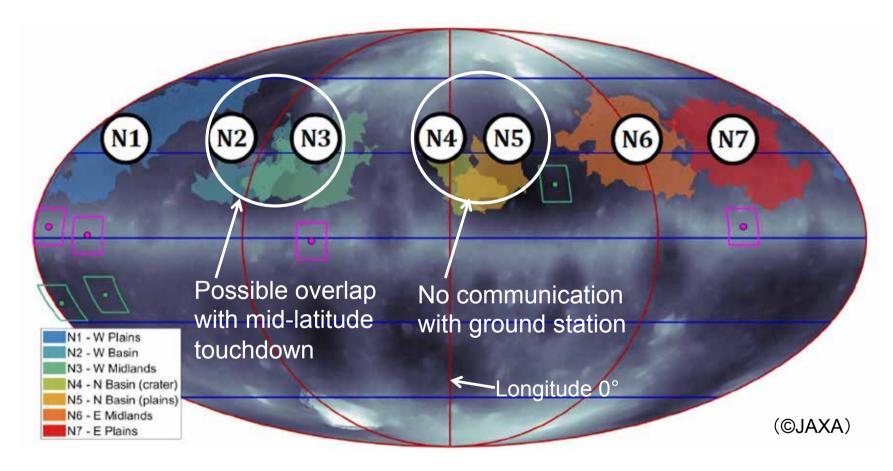

- •Touchdown confirm no overlap with MASCOT's landing site.
- Also consider observability etc. using the ONC-T camera.



Candidate locations:

N6 > N1 > N7



Strategy toward the successful touchdown



