Hawai'i Natural Energy Institute Research Highlights

Advanced Materials

Printable Photovoltaics

OBJECTIVE AND SIGNIFICANCE: The objective of this program is to develop high-throughput ink-based fabrication techniques for light-weight thin-film photovoltaics (PV). This approach has the potential to reduce manufacturing costs and enable PV integration on non-conventional substrates such as polyamides or woven fabrics.

BACKGROUND: Crystalline silicon has been leading the PV market for over 20 years. These panels, found primarily on roof-tops and centralized production plants, are easily recognizable by their architecture, with interconnected wafer-like solar cells laminated under a flat sheet of glass. Although well-suited for stationary electrical production, the mechanical rigidity and weight of silicon PV modules become a burden for mobile applications, where portability is more critical than performance. To this end, R&D efforts have focused on methods to integrate ultralight and flexible thin film solar materials onto lightweight/flexible substrates, including plastics (polyamides) and fabrics. Such devices can generate enough electricity to power small electronic devices for both civilian and military applications, such as phones, electronic tablets, and sensors.

PROJECT STATUS/RESULTS: With support from the Office of Naval Research, the research team at HNEI's Thin Films Laboratory is developing a unique method to print thin-film PV using liquid molecular inks, which contain the raw chemical elements necessary for the synthesis of the solar absorber. This low-cost printing process is intended to replace conventional vacuum-based deposition tools, which are costly to operate and maintain.

Our research is currently focused on a multicompound alloy (CuInSe₂, CISe) – a material which meets the mechanical and weight requirements for light weight flexible PV. HNEI's results demonstrate that high-quality CISe solar absorbers can be achieved with this printing technology, leading to solar cells with power conversion efficiency over 8%.

In addition, HNEI demonstrated that additives directly incorporated into the molecular ink, such as aluminum nitrate, can passivate native defects in CISe during fabrication, yielding to efficiency as high as 11%. Using state-of-the-art electron microscopy analysis available at UH, the HNEI team discovered that aluminum nitrate reacted with oxygen during CISe growth to form nano-sized amorphous alumina (Al₂O₃) grains. This new process was found to incorporate Al₂O₃ through the entire solar absorber's volume, passivating defects notably at grain boundaries and interfaces.

To date, this project has produced the following paper:


2021, W. Septina, et al, <u>In situ Al₂O₃</u>
 incorporation enhances the efficiency of <u>CuIn(S,Se)₂ solar cells prepared from</u>
 molecular-ink solutions, Journal of Materials
 Chemistry A, Vol. 9, Issue 16, pp. 10419-10426.


Funding Source: Office of Naval Research


Contact: Nicolas Gaillard, ngaillar@hawaii.edu

Last Updated: November 2023

Molecular ink Cross-section of a 11% efficient CISe printed solar cell containing isolated nano-sized amorphous Al₂O₃ grains

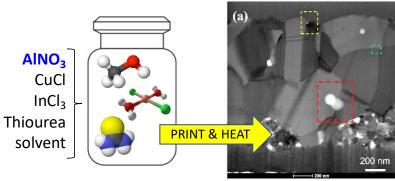





Hawai'i Natural Energy Institute | School of Ocean & Earth Science & Technology University of Hawai'i at Mānoa, 1680 East-West Road, POST 109 • Honolulu, HI 96822 Phone: (808) 956-8890 • Fax: (808) 956-2336 • www.hnei.hawaii.edu