



# SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Fujitsu Siemens Computers

### SPECfp®\_rate2006 = 30.7

### CELSIUS M460, Intel Core 2 Duo E6850 processor

### SPECfp\_rate\_base2006 = 28.9

CPU2006 license: 22


Test sponsor: Fujitsu Siemens Computers

Tested by: Fujitsu Siemens Computers

Test date: Dec-2007

Hardware Availability: Nov-2007

Software Availability: Nov-2007

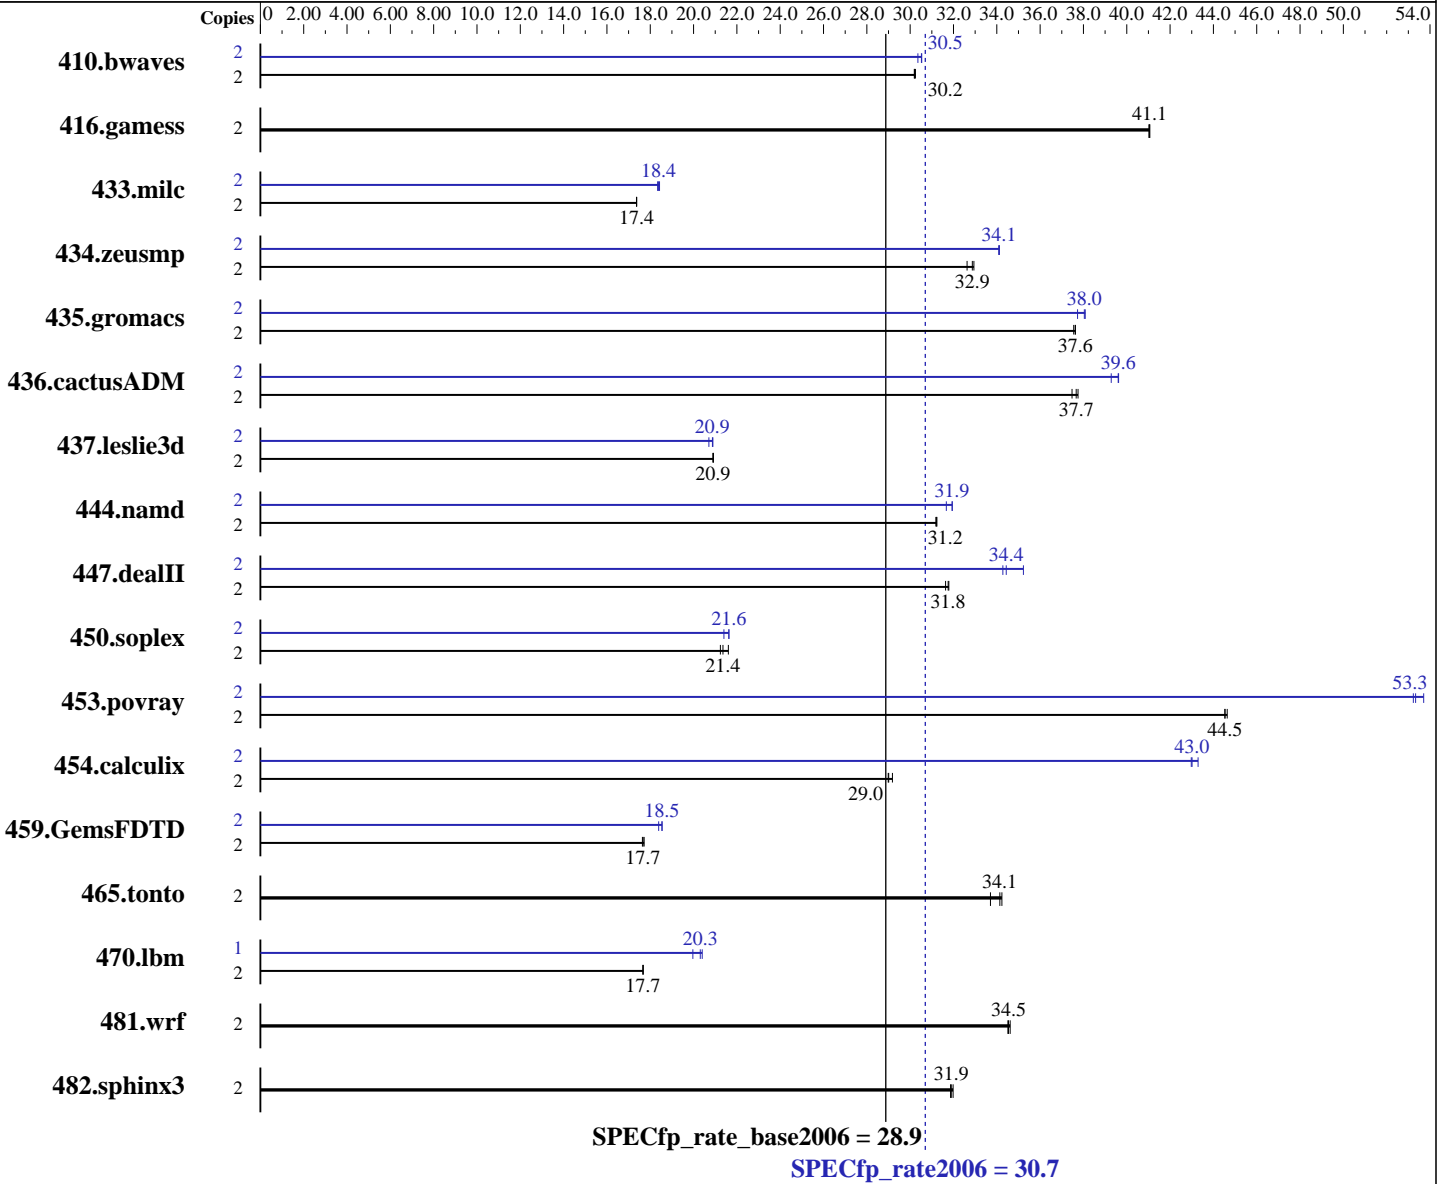

#### Hardware

CPU Name: Intel Core 2 Duo E6850  
 CPU Characteristics:  
 CPU MHz: 3000  
 FPU: Integrated  
 CPU(s) enabled: 2 cores, 1 chip, 2 cores/chip  
 CPU(s) orderable: 1 chip  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 4 MB I+D on chip per chip

Continued on next page

#### Software

Operating System: Microsoft Windows Vista Ultimate (x64)  
 Compiler: Intel C++ and Fortran Compilers for Intel64, Version 10.1, Build 20070913  
 Microsoft Visual Studio 2005 with SP1 (for libraries)  
 Auto Parallel: No  
 File System: NTFS

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Fujitsu Siemens Computers

SPECfp\_rate2006 = 30.7

CELSIUS M460, Intel Core 2 Duo E6850 processor

SPECfp\_rate\_base2006 = 28.9

CPU2006 license: 22

Test date: Dec-2007

Test sponsor: Fujitsu Siemens Computers

Hardware Availability: Nov-2007

Tested by: Fujitsu Siemens Computers

Software Availability: Nov-2007

L3 Cache: None  
Other Cache: None  
Memory: 4 GB (4x1 GB PC2-6400 CL6 SDRAM)  
Disk Subsystem: 1 x 400 GB SATA II 7200 RPM  
Other Hardware: None

System State: Default  
Base Pointers: 64-bit  
Peak Pointers: 64-bit  
Other Software: MicroQuill SmartHeap Library, Version 8.0 (64 bit)

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	2	899	30.2	900	30.2	<b>900</b>	<b>30.2</b>	2	<b>891</b>	<b>30.5</b>	890	30.5	895	30.4
416.gamess	2	955	41.0	<b>954</b>	<b>41.1</b>	954	41.1	2	955	41.0	<b>954</b>	<b>41.1</b>	954	41.1
433.milc	2	<b>1057</b>	<b>17.4</b>	1057	17.4	1057	17.4	2	<b>999</b>	<b>18.4</b>	996	18.4	1001	18.3
434.zeusmp	2	552	32.9	558	32.6	<b>554</b>	<b>32.9</b>	2	534	34.1	<b>534</b>	<b>34.1</b>	533	34.1
435.gromacs	2	380	37.6	<b>380</b>	<b>37.6</b>	380	37.6	2	375	38.1	<b>375</b>	<b>38.0</b>	379	37.7
436.cactusADM	2	<b>635</b>	<b>37.7</b>	633	37.8	638	37.5	2	603	39.6	<b>603</b>	<b>39.6</b>	608	39.3
437.leslie3d	2	900	20.9	<b>899</b>	<b>20.9</b>	899	20.9	2	900	20.9	<b>901</b>	<b>20.9</b>	908	20.7
444.namd	2	514	31.2	<b>514</b>	<b>31.2</b>	514	31.2	2	<b>502</b>	<b>31.9</b>	502	31.9	506	31.7
447.dealII	2	720	31.8	723	31.6	<b>721</b>	<b>31.8</b>	2	667	34.3	<b>664</b>	<b>34.4</b>	649	35.2
450.soplex	2	785	21.2	<b>781</b>	<b>21.4</b>	772	21.6	2	771	21.6	<b>771</b>	<b>21.6</b>	779	21.4
453.povray	2	239	44.5	238	44.6	<b>239</b>	<b>44.5</b>	2	198	53.7	<b>199</b>	<b>53.3</b>	200	53.2
454.calculix	2	569	29.0	565	29.2	<b>569</b>	<b>29.0</b>	2	381	43.3	384	43.0	<b>384</b>	<b>43.0</b>
459.GemsFDTD	2	<b>1201</b>	<b>17.7</b>	1198	17.7	1203	17.6	2	1154	18.4	<b>1145</b>	<b>18.5</b>	1144	18.5
465.tonto	2	575	34.2	<b>576</b>	<b>34.1</b>	584	33.7	2	575	34.2	<b>576</b>	<b>34.1</b>	584	33.7
470.lbm	2	1555	17.7	1556	17.7	<b>1555</b>	<b>17.7</b>	1	674	20.4	688	20.0	<b>677</b>	<b>20.3</b>
481.wrf	2	647	34.5	<b>647</b>	<b>34.5</b>	645	34.6	2	647	34.5	<b>647</b>	<b>34.5</b>	645	34.6
482.sphinx3	2	1219	32.0	1223	31.9	<b>1222</b>	<b>31.9</b>	2	1219	32.0	1223	31.9	<b>1222</b>	<b>31.9</b>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Platform Notes

BIOS default settings have been used.

## General Notes

For information about Fujitsu Siemens Computers please see:  
<http://www.fujitsu-siemens.com>

## Base Compiler Invocation

C benchmarks:  
icl -Qvc8 -Qc99

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu Siemens Computers

SPECfp\_rate2006 = 30.7

CELSIUS M460, Intel Core 2 Duo E6850 processor

SPECfp\_rate\_base2006 = 28.9

CPU2006 license: 22

Test date: Dec-2007

Test sponsor: Fujitsu Siemens Computers

Hardware Availability: Nov-2007

Tested by: Fujitsu Siemens Computers

Software Availability: Nov-2007

## Base Compiler Invocation (Continued)

C++ benchmarks:

icl -Qvc8

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

icl -Qvc8 -Qc99 ifort

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_P64  
416.gamess: -DSPEC\_CPU\_P64  
433.milc: -DSPEC\_CPU\_P64  
434.zeusmp: -DSPEC\_CPU\_P64  
435.gromacs: -DSPEC\_CPU\_P64  
436.cactusADM: -DSPEC\_CPU\_P64 -Qlowercase -assume:underscore  
437.leslie3d: -DSPEC\_CPU\_P64  
444.namd: -DSPEC\_CPU\_P64 -TP  
447.dealII: -DSPEC\_CPU\_P64 -DDEAL\_II\_MEMBER\_VAR\_SPECIALIZATION\_BUG  
450.soplex: -DSPEC\_CPU\_P64  
453.povray: -DSPEC\_CPU\_P64 -DSPEC\_CPU\_WINDOWS\_ICL  
454.calculix: -DSPEC\_CPU\_P64 -DSPEC\_CPU\_NOZMODIFIER -Qlowercase  
459.GemsFDTD: -DSPEC\_CPU\_P64  
465.tonto: -DSPEC\_CPU\_P64  
470.lbm: -DSPEC\_CPU\_P64  
481.wrf: -DSPEC\_CPU\_P64 -DSPEC\_CPU\_WINDOWS\_ICL  
482.sphinx3: -DSPEC\_CPU\_P64

## Base Optimization Flags

C benchmarks:

-fast -F950000000 shlW64M.lib

C++ benchmarks:

-fast -Qcxx-features -F950000000 shlW64M.lib

Fortran benchmarks:

-fast -F950000000

Benchmarks using both Fortran and C:

-fast -F950000000



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu Siemens Computers

SPECfp\_rate2006 = 30.7

CELSIUS M460, Intel Core 2 Duo E6850 processor

SPECfp\_rate\_base2006 = 28.9

CPU2006 license: 22

Test date: Dec-2007

Test sponsor: Fujitsu Siemens Computers

Hardware Availability: Nov-2007

Tested by: Fujitsu Siemens Computers

Software Availability: Nov-2007

## Peak Compiler Invocation

C benchmarks:

icl -Qvc8 -Qc99

C++ benchmarks:

icl -Qvc8

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

icl -Qvc8 -Qc99 ifort

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

433.milc: -Qprof\_gen(pass 1) -Qprof\_use(pass 2) -fast -F950000000

470.lbm: -fast -Qunroll2 -Qscalar-rep- -Qprefetch -F950000000

482.sphinx3: basepeak = yes

C++ benchmarks:

444.namd: -fast -Oa -F950000000 shlW64M.lib

447.dealII: -Qprof\_gen(pass 1) -Qprof\_use(pass 2) -fast -Qcxx-features  
-F950000000

450.soplex: Same as 447.dealII

453.povray: Same as 447.dealII

Fortran benchmarks:

410.bwaves: -Qprof\_gen(pass 1) -Qprof\_use(pass 2) -fast -F950000000

416.gamess: basepeak = yes

434.zeusmp: -QxT -O2 -Qprec-div- -Qunroll10 -Qscalar-rep- -F950000000

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Fujitsu Siemens Computers**

**SPECfp\_rate2006 = 30.7**

**CELSIUS M460, Intel Core 2 Duo E6850 processor**

**SPECfp\_rate\_base2006 = 28.9**

**CPU2006 license:** 22

**Test date:** Dec-2007

**Test sponsor:** Fujitsu Siemens Computers

**Hardware Availability:** Nov-2007

**Tested by:** Fujitsu Siemens Computers

**Software Availability:** Nov-2007

## Peak Optimization Flags (Continued)

437.leslie3d: Same as 410.bwaves

459.GemsFDTD: -fast -Qunroll2 -Ob0 -Qprefetch -F950000000

465.tonto: basepeak = yes

Benchmarks using both Fortran and C:

435.gromacs: -Qprof\_gen(pass 1) -Qprof\_use(pass 2) -fast -F950000000

436.cactusADM: -fast -Qunroll2 -Qprefetch -F950000000

454.calculix: -fast -Qunroll-aggressive -F950000000

481.wrf: basepeak = yes

The flags file that was used to format this result can be browsed at

[http://www.spec.org/cpu2006/flags/CPU2006\\_flags.20090713.03.html](http://www.spec.org/cpu2006/flags/CPU2006_flags.20090713.03.html)

You can also download the XML flags source by saving the following link:

[http://www.spec.org/cpu2006/flags/CPU2006\\_flags.20090713.03.xml](http://www.spec.org/cpu2006/flags/CPU2006_flags.20090713.03.xml)

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.0.  
Report generated on Tue Jul 22 15:17:39 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 24 January 2008.