



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/120Rh-1
(Intel Xeon X5260)

SPECint®_rate2006 = 81.2

SPECint_rate_base2006 = 69.3

CPU2006 license: 9006


Test sponsor: NEC Corporation

Tested by: NEC Corporation

Test date: Feb-2008

Hardware Availability: Jan-2008

Software Availability: Nov-2007

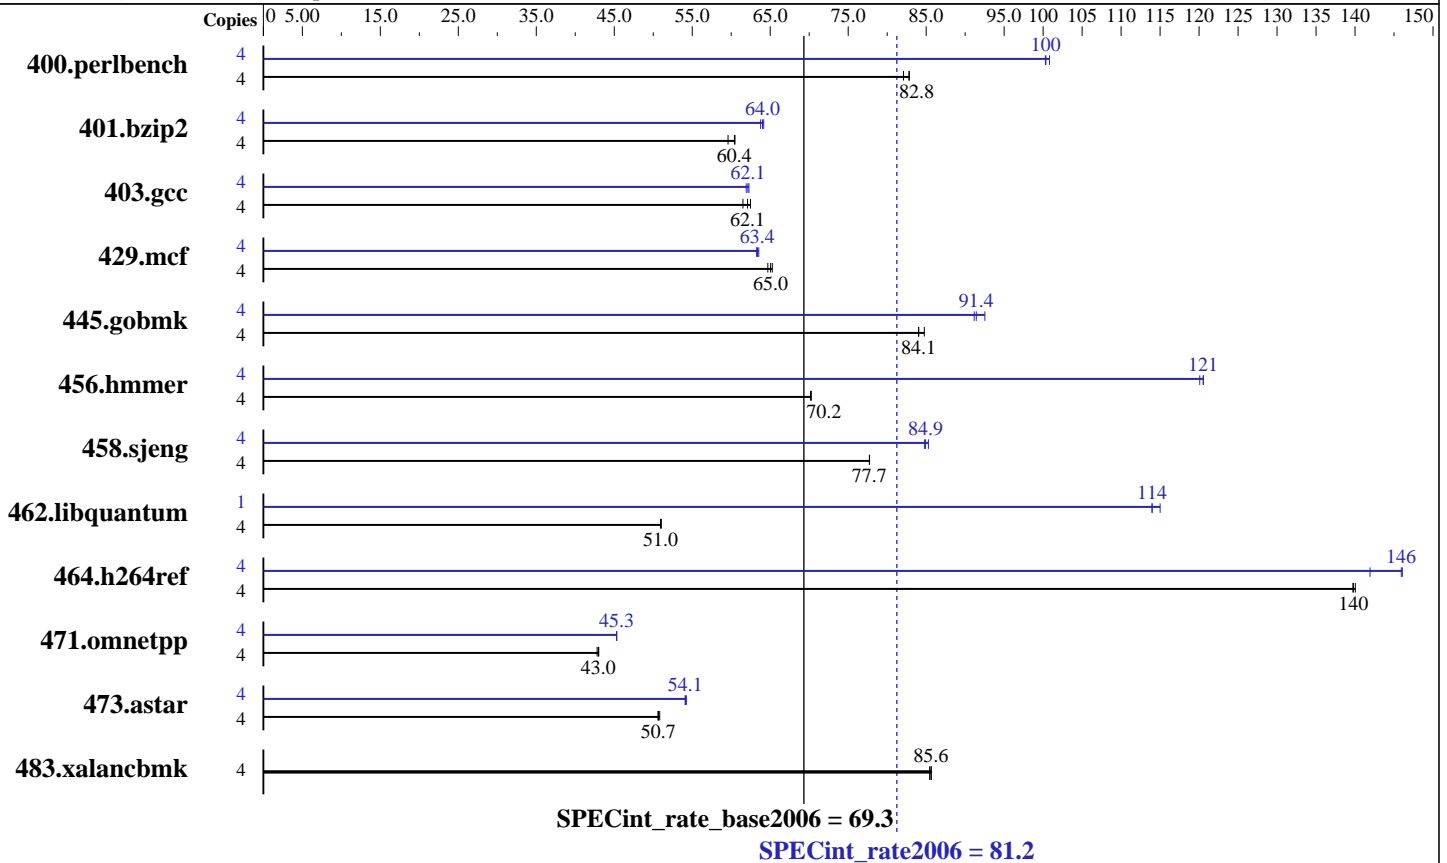

Hardware

CPU Name: Intel Xeon X5260
 CPU Characteristics: 3.33 GHz, 6 MB L2, 1333 MHz bus
 CPU MHz: 3333
 FPU: Integrated
 CPU(s) enabled: 4 cores, 2 chips, 2 cores/chip
 CPU(s) orderable: 1,2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 6 MB I+D on chip per chip
 L3 Cache: None
 Other Cache: None
 Memory: 12 GB (12x1 GB PC2-5300F, 2 rank, CL5-5-5, ECC)
 Disk Subsystem: 1x146.5 GB SAS, 15000RPM
 Other Hardware: None

Software

Operating System: SUSE Linux Enterprise Server 10 (x86_64) SP1, Kernel 2.6.16.46-0.12-smp
 Compiler: Intel C++ Compiler for Linux32 and Linux64 version 10.1 Build 20070913 Package ID: l_cc_p_10.1.008
 Auto Parallel: Yes
 File System: ext2
 System State: Run level 3 (multi-user)
 Base Pointers: 32-bit
 Peak Pointers: 32/64-bit
 Other Software: MicroQuill SmartHeap library 8.1 binutils-2.17.tar.gz, Version 2.17



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/120Rh-1
(Intel Xeon X5260)

SPECint_rate2006 = 81.2

SPECint_rate_base2006 = 69.3

CPU2006 license: 9006

Test sponsor: NEC Corporation

Tested by: NEC Corporation

Test date: Feb-2008

Hardware Availability: Jan-2008

Software Availability: Nov-2007

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	4	472	82.8	476	82.1	472	82.8	4	388	101	390	100	389	100
401.bzip2	4	648	59.6	639	60.4	638	60.5	4	603	64.0	602	64.2	605	63.8
403.gcc	4	524	61.5	515	62.5	519	62.1	4	517	62.3	518	62.1	520	61.9
429.mcf	4	564	64.7	559	65.3	561	65.0	4	574	63.5	576	63.4	577	63.3
445.gobmk	4	499	84.1	495	84.8	499	84.0	4	459	91.4	460	91.2	453	92.5
456.hammer	4	531	70.2	532	70.2	531	70.2	4	310	121	311	120	310	121
458.sjeng	4	623	77.7	623	77.7	623	77.7	4	571	84.8	570	84.9	567	85.3
462.libquantum	4	1624	51.0	1627	51.0	1626	51.0	1	180	115	182	114	182	114
464.h264ref	4	633	140	633	140	632	140	4	606	146	607	146	624	142
471.omnetpp	4	581	43.0	584	42.8	582	43.0	4	552	45.3	552	45.3	552	45.3
473.astar	4	555	50.6	554	50.7	552	50.8	4	519	54.1	518	54.3	519	54.1
483.xalancbmk	4	322	85.6	323	85.4	322	85.7	4	322	85.6	323	85.4	322	85.7

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run
OMP_NUM_THREADS set to number of cores

Platform Notes

Bios settings:
Intel SpeedStep Technology: Disabled

General Notes

All benchmarks compiled in 32-bit mode except 401.bzip2, 456.hammer, for peak, are compiled in 64-bit mode

The NEC Express5800/120Rh-1(Intel Xeon Processor X5260), the NEC Express5800/120Rj-2(Intel Xeon Processor X5260), the Bull NovaScale R440 E1 (Intel Xeon X5260,3.33GHz) and the Bull NovaScale R460 E1 (Intel Xeon X5260,3.33GHz) models are electronically equivalent. The results have been measured on a NEC Express5800/120Rj-2(Intel Xeon Processor X5260) model.

Base Compiler Invocation

C benchmarks:
icc

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/120Rh-1
(Intel Xeon X5260)

SPECint_rate2006 = 81.2

SPECint_rate_base2006 = 69.3

CPU2006 license: 9006

Test sponsor: NEC Corporation

Tested by: NEC Corporation

Test date: Feb-2008

Hardware Availability: Jan-2008

Software Availability: Nov-2007

Base Compiler Invocation (Continued)

C++ benchmarks:
icpc

Base Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:
-fast -inline-calloc -opt-malloc-options=3

C++ benchmarks:
-xT -ipo -O3 -no-prec-div -Wl,-z,muldefs
-L/opt/SmartHeap_8.1/lib -lsmartheap

Base Other Flags

C benchmarks:
403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):
icc

401.bzip2: /opt/intel/cce/10.1.008/bin/icc
-L/opt/intel/cce/10.1.008/lib
-I/opt/intel/cce/10.1.008/include

456.hmmer: /opt/intel/cce/10.1.008/bin/icc
-L/opt/intel/cce/10.1.008/lib
-I/opt/intel/cce/10.1.008/include

C++ benchmarks:
icpc



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/120Rh-1
(Intel Xeon X5260)

SPECint_rate2006 = 81.2

SPECint_rate_base2006 = 69.3

CPU2006 license: 9006

Test sponsor: NEC Corporation

Tested by: NEC Corporation

Test date: Feb-2008

Hardware Availability: Jan-2008

Software Availability: Nov-2007

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
401.bzip2: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -prof-gen(pass 1) -prof-use(pass 2) -fast -ansi-alias
-prefetch
401.bzip2: -prof-gen(pass 1) -prof-use(pass 2) -fast -prefetch
403.gcc: -fast -inline-calloc -opt-malloc-options=3
429.mcf: -fast -prefetch
445.gobmk: -prof-gen(pass 1) -prof-use(pass 2) -xT -O2 -ipo
-no-prec-div -ansi-alias
456.hmmer: -fast -unroll2 -ansi-alias -opt-multi-version-aggressive
458.sjeng: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll4
462.libquantum: -fast -unroll4 -Ob0 -prefetch
-opt-streaming-stores always -vec-guard-write
-opt-malloc-options=3 -parallel -par-runtime-control
464.h264ref: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2
-ansi-alias

C++ benchmarks:

471.omnetpp: -prof-gen(pass 1) -prof-use(pass 2) -xT -O3 -ipo
-no-prec-div -ansi-alias -opt-ra-region-strategy=block
-Wl,-z,muldefs -L/opt/SmartHeap_8.1/lib -lsmarheap
473.astar: -prof-gen(pass 1) -prof-use(pass 2) -xT -O3 -ipo
-no-prec-div -ansi-alias -opt-ra-region-strategy=routine
-Wl,-z,muldefs -L/opt/SmartHeap_8.1/lib -lsmarheap
483.xalancbmk: basepeak = yes



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/120Rh-1
(Intel Xeon X5260)

SPECint_rate2006 = 81.2

SPECint_rate_base2006 = 69.3

CPU2006 license: 9006
Test sponsor: NEC Corporation
Tested by: NEC Corporation

Test date: Feb-2008
Hardware Availability: Jan-2008
Software Availability: Nov-2007

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/NEC-Intel-ic10.1-INT-ia32-linux-flags.20090713.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/NEC-Intel-ic10.1-INT-ia32-linux-flags.20090713.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.
Report generated on Tue Jul 22 15:33:05 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 19 March 2008.