

On the Easiest and Hardest Fitness Functions

Jun He*

Department of Computer Science
Aberystwyth University, Aberystwyth, SY23 3DB, U.K.

Tianshi Chen[†]

Institute of Computing Technology
Chinese Academy of Sciences, Beijing 100190, China

Xin Yao[‡]

CERCIA, School of Computer Science
University of Birmingham, Birmingham B15 2TT, UK.

September 16, 2018

Abstract

The hardness of fitness functions is an important research topic in the field of evolutionary computation. In theory, the study can help understanding the ability of evolutionary algorithms (EAs). In practice, the study may provide a guideline to the design of benchmarks. The aim of this paper is to answer the following research questions: Given a fitness function class, which functions are the easiest with respect to an EA? Which are the hardest? How are these functions constructed? The paper provides theoretical answers to these questions. The easiest and hardest fitness functions are constructed for an elitist (1+1) EA in maximising a class of fitness functions with the same optima. The paper also reveals that a fitness function that is easiest to one EA may become the hardest to another EA, and vice versa.

1 Introduction

Which fitness functions are easy for an EA and which are not? This is an important research topic in the field of evolutionary computation. In theory, the study of the hardness of fitness functions can help understanding the ability of EAs. In practice, the study may provide a guideline to the design of benchmarks. The answer to the above questions vary as the domain of fitness functions changes from all possible functions to a single function.

The first scenario is to consider all possible fitness functions. In this case No Free Lunch theorems [1, 2] have answered the question. The theorems claim that the performance of any two EAs are equivalent in terms of average performance.

The second scenario is to consider a class of fitness functions with the same features, such as unimodal functions versus multi-modal functions, or deceptive functions versus non-deceptive functions. However a multi-modal function may be easy solve [3]. A unimodal function may be difficult for certain EAs but easy for others [4]. A non-deceptive function may be difficult to an EA [5], and a deceptive function may be easy [6]. Few features are able to distinguish whether a function class is easy or hard for an EA.

The third scenario is to consider a single fitness function. A popular approach is to develop a statistic measure to predict the hardness of a fitness function, such as fitness-distance correlation [7], fitness variance [8], and epistasis variance [9]. Unfortunately it is intractable to design a measure that can predict the hardness of a function efficiently [10, 11].

*email: jun.he@ieee.org

[†]email: chentianshi@ict.ac.cn.

[‡]email: x.yao@cs.bham.ac.uk.

Different from the above three scenarios, an alternative scenario is considered in the current paper: given an EA and a class of fitness functions with the same optima, which function is the hardest within the class? Which is the easiest? And how to construct them? Here the easiest function is referred to a function on which the runtime of the EA is the shortest; and the hardest is a function on which the runtime of the EA is the longest. Both are compared with other functions in the same class. These questions never have rigorously been answered before.

Our research aims at understanding the hardest and easiest fitness functions within a function class, and helping design benchmarks. The set of benchmarks usually include several typical fitness functions, for example, easy, hard and ‘averagely hard’ functions in the class. An EA has the best performance on the easiest function, and the worst performance on the hardest function. We will focus on these two extreme cases in this paper.

The paper is organised as follows: Section 2 describes related work. Section 3 defines the easiest and hardest fitness functions, and establishes criteria of determining whether a function is the easiest or the hardest. Sections 4 constructs the easiest and hardest functions. Section 5 discusses the mutual transformation between the easiest and hardest functions. Section 6 concludes the paper.

2 Related Work

In this section we briefly review literature and indicate the difference between our work and previous ones.

The hardness of fitness functions (or called problem difficulty) has been studied over two decades. Normally a fitness function is said to be easy to an EA if the runtime is polynomial or hard if the runtime is exponential. How to characterize which fitness functions are easy or hard was thought to be a major challenge [10].

One approach is to link features of a fitness landscape to the hardness of fitness functions. Several features have been investigated, for example, isolation, deception and multi-modality, ruggedness and neutrality. A fitness landscape with isolation is hard for EAs, but other characteristics may not be related too much to the hardness of fitness functions [10]. A fully non-deceptive function may be difficult for an EA [5] but some deceptive functions can easily be solved by an EA [6]. Some multi-modal functions may be easy solve [3], but the unimodal function like the ‘long path’ problem [3] could be difficult for certain EAs, but easy for others [4]. Few features are universally useful to distinguish between hard and easy fitness functions.

Another approach is to measure the hardness of a fitness function through statistic measures. Many measures are proposed, for example, fitness-distance correlation [7], correlation length and operator correlation [12], fitness variance [8], and epistasis variance [9]. Nevertheless, to compute the exact value of such measures usually is exponential in the problem size due to the fact that the search space is exponentially large [13, 10, 11]. Inherent flaws also exist in the common hardness measures such as epistasis variance, fitness-distance correlation and epistasis correlation [14].

An alternative theoretical approach is based on fitness levels [15, 16]. Hard fitness functions are classified into two types: ‘wide gap’ problems and ‘long path’ problems. For the ‘wide gap’ type, the EA is trapped at a fitness level, because there is a wide gap between that fitness level and higher fitness levels. For the ‘long-path’ type, the EA has to take a long path to reach an optimum.

The research in the current paper is totally different from previous work. The hardest and easiest functions are compared with other fitness functions within the same function class. The hardest function are not relevant to exponential runtime and the easiest fitness functions are not relevant to polynomial runtime. For some function class, an EA only needs polynomial time on the hardest function. For some other function class, an EA may take exponential time on the easiest function.

Our study is also different from No Free Lunch theorems [1, 2], which state that any two EAs are equivalent when their performance is averaged across all possible fitness functions. We don’t intend to investigate the easiest and hardest functions among all possible fitness functions, instead only in a class of fitness functions with the same optima.

3 Easiest and Hardest Fitness Functions

In this section we define the easiest and hardest fitness functions in a function class and establish the criteria to determine whether a function is the easiest or hardest.

3.1 Definition of Easiest and Hardest Fitness Functions

Consider the problem of maximizing a class of fitness functions with the same optima. An instance of the problem is to maximize a fitness function $f(x)$:

$$\max\{f(x); x \in S\}, \text{ subject to constraint(s)}, \quad (1)$$

where S is a finite set.

The simplest technique is taken to handle constraint(s): an infeasible solution is always rejected. In this case the search space is reduced to feasible solutions only, still denoted by S . The optimal set is denoted by S_{opt} and the non-optimal set by S_{non} . Without loss of generality, the function $f(x)$ takes $L + 1$ finite values $f_0 > f_1 > \dots > f_L$. Corresponding to fitness levels, the set S is decomposed into $L + 1$ subsets:

$$S_l := \{x \mid f(x) = f_l\}, l = 0, 1, \dots, L.$$

For simplicity of analysis, we only investigate strictly elitist (1+1) EAs. Using *strictly elitist selection*, the parent is replaced by the child only when the child is fitter. Therefore the best found solution is always preserved. In the EAs, mutation is independent of the fitness function. Both mutation and selection are time invariant (non-adaptive EAs). The procedure of such an elitist (1+1) EA is described as follows.

- 1: **input:** fitness function $f(x)$;
- 2: generate a feasible solution at random and denote it by ϕ_0 ;
- 3: generation counter $t \leftarrow 0$;
- 4: **while** the maximum value of $f(x)$ is not found **do**
- 5: child $\phi_{t,m} \leftarrow$ is mutated from parent ϕ_t ;
- 6: **if** $\phi_{t,m}$ is an infeasible point **then**
- 7: next generation parent $\phi_{t+1} \leftarrow \phi_t$;
- 8: **else if** $f(\phi_{t,m}) > f(\phi_t)$ **then**
- 9: next generation parent $\phi_{t+1} \leftarrow \phi_{t,m}$;
- 10: **else**
- 11: next generation parent $\phi_{t+1} \leftarrow \phi_t$;
- 12: **end if**
- 13: $t \leftarrow t + 1$;
- 14: **end while**
- 15: **output:** the maximal value of $f(x)$.

Let $G(x)$ denote the expected number of generations for an EA to find an optimal solution for the first time when starting at x (called *expected hitting time*). In (1+1) EAs, $G(x)$ also represents the expected number of fitness evaluations (called *expected runtime*). In this paper, we restrict our discussion to those EAs whose expected runtime is finite (convergent EAs).

Definition 1. Given an EA for maximising a class of fitness functions with the same optima, a function $f(x)$ in the class is said to be the *easiest* to the EA if starting from any initial point, the runtime of the EA for maximising $f(x)$ is no more than the runtime for maximising any fitness function $g(x)$ in the class when starting from the same initial point. A function $f(x)$ in the class is said to be the *hardest* to the EA if starting from any initial point, the runtime of the EA for maximising $f(x)$ is no less than the runtime for maximising any fitness function $g(x)$ in the class when starting from the same initial point.

The definition of the easiest and hardest functions is based on a point-by-point comparison of the runtime of the EA on two fitness functions. It is irrelevant to polynomial or exponential runtime. The easiest and hardest functions are not unique. Actually the number of both functions is infinite (this will be demonstrated in the next section).

3.2 Criterion for Determining Easiest Function

Before we establish the criterion, we apply drift analysis to the random sequence $\{\phi_t, t = 0, 1, \dots\}$ and draw several preliminary results. Notice that each generation of the (1+1) EA consists of two steps: mutation and selection,

$$\phi_t \xrightarrow{\text{mutation}} \phi_{t,m} \text{ with } \phi_{t,m} \xrightarrow{\text{selection}} \phi_{t+1}.$$

The mutation operator is a transition from ϕ_t to $\phi_{t,m}$, whose transition probabilities are represented by

$$P^{[m]}(x, y) := P(\phi_{t,m} = y \mid \phi_t = x), x, y \in S. \quad (2)$$

Here ϕ is a random variable and x its value.

The selection operator is another transition from ϕ_t and $\phi_{t,m}$ to ϕ_{t+1} , whose transition probabilities are represented by

$$P^{[s]}(x, y, z) := P(\phi_{t+1} = z \mid \phi_t = x, \phi_{t,m} = y), x, y, z \in S.$$

The t -th generation is a transition from ϕ_t to ϕ_{t+1} , whose transition probabilities are represented by

$$P(x, z) := P(\phi_{t+1} = z \mid \phi_t = x). \quad (3)$$

In drift analysis, a function $d(x)$ is called a *drift function* if it is non-negative at any point and equals 0 at any optimum. Given a drift function $d(x)$, *drift* represents the progress rate of moving towards the optima per generation. Drift at point x is defined by

$$\Delta(x) := \sum_{y \in S} P(x, y)(d(x) - d(y)).$$

Define positive drift $\Delta^+(x)$ and negative drift $\Delta^-(x)$ as follows

$$\begin{aligned} \Delta^+(x) &= \sum_{y: d(x) > d(y)} P(x, y)(d(x) - d(y)), \\ \Delta^-(x) &= \sum_{y: d(x) < d(y)} P(x, y)(d(x) - d(y)). \end{aligned}$$

Then the drift

$$\Delta(x) = \Delta^+(x) + \Delta^-(x).$$

Using Drift Analysis theorems [17], we obtain the following preliminary results.

Lemma 1. [17, Lemma 1] *If the drift satisfies that $\Delta(x) \geq 1$ for any non-optimal point x , then the expected runtime satisfies that $G(x) \leq d(x)$ for any point x .*

Lemma 2. [17, Lemma 2] *If the drift satisfies that $\Delta(x) \leq 1$ for any non-optimal point x , then the expected runtime satisfies that $G(x) \geq d(x)$ for any point x .*

Lemma 3. [17, Lemma 3] *Let the drift function $d(x) = G(x)$, then the drift satisfies $\Delta(x) = 1$ for any non-optimal point x .*

Furthermore, the runtime of an elitist (1+1) EA can be explicitly expressed in transition probabilities.

Lemma 4. [15, Theorem 4] *For any elitist (1+1) EA, its expected runtime is given by*

$$G(x) = \begin{cases} 0, & x = S_0. \\ \frac{1 + \sum_{k=0}^{l-1} \sum_{y \in S_k} P(x, y) G(y)}{\sum_{k=0}^{l-1} \sum_{y \in S_k} P(x, y)}, & x \in S_l, l > 0. \end{cases}$$

Using the above lemmas, we establish a criterion of determining whether a fitness function is the easiest to an elitist (1+1) EA.

Theorem 1. *Given an elitist (1+1) EA, and a class of fitness functions with the same optima, let $G(x)$ denote the expected runtime for maximising $f(x)$. If the following monotonically decreasing condition holds:*

- *for any two points x and y such that $G(x) < G(y)$, it has $f(x) > f(y)$,*

then $f(x)$ is the easiest in the fitness function class.

Proof. Let $g(x)$ be a fitness function in the function class. $\{\phi_t, t = 1, 2, \dots\}$ denotes the sequence for maximising $f(x)$, and $\{\psi_t, t = 1, 2, \dots\}$ the sequence for maximising $g(x)$. $G_f(x)(= G(x))$ and $G_g(x)$ denote the runtime of the (1+1) EA for maximising $f(x)$ and $g(x)$ respectively.

Since our target is to show the expected runtime on $f(x)$ is no more than the runtime on other functions, we take the runtime on $f(x)$ as the drift function: $d(x) = G_f(x)$. This plays a crucial role in our analysis.

For the sequence $\{\phi_t\}$, denote the drift at point x by $\Delta_\phi(x)$. For the sequence $\{\psi_t\}$, denote the drift at point x by $\Delta_\psi(x)$. The subscripts ϕ and ψ are used to distinguish between the two sequences $\{\phi_t\}$ and $\{\psi_t\}$.

Notice that $d(x) = G_f(x)$, then we apply Lemma 3 and get that for any non-optimal point x

$$\Delta_\phi(x) = 1. \quad (4)$$

The rest of proof is based on the idea: first, we prove the drift $\Delta_\psi(x) \leq 1$, then draw the derived conclusion using Lemma 2.

(1) First we compare the negative drift of the two sequences. In the case of negative drift, we consider two points x and y such that $d(x) < d(y)$ (i.e., $G_f(x) < G_f(y)$). According to the monotonically decreasing condition, $f(x) > f(y)$.

For the sequence $\{\phi_t\}$, y is never accepted due to elitist section, which leads to

$$P_\phi(x, y) = 0.$$

Thus for the sequence $\{\phi_t\}$, there is no negative drift.

$$\Delta_\phi^-(x) = 0.$$

For the sequence $\{\psi_t\}$, there exist two cases: (i) $g(x) < g(y)$; (ii) $g(x) \geq g(y)$. In the case of $g(x) < g(y)$, y will be accepted, which implies

$$P_\psi(x, y) \geq 0.$$

Thus there exists negative drift for the sequence $\{\psi_t\}$.

$$\Delta_\psi^-(x) \leq 0.$$

Comparing the negative drift of these two sequences, we get

$$\Delta_\psi^-(x) \leq \Delta_\phi^-(x) \quad (5)$$

(2) Secondly we compare the positive drift of the two sequences. In the case of positive drift, we consider two points x and y such that $d(x) > d(y)$. If y is not an optimum, then according to the monotonically decreasing condition, $f(x) < f(y)$. If y is an optimum, then naturally $f(x) < f(y)$.

For the sequence $\{\phi_t\}$, if such a y has been mutated from x , then y is always accepted due to elitist selection. Thus

$$P_\phi(x, y) = P^{[m]}(x, y).$$

For the sequence $\{\psi_t\}$, there exist two cases: (i) $g(x) < g(y)$; (ii) or $g(x) \geq g(y)$. In the case of $g(x) < g(y)$, according to elitist section, y is always accepted. Thus

$$P_\psi(x, y) = P^{[m]}(x, y).$$

In the case of $g(x) \geq g(y)$, according to elitist section, y will not be accepted. The transition probability is 0:

$$P_\psi(x, y) = 0.$$

Then we get that

$$P_\phi(x, y) \geq P_\psi(x, y).$$

Hence

$$\begin{aligned} & \sum_{y:d(x)>d(y)} P_\psi(x, y)(d(x) - d(y)) \\ & \leq \sum_{y:d(x)>d(y)} P_\phi(x, y)(d(x) - d(y)). \end{aligned}$$

So the positive drift of the two sequences satisfies

$$\Delta_\psi^+(x) \leq \Delta_\phi^+(x). \quad (6)$$

Merging (5) and (6) and using (4), we know that the total drift of the two sequences satisfies

$$\Delta_\psi(x) \leq \Delta_\phi(x) = 1.$$

Applying Lemma 2, we see the expected runtime on $g(x)$ satisfies

$$G_g(x) \geq d(x) = G_f(x),$$

then we finish the proof. \square

Now we give an intuitive explanation of the above theorem. The monotonically decreasing condition means the function is unimodal and Theorem 1 asserts that a unimodal function is always the easiest. We regard $G(x)$ (runtime) as the distance $d(x)$ between a point x and the optimum. It is completely different from the neighbourhood-based distance such as the Hamming distance. Time is seldom used as a distance measure in evolutionary computation but popular in our real life. Taking runtime as the distance, we visualise the monotonically decreasing condition

- for any two points x and y such that $d(x) < d(y)$, it has $f(x) > f(y)$,

using a *time-fitness landscape* (see Figure 1), where the x -axis is the runtime and the y -axis is the fitness, and the origin represents the set of optima with $d(x) = 0$. From the figure it is clear that the landscape is *unimodal*: the function $f(x)$ has exactly one optimum. In contrast, any unimodal function defined in the 2-D time-fitness landscape will satisfy the monotonically decreasing condition. The unimodal property implies that no negative drift exists in an elitist EA. Thus the EA always moves towards the optimum. This makes the unimodal time-fitness landscapes the easiest to the EA.

The theorem only states that a unimodal time-fitness landscape is the easiest. Nevertheless this assertion could not be established if using a neighbourhood-based distance such as the Hamming distance. A unimodal function in the context of a neighbourhood-based fitness landscape is not always the easiest.

3.3 Criterion of Determining Hardest Function

In a similar way, we establish a criterion of determining whether a fitness function is the hardest to an elitist (1+1) EA. It is similar to Theorem 1. The monotonically decreasing condition is replaced by the monotonically increasing condition.

Theorem 2. *Given an elitist (1+1) EA, and a class of fitness function with the same optima, let $G(x)$ denote the expected runtime for maximising $f(x)$. If the following monotonically increasing condition holds:*

- for any two non-optimal points x and y such that $G(x) < G(y)$, it has $f(x) < f(y)$,

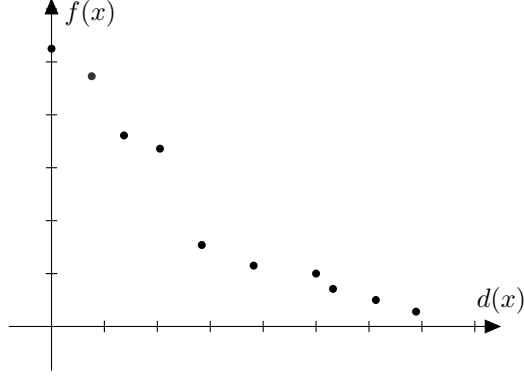


Figure 1: A unimodal time-fitness landscape. The x axis is the runtime. The y axis is the fitness function. The origin represents the optimum.

then $f(x)$ is the hardest in the class.

Proof. The proof is similar to that of Theorem 1 but with several changes.

Let $g(x)$ be a fitness function in the function class. $\{\phi_t, t = 1, 2, \dots\}$ denotes the sequence for maximising $f(x)$, and $\{\psi_t, t = 1, 2, \dots\}$ the sequence for maximising $g(x)$. $G_f(x)(= G(x))$ and $G_g(x)$ denote the runtime of the (1+1) EA for maximising $f(x)$ and $g(x)$ respectively. We take the runtime on $f(x)$ as the drift function: $d(x) = G_f(x)$.

For the sequence $\{\phi_t\}$, notice that $d(x) = G_f(x)$, then we apply Lemma 3 and get for any non-optimal point x

$$\Delta_\phi(x) = 1. \quad (7)$$

(1) First we compare the negative drift of the two sequences. In the case of negative drift, we consider two non-optimal points x and y such that $d(x) < d(y)$ (i.e., $G_f(x) < G_f(y)$). According to the monotonically increasing condition, $f(x) < f(y)$.

For the sequence $\{\phi_t\}$, if such a y has been mutated from x , then y is always accepted due to elitist selection. Thus

$$P_\phi(x, y) = P^{[m]}(x, y).$$

For the sequence $\{\psi_t\}$, there exist two cases: (i) $g(x) < g(y)$; (ii) or $g(x) \geq g(y)$. In the case of $g(x) < g(y)$, if such a y has been mutated from x , then y is always accepted due to elitist selection. Thus

$$P_\psi(x, y) = P^{[m]}(x, y).$$

In the case of $g(x) \geq g(y)$, according to elitist section, y will not be accepted. The probability $P_\psi(x, y)$ equals

$$P_\psi(x, y) = 0.$$

Then we get that

$$P_\phi(x, y) \geq P_\psi(x, y).$$

Hence

$$\begin{aligned} & \sum_{y:d(x)>d(y)} P_\psi(x, y)(d(x) - d(y)) \\ & \geq \sum_{y:d(x)>d(y)} P_\phi(x, y)(d(x) - d(y)). \end{aligned} \quad (8)$$

Equivalently the negative drift of the two sequences satisfies

$$\Delta_{\psi}^{-}(x) \geq \Delta_{\phi}^{-}(x). \quad (9)$$

(2) Secondly we compare the positive drift of the two sequences. In the case of positive drift, we consider two points x and y such that $d(x) > d(y)$. y could be either an optimum or not.

First consider y an optimum. For the sequence $\{\phi_t\}$, if such a y has been mutated from x , then y is always accepted due to elitist selection. Thus

$$P_{\phi}(x, y) = P^{[m]}(x, y).$$

Similar for the sequence $\{\psi_t\}$, y is always accepted due to elitist selection. Thus

$$P_{\psi}(x, y) = P^{[m]}(x, y).$$

Then we get

$$P_{\psi}(x, y) = P_{\phi}(x, y). \quad (10)$$

Then consider y not an optimum. According to the monotonically increasing condition, $f(x) > f(y)$ if y is not an optimum.

For the sequence $\{\phi_t\}$, y is never accepted due to elitist section, which leads to

$$P_{\phi}(x, y) = 0.$$

For the sequence $\{\psi_t\}$, even if $f(x) > f(y)$, it is still possible that $g(x) < g(y)$. So y may be accepted. This means

$$P_{\psi}(x, y) \geq 0.$$

Thus we have

$$P_{\psi}(x, y) \geq P_{\phi}(x, y). \quad (11)$$

Combining (10) and (11), we have for any y ,

$$P_{\psi}(x, y) \geq P_{\phi}(x, y).$$

Then

$$\begin{aligned} & \sum_{y:d(x)<d(y)} P_{\psi}(x, y)(d(x) - d(y)) \\ & \geq \sum_{y:d(x)<d(y)} P_{\phi}(x, y)(d(x) - d(y)). \end{aligned} \quad (12)$$

Equivalently the positive drift of the two sequences satisfies

$$\Delta_{\psi}^{+}(x) \geq \Delta_{\phi}^{+}(x). \quad (13)$$

Merging (9) and (13) and using (7), we draw that the total drift of the two sequences satisfies

$$\Delta_{\psi}(x) \geq \Delta_{\phi}(x) = 1.$$

It follows from Lemma 1 that for any non-optimal point x

$$G_g(x) \leq d(x) = G_f(x),$$

then we finish the proof. □

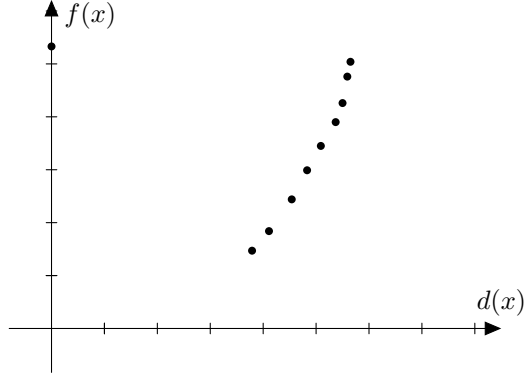


Figure 2: A deceptive time-fitness landscape. The x axis is the runtime. The y axis is the fitness function. The origin represents the optimum.

An intuitive explanation of the above theorem is that the monotonically increasing condition means the function is deceptive and Theorem 2 a deceptive function is always the hardest. Let's demonstrate this using the time-fitness landscape. Still taking runtime $G(x)$ as the distance $d(x)$ to the optima, we visualise the monotonically increasing condition

- for any two non-optimal points x and y such that $d(x) < d(y)$, it has $f(x) < f(y)$,

using a time-fitness landscape (see Figure 2). The landscape is *deceptive*: the closer a point is to the origin, the lower its fitness is. In the deceptive time-fitness landscape, the drift towards the optima is the smallest, so the problem becomes the hardest.

When using a neighbourhood-based distance, it is impossible to establish a similar result under a similar condition. A deceptive function in the context of the neighbourhood-based fitness landscape is not always the hardest.

3.4 Case Study: 0-1 Knapsack Problem

We give two simple examples to show the application of the above theorems. The examples come from the 0-1 knapsack problem. We will not consider all instances of the 0-1 knapsack problem since this is equivalent to consider all possible fitness functions. Instead we focus on an instance class.

Example 1. Consider an instance class of the 0-1 knapsack problem described as follows:

$$\begin{aligned} & \text{maximize} && f(x) = \sum_{i=1}^n v_i x_i, \\ & \text{subject to} && \sum_{i=1}^n w_i x_i \leq C, \end{aligned}$$

where $v_i > 0$ is the value of item i , $w_i > 0$ its weight, and C the knapsack capacity. The value of items satisfies $v_1 > v_2 + \dots + v_n$, and the weight of items satisfies $w_1 > w_2 + \dots + w_n$, the knapsack capacity $C = w_1$. A solution is represented by a binary string $x = (x_1, \dots, x_n)$. The unique optimum is $(1, 0, \dots, 0)$, denoted by x^* .

An elitist (1+1) EA using bitwise mutation is applied to the problem.

- **EA**($\frac{1}{n}$). Flip each bit independently with flipping probability $\frac{1}{n}$.

Let's investigate a special instance in the class: $v_1 = n$ and $v_2 = \dots = v_n = 1$; $w_1 = n$ and $w_2 = \dots = w_n = 1$.

We prove the monotonically increasing condition. We give an outline of the proof but omit its detailed calculation. Corresponding to fitness level f_l , the subset

$$\begin{aligned} S_0 &= \{x^*\}, \text{ and } f_0 = n, \\ S_l &= \{x \mid h(x, x^*) = n - l\}, \text{ and } f_l = n - l, \end{aligned} \quad \text{for } l > 0,$$

where $h(x, y)$ is the Hamming distance between x and y .

According to Lemma 4, the expected runtime of $\text{EA}(\frac{1}{n})$ is given by the following recurrence relation: $G(x) = 0$ for $x \in S_0$ and

$$G(x) = \frac{1 + \sum_{k=0}^{l-1} \sum_{y \in S_k} P(x, y)G(y)}{\sum_{k=0}^{l-1} \sum_{y \in S_k} P(x, y)}, \quad x \in S_l,$$

where

$$P(x, y) = P^{[m]}(x, y) = \left(1 - \frac{1}{n}\right)^{h(x, y)} \left(\frac{1}{n}\right)^{n-h(x, y)}.$$

Then the monotonically increasing condition holds.

$$G(x) < G(y) \implies f(x) < f(y), \quad x, y \in S_{\text{non}}.$$

Applying Theorem 2, we know the fitness function related to this instance is the hardest in the class.

Example 2. Consider an instance class of the 0-1 knapsack problem. The knapsack capacity C is enough large such that $C \geq w_1 + \dots + w_n$. The unique optimum is $\vec{1} := (1, \dots, 1)$. This function class is equivalent to linear functions. We apply $\text{EA}(\frac{1}{n})$ to the problem.

Let's investigate a special instance in the class: $v_1 = \dots = v_n = 1$. It is equivalent to the One-Max fitness function.

We prove the monotonically decreasing condition. We give an outline of the proof. Corresponding to fitness level f_l where $l = 0, \dots, n$, the subset

$$S_l = \{x \mid h(x, \vec{1}) = l\}, \quad \text{and } f_l = n - l,$$

where $h(x, y)$ is the Hamming distance between x and y .

According to Lemma 4, the expected runtime of $\text{EA}(\frac{1}{n})$ is given by the following recurrence relation: $G(x) = 0$ for $x \in S_0$ and for $l > 0$

$$G(x) = \frac{1 + \sum_{k=0}^{l-1} \sum_{y \in S_k} P(x, y)G(y)}{\sum_{k=0}^{l-1} \sum_{y \in S_k} P(x, y)}, \quad x \in S_l,$$

where

$$P(x, y) = P^{[m]}(x, y) = \left(1 - \frac{1}{n}\right)^{h(x, y)} \left(\frac{1}{n}\right)^{n-h(x, y)}.$$

Then the monotonically decreasing condition holds.

$$G(x) < G(y) \implies f(x) > f(y), \quad x, y \in S.$$

Applying Theorem 1, we see the One-Max function is the easiest among all linear functions.

Note: the monotonically increasing condition is a sufficient condition for a fitness function being the hardest, but not necessary. The same is true to the monotonically decreasing condition of the easiest functions. The reason is trivial: Consider a function class only includes one function, then the function will be both the easiest and hardest in the class, regardless of the monotonically increasing or decreasing condition.

4 Construction of Easiest and Hardest Fitness Functions to an EA

According to the monotonically decreasing and increasing conditions, we construct unimodal functions (the easiest) and deceptive functions (the hardest), respectively, to any given elitist (1+1) EA in this section.

4.1 Construction of Easiest Fitness Functions

Given a class consisting of all fitness functions with the same optima on a finite set S , consider an elitist (1+1) EA for maximising a fitness function in the class. We construct the easiest function $f(x)$ to the EA as follows.

1. Let $S_0 = S_{\text{opt}}$. For any $x \in S_0$, define $G'(x) = 0$.
2. Suppose that the subsets S_0, \dots, S_{l-1} are given and $G'(x)$ has been defined on these subsets. Let S_l be the set consisting of all points such that

$$\arg \min_{x \in S \setminus \cup_{k=0}^{l-1} S_k} \frac{1 + \sum_{k=0}^{l-1} \sum_{y \in S_k} P^{[m]}(x, y) G'(y)}{\sum_{k=0}^{l-1} \sum_{y \in S_k} P^{[m]}(x, y)}.$$

For any $x \in S_l$, define

$$G'(x) = \frac{1 + \sum_{k=0}^{l-1} \sum_{y \in S_k} P^{[m]}(x, y) G'(y)}{\sum_{k=0}^{l-1} \sum_{y \in S_k} P^{[m]}(x, y)}. \quad (14)$$

Note: the value of $G'(x)$ is the same in the same subset.

3. Repeat the above step until any point is covered by a subset. Then there exists some integer $L > 0$ and $S = \cup_{k=0}^L S_k$.
4. Choose $L + 1$ numbers f_0, \dots, f_L such that $f_0 > \dots > f_L$. Set a fitness function $f(x)$ as follows: $f(x) = f_k$, for $x \in S_k$.

The following theorem shows that the fitness function constructed above is the easiest to the EA. The proof is a direct application of the monotonically decreasing condition.

Theorem 3. *$f(x)$ is the easiest function in the function class with respect to the EA.*

Proof. (1) We show that $G'(x)$ equals to the expected runtime $G(x)$.

According to Lemma 4, the expected runtime $G(x) = 0$ for $x \in S_0$ and for $l > 0$

$$G(x) = \frac{1 + \sum_{k=0}^{l-1} \sum_{y \in S_k} P(x, y) G(y)}{\sum_{k=0}^{l-1} \sum_{y \in S_k} P(x, y)}, \quad x \in S_l. \quad (15)$$

For any $x \in S_k$ and $y \in S_l$ where $k > l$, since $f(x) = f_k < f(y) = f_l$ and the EA adopts elitist selection, y is always accepted if it has been generated via mutation. Thus the transition probability $P(x, y)$ equals $P^{[m]}(x, y)$. (15) equals

$$G(x) = \frac{1 + \sum_{k=0}^{l-1} \sum_{y \in S_k} P^{[m]}(x, y) G(y)}{\sum_{k=0}^{l-1} \sum_{y \in S_k} P^{[m]}(x, y)}, \quad x \in S_l. \quad (16)$$

Comparing it with (14), $G(x)$ and $G'(x)$ are identical.

(2) We prove the monotonically decreasing condition.

First we prove an inequality:

$$G(x) > G(y), \quad x \in S_{l+1}, y \in S_l. \quad (17)$$

We prove this fact by induction. For any $x \in S_1, y \in S_0$, it is trivial that $G(x) > G(y) = 0$. Suppose that for any $x \in S_l, y \in S_{l-1}$, it holds $G(x) > G(y)$. We prove that for any $x \in S_{l+1}, y \in S_l$, it holds $G(x) > G(y)$. Since $y \in S_l$, from the construction, we know that

$$G(y) = \min_{w \in S \setminus \cup_{k=0}^{l-1} S_k} \frac{1 + \sum_{k=0}^{l-1} \sum_{z \in S_k} P^{[m]}(w, z) G(z)}{\sum_{k=0}^{l-1} \sum_{z \in S_k} P^{[m]}(w, z)}.$$

Let $w = x$, then we get

$$G(y) \leq \frac{1 + \sum_{k=0}^{l-1} \sum_{x \in S_k} P^{[m]}(x, z)G(z)}{\sum_{k=0}^{l-1} \sum_{z \in S_k} P^{[m]}(x, z)}.$$

Equivalently

$$G(y) \sum_{k=0}^{l-1} \sum_{z \in S_k} P^{[m]}(x, z) \leq 1 + \sum_{k=0}^{l-1} \sum_{z \in S_k} P^{[m]}(x, z)G(z).$$

We add the term $\sum_{z \in S_l} P^{[m]}(x, z)G(z)$ to both sides. Notice that $G(z) = G(y)$ when $z \in S_l$. As to the left-hand side, we replace the factor $G(z)$ by $G(y)$ and move it outside of the summation and then get

$$G(y) \sum_{k=0}^l \sum_{z \in S_k} P^{[m]}(x, z) \leq 1 + \sum_{k=0}^l \sum_{z \in S_k} P^{[m]}(x, z)G(z).$$

Equivalently

$$G(y) \leq \frac{1 + \sum_{k=0}^l \sum_{z \in S_k} P^{[m]}(x, z)G(z)}{\sum_{k=0}^l \sum_{z \in S_k} P^{[m]}(x, z)}.$$

Since $x \in S_{l+1}$, it follows from (16)

$$G(x) = \frac{1 + \sum_{k=0}^l \sum_{z \in S_k} P^{[m]}(x, z)G(z)}{\sum_{k=0}^l \sum_{z \in S_k} P^{[m]}(x, z)}.$$

So we get $G(y) \leq G(x)$. The inequality is strict since x and y are in different subsets. Thus we prove (17).

Secondly using (17), we can infer the monotonically decreasing condition easily. From (17), we draw that

$$G(x) > G(y), \quad \text{if } x \in S_l, y \in S_k \text{ with } l > k. \quad (18)$$

For any two points x and y such that $G(x) > G(y)$, they belong to different fitness levels and different subsets: $x \in S_k, y \in S_l$. k and l must satisfy $k < l$. Then we have $f(x) = f_k < f(y) = f_l$. This proves the monotonically decreasing condition.

(3) The conclusion is drawn from Theorem 1. \square

The above theorem provides an approach to designing the easiest fitness functions in the function class. The idea behind the construction procedure is simple: we construct a function which is unimodal in the time-fitness landscape and then it is the easiest. Notice that the number of the easiest functions is infinite since the potential values of each f_l are infinite.

4.2 Construction of Hardest Fitness Functions

We consider an elitist (1+1) EA and a class of fitness functions with the same optima. The hardest fitness function $f(x)$ in this class is constructed as follows.

1. Let $S_0 = S_{\text{opt}}$. For any $x \in S_0$, let $G'(x) = 0$.
2. Suppose that the subsets S_0, \dots, S_{l-1} have been produced and $G(x)$ have been defined on these subsets. Then define S_l to be the set of all points such that

$$\arg \max_{x \in S \setminus \bigcup_{k=0}^{l-1} S_k} \frac{1 + \sum_{k=0}^{l-1} \sum_{y \in S_k} P^{[m]}(x, y)G'(y)}{\sum_{k=0}^{l-1} \sum_{y \in S_k} P^{[m]}(x, y)}.$$

For any $x \in S_l$, set

$$G'(x) = \frac{1 + \sum_{k=0}^{l-1} \sum_{y \in S_k} P^{[m]}(x, y)G'(y)}{\sum_{k=0}^{l-1} \sum_{y \in S_k} P^{[m]}(x, y)}. \quad (19)$$

3. Repeat the above step until any point is covered by a subset. Then there exists an integer $L > 0$ and $S = \cup_{k=0}^L S_k$.
4. Choose $L + 1$ number f_0, \dots, f_L such that $f_0 > \dots > f_L > 0$. Set the fitness function $f(x)$ to be $f(x) = f_k, x \in S_k$.

Now we prove that $f(x)$ is the hardest fitness function in the class using the monotonically increasing condition.

Theorem 4. *$f(x)$ is the hardest function in the function class to the EA.*

Proof. (1) We prove that the mean runtime $G(x) = G'(x)$. The proof is similar to the first step in the proof of Theorem 3.

(2) We prove the monotonically increasing condition. The proof is similar to the second step in the proof of Theorem 3.

(3) The conclusion is drawn from Theorem 2. □

The above theorem provides an approach to designing the hardest fitness functions in the class. The idea behind construction is simple: we construct a function which is deceptive in the time-fitness landscape and then it is the hardest.

Note: In the construction of the easiest and hardest functions, we don't restrict the representation of fitness functions. However, the current approach is not suitable for the fitness function class with a specific requirement, for example, all fitness functions in the class must be linear or quadratic. This research issue is left for future studies.

4.3 Case Study: Benchmarks in Pseudo-Boolean Optimisation

So far we have introduced a general approach to constructing the easiest and hardest fitness functions. Now we illustrate an application in pseudo-Boolean optimisation: to design benchmarks within a fitness function class. According to No Free Lunch theorems, the performance of two EAs are equivalent if averaged over all possible Boolean-valued fitness functions. Therefore we only consider a fitness class here.

Example 3. Consider the class of all pseudo-Boolean functions with the same optima at $\vec{0} := (0, \dots, 0)$ and $\vec{1} := (1, \dots, 1)$.

$$\max\{f(x); x \in \{0, 1\}^n\}. \quad (20)$$

We compare the performance of two (1+1) elitist EAs on this problem using different mutation rates.

1. **EA**($\frac{1}{n}$). Flip each bit independently with flipping probability $\frac{1}{n}$. The mutation probability from x to y is

$$P^{[m]}(x, y) = \left(1 - \frac{1}{n}\right)^{h(x, y)} \left(\frac{1}{n}\right)^{n-h(x, y)}, \quad (21)$$

where $h(x, y)$ denote the Hamming distance between x and y .

2. **EA**($\frac{1}{2}$). Flip each bit independently with flipping probability $\frac{1}{2}$. The mutation probability from x to y is

$$P^{[m]}(x, y) = \left(1 - \frac{1}{2}\right)^{h(x, y)} \left(\frac{1}{2}\right)^{n-h(x, y)}. \quad (22)$$

As to benchmark functions, their optima must be known in advance and the number of benchmarks is often between 10 to 30. Since a function class normally include a large amount of functions, a question is which functions should be chosen as benchmarks? Naturally we prefer typical functions in the class: easy, hard and 'averagely hard' functions. Here we only consider how to design the easiest and hardest fitness functions.

The easiest fitness function to EA($\frac{1}{n}$) is constructed as follows.

1. Let $S_0 = \{\vec{0}, \vec{1}\}$. For any $x \in S_0$, define $G(x) = 0$.
2. Suppose that the subsets S_0, \dots, S_{l-1} are given and $G(x)$ has been defined on these subsets. Let S_l be the set consisting of all points such that

$$\arg \min_{x \in S \setminus \cup_{k=0}^{l-1} S_k} \frac{1 + \sum_{k=0}^{l-1} \sum_{y \in S_k} P^{[m]}(x, y) G(y)}{\sum_{k=0}^{l-1} \sum_{y \in S_k} P^{[m]}(x, y)}. \quad (23)$$

Using the mutation probability

$$P^{[m]}(x, y) = \left(1 - \frac{1}{n}\right)^{h(x, y)} \left(\frac{1}{n}\right)^{n-h(x, y)},$$

we get

$$S_l = \{x \mid \min\{h(x, \vec{0}), h(x, \vec{1})\} = l\}.$$

For any $x \in S_l$, define

$$G(x) = \frac{1 + \sum_{k=0}^{l-1} \sum_{y \in S_k} P^{[m]}(x, y) G(y)}{\sum_{k=0}^{l-1} \sum_{y \in S_k} P^{[m]}(x, y)}. \quad (24)$$

3. Repeat the above step until any point is covered by a subset. The last subset is S_L where $L := n/2$. Without loss of generality, assume n is even.
4. Choose $n+1$ numbers f_0, \dots, f_L such that $f_0 > \dots > f_L$. Set the fitness function $f(x) = f_l$, for $x \in S_l$. Then $f(x)$ is the easiest function in the function class.

An example of the easiest function to EA($\frac{1}{n}$) is the Two Max function, given by

$$f(x) = n - \min\{h(x, \vec{0}), h(x, \vec{1})\}. \quad (25)$$

The runtime is calculated as follows. Let $x \in S_l$, without loss of generality, suppose it has l 0-valued bits and $n-l$ 1-valued bits (with $l \leq n-l$). The event of going from the fitness level f_l to a higher fitness level will happen if one of 0-valued bits is flipped and other bits are kept unchanged. The probability of this event is at least

$$\binom{l}{1} \frac{1}{n} \left(1 - \frac{1}{n}\right)^{n-1} \geq \frac{l}{ne},$$

where e is Euler's constant. Thus the runtime of going from the fitness level f_l to a higher fitness level is no more than

$$\frac{en}{l}.$$

Since the number of fitness levels is L , therefore the total runtime is at most

$$\sum_{l=1}^L \frac{en}{l} = O(n \ln n).$$

There are infinite easiest fitness functions, including linear, quadratic and other types of functions, for example,

$$f(x) = \left(n - \min\{h(x, \vec{0}), h(x, \vec{1})\}\right)^k, \quad k = 1, 2, \dots \quad (26)$$

The runtime of the EA on all easiest fitness functions is the same no matter whether they are linear or not.

Note: The Two Max function is unimodal in the time-fitness landscape. Using the Hamming distance, the function is two-modal due to two optima at $\vec{0}$ and $\vec{1}$.

The hardest fitness function to EA($\frac{1}{n}$) is constructed as follows.

1. Let $S_0 = \{\vec{0}, \vec{1}\}$. For any $x \in S_0$, let $G(x) = 0$.
2. Suppose that the subsets S_0, \dots, S_{l-1} have been produced and $G(x)$ have been defined on these subsets. Then define S_l to be the set of all points such that

$$\arg \max_{x \in S \setminus \cup_{k=0}^{l-1} S_k} \frac{1 + \sum_{k=0}^{l-1} \sum_{y \in S_k} P^{[m]}(x, y) G(y)}{\sum_{k=0}^{l-1} \sum_{y \in S_k} P^{[m]}(x, y)}.$$

Using the mutation probability

$$P^{[m]}(x, y) = \left(1 - \frac{1}{n}\right)^{h(x, y)} \left(\frac{1}{n}\right)^{n-h(x, y)},$$

we get (let $L := n/2$)

$$S_l = \{x \mid \min\{h(x, \vec{0}), h(x, \vec{1})\} = L - l - 1\}.$$

For any $x \in S_l$, set

$$G(x) = \frac{1 + \sum_{k=0}^{l-1} \sum_{y \in S_k} P^{[m]}(x, y) G(y)}{\sum_{k=0}^{l-1} \sum_{y \in S_k} P^{[m]}(x, y)}. \quad (27)$$

3. Repeat the above step until any point is cover by a subset. The last subset is S_L .
4. Choose $n+1$ numbers f_0, \dots, f_L such that $f_0 > \dots > f_L$. Set the fitness function $f(x) = f_l$, for $x \in S_l$. An example of the hardest function to EA($\frac{1}{n}$) is a Fully Deceptive function

$$f(x) = \begin{cases} n+1, & \text{if } x = \vec{0}, \vec{1}; \\ \min\{h(x, \vec{0}), h(x, \vec{1})\}, & \text{otherwise.} \end{cases} \quad (28)$$

Now we calculate the runtime $G(x)$ if $x \in S_1$. Since the Hamming distance between x and the optima $\vec{0}$ and $\vec{1}$ is L , so the transition probability of going from x to the optima is no more than

$$2 \left(1 - \frac{1}{n}\right)^L \left(\frac{1}{n}\right)^{n-L},$$

and the runtime is $\Theta(n^{n-L}) = \Theta(n^{n/2})$.

There are infinite hardest fitness functions, for example, for $k = 1, 2, \dots$

$$f(x) = \begin{cases} (n+1)^k, & \text{if } x = \vec{0}, \vec{1}; \\ \left(\min\{h(x, \vec{0}), h(x, \vec{1})\}\right)^k, & \text{otherwise.} \end{cases} \quad (29)$$

We can construct the easiest and hardest fitness functions to EA($\frac{1}{2}$) in the same way. The easiest fitness function to EA($\frac{1}{2}$) is constructed as follows.

1. Let S_0 be the set of optima $\vec{0}$ and $\vec{1}$.
2. Let S_1 be the set consisting of all points such that

$$\arg \min_{x \in S \setminus S_0} \frac{1}{\sum_{y \in S_0} P^{[m]}(x, y)}.$$

Using the mutation probability

$$P^{[m]}(x, y) = \left(1 - \frac{1}{2}\right)^{h(x, y)} \left(\frac{1}{2}\right)^{n-h(x, y)},$$

we get $S_1 = \{x \mid x \neq \vec{0}, \vec{1}\}$.

3. Choose 2 numbers f_0, f_1 such that $f_0 > f_1$. Set the fitness function $f(x) = f_l$, for $x \in S_l$. Then $f(x)$ is the easiest function in the function class.

An example of the easiest function to $\text{EA}(\frac{1}{n})$ is the Two Needles in the Haystack function

$$f(x) = \begin{cases} 1, & \text{if } x = \vec{0}, \vec{1}; \\ 0, & \text{otherwise.} \end{cases} \quad (30)$$

We calculate the runtime $G(x)$ for $x \in S_1$ as follows. The transition probability of going from x to the optima is no more than $2 \times (\frac{1}{2})^n$. Then the runtime is $\Theta(2^n)$.

The hardest fitness function to $\text{EA}(\frac{1}{2})$ is constructed as follows.

1. Let $S_0 = \{\vec{0}, \vec{1}\}$.
2. Let S_1 be the set of all points such that

$$\arg \max_{x \in S \setminus S_0} \frac{1}{\sum_{y \in S_0} P^{[m]}(x, y)}.$$

Using the mutation probability

$$P^{[m]}(x, y) = \left(1 - \frac{1}{2}\right)^{h(x, y)} \left(\frac{1}{2}\right)^{n-h(x, y)},$$

we get $S_1 = \{x \mid x \neq \vec{0}, \vec{1}\}$.

3. Choose 2 numbers f_0, f_1 such that $f_0 > f_1$. Set the fitness function $f(x) = f_l$, for $x \in S_l$. Then the above function $f(x)$ is the hardest to $\text{EA}(\frac{1}{2})$.

An example of the hardest function to $\text{EA}(\frac{1}{n})$ is the Two Needles in the Haystack function, the same as the easiest function. The runtime is $\Theta(2^n)$. Since the runtime of $\text{EA}(\frac{1}{2})$ on both the easiest and hardest functions is $\Theta(2^n)$. Then we know for any function in the class, its runtime is $\Theta(2^n)$.

We have constructed three benchmark functions, Two Max, Fully Deceptive and Two Needles in the Haystack. They are described in Table 1. The three functions represent three typical fitness landscapes: unimodal, deceptive and isolation. Using the benchmarks, we can make a fair comparison of the performance of $\text{EA}(\frac{1}{n})$ and $\text{EA}(\frac{1}{2})$. Table 1 list the results.

Table 1: Three benchmarks and Runtime Comparison of Two EAs.

name	function	landscape	$\text{EA}(\frac{1}{n})$	$\text{EA}(\frac{1}{2})$
Two Max	$f(x) = n - \min\{h(x, \vec{0}), h(x, \vec{1})\}$	unimodal	$O(n \ln n)$	$\Theta(2^n)$
Fully Deceptive	$f(x) = \begin{cases} n + 1, & \text{if } x = \vec{0}, \vec{1}; \\ \min\{h(x, \vec{0}), h(x, \vec{1})\}, & \text{otherwise.} \end{cases}$	deceptive	$\Theta(n^{n/2})$	$\Theta(2^n)$
Two Needles in Haystack	$f(x) = \begin{cases} 1, & \text{if } x = \vec{0}, \vec{1}; \\ 0, & \text{otherwise.} \end{cases}$	isolation	$n^{\Theta(n)}$	$\Theta(2^n)$

The runtime of $\text{EA}(\frac{1}{n})$ on the Two Needles in the Haystack function is calculated as follows. Suppose the initial point x consists of $\Theta(n)$ 0-valued bits and $\Theta(n)$ 1-valued bits, then the event of going from x to the optima happens only when either all 0-valued bits are flipped or all 1-valued bits are flipped. The probability of the event is no more than $2(\frac{1}{n})^{\Theta(n)}$. Thus the runtime is $n^{\Theta(n)}$.

From the table, we see that $\text{EA}(\frac{1}{n})$ is better than $\text{EA}(\frac{1}{2})$ on the Two Max function, but worse on the Fully Deceptive Points and Two Needles in the Haystack functions. The comparison gives a complete understanding of the two EAs' ability in different fitness landscapes: unimodal, deceptive and isolation. Each EA has its own advantage. $\text{EA}(\frac{1}{n})$ is more suitable for unimodal functions, but $\text{EA}(\frac{1}{2})$ is better on deceptive or isolation functions.

Note: It is difficult to compare the performance of $\text{EA}(\frac{1}{n})$ and $\text{EA}(\frac{1}{2})$ via computer experiments unless n is very small or the chosen benchmark functions are very easy. From Table 1 we see that the runtime of the EAs increases exponentially fast on both Fully Deceptive and Two Needles in the Haystack functions.

5 Mutual Transformation Between the Easiest and Hardest Fitness Functions

In the case study of the previous section, we observe that the easiest and hardest fitness functions vary as EAs change. In this section we prove an interesting result: a fitness function that is the easiest to one elitist (1+1) EA could become hardest to another elitist (1+1) EA and vice versa.

5.1 Easiest May Become Hardest

Consider a class consisting of all functions with the same optima. Let $f(x)$ be the easiest to an elitist (1+1) EA. Denote its fitness levels by $f_0 > \dots > f_L$ and define the set $S_l = \{x; f(x) = f_l\}$. We construct another elitist (1+1) EA and show $f(x)$ is the hardest to the new EA.

The mutation operator in the new EA is constructed as follows.

1. Choose $L + 1$ non-negative numbers m_0, m_1, \dots, m_L such that $m_0 = 0, m_1 > m_2 > \dots > m_L > 0$.
2. For any $x \in S_0$ and $y \in S$, let the mutation transition probability $P^{[m]}(x, y)$ be any probability.
3. For any $x \in S_l$ (where $l = 1, \dots, L$) and $y \in S$, set the mutation transition probability $P^{[m]}(x, y)$ such that

$$\frac{1 + \sum_{j=0}^{k-1} \sum_{y \in S_j} P^{[m]}(x, y) m_j}{\sum_{j=0}^{k-1} \sum_{y \in S_j} P^{[m]}(x, y)} < m_k, \quad \text{for } k < l.$$

and

$$\frac{1 + \sum_{j=0}^{l-1} \sum_{y \in S_j} P^{[m]}(x, y) m_j}{\sum_{j=0}^{l-1} \sum_{y \in S_j} P^{[m]}(x, y)} = m_l. \quad (31)$$

Note: the above mutation operator is determined by the subsets S_1, \dots, S_l rather than fitness levels.

The following theorem shows the function $f(x)$ satisfies the monotonically increasing condition and then it is the hardest to the new EA.

Theorem 5. *$f(x)$ is the hardest function to the new EA.*

Proof. (1) We prove that the expected runtime of the new EA $G(x) = m_l$, for $x \in S_l, l = 0, \dots, L$.

According to Lemma 4, the expected runtime

$$G(x) = \frac{1 + \sum_{j=0}^{l-1} \sum_{y \in S_j} P(x, y) G(y)}{\sum_{j=0}^{l-1} \sum_{y \in S_j} P(x, y)}.$$

For any $x \in S_l$ and $y \in S_k$ where $l > k$. Since $f(x) = f_l < f(y) = f_k$ and the EA adopts elitist selection, y is always accepted if it has been generated via mutation. Thus the transition probability $P(x, y)$ equals to $P^{[m]}(x, y)$.

The expected runtime becomes

$$G(x) = \frac{1 + \sum_{j=0}^{l-1} \sum_{y \in S_j} P^{[m]}(x, y) G(y)}{\sum_{j=0}^{l-1} \sum_{y \in S_j} P^{[m]}(x, y)}.$$

Comparing it with (31), we obtain $G(x)$ and m_k are identical.

(2) We prove the monotonically increasing condition.

Assume that $x \in S_l, y \in S_k$ for some l and k . If $G(x) < G(y)$, then it is equivalent to $m_l < m_k$. Thus we have $k < l$ and

$$f(x) = f_l < f(y) = f_k.$$

which gives the the monotonically increasing condition.

(3) The conclusion is drawn from Theorem 2. □

The theorem reveals if one fitness function is the hardest to one EA, then it is possible to find another EA to which the function is the easiest. From the theoretical viewpoint, the theorem shows the existence of a good EA to a hardest fitness function. However, the above construction method is intractable in practice since the complexity of construction is exponential. How to design such a good EA is an ultimate goal in the study of EAs but beyond the target of the current paper.

Note: In the construction of the mutation operator and the proof of the above theorem, we don't utilize the assumption of $f(x)$ being the easiest to an EA. Thus the theorem can be understood more generally: for any fitness function $f(x)$, we can construct an elitist (1+1) EA to which $f(x)$ is the hardest.

5.2 Hardest May Become Easiest

Let $f(x)$ be a hardest fitness function to an elitist (1+1) EA. We construct another elitist (1+1) EA, and show $f(x)$ becomes the easiest to the new EA.

The mutation operator is constructed as follows.

1. Choose $L + 1$ non-negative numbers m_0, \dots, m_L such that $m_0 = 0 < \dots < m_L$.
2. For any $x \in S_0$ and $y \in S$, let the mutation transition probability $P^{[m]}(x, y)$ be any probability.
3. For any $x \in S_l$ (where $l = 1, \dots, L$) and $y \in S$, set the mutation transition probability $P^{[m]}(x, y)$ such that

$$\frac{1 + \sum_{j=0}^{k-1} \sum_{y \in S_j} P^{[m]}(x, y) m_j}{\sum_{j=0}^{k-1} \sum_{y \in S_j} P^{[m]}(x, y)} > m_k, \quad \text{for } k < l.$$

and

$$\frac{1 + \sum_{j=0}^{l-1} \sum_{y \in S_j} P^{[m]}(x, y) m_j}{\sum_{j=0}^{l-1} \sum_{y \in S_j} P^{[m]}(x, y)} = m_l. \quad (32)$$

The following theorem shows $f(x)$ satisfies monotonically decreasing condition and then it is the easiest to the new EA.

Theorem 6. *$f(x)$ is the easiest function to the new EA.*

Proof. (1) We prove that the expected runtime of the new EA $G(x) = m_k$, for $x \in S_k, k = 0, 1, \dots, L$. The proof is similar to the first step in the proof of Theorem 5.

(2) We prove the monotonically decreasing condition. The proof is similar to the second step in the proof of Theorem 5.

(3) The conclusion is drawn from Theorem 1. □

Note: In the construction of the mutation operator and the proof of the above theorem, we don't utilize the assumption of $f(x)$ being the hardest to an EA. The theorem implies that for any fitness function $f(x)$, we can construct an elitist (1+1) EA to which $f(x)$ is the easiest.

Theorems 5 and 6 can be viewed as a complement to No Free Lunch theorems. No Free Lunch theorems concern all potential fitness functions. The theorems claim the performance of any two EAs are equivalent if averaged over all possible functions. Theorems 5 and 6 concern the hardness of a single fitness function. The two theorems assert that a fitness function could be the easiest to one elitist (1+1) EA and the hardest to another EA. This implies for a single fitness function, a good EA (also a bad EA) always exists from the theoretical viewpoint.

6 Conclusions and Future Work

This paper presents a rigorous analysis devoted to the easiest and hardest fitness functions with respect to any given elitist (1+1) EA for maximising a class of fitness functions with the same optima. Such fitness functions have been constructed step by step. It is demonstrated that the unimodal functions are the easiest

and deceptive functions are the hardest in terms of the time-fitness landscape. Furthermore it reveals that the hardest (and easiest) functions may become the easiest (and hardest) with respect to another elitist (1+1) EA. From the theoretical viewpoint, a good EA (also a bad EA) always exists for a single fitness function.

A potential application of the theoretical work is the design of benchmarks. Benchmarks play an essential role in the empirical comparison of EAs. In order to make a fair comparison, a good practice is to choose typical fitness functions in benchmarks, for example, several easy, hard and ‘averagely hard’ fitness functions. Our work provides a theoretical guideline to the design of easy and hard functions: to choose unimodal (the easiest) and deceptive (the hardest) fitness functions with respect to EAs under comparison.

Another application is to understand the ability of EAs on a class of fitness functions with the same optima. Through the comparison of EAs on the easiest and hardest fitness functions, our work helps to understand the ability of EAs in unimodal and deceptive time-fitness landscapes. This has been shown in the second case study.

Non-elitist EAs, population-based EAs and adaptive EAs are not investigated in this paper. The extension of our work to such EAs will be the future research. Another of our future work is to study how to construct the easiest and hardest fitness functions such that a special requirement, for example, all fitness functions must be linear or quadratic.

Acknowledgement

This work was supported by EPSRC through grant Nos. EP/I009809/1 and EP/I010297/1. Xin Yao was supported by a Royal Society Wolfson Research Merit Award.

References

- [1] D. Wolpert and W. Macready, “No free lunch theorems for optimization,” *IEEE Transactions on Evolutionary Computation*, vol. 1, no. 1, pp. 67–82, 1997.
- [2] D. H. Wolpert and W. G. Macready, “Coevolutionary free lunches,” *IEEE Transactions on Evolutionary Computation*, vol. 9, no. 6, pp. 721–735, 2005.
- [3] J. Horn and D. E. Goldberg, “Genetic algorithms difficulty and the modality of fitness landscapes,” in *Proceedings of the 3rd Workshop on Foundations of Genetic Algorithms*, L. D. Whitley and M. D. Vose, Eds. Morgan Kaufman, 1995, pp. 243–269.
- [4] G. Rudolph, “How mutation and selection solve long path problems in polynomial expected time,” *Evolutionary Computation*, vol. 4, no. 2, pp. 207–211, 1996.
- [5] M. D. Vose and A. H. Wright, “Stability of vertex fixed points and applications,” in *Proceedings of the 3rd Workshop on Foundations of Genetic Algorithms*, L. D. Whitley and M. D. Vose, Eds. Morgan Kaufmann, 1995, pp. 103–114.
- [6] S. W. Wilson, “GA-easy does not imply steepest-ascent optimizable,” in *Proceedings of the 4th International Conference on Genetic Algorithms*, R. K. Belew and L. B. Booker, Eds. Morgan Kaufmann, 1991, pp. 85–89.
- [7] T. Jones and S. Forrest, “Fitness distance correlation as a measure of problem difficulty for genetic algorithms,” in *Proceedings of the 6th International Conference on Genetic Algorithms*, L. J. Eshelman, Ed. Morgan Kaufmann Publishers, 1995, pp. 184–192.
- [8] N. J. Radcliffe and P. D. Surry, “Fitness variance of formulae and performance prediction,” in *Proceedings of the 3rd Workshop on Foundations of Genetic Algorithms*, L. D. Whitley and M. D. Vose, Eds. Morgan Kaufmann, 1995, pp. 51–72.
- [9] Y. Davidor, “Epistasis variance: A viewpoint on GA-hardness,” in *Proceedings of the 1st Workshop on Foundations of Genetic Algorithms.*, G. J. E. Rawlins, Ed. Morgan Kaufmann, 1991, pp. 23–35.

- [10] B. Naudts and L. Kallel, "A comparison of predictive measure of problem difficulty in evolutionary algorithms," *IEEE Trans. on Evolutionary Computation*, vol. 4, no. 1, pp. 1–15, 2000.
- [11] J. He, C. Reeves, C. Witt, and X. Yao, "A note on problem difficulty measures in black-box optimization: Classification, existence and predictability," *Evolutionary Computation*, vol. 15, no. 4, pp. 435–443, 2007.
- [12] B. Manderick, M. K. de Weger, and P. Spiessens, "The genetic algorithms and the structure of the fitness landscape," in *Proceedings of the 4th International Conference on Genetic Algorithms*, R. K. Belew and L. B. Booker, Eds. Morgan Kaufman, 1991, pp. 143–150.
- [13] T. Jansen, "On classifications of fitness functions," in *Theoretical Aspects of Evolutionary Computing*, L. Kallel, B. Naudts, and A. Rogers, Eds. Springer Berlin Heidelberg, 2001, pp. 371–386.
- [14] C. Reeves, "Predictive measures for problem difficulty," in *Proceedings of 1999 Congress on Evolutionary Computation*, vol. 1. IEEE Press, 1999, pp. 736–743.
- [15] J. He and X. Yao, "Towards an analytic framework for analysing the computation time of evolutionary algorithms," *Artificial Intelligence*, vol. 145, no. 1-2, pp. 59–97, 2003.
- [16] J. He, X. Yao, and Q. Zhang, "To understand one-dimensional continuous fitness landscapes by drift analysis," in *Proceedings of 2004 Congress on Evolutionary Computation*. IEEE Press, 2004, pp. 1248–1253.
- [17] J. He and X. Yao, "A study of drift analysis for estimating computation time of evolutionary algorithms," *Natural Computing*, vol. 3, no. 1, pp. 21–35, 2004.