

Retrieval of Experiments with Sequential Dirichlet Process Mixtures in Model Space

Ritabrata Dutta · Sohan Seth · Samuel Kaski

Received: 06.03.2014 / Accepted: date

Abstract We address the problem of retrieving relevant experiments given a query experiment, motivated by the public databases of datasets in molecular biology and other experimental sciences, and the need of scientists to relate to earlier work on the level of actual measurement data. Since experiments are inherently noisy and databases ever accumulating, we argue that a retrieval engine should possess two particular characteristics. First, it should compare models learnt from the experiments rather than the raw measurements themselves: this allows incorporating experiment-specific prior knowledge to suppress noise effects and focus on what is important. Second, it should be updated sequentially from newly published experiments, without explicitly storing either the measurements or the models, which is critical for saving storage space and protecting data privacy: this promotes life long learning. We formulate the retrieval as a “supermodelling” problem, of sequentially learning a model of the set of posterior distributions, represented as sets of MCMC samples, and suggest the use of Particle-Learning-based sequential Dirichlet process mixture (DPM) for this purpose. The relevance measure for retrieval is derived from the *supermodel* through the mixture representation. We demonstrate the performance of the proposed retrieval method on simulated data and molecular biological experiments.

Keywords Experiment Retrieval · Posterior Distribution · Dirichlet Process Mixture

This work was financially supported by the Academy of Finland (Finnish Centre of Excellence in Computational Inference Research COIN, grant no 251170)

Ritabrata Dutta
Department of Information and Computer Science, Aalto University, Finland
E-mail: ritabrata.dutta@aalto.fi
corresponding author

Sohan Seth
Department of Information and Computer Science, Aalto University, Finland
E-mail: sohan.seth@aalto.fi

Samuel Kaski
Department of Information and Computer Science, Aalto University, Finland
Department of Computer Science, University of Helsinki, Finland
E-mail: samuel.kaski@aalto.fi
corresponding author

1 Introduction

Assume that we have a set of models $\mathcal{M}^e = \{\mathcal{M}_i : i = 1, \dots, e\}$, each represented by a set of samples from the posterior distribution given the observed data, that is, $\mathcal{M}_i \equiv \{\theta_j^{(i)} : j = 1, \dots, n_i\}$. Given an additional query model \mathcal{M}_{e+1} , our task is to find the most relevant models from \mathcal{M}^e . This set-up is motivated by the problem of retrieving relevant experiments given a query experiment. By an experiment, we imply a set of experimental data, observations $D_i = \{y_j^{(i)}\}_{j=1}^n$ or $D_i = \{(x_j^{(i)}, y_j^{(i)})\}_{j=1}^n$ where the $x_j^{(i)}$ are experimental factors or covariates under which the $y_j^{(i)}$ have been measured. The setting naturally generalizes to any set of data sets, given suitable models \mathcal{M}_i learned for the D_i .

We argue that comparing experiments in the posterior model space has two distinct advantages. First, it allows incorporating experiment-specific *prior information* to reduce uncertainty inherent to any experiment and to indicate what is important in the data. Second, it allows *not* storing the experiments explicitly which is critical for saving storage space and protecting data privacy.

To corroborate our motivation further, consider the example of biological experiments - a set of measurements over, for instance, a microarray probe set. Finding relevant existing experiments in this context is of importance for knowledge transfer, and designing future experiments. State of the art is comparing manual annotations e.g. (Malone et al, 2010), which is problematic as the labels are incomplete, the related terminology varies and develops and, most importantly, annotations are restricted to known findings. Comparing the actual measurement data would be desirable but is problematic as well, since the measurements themselves are inherently noisy, and are usually very few due to price or availability, in particular in molecular biology. Learning sensibly from such measurements requires extensive prior information, for example in selecting informative variables. Also with the accumulation of new datasets from new experiments, storage becomes a bottleneck for life long learning where we want to infer sequentially from the new experiments for uncertain future. Hence, our objective is to build *retrieval engines* that compare experiments in the model space, and also, to not store either the measurements or the models to promote life long learning as new measurements become available. To the best of our knowledge, this is a novel set-up.

The empirical distribution over the parameter space derived from each \mathcal{M}_i represents the corresponding posterior distribution given D_i . Our strategy is to learn a summary model or supermodel over the set of posterior distributions from the previous experiments, to summarize the information in them, and then exploit this information in retrieval. Hence this supermodel will be a latent variable model of the previous posteriors on the parameter space. Each of the previous posteriors can then be represented as a weighted mixtures of those latent variables with fixed weights for each \mathcal{M}_i and the supermodel would contain all the latent variables and summarize all the previous posteriors jointly. While a new posterior comes, we can then represent it using the latent variables of the existing supermodel and some new latent variables, which will automatically give us the distances between the previous posteriors and the new one depending on their shared latent variables and their corresponding weights.

There are two primary challenges in fulfilling this objective. First, modelling the posterior distributions in the parameter space Θ , and second, doing it sequentially. In this paper we assume all distributions to be in the same parameter space, and represented as a set of MCMC samples. We suggest the use of sequential Dirichlet process mixture model (Zhang et al, 2005; Wang and Dunson, 2011) for sequential inference.

Given a large number of samples and a well-behaving model, it is well known that under some regularity constraints the posterior is approximately normally distributed. For small datasets the posterior can be flat, and even multi-modal; multi-modality can also result from symmetries in the model family. We argue that in either case a suitable choice of a super-model is DPM of Gaussian distributions (Ferguson, 1973; Antoniak, 1973). The consistency of the DPM for density estimation on parameter space which is Riemannian manifold can be stated from Bhattacharya and Dunson (2010). The existing methods using Gibbs sampling (Neal, 2000; Jain and Neal, 2004) and variational inference (Blei and Jordan, 2006) to learn DPM models are well explored. The next challenge is to learn this mixture model incrementally; that is, while learning from \mathcal{M}_j we should not need to access \mathcal{M}^{j-1} . To tackle this issue we use a sequential DPM model (Zhang et al, 2005; Wang and Dunson, 2011), with a state-of-the-art particle learning solution which avoids technical issues in the more straightforward solutions.

DPMs have been extended towards sequential learning before but the existing algorithms (Wang and Dunson, 2011) do not fit our purpose, as they eventually require access to samples together in order to learn an appropriate order in which the samples are to be introduced to the algorithm. We propose a sequential extension that fits our objective based on particle learning, based on recent works using particle learning for mixture models in (Carvalho et al, 2010; Fearnhead, 2004; Ulker et al, 2010). We exploit this methodology to achieve a true sequential scheme to explore the parameter space well for multi-modal density estimation in a high-dimensional space.

We make four contributions in this paper. We (i) introduce the new retrieval of experiments problem, (ii) propose a solution by sequential “supermodelling” of sets of posterior samples, (iii) use a state-of-the-art sequential DPM algorithm to solve the problem, and (iv) demonstrate the retrieval in preliminary experiments on simulated data and molecular biological data.

To verify our claims, we have showed first by simulation the available prior information for different experiments help in improving the performance of experiment retrieval in the case of Linear Regression and Sparse Linear Regression for High-dimensional dataset. This again supports our intuition of using posterior distribution for retrieval of experiments as a tool to summarize information from both the prior and data. While showing the performance of our sequential experiment retrieval scheme outperforming the performance of the best known non-sequential method for different simulated and real life experiments, we have covered 4 different kinds of models (namely, Linear Regression, Bayesian Lasso for Sparse Linear Regression, Logistic Regression and Factor Models) and used corresponding Bayesian sampling schemes. This shows the adaptability of our method for variety of models learnt from different kinds of experiments to retrieve the most relevant experiments.

Our problem set-up resembles multi-task learning and transfer learning but with some crucial differences. We do not learn directly from the datasets as in these problems, but from the models. Also, we do not learn the model of the query dataset using the previously learned models, and hence do not need to make assumptions about their relevance *a priori*, we just retrieve them. Our method assumes that the individual models have been learned before, but that they have been learned individually to incorporate experiment-specific knowledge, and not as part of learning a computationally demanding joint model, which would be the case in multi-task or transfer learning. That being said, the proposed approach can be seen as transfer learning in the model space.

2 Methodology

We consider an experiment \mathcal{E} to be a triplet $\mathcal{E} \equiv \{\mathcal{D}, \pi, \mathcal{M}\}$, where \mathcal{D} is a set of n measurements in \mathbb{R}^f , π is the prior knowledge regarding this experiment, and \mathcal{M} is the posterior of the model, inferred from \mathcal{D} and π . To facilitate the inference where a model is learnt from both \mathcal{D} and π , we use Bayesian inference. To capture the posterior distribution well, and to facilitate retrieval in the model space, we represent each model as a set of MCMC samples in the parameter space Θ .

Given e experiments $\{\mathcal{E}_1, \mathcal{E}_2, \dots, \mathcal{E}_e\}$, our goal is to summarize the posterior samples by finding the latent components in the model space and modelling each \mathcal{M}_i as a mixture of those latent components. Given a new experiment \mathcal{E}_{e+1} , we decide whether \mathcal{M}_{e+1} can be represented as a mixture of latent components in the model space similar to the already inferred ones or something dissimilar. In either case this leads to a natural similarity measure between the new experiment and the existing ones (details below), which can be exploited for retrieval. A particular model type suitable to model the latent components of the model space is a Dirichlet Process Mixture (DPM) of Gaussian distributions. Here, as we consider the models sequentially for faster inference and to prevent the cumulative data storage issues, the MCMC samples of the models come in batches (MCMC samples from one experiment is considered as a batch), hence we need to fit the DPM sequentially.

Dirichlet process mixtures are well known Bayesian nonparametric models used for consistent density estimation and clustering. They are special types of product partition models (PPM) (Barry and Hartigan, 1992), which induce a probability model on the partition of the integers $\{1, \dots, n\}$. Exploiting the connection between DPMs and PPMs, a sequential learning extension of DPM has recently been developed (Wang and Dunson, 2011) for large datasets. However, this method depended heavily on the order in which the observations are presented to the model. The authors optimized the ordering by calculating a pseudo-marginal likelihood over several random orderings of the observations, which is obviously not possible sequentially. In our work we utilize the Particle Learning scheme developed for Mixture Models by Carvalho et al (2010), to implement a sequential DPM method capable of learning the model over a single pass.

In the next two subsections we describe how we do experiment retrieval with the models and how to operate the models on the parameter space instead of dataspace.

2.1 Retrieval of Experiments

Here we use sequential DPM scheme on parameter space as the supermodel, input data being the MCMC samples coming in batches from each new model. Given experiments $\{\mathcal{E}_1, \mathcal{E}_2, \dots, \mathcal{E}_e\}$, we model the posterior samples $\{\theta_j^{(i)} : i = 1, \dots, e, j = 1, \dots, n_e\}$ sequentially in the parameter space. We make the approximative assumption that they are simulated from a DP mixture of multivariate normals. This is a reasonably general assumption although, for instance, discrete-valued parameters need another model family. So under standard regularity assumptions, the corresponding posterior is close to a mixture of Gaussian, and hence we can use the mixture of Gaussians as supermodel. We will describe the details of the sequential DPM on parameter space in the next subsection, but here we will first elaborate on how can we use the supermodel for retrieval of relevant experiments.

While learning the supermodel, we also simultaneously retrieve relevant experiments using sequential learning. Supermodel can be used for retrieval of experiments while learning sequentially the new query experiment. Given a set of experiments $\{\mathcal{E}_1, \dots, \mathcal{E}_e\}$ and

already learnt supermodel, we sequentially learn a DPM from the corresponding MCMC samples $\{\theta_j^{(i)} : j = 1, \dots, n_i\}_{i=1, \dots, e}$. Assume the output of DPM from $\{\mathcal{E}_1, \dots, \mathcal{E}_e\}$ is $\{p_j, \Omega_j\}_{j=1}^h$ where $\{p_j\}$ are the mixing coefficients, and Ω are the parameters of the corresponding mixing distribution $f(\cdot|\Omega)$. Under our assumption of multivariate normal assumption, $\Omega = (\mu, \Sigma)$ and f will be the standard multivariate normal density function. For retrieval, we have already stored the assignment of the MCMC samples to the mixture components,

$$\xi_j^{(i)} \equiv \left| \{\theta_k^{(i)} : c(\theta_k^{(i)}) = j\} \right|,$$

where $c(\theta_k)$ is the component index of the MCMC sample θ_k . Using $\xi_j^{(i)}$ and the mixture components we can get back the posteriors for each \mathcal{M}_i .

Now given a new query experiment $e+1$, the relevant experiments to \mathcal{E}_{e+1} can be found by ranking the earlier experiments with

$$\rho(\mathcal{E}_{e+1}|\mathcal{E}_l) = \prod_{j=1}^{n_{e+1}} \sum_{k=1}^h \xi_k^{(l)} f(\mathcal{M}_j^{(e+1)}|\Omega_k), \forall l = 1, \dots, e. \quad (1)$$

where $\rho(\mathcal{E}_{e+1}|\mathcal{E}_l)$ is the probability of the posterior distribution of \mathcal{E}_{e+1} given \mathcal{E}_l defined by the mixture components $\{\Omega_j\}_{j=1}^h$ and their corresponding weights $\{\xi_{j=1, \dots, h}^{(l)}\}_{l=1}^i$. This probability measures how good a model learnt from the experiment \mathcal{E}_l would be for \mathcal{E}_{e+1} conditioned on the supermodel already learnt. To our knowledge this is a novel distance measure between two experiments which captures all of the prior information and information in datasets, satisfying our criterion of using prior information without the need of storing datasets.

2.2 Sequential DPM on Parameter Space

To implement the sequential DPM algorithm for modelling the parameter space, we model each of the latent variables (or clusters of MCMC samples) as multivariate normal distribution with mean μ and variance-covariance matrix Σ . For μ, Σ of each of the latent variable or cluster we assume conjugate multivariate-normal-inverse-Wishart prior $p_0(\mu, \Sigma) \sim \mathcal{N}\mathcal{I}\mathcal{W}(\lambda, \kappa, \Sigma, \nu)$ which means

$$\mu|\lambda, \Sigma, \kappa \sim \mathcal{N}\left(\mu \left| \lambda, \frac{\Sigma}{\kappa} \right.\right), \Sigma|\Omega, \nu \sim \mathcal{I}\mathcal{W}(\Sigma|\Omega, \nu),$$

and the posterior distribution belongs to the same family. Using this posterior distribution we can evaluate the likelihood of a new sample θ_{i+1} to be assigned to the cluster c , given previous i samples and their cluster allocations $(\gamma_{(i)})$ as a multivariate t -distribution:

$$L_{i+1,c}(\theta_{i+1}) = \begin{cases} t_{d_0}(\theta_{i+1}|a_0, B_0\Omega), & c = k_i + 1 \\ t_{d_{i,c}}(\theta_{i+1}|a_{i,c}, B_{i,c}[\Omega + .5D_{i,c}]), & o.w. \end{cases}$$

where

$$d_0 = 2\nu - p + 1, a_0 = \lambda, B_0 = 2(\kappa + 1)/\kappa(2\nu - p + 1), \\ d_{i,c} = 2\nu + n_{i,c} - p + 1, a_{i,c} = \kappa\lambda + n_{i,c}\bar{\theta}_{i,c}/\kappa + n_{i,c},$$

$$\begin{aligned}
B_{i,c} &= 2(\kappa + n_{i,c} + 1)/(\kappa + n_{i,c})(2\nu + n_{i,c} - p + 1), \\
D_{i,c} &= S_{i,c} + \frac{\kappa n_{i,c}}{\kappa + n_{i,c}}(\lambda - \bar{\theta}_{i,c})(\lambda - \bar{\theta}_{i,c})', \\
S_{i,c} &= \sum_{\gamma_i=c} (\theta_i - \bar{\theta}_{i,c})(\theta_i - \bar{\theta}_{i,c})', n_{i,c} = 6 \sum_{j=1}^n \gamma_j = c, \bar{\theta}_{i,c} = \frac{1}{n_{i,c}} \sum_{j:\gamma_j=c} \theta_j.
\end{aligned}$$

To learn DPM of Gaussian we will use Particle learning (PL) scheme. The estimate given by PL for DPM is order independent as it shares information between N particles and each particle has different assignments. Following PL terminology, we will track particles Z_i specified by $Z_i = \{\gamma^i, \mathbf{s}_i, \mathbf{n}_i, k_i\}$, where the vector \mathbf{n}_i stores the number of observations in each component and the \mathbf{s}_i contains the sufficient statistics $\bar{\theta}_{i,c}$ and $S_{i,c}$. In our simulation studies and real life examples, we will use $N = 100$, and our prior parameters are $\alpha = 2$, $\lambda = 0$, $\kappa = 0.25$, $\nu = p + 2$, and $\Omega = (\nu - 0.5(d + 1))I$.

Updating Equation for Particle: When a new observation θ_{i+1} comes, we will allocate it to the latent variable or cluster with highest posterior probability and update the parameters of that cluster. The particle Z_{i+1} is updated as follows:

- If $\gamma_{i+1} = k_i + 1$,

$$m_{i+1} = m_i + 1, \text{ and } \mathbf{s}_{i+1, m_{i+1}} = [\theta_{i+1}, 0]$$

- If $\gamma_{i+1} = c$,

$$\begin{aligned}
n_{i+1,c} &= n_{i,c} + 1, \\
\bar{\theta}_{i+1} &= (n_{i,c} \bar{\theta}_{i,c} + \theta_{i+1})/n_{i+1,c} \\
S_{i+1,c} &= S_{i,c} + \theta_{i+1} \theta_{i+1}' + n_{i,c} \bar{\theta}_{i,c} \bar{\theta}_{i,c}' \\
&\quad - n_{i+1} \bar{\theta}_{i+1,c} \bar{\theta}_{i+1,c}'.
\end{aligned}$$

All other statistics will remain same.

Resample the Particles: In the PL scheme, we will have N particles, $\{Z_i^t\}_{t=1, \dots, N}$ and after arrival of each new observation we will resample N particles from the existing particles, according to the distribution $p(\theta_{i+1} | Z_i^t)$ and update these new N particles. Through this resampling scheme, we share information between N particles which helps us in achieving the order independence of the observations.

Learning from the Particles: Each of the particles gives a mixture normal density estimate on the parameter space. Our final density estimate or supermodel will be an average over all N particles.

3 Simulated Examples

In this section, first we show the efficacy of the sequential density estimation scheme on a toy example explored by Wang and Dunson (2011) and then we evaluate the effect of prior information on the retrieval performance. To be specific, we verify that retrieval performance improves if experiment-specific prior information is provided. For our simulated and real life examples, we will use a cross validation type set-up where we first learn from all the models sequentially, and then for any experiment we retrieve from the rest, rather than doing it on-line.

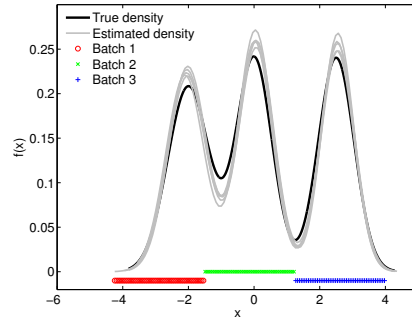


Fig. 1 Sequential DPM density estimation from batches of samples. For each of the estimated curves the batches have been presented in random order.

One-Dimensional Toy Example. We consider the 1-dimensional example from Wang and Dunson (2011), where the observations are generated from the following density

$$f(y) = 0.3\mathcal{N}(y; -2, 0.4) + 0.5\mathcal{N}(y; 0, 0.3) + 0.2\mathcal{N}(y; 2.5, 0.3) .$$

But as we are interested in learning sequentially, we sample from the three modes sequentially and learn the density in a true sequential manner. Thus, we have samples $\{y_j^{(i)} : j = 1, \dots, n_i, i = 1, 2, 3\}$ where each i corresponds to a particular Gaussian mode. In Figure 1, we show the densities estimated by the proposed approach along with the true density. We observe that the proposed approach is robust in estimating the true underlying density. Compared to the non-sequential method in Wang and Dunson (2011) which optimizes over all possible orderings, the method considered here can predict the true density in a purely sequential manner.

Effect of Prior Information on Retrieval Performance. We consider two simulated examples of a Bayesian linear regression model,

$$y_i = \beta^\top \mathbf{x}_i + \epsilon, \text{ where } \beta, \mathbf{x} \in \mathbb{R}^p, \text{ and } \epsilon \sim \mathcal{N}(\epsilon|0, \sigma^2) ,$$

with different levels of prior information: In the first example (Case I), regression problem in low-dimensional, $p = 50$, and the information in the prior is defined through the distance between the prior mean and the true model parameters; in the second example (Case II), we will consider a high-dimensional, $p = 100$, regression problem where prior information is provided only sparsity assumption (number of active-inactive components). We compare the performance of the proposed method (“Sequential”) with a non-sequential baseline (“NSBL”) that measures the dissimilarity between two models as the L_2 distance between their respective posterior means. Observe that for a mean-based model, this baseline will perform very well for the retrieval purpose.

We next describe the details on the sampling schemes and on how we introduce prior information to the models. We randomly generate $e = 100$ and $e = 164$ true models from 10 and 20 classes respectively for the two cases: The true model coefficients were randomly selected between $[-3, 3]$ and $[-2, 2]$ respectively, and noise variance was set to 1. For each true model we generate a random number of observations between 10-15 and 20-30, respectively for two cases. For both cases we generate 500 MCMC samples from each experiment. Prior information will be included through the parameter η ; its definition is different in the different cases, and will be explained below.

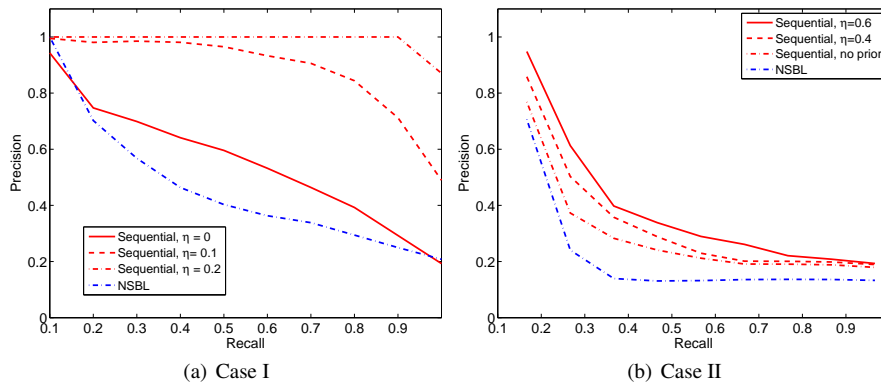


Fig. 2 Effect of varying the amount of prior information on retrieval performance in Bayesian linear regression models. “Sequential” is the proposed approach of modelling the parameter space, with η describing the amount of inserted prior information. The non-sequential baseline NSBL retrieves according to the L_2 distance between the posterior means. It is a proxy for modelling the parameter space non-sequentially using standard DPM models, and hence computationally impractical due to the dimensionality and ultimate sample sizes.

Case I: We use a normal conjugate prior $\pi(\beta^{(i)}) \sim \mathcal{N}(\beta^{(i)} | \eta \beta_0^{(i)}, 1)$, where $\beta_0^{(i)}$ is the true regressor, and $\eta \in [0, 1]$. Therefore, when $\eta = 0$, we essentially provide an uninformative prior whereas when $\eta = 1$ we provide the true model as the prior. We show the precision-recall curves as a function of η in Figure 2. We can see that for linear regression our method reaches very close to the optimal level with very little prior information ($\eta = 0.2$).

Case II: Following the Bayesian LASSO formulation of Park and Casella (2008), we use the conditional Laplace prior

$$\pi(\beta | \sigma^2) = \prod_{j=1}^p \frac{\lambda_j}{2\sqrt{\sigma^2}} e^{-\lambda_j |\beta_j| / 2\sqrt{\sigma^2}}$$

and the uninformative scale-invariant marginal prior $\pi(\sigma^2) = 1/\sigma^2$. Therefore, a higher λ_j imposes sparsity over β_j . We randomly create true models $\{\beta_0^{(i)}\}$ with varying sparse components, say $S_i \in \{1, \dots, p\}$. For any true model $\beta_0^{(i)}$, we set $|S_i|$ of the λ_j 's to 10 (sparse) and the rest to 1 (non-sparse). We select λ_j at sparse locations 1 (w.p. η) and 10 (w.p. $1 - \eta$) and at non-sparse locations 10 (w.p. η) and 1 (w.p. $1 - \eta$). Hence η defined the amount of true sparsity information in the prior.

For both cases we observe in Figure 2 that the retrieval performance improves consistently as more experiment-specific prior information is incorporated. In Case II, our prior information was only regarding the sparsity of the parameters, not about their real values as in Case I. Hence the improvement due to taking the prior into account is smaller. This analysis signifies the importance of inclusion of true prior knowledge in a Bayesian study, and shown that the information can be used beneficially in the mentioned of data sets/models.

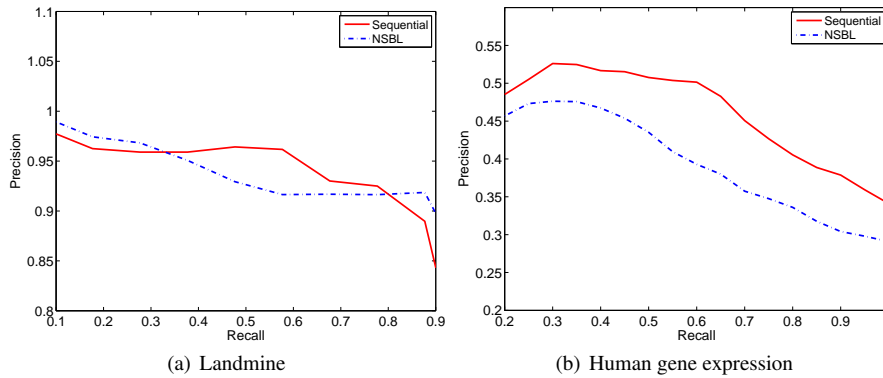


Fig. 3 Retrieval performance on real data. “Sequential” is the proposed approach of modelling the parameter space. The non-sequential baseline NSBL retrieves according to the L_2 distance between the posterior means. It is a proxy for modelling the parameter space non-sequentially using standard DPM models, and hence computationally impractical due to the dimensionality and ultimate sample sizes.

4 Experiments

We validate the performance of the proposed method on one widely used data set (landmine), and one molecular biology set (human gene expression); we do not include any additional prior information in either study. We compare to a non-sequential baseline method that compares directly posterior means; the expectation is that our method should perform at the same level or better. The baseline has the advantage of not having to be sequential, but on the other hand it only takes the first moments of the distribution into account. However, the model families are higher-dimensional, and hence the higher moments are not expected to be very informative. Similar performances would indicate that the particle learning is able to cope with the dimensionalities.

4.1 Landmine dataset

We tested the performance of the proposed approach on a landmine detection dataset (Xue et al, 2007), consisting of 29 “experiments.” Each experiment is a classification task for detecting the presence of landmine (1) or clutter (0) from 9 input features. Each experiment has been collected from either a highly foliated region or a desert-like region. Thus they can be split in two classes (16-13). We train a Bayesian logistic regression classifier for each experiment with 500 MCMC samples. For MCMC sampling from Bayesian logistic classifier we have used a block-Gibbs sampler as in Holmes and Held (2006). We compare the retrieval performance of our algorithm against the same posterior mean based comparison as in the previous section (Figure 3(a)). We observe that the sequential method performs as well as the non-sequential method. This is expected since the two classes are well separable as reported in the multitask learning literature (Xue et al, 2007).

4.2 Human gene expression data

We consider the human gene expression data from Lukk et al (2010). The data set is a collection of 5372 absolute (jointly normalized) gene expression values recorded over ~ 22000 probe sets, mapping to ~ 14000 genes. The collection is divided in 206 studies, where each study has multiple annotations, such as cell type, disease state, etc. annotation “15 meta-groups”, and We declare the ground truth that two experiments are similar if they share at least one category in a particular annotation. We only consider 70 experiments with at least 20 samples, for our evaluation. We pre-process the samples to reduce the dimensionality of the feature space to 1400 using Gene Set Enrichment Analysis (GSEA) (applied on probe level for each sample), and further to 100 by selecting the most informative gene sets among them. Hence, we have 70 experiments over a 100 dimensional space. We model each experiment with a factor model, and draw 100 MCMC samples for each experiment. In Figure 3 (b), we compare the performance of the proposed approach with the standard baseline that compares distance between the posterior means. We observe that the non-sequential baseline performs reasonably well in this high-dimensional set-up; however, the sequential retrieval scheme outperforms.

5 Discussion

In this paper we introduce the problem of experiment retrieval and a solution where we can use the available prior information and do not need to store the actual data. The core element of the solution is each experiment is represented by MCMC samples from the model describing it. The motivation for using MCMC samples rather than the raw observations is to incorporate experiment specific prior knowledge as the posterior samples contain both prior and data information, and we have demonstrated that this indeed leads to improvement in the retrieval performance on simulated data. We also were able to get rid of the need of data-storage by modelling the posterior distributions with an underlying latent variable model. We introduced the concepts of the supermodel for relating MCMC samples which an efficient sequentially computable representation of set of experiments. Particle Learning, the sequential scheme for learning a Dirichlet process mixture under the assumption that the observations are presented to the algorithm in batches, and each batch has one or many clusters is used for fast inference. We also solved the issue of data storage creating the provision for life long learning which suffers from cumulative experiment collections and data storage while learning for unlimited time-frame. However, this is a generic set-up that can be applied to other problems as well.

Though the proposed method performs better in mean-based models like regression and logistic regression, solutions of very high-dimensional models, such as factor models of the covariance structure of the dataset, require further effort. Many model families have label-switching issues, and the sheer dimensionality is challenging. We have essentially proposed density estimation in the model space, and as is well-known, density estimation in ultra-high dimensionalities is difficult. The current solution is expected to be useful at least when the parametrization of the model family significantly compresses the dimensionality of the original data.

References

- Antoniak C (1973) Mixtures of Dirichlet processes with applications to bayesian nonparametric problems. *Annals of Statistics* 2(6):1152–1174
- Barry D, Hartigan J (1992) Product partition models for change point problems. *Annals of Statistics* 20:260–279, DOI 10.1214/aos/1176348521
- Bhattacharya A, Dunson DB (2010) Nonparametric Bayesian density estimation on manifolds with applications to planar shapes. *Biometrika* 97:851–865, DOI 10.1093/biomet/asq044
- Blei D, Jordan M (2006) Variational inference for Dirichlet process mixtures. *Bayesian Analysis* 1:121–144
- Cappé O, Godsill S, Moulines E (2007) An overview of existing methods and recent advances in sequential monte carlo. *IEEE Proceedings* 95:899–924
- Carvalho CM, Lopes HF, Polson NG, Taddy MA (2010) Particle learning for general mixtures. *Bayesian Analysis* 5(4):709–740, DOI 10.1214/10-BA525
- Chen R, Liu J (2000) Mixture kalman filters. *J Roy Statist Soc Ser B* 62:493–508
- Fearnhead P (2004) Particle lters for mixture models with an unknown number of components. *Journal of Statistics and Computing* 14:11–21
- Ferguson T (1973) A bayesian analysis of some nonparametric problems. *Annals of Statistics* 1:209–230
- Holmes CC, Held L (2006) Bayesian auxiliary variable models for binary and multinomial regression. *Bayesian Analysis* 1(1):145–168
- Jain S, Neal R (2004) A split-merge markov chain monte carlo procedure for the Dirichlet process mixture model. *Journal of Computational and Graphical Statistics* 13:158–182
- Kalman R (1960) A new approach to linear filtering and prediction problems. *Transactions of the ASME-Journal of Basic Engineering* 82:35–45
- Lo AY (1984) On a class of Bayesian nonparametric estimates: I. Density estimates. *Annals of Statistics* 12(1):351–357, DOI 10.1214/aos/1176346412
- Lukk L, Kapushesky M, Nikkilä J, Parkinson H, Goncalves A, Huber W, Ukkonen E, Brazma A (2010) A global map of human gene expression. *Nature Biotechnology* 28(4):322–324, DOI 10.1038/nbt0410-322
- Malone J, Holloway E, Adamusiak T, Kapushesky M, Zheng J, Kolesnikov N, Zhukova A, Brazma A, Parkinson H (2010) Modeling sample variables with an experimental factor ontology. *Bioinformatics* 26(8):1112–1118
- Neal R (2000) Markov chain sampling methods for Dirichlet process mixture models. *Journal of Computational and Graphical Statistics* 9(2):249–265
- Park T, Casella G (2008) The Bayesian Lasso. *Journal of the American Statistical Association* 103(482):681–686, DOI 10.1198/016214508000000337
- Ulker Y, Gnsel B, Cemgil T (2010) Sequential monte carlo samplers for Dirichlet process mixtures. *13th International Conference on Artificial Intelligence and Statistics (AISTATS)* 9:876–883
- van der Vaart A (1998) *Asymptotic Statistics*. Cambridge University Press, New York
- Wang L, Dunson DB (2011) Fast Bayesian inference in Dirichlet process mixture models. *Journal of Computational and Graphical Statistics* 20(1):196–216, DOI 10.1198/jcgs.2010.07081
- Xue Y, Liao X, Carin L, Krishnapuram B (2007) Multi-task learning for classification with Dirichlet process priors. *Journal of Machine Learning Research* 8:35–63
- Zhang J, Ghahramani Z, Yang Y (2005) A probabilistic model for online document clustering with application to novelty detection. In *Advances in Neural Information Processing*

Systems 17