Separated by an Un-common Language: Towards Judgment Language Informed Vector Space Modeling

Ira Leviant
IE&M faculty
Technion - IIT

Roi Reichart IE&M faculty Technion - IIT

ira.leviant@campus.technion.ac.il roiri@ie.technion.ac.il

Abstract

A common evaluation practice in the vector space models (VSMs) literature is to measure the models' ability to predict human judgments about lexical semantic relations between word pairs. Most existing evaluation sets, however, consist of scores collected for English word pairs only, ignoring the potential impact of the *judgment language* in which word pairs are presented on the human scores.

In this paper we translate two prominent evaluation sets, wordsim353 (association) and SimLex999 (similarity), from English to Italian, German and Russian and collect scores for each dataset from crowdworkers fluent in its language. Our analysis reveals that human judgments are strongly impacted by the judgment language. Moreover, we show that the predictions of monolingual VSMs do not necessarily best correlate with human judgments made with the language used for model training, suggesting that models and humans are affected differently by the language they use when making semantic judgments. Finally, we show that in a large number of setups, multilingual VSM combination results in improved correlations with human judgments, suggesting that multilingualism may partially compensate for the judgment language effect on human judgments.¹

1 Introduction

In recent years, there has been an immense interest in the development of *Vector Space Models* (VSMs) for word meaning representation. Most

VSMs are based on the distributional hypothesis (Harris, 1954), stating that words that occur in similar contexts tend to have similar meanings.

VSMs produce a vector representation for each word in the lexicon. A common evaluation practice for such models is to compute a score for each member of a word pair set by applying a similarity function to the vectors of the words participating in the pair. The resulting score should reflect the degree to which one or more lexical relations between the words in the pair hold. The correlation between the model's scores and the scores generated by human evaluators is then computed.

Humans as well as VSMs may consider various languages when making their judgments and predictions. Recent research on multilingual approaches to VSMs aims to exploit multilingual training (training with corpora written in different languages) to improve VSM predictions. The resulting models are evaluated either against human scores, most often produced for word pairs presented to the human evaluators in English, or on multilingual text mining tasks (§ 2). While works of the latter group do recognize the connection between the VSM training language (TL) and the task's language, to the best of our knowledge no previous work systematically explored the impact of the judgment language (JL), the language in which word pairs are presented to human evaluators, on human semantic judgments and on their correlation with VSM predictions.

In this paper we therefore explore two open issues: (a) the effect of the JL on the human judgment of semantic relations between words; and (b) the effect of the TL(s) on the capability of VSMs to predict human judgments generated with different JLs. To address these issues we translate two

¹All the datasets and related documents produced in this work will be released upon acceptance of the paper.

prominent datasets of English word pairs scored for semantic relations: WordSim353 (Ws353, (Finkelstein et al., 2001)), consisting of 353 word pairs scored for association, and SimLex999 (SL999, (Hill et al., 2014b)), consisting of 999 word pairs scored for similarity. For each dataset, the word pairs and the annotation guidelines are translated to three languages from different branches of the Indo-European language family: German (Germanic), Italian (Romance) and Russian (Slavic). We then employ the CrowdFlower crowdsourcing service ² to collect judgments for each set from human evaluators fluent in its JL (§ 3).

In § 5 we explore the hypothesis that due to a variety of factors – linguistic, cultural and others – the JL should affect human generated association and similarity scores. Indeed, our results show that inter evaluator agreement is significantly higher within a JL than it is across JLs. This suggests that word association and similarity are JL dependent.

We then investigate (§ 6) the connection between the VSM TL and the human JL. We experiment with two VSMs that capture distributional co-occurrence statistics in different ways: a bag-of-word (BOW) model that is based on direct counts and the neural network (NN) based word2vec (W2V, (Mikolov et al., 2013a)). We train these models on monolingual comparable corpora from our four JLs (§ 4) and compare their predicted scores with the human scores produced for the various JLs. Our analysis reveals fundamental differences between word association and similarity. For example, while for association the predictions of a VSM trained on a given language best correlate with human judgments made with that language, for similarity some JLs better correlate with all monolingual models than others.

Finally (§ 7), we explore how multilingual model combination affects the ability of VSMs to predict human judgments for varios JLs. Our results show a positive effect for a large number of TL and JL combinations, suggesting that multilingualism may partially compensate for the judgment language effect on human semantic judgments.

2 Previous Work

Vector Space Models and Their Evaluation. Ear-

lier VSM work (see (Turney and Pantel, 2010)) designed word representations based on word colocation counts, potentially post-processed using techniques such as Positive Pointwise Mutual Information (PPMI) and dimensionality reduction methods. Recently, much of the focus has drifted to the development of NNs for representation learning (Bengio et al., 2003; Collobert and Weston, 2008; Collobert et al., 2011; Huang et al., 2012; Mikolov et al., 2013a; Mikolov et al., 2013c; Levy and Goldberg, 2014; Pennington et al., 2014, inter alia).

VSMs have been evaluated in two main forms: (a) comparing model-based word pair scores with human judgments of various semantic relations. The model scores are generated by applying a similarity function, usually the cosine metric, to the vectors generated by the model for the words in the pair (Huang et al., 2012; Baroni et al., 2014; Levy and Goldberg, 2014; Pennington et al., 2014; Schwartz et al., 2015, inter alia); and (b) evaluating the contribution of the generated vectors to NLP applications (Collobert and Weston, 2008; Collobert et al., 2011; Pennington et al., 2014, inter alia).

Several evaluation sets consisting of English word pairs scored by humans for semantic relations (mostly association and similarity) are in use for VSM evaluation. Among these are RG-65 (Rubenstein and Goodenough, 1965), MC-30 (Miller and Charles, 1991), ws353 ((Finkelstein et al., 2001)), YP-130 (Yang and Powers, 2006), and SL999 (Hill et al., 2014b). Recently a few evaluation sets consisting of scored word pairs in languages other than English (e.g. Arabic, French, Farsi, German, Portuguese, Romanian and Spanish) were presented (Gurevych, 2005; Zesch and Gurevych, 2006; Hassan and Mihalcea, 2009; Schmidt et al., 2011; Camacho-Collados et al., 2015; Köper et al., 2015, inter alia). Most of these datasets, however, are translations of the English sets, where the original human scores produced for the original English set are kept. Even for those cases where evaluation sets were re-scored (e.g. (Camacho-Collados et al., 2015; Köper et al., 2015)) our investigation of the JL effect is much more thorough.³ A comprehen-

²http://www.crowdflower.com/

³Although WS353 was translated to German and then scored with the German JL (Köper et al., 2015), we translated and scored the dataset again in order to keep the same translation and scoring decisions across our datasets. We applied the same

sive list of these datasets, as well as of evaluation sets for word relations beyond word pair similarity and association (Mitchell and Lapata, 2008; Bruni et al., 2012; Baroni et al., 2012, inter alia), is given at http://wordvectors.org/suite.php.

Multilingual VS Modeling. Recently, there has been a growing interest in multilingual vector space modeling (Klementiev et al., 2012; Lauly et al., 2013; Khapra et al., 2013; Hermann and Blunsom, 2014b; Hermann and Blunsom, 2014a; Kočiský et al., 2014; Lauly et al., 2014; Al-Rfou et al., 2013; Faruqui and Dyer, 2014; Coulmance et al., 2015, inter alia). These works train VSMs on multilingual data, either parallel or not, or combine VSMs trained on monolingual data. The resulting models are evaluated either against human scores, most often produced for word pairs presented to the human evaluators in English, or on multilingual text mining tasks.

3 Multilingual Human Judgment Data

Here we describe the data collection process, consisting of dataset translation (3.1) and scoring (3.2). Our working datasets are Ws353 (Finkelstein et al., 2001) and SL999 (Hill et al., 2014b).⁴

3.1 Evaluation Sets Translation

We started by translating the W\$353 and \$L999 scoring guidelines to the target languages. For each language the translation was done by two native speakers, and disagreements were solved through a discussion mediated by an experiment manager. An external evaluator, fluent in both the target language and in English then verified the translation quality.

The word pair translation process was more complicated. We followed the same protocol outlined above and further set a number of rules that guided our translators in challenging cases. Below we discuss the different types of translation ambiguities addressed in our guidelines.

Gender. In some cases English does not make gender distinctions that some of the other languages do. For example, the English word *cat* refers to both the female and the male cat while in Russian and

Italian each gender has its own word (e.g. *gatto* and *gatta* in Italian). In such cases, if the other word in the English pair has a clear gender interpretation we followed this gender in the translation of both words, otherwise we chose one of the genders randomly and kept it fixed across the target languages.⁵

Word Senses. It is common that some words in a given language have a sense set that is not conveyed by any of the words of another given language. For example, the English word *plane*, from the WS353 pair (*car,plane*), has both the *airplane* and the *geometric plane* senses. However, to the best of our translators' knowledge, no German, Italian or Russian word has these two senses.

We assume that when the authors of the evaluation sets paired two words, they referred to their closest senses. Therefore, like for gender, we used the other word in the pair for sense disambiguation. In our example, *plane* is translated to the target language word which has the *airplane* meaning (e.g. *Flugzeug* in German, *aeroplano* in Italian), since this sense is closer to the meaning of *car*.

In cases where the other word in the pair does not clearly disambiguate the sense of its polysemous counterpart, we randomly chose one of the latter word's senses, and kept it fixed across the target languages. Consider, for example, the SL999 pair (portray,decide). Portray has three senses ⁶ - one related to describing someone or something, one related to showing in painting and one to playing a character in a tv show, play or a movie. Since it was not clear to our translators how the word decide can facilitate sense selection, we randomly chose the first sense and used it across target languages.

Sense disambiguation is done on a POS basis as well. For example, in the pair (attempt, peace) attempt can be a verb or a noun, but none of these senses is necessarily closer to the meaning of peace. In such cases, reasoning that words with the same POS tend to have a closer meaning, we used the interpretation of the polysemous word which has the same POS as the other word in the pair. That is, in the current example attempt was assigned its noun sense, as peace is a noun. Naturally, the target language translation of a given English word may also

considerations when re-scoring the original English versions of WS353 and SL999.

⁴The original datasets and annotation guidelines are available at http://www.cs.technion.ac.il/~gabr/resources/data/wordsim353/wordsim353.html and http://www.cl.cam.ac.uk/~fh295/simlex.html respectively.

⁵We did not observe any case of gender disagreement between languages.

⁶http://www.merriam-webster.com/dictionary/portray

have multiple senses, some of which are not expressed by the English word. We guided our translators to avoid such translations whenever possible, although in a few cases that was impossible.

Pair Exclusion. We excluded some of the pairs from the evaluation sets in our experiments. Three pairs were excluded from WS353 due to translation difficulties. The pairs (noon,midday) and (coast, shore) were excluded because none of the target languages includes two different words that convey the meaning of either set. The pair (football,soccer) was also excluded since it reflects a cultural distinction that is not made in the target languages. The resulting datasets in all four languages therefore consist of 350 word pairs.

For SL999 all 999 pairs were translated, scored and employed in the JL analysis of § 5. However, as for 23 of the pairs at least one of the participating words did not appear in at least one of the VSM training corpora (see § 4), we excluded these pairs from the analysis of the relations between the TLs and the JLs (§ 6 and § 7).

Inter Translator Agreement. The disagreement rates between our two translators for Ws353 (700 words) and SL999 (1998 words) are (left parentheses for Ws353, right for SL999): Russian ((85 words, 12.1%), (353 words, 17.7%)), Italian ((57 words, 8.1%), (196 words, 9.8%)) and German ((113 words, 16.1%), (396 words, 19.8%)). To resolve disagreements, for each language we asked one of the translators to choose the translation which is more similar in meaning to the other word in the pair. If this is not possible, the translator was asked to choose the word which seems to her more common in the target language.

3.2 Word Pair Scoring

We next describe the word pair scoring process. In order to keep our analysis unbiased across JLs, we scored WS353 and SL999 in all four languages, including English. We divided each dataset to non-overlapping batches of 50 word pairs each (7 for WS353, 20 for SL999, with one SL999 batch consisting of 49 pairs) and employed the crowdflower crowdsourcing service to recruit fluent speakers of each target language to score each batch. Evaluators were presented with the scoring guidelines translated to their JL and were asked to score the pairs

on a 0-10 scale.

We verified the quality of our evaluators through a three step process. First, for each JL we only recruited evaluators who were located at a country where this language is the mother tongue of the majority of the population (i.e. US, Germany, Italy or Russia). Second, in order to make sure that our evaluators understand the task properly, we generated 7 tests for each language, each consisting of two word pairs that do not appear in the evaluation set. The participating pairs consisted of words that were either very similar or very dissimilar. Before scoring a batch of word pairs, each evaluator was presented with a randomly sampled test in its language and was asked to score its word pairs. Every evaluator that assigned a similar pair with a score lower than 7 or a non-similar pair with a score higher than 3 was excluded from the experiment. Finally, we ran an outlier detection procedure in order to exclude evaluators whose scores were substantially different from those of the other evaluators of their batch. ⁷ For each evaluator we computed the distance of its average score from the average of the other evaluators and normalized by the standard deviation of the latter set. Evaluators whose statistic was above a predefined threshold 8 were excluded from the final dataset. We performed this procedure periodically and once a batch had 13 annotators that passed the test we stopped collecting scores for that batch.

4 Vector Space Models

Here we describe the VSMs we employ, their training data and evaluation protocol.

4.1 Models

Bag of Words (BOW). We constructed a VSM following the optimal performance guidelines of (Kiela and Clark, 2014). After extracting the k most frequent words in the training corpus, we generated a matrix of co-occurrence counts with a row for each of the words in any of the pairs in an evaluation set,

⁷Some works that employ crowdsourcing compare some of the collected annotation to a pre-prepared gold standard. We consider our outlier detection process an alternative as it keeps only those annotators who tend to agree with the others.

 $^{^8}$ The threshold was set to 1.45, reasoning that if the statistics were sampled from a Gaussian with the empirical mean and variance, then ${\sim}80\%$ of the evaluators would be included.

and a column for each of the k most frequent words. Co-occurrence was counted within a window size C, without crossing sentence boundaries. The entries of the matrix were then normalized to PPMI values. The resulting matrix's rows constitute the vector representations of the words.⁹

word2vec. The Mikolov et al.'s NN model (Mikolov et al., 2013a; Mikolov et al., 2013b).¹⁰ The model aims to learn word representations that maximize the objective:

$$L = \sum_{t=1}^{T} \sum_{-c \le j \le c, j \ne 0} \log p(w_{t+j}|w_t)$$

Where T is the number of training tokens, and c a window size parameter. The objective respects sentence boundaries, conditioning only words from the same sentence on each other. 11

We tuned three parameters D - the vector dimensionality, F - a frequency cutoff for words to be included in the objective, and c - the window size. We followed Radim Rehurek's W2V tutorial 12 and set $c=5,\,D=400$ and F=1 for all TLs.

Training and Word Pair Scoring

We trained our VSMs on the Wikipedia corpora released by (Al-Rfou et al., 2013). 13 This is a set of multilingual comparable corpora, as Wikipedia entries covering the same topic have similar content across languages. This allows us to focus on the effect of the (TL, JL) combination, while keeping the training topics fixed across languages.

The size of these corpora is as follows (left number for the number of word types, right number for the number of word tokens): English (3.98 M, 1.4 G), German (5.1 M, 484.5 M), Italian (1.65 M, 281.6 M), Russian (2.81 M, 230 M). Before training the models, we cleaned the corpora, removing stopwords and any string that is not comprised of alphabetic characters only, 14 and stemming the remaining words using an NLTK stemmer. 15

The score assigned to a word pair by a model is the cosine similarity between the vectors the model induces for the pair's words. For each (TL, JL) pair we compute the Spearman correlation coefficient (ρ) between the ranking derived from a model's scores and the ranking derived from the human scores.¹⁶

Our main experimental setup reflects a preference for comparable corpora. This choice has consequences: first, our English and German corpora are substantially larger than their Russian and Italian counterparts; and, second, our training corpora are smaller than some of the alternative publicly available corpora that have been used for VSM training.

To exclude the possibility that our observations are the mere outcome of these biases, we replicated the experiments of § 6 and § 7 in two additional setups. First, in the small training setup we re-ran our experiments when the English and the German training corpora were cut to the size of the Russian or the Italian corpus. The results in this setup were averaged over 5 random samples from each corpus. Second, in the *large training setup* we re-ran our experiments when the English, German and Italian corpora were replaced with much larger, incomparable corpora: English with the 8G word tokens corpus constructed using the W2V script, ¹⁷ and Italian and German with the WaCky corpora ((?),18 Italian: 1.585G word tokens, German: 1.278G word tokens).¹⁹ Since the result patterns in these setups are very similar to those in the major, comparable corpora setup, we report them briefly.

The Judgment Language Effect

Our first question is: how does the JL affect the word pair scores produced by the human evaluators. To provide a quantitative answer, we run the following protocol, both within and across JLs. For each of the 50 word pair batches, we generate all possible K-size subsets of the batch evaluators, each K-size subset defining a unique partition of these evaluators

⁹We experimented with $k \in \{1000, 2000, ..., 10000\}$ and $C \in \{2, 3, ..., 8\}$ and set k = 10000 and C = 2 for all TLs.

¹⁰ http://word2vec.googlecode.com/svn/trunk/word2vec.c

¹¹We excluded this detail from the objective for brevity. 12 http://radimrehurek.com/2014/02/word2vec-tutorial/

¹³https://sites.google.com/site/rmyeid/projects/polyglot

¹⁴ According to the NLTK list, http://www.nltk.org/

¹⁵ http://www.nltk.org/howto/stem.html

¹⁶Result patterns are very similar when considering the Pearson and Kandall Tao scores. We hence keep our presentation concise and report only the Spearman scores.

¹⁷code.google.com/p/word2vec/source/browse/trunk/demotrain-big-model-v1.sh

¹⁸ http://wacky.sslmit.unibo.it/doku.php

¹⁹Russian is not included in this latter setup since we could not find a publicly available substantially larger Russian corpus.

$L_1 L_2$	Eng	lish	Ger	man	Ital	ian	Rus	sian
	mean	std	mean	std	mean	std	mean	std
English	0.838 0.896	0.083 0.033	0.752	0.105	0.739	0.092	0.739	0.110
German	0.648	0.187	0.808 0.864	0.062 0.055	0.700	0.105	0.720	0.076
Italian	0.729	0.084	0.633	0.197	0.879 0.871	0.053 0.055	0.720	0.121
Russian	0.724	0.097	0.621	0.170	0.705	0.073	0.880 0.880	0.045 0.033

Table 1: Average Spearman ρ correlation coefficient between human judgments in the within and the cross language setups. The (L_1, L_2) table entry (which is further divided into *mean* and standard deviation (*std*) columns) corresponds to the comparison of evaluators with judgment language L_1 to evaluators with judgment language L_2 . For each pair of languages the entry above the main diagonal of the matrix is for Ws353 and the entry below the main diagonal (italic font) is for sL999 (for example, the (German, Italian) entry is for Ws353 while the (Italian, German) entry is for sL999). On the main diagonal, for both the mean and the std entries, the left number is for SL999 while the right number is for Ws353.

$T \mid J$	English	German	Italian	Russian
English	0.600	0.523	0.488	0.496
German	0.387	0.414	0.360	0.408
Italian	0.485	0.410	0.451	0.427
Russian	0.403	0.377	0.360	0.426

(a) BOW - WS353

$T \mid J$	English	German	Italian	Russian
English	0.214	0.304	0.271	0.220
German	0.086	0.268	0.199	0.087
Italian	0.140	0.236	0.214	0.115
Russian	0.141	0.240	0.226	0.157

(c) BOW - SL999

$T \mid J$	English	German	Italian	Russian
English	0.652	0.618	0.614	0.585
German	0.537	0.595	0.505	0.554
Italian	0.564	0.483	0.569	0.504
Russian	0.574	0.532	0.495	0.606

(b) w2v - ws353

$T \mid J$	English	German	Italian	Russian
English	0.266	0.354	0.308	0.260
German	0.198	0.342	0.249	0.170
Italian	0.207	0.299	0.293	0.197
Russian	0.160	0.250	0.242	0.234

(d) w2v - sL999

Table 2: Spearman ρ correlation coefficient between human scores and VSM scores. The (T, J) entry of each matrix presents the ρ value between the scores of a VSM trained on language T and the human scores produced for judgment language J. In each table, for each training language (row) the best judgment language is highlighted in bold.

(we set K to 6). Then, for the within language evaluation we calculate the correlation between the averaged word pair scores of the two subsets induced by each K-size subset selection. For the cross language evaluation, in turn, we calculate the correlation between the average word pair scores of each K-size subset of language 1 with its corresponding subset of language 2. The resulting ρ scores were averaged to get a final score for each language (in the within-language case) and language pair (in the cross-language case).

Table 1 presents our results. The correlations within a JL are clearly higher compared to their cross JL counterparts, with mean values at the range of [0.864-0.896] for Ws353 and [0.808-0.880] for SL999 within JLs, compared to [0.700-0.752] for Ws353 and [0.621-0.729] for SL999 across JLs.

For both evaluation sets, we ran the Welch's t-test

for each set of correlations computed for an individual language with each set of correlations computed for a pair of languages. In all 24 cases 21 of each evaluation set the null hypothesis stating that the two sets have an equal mean was rejected with Pvalue < 0.001.

Further, the standard deviation values are [0.033-0.055] for ws353 and [0.045-0.083] for sL999 in the within language setup, compared to [0.076-0.121] for ws353 and [0.073-0.197] for sL999 in the cross language setup. These results reflect the weaker dependence of the human judgment in the within language setup on the involved word-pairs and human evaluators.

To better understand the JL effect, for each JL we rank the word pairs according to their average human score and, then, compute for each pair of JLs the relative F-score between corresponding quintiles in the rankings. ²² The top line of Figure 1

²⁰We have 1716 K-size subsets for each batch and totals of 1716*7 and 1716*20 correlations for each WS353 and SL999 scenarios respectively.

²¹we have four languages and hence six language pairs.

²²For each of the 1716 K-size subset pairs (all possible divi-

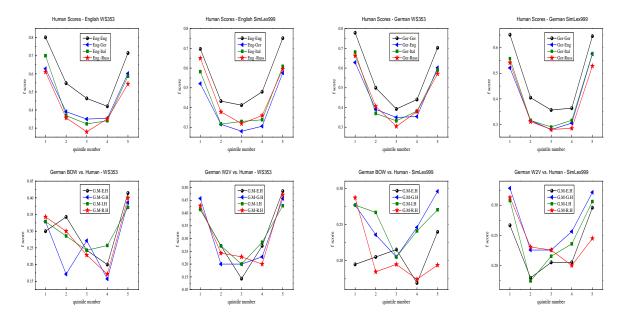


Figure 1: Relative F-score of the word pair lists in corresponding quintiles of: (a) human rankings with different judgment languages (top line, two left graphs show all combinations of English with another language, two right graphs show the same for German); and (b) model rankings with training language l_1 vs. human ranking with judgment language l_2 (bottom line, graphs presented for all combinations of models (BOW and W2V) and evaluation sets (WS353 and SL999) for $l_1 = German$). Languages are denoted with a one or a three letter abbreviation, M stands for model and H for human.

(two left graphs for comparisons where English is involved, two right graphs for comparisons where German is involved) reveals that the overlap between corresponding quintiles is substantially larger for the top and bottom quintiles (top and bottom 20% of the word pairs according to each of the rankings) compared to quintiles 2-4. The graphs further demonstrate the larger overlap between corresponding quintiles in the within language setups compared to the cross-language setups, highlighting the impact of JL differences on this phenomenon.²³

All in all our results suggest that the concepts of word similarity and association may be JL dependent. Our next natural question is how the relations between the VSM TL and the human JL affect the cor-

sions of the scores to subsets of 6 and 7 for the within language case, every subset of size 6 in one language with its corresponding subset in the other language in the cross language case), we produced two word pair rankings according to the average score within each subset. We then divided each ranked list to 5 quintiles and computed relative F-scores between each pair of corresponding quintiles. We finally report the average F-score for each pair of corresponding quintiles across all these 1716 cases.

relation between the model and the human scores.

6 The VSM Training Language Effect

Table 2 presents the Spearman ρ correlation coefficient between human and model scores.

Training Language Choice. For each of the JLs J, we first ask what is the TL T that leads to the monolingual model that best predicts human judgments with J. Both word association (WS353) and similarity (SL999) demonstrate very similar answers to this question.

A first shared pattern is that English is overall the best choice of TL for both BOW and W2V: in 7 out of 8 cases for WS353 and in all 8 cases for SL999. A second shared pattern is that the JL itself is overall the second best TL, which is observed in 10 of the 11 cases where English is the best TL for a given JL and JL != English.

Judgment Language Choice. Our second question is complementary to the first one, namely, for each of the TLs T, what is the JL J that leads to human judgments that best correlate with the predictions of the monolingual model trained with T.

²³We performed the same analysis for the cases where the Italian and Russian JLs are involved and observed very similar patterns. These graphs are omitted due to space constraints.

Here we observe considerable differences between word similarity and association.

A first major difference is in the identity of the best JL. While for WS353 in 7 of 8 cases a model trained with a TL T best correlates with human judgments made with T as a JL, for SL999 both models best correlate with German judgments for all TLs.

A second major difference is related to the English JL. For WS353 in 3 out of the 5 cases where English is not the best JL for a model it is the second best JL. For SL999, in contrast, for all 8 TL and model type combinations, English is the JL with the lowest correlation. For this dataset, Italian is always the second best JL, and Russian is the third best.

VSM Comparison. Our experiments also cast light on the effectiveness of the participating VSMs. For every combination of TL, JL and word pair dataset, the NN-based W2V is superior to the countbased BOW. This finding supports recent conclusions on the superiority of "predict" models over their "count" counterparts (Baroni et al., 2014).

Quintile Analysis. To further investigate the mutual impact of the TLs and JLs, we replicated the quintile analysis of § 5, this time comparing the rankings of a model trained with language l_1 to the human scores obtained with JL l_2 .²⁴ Results are presented in the bottom line of Figure 1.²⁵

Interestingly, like in the respective analysis for JL pairs, human-model disagreement is generally most prominent for word pairs that are considered of medium similarity or association. Note, however, that in the current analysis, the human-model agreement is weaker than the human-human agreement on the corresponding quintiles we explored in § 5. Moreover, while in the analysis of § 5 the F-score values in the within language setup are superior to their cross-language counterparts, here keeping the TL and JL identical does not result in superior F-scores in most cases.

Observations. Our analysis leads to several observations. First, word similarity and association judgments have a language specific component. Consequently, the JL is a good choice for model training (first question) and the predictions of models trained on a given language are best correlated with human judgments performed with that language, at least for word association (second question). While this seems obvious in machine learning terms, as indomain training is preferable and language change is analogous to domain change, the semantic nature of our tasks would suggest that VSMs should preserve their outcome across languages. Our results suggest that this latter assumption is not true.

Second, English has a special status in VSM research: as a VSM TL for both association and similarity prediction (first question), and as a JL for word association. The special status of English as a TL may result from its simpler morphology ²⁶ which may allow more robust statistics to be collected. Another possible explanation is that our evaluators are likely to have some command of English ²⁷ which may bias their semantic judgments towards those made by an English trained model.

The JL pattern is harder to understand. One possible hypothesis is that the dominance of English for word association is the result of our evaluation sets being translations of sets originally authored in English. Consequently, some important meaning components may get lost in translation. However, the poor similarity predictions of both models with all four TLs when English is the JL, seriously challenge this hypothesis.

Finally, for word similarity both VSMs are much better correlated with human scores when the JL is German compared to the other JLs and particularly to English. We will investigate this surprising observation in future work.

Training Corpus Size Effect. In the *small training setup* our results were very similar to the results reported above both in terms of qualitative patterns and in the numerical correlation values (up to 0.02 difference in Spearman ρ). In the *large train*

²⁴Since the models produce only one score per word pair, in this analysis we ranked the word pairs according to the model scores as well as according to the average of all 13 human scores, divided each ranked list to quintiles and computed a relative F-score for each pair of corresponding quintiles.

²⁵For brevity, we present only the curves for l1 = German, the patterns for the other cases are very similar.

²⁶This is reflected, for example, by the lower type-to-token ratio of English in our training corpora: English = 0.0028; German = 0.011; Italian = 0.0058; Russian = 0.012.

²⁷We have not checked this.

$T \mid J$	English	German	Italian	Russian		$T \mid J$	English	German	Italian	Russian
E-G	0.544	0.528	0.490	0.504	l i	E-G	0.675	0.667	0.630	0.630
E-I	0.575	0.531	0.516	0.517	l i	E-I	0.696	0.633	0.662	0.621
E-R	0.556	0.526	0.494	0.515	l i	E-R	0.687	0.645	0.624	0.646
G-I	0.504	0.466	0.479	0.482	l i	G-I	0.657	0.629	0.625	0.623
G-R	0.437	0.450	0.407	0.473	l i	G-R	0.618	0.628	0.553	0.645
I-R	0.508	0.445	0.475	0.481		I-R	0.657	0.585	0.606	0.644
E-E	0.543	0.518	0.484	0.492	ĺ	E-E	0.652	0.620	0.609	0.591
G-G	0.342	0.400	0.353	0.402		G-G	0.540	0.601	0.497	0.563
I-I	0.46	0.400	0.443	0.416	İ	I-I	0.582	0.500	0.582	0.514
R-R	0.00.0	0.365	0.355	0.420	1 1	R-R	0.571	0.534	0.498	0.610
IX-IX	0.395			0.420		K-K	0.571	0.554	0.476	0.010
K-K		0.363 BOW - WS		0.420	l l	K-K		v2v - ws		0.010
T J				Russian	I [T J				Russian
	(a) E	BOW - WS	3353				(b) v	v2v - ws	3353	
$T \mid J$	(a) E	BOW - WS	3353	Russian		$T \mid J$	(b) V	V2V - WS	3353	Russian
T J E-G	(a) English	German 0.334	3353 Italian 0.273	Russian 0.180		T J E-G	(b) V English 0.263	V2V - WS German 0.392	3353 Italian 0.313	Russian 0.244
T J E-G E-I	(a) English 0.177 0.201	German 0.334 0.313	3353 Italian 0.273 0.276	Russian 0.180 0.192		T J E-G E-I	(b) V English 0.263 0.267	W2V - WS German 0.392 0.371	3353 Italian 0.313 0.340	Russian 0.244 0.260
T J E-G E-I E-R	(a) English 0.177 0.201 0.209	German 0.334 0.313 0.318	353 Italian 0.273 0.276 0.289	Russian 0.180 0.192 0.217		T J E-G E-I E-R	(b) V English 0.263 0.267 0.233	German 0.392 0.371 0.332	3353 Italian 0.313 0.340 0.302	Russian 0.244 0.260 0.274
T J E-G E-I E-R G-I	(a) E English 0.177 0.201 0.209 0.131	German 0.334 0.313 0.318 0.294	Italian 0.273 0.276 0.289 0.238	Russian 0.180 0.192 0.217 0.119		T J E-G E-I E-R G-I	(b) V English 0.263 0.267 0.233 0.242	German 0.392 0.371 0.332 0.380	Italian 0.313 0.340 0.302 0.319	Russian 0.244 0.260 0.274 0.223
T J E-G E-I E-R G-I G-R	(a) E English 0.177 0.201 0.209 0.131 0.135	German 0.334 0.313 0.318 0.294 0.288	Italian 0.273 0.276 0.289 0.238 0.243	Russian 0.180 0.192 0.217 0.119 0.145		T J E-G E-I E-R G-I G-R	(b) V English 0.263 0.267 0.233 0.242 0.212	German 0.392 0.371 0.332 0.380 0.338	3353 Italian 0.313 0.340 0.302 0.319 0.284	Russian 0.244 0.260 0.274 0.223 0.242

0.235 (c) BOW - SL999

0.223

0.256 (d) w2v - sL999

0.260

Table 3: Spearman ρ correlation coefficient between human scores and the outcome of a linear interpolation (LI) of the scores of pairs of monolingual models. The $(T=L_1-L_2,J=L_3)$ entry of each table is the correlation of (1) the outcome of a LI of the scores of monolingual models trained on languages L_1 and L_2 with (2) the human scores produced with the JL L_3 . Cases where the LI of L1 and L_2 outperforms a monolingual model trained on L_3 (where L_3 is the JL) are highlighted in bold. .

m l x							TO 11 1	_ ~	Y 11	_
$T \mid J$	English	German	Italian	Russian	T		English	German	Italian	R
E-G	-0.130	-0.071	-0.070	-0.121	E-		0.340	0.356	0.312	0
E-I	-0.068	-0.033	-0.011	-0.070	E-		0.295	0.289	0.302	0
E-R	-0.099	-0.043	-0.026	-0.090	E-	-R	0.274	0.291	0.261	0.
G-I	-0.076	-0.052	-0.038	-0.081	G-	-I	0.286	0.311	0.291	0.
G-R	-0.128	-0.068	-0.075	-0.126	G-	-R	0.284	0.339	0.267	0.
I-R	-0.062	-0.034	-0.032	-0.084	I-]	R	0.223	0.218	0.230	0.
E-E	-0.112	-0.049	-0.034	-0.103	E-	-E	0.28	0.251	0.23	0.
G-G	-0.14	-0.078	-0.107	-0.129	G-	-G	0.206	0.291	0.212	0.
I-I	-0.06	-0.036	-0.006	-0.059	I-1	I	0.228	0.227	0.205	0.
R-R	-0.112	-0.059	-0.039	-0.103	R-	-R	0.236	0.252	0.253	0.
	. ,	BOW - WS					. ,	v2v - ws		
	. ,			Puccian	T	1 1	. ,			D
$T \mid J$	English	German	Italian	Russian	T		English	German	Italian	
<i>T</i> <i>J</i> E-G	English 0.222	German 0.234	Italian 0.273	0.253	E-	-G	English 0.319	German 0.434	Italian 0.374	R 0.
T J E-G E-I	English 0.222 0.232	German 0.234 0.214	Italian 0.273 0.260	0.253 0.236	E-	-G -I	English 0.319 0.312	German 0.434 0.408	Italian 0.374 0.395	0.
T J E-G E-I E-R	English 0.222 0.232 0.270	German 0.234 0.214 0.240	Italian 0.273 0.260 0.289	0.253 0.236 0.277	E- E-	-G -I -R	English 0.319 0.312 0.296	German 0.434 0.408 0.361	Italian 0.374 0.395 0.355	0. 0.
T J E-G E-I E-R G-I	English 0.222 0.232 0.270 0.199	German 0.234 0.214 0.240 0.211	Italian 0.273 0.260 0.289 0.249	0.253 0.236 0.277 0.216	E- E- G-	-G -I -R -I	English 0.319 0.312 0.296 0.289	German 0.434 0.408 0.361 0.417	Italian 0.374 0.395 0.355 0.369	0. 0. 0.
T J E-G E-I E-R G-I G-R	English 0.222 0.232 0.270 0.199 0.212	German 0.234 0.214 0.240 0.211 0.206	Italian 0.273 0.260 0.289 0.249 0.246	0.253 0.236 0.277 0.216 0.228	E- E- G- G-	-G -I -R -I -R	English 0.319 0.312 0.296 0.289 0.275	German 0.434 0.408 0.361 0.417 0.366	Italian 0.374 0.395 0.355 0.369 0.330	0. 0. 0. 0.
T J E-G E-I E-R G-I G-R I-R	English 0.222 0.232 0.270 0.199 0.212 0.223	German 0.234 0.214 0.240 0.211 0.206 0.192	0.273 0.260 0.289 0.249 0.246 0.239	0.253 0.236 0.277 0.216 0.228 0.226	E- E- E- G- G- I-l	-G -I -R -I -R -R	English 0.319 0.312 0.296 0.289 0.275 0.262	German 0.434 0.408 0.361 0.417 0.366 0.331	Italian 0.374 0.395 0.355 0.369 0.330 0.346	0. 0. 0. 0.
T J E-G E-I E-R G-I G-R I-R	English 0.222 0.232 0.270 0.199 0.212 0.223 0.244	German 0.234 0.214 0.240 0.211 0.206 0.192 0.226	Italian 0.273 0.260 0.289 0.249 0.246 0.239	0.253 0.236 0.277 0.216 0.228 0.226	E- E- G- G- I-l	-G -I -R -I -R R	English 0.319 0.312 0.296 0.289 0.275 0.262 0.332	German 0.434 0.408 0.361 0.417 0.366 0.331 0.399	Italian 0.374 0.395 0.355 0.369 0.330 0.346	0. 0. 0. 0. 0.
T J E-G E-I E-R G-I G-R I-R	English 0.222 0.232 0.270 0.199 0.212 0.223	German 0.234 0.214 0.240 0.211 0.206 0.192	0.273 0.260 0.289 0.249 0.246 0.239	0.253 0.236 0.277 0.216 0.228 0.226	E- E- G- G- I-l	-G -I -R -I -R -R	English 0.319 0.312 0.296 0.289 0.275 0.262	German 0.434 0.408 0.361 0.417 0.366 0.331	Italian 0.374 0.395 0.355 0.369 0.330 0.346	0. 0. 0. 0.
T J E-G E-I E-R G-I G-R I-R	English 0.222 0.232 0.270 0.199 0.212 0.223 0.244	German 0.234 0.214 0.240 0.211 0.206 0.192 0.226	Italian 0.273 0.260 0.289 0.249 0.246 0.239	0.253 0.236 0.277 0.216 0.228 0.226	E- E- G- G- I-1	-G -I -R -I -R R R	English 0.319 0.312 0.296 0.289 0.275 0.262 0.332	German 0.434 0.408 0.361 0.417 0.366 0.331 0.399	Italian 0.374 0.395 0.355 0.369 0.330 0.346	0. 0. 0. 0. 0.

Table 4: Spearman ρ correlation coefficient of the scores resulting from a CCA combination of monolingual models, with corresponding human scores. Table entries and highlighting is as in Table 3.

ing setup we observed the exact same patterns detailed above but the Spearman ρ values for every (TL, JL) pair were higher than those of Table 2, with the ρ differences having the following (mean, std) values: BOW/WS353: (0.036,0.025), W2V/WS353: (0.031,0.013), BOW/SL999: (0.048, 0.046) and

W2V/SL999: (0.042,0.033).

Our final investigation is of the potential of monolingual VSM combination to compensate for the JL effect.

7 The Multilingual Combination Effect

We explore two simple methods for the combination of VSMs trained on corpora of different languages, l1 and l2. In the first method, *linear interpolation* (LI), we combine the scores produced by two VSMs for a word pair (w_i, w_j) using the linear equation:

$$Score(w_i, w_j) = \lambda \cdot sc_{l1}(w_i, w_j) + (1 - \lambda) \cdot sc_{l2}(w_i, w_j)$$

Where $sc_{li}(w_i, w_j)$ is the score produced by the model trained on the li language and $\lambda \in [0, 1]^{.28}$

Our second combination method is Canonical Correlation Analysis (CCA). For each pair of languages, (l_1, l_2) , we calculated a pair of projection matrices to the shared subspace through the CCA method (Hardoon et al., 2004), using the vectors induced by monolingual models trained on an l_1 and an l_2 corpora. We then constructed a multilingual vector representation for each word by concatenating the l_1 and l_2 projected representations. ²⁹ ³⁰

We compare the performance of each multilingual combination method to a monolingual baseline in which the predictions of two monolingual models, each trained with randomly sampled 80% of *the same* monolingual training corpus, were combined using one of the above methods.³¹ This is done in order to rule out the possibility that our improvements are the mere result of the smoothing effect that model combination provides.

Tables 3 (top 6 lines of each table) presents results for multilingual LI. The numbers clearly show that this is an effective method of combining two monolingual models, leading to improvements over the participating monolingual models in most dataset and model combinations.³² Improvements com-

puted with respect to monolingual models trained on the JL (TL = JL, i.e. the results on the main diagonals of the sub-tables of table 2), are more prominent for German, Italian and Russian than for English (highlighted in bold in Table 3), which is not surprising given that English is the best TL of monolingual VSMs for the majority of evaluation set, JL and model combinations (§ 6). Multilingual interpolated models improve over such non-interpolated monolingual models in 68 of 96 cases (70.8%).

Comparison to monolingual LI (bottom 4 lines of each table) reveals the impact of the multilingual combination. As an example indication, monolingual LI improves over monolingual models trained on the JL in only 18 of 64 cases (28.1 %).³³

Interestingly, CCA combination improves over monolingual models trained on the JL only for SL999. This result adds mixed observations to previous positive results on the effect of CCA combination for multilingual VSM construction with the English JL (Faruqui and Dyer, 2014) and for the combination of visual and textual representations (Silberer and Lapata, 2012; Hill et al., 2014a).

Like in § 6, we controlled against corpus size effects. The results of both the *small* and the *large training setups* were very similar to those reported above both qualitatively and quantitatively. For example, in the *large training setups* the multilingual interpolated models improved over monolingual non-interpolated models trained on the JL in 61.1% of the cases, compared to 16.7% of the cases where the monolingual interpolated models achieve such an improvement. The differences in numerical Spearman ρ values were up to 0.01 across setups.

8 Conclusions

In this paper we aimed to establish the importance of the human JL in lexical semantics research. We translated and re-scored two prominent datasets, WS353 and SL999, and demonstrated the impact of the JL on: (a) human semantic judgments; and

 $^{^{28}}$ We experimented with $\lambda \in \{0.25, 0.33, 0.5, 0.67, 0.75\}$ and got improvements for most combinations of TL pairs, JLs and λs (see below). We report results with $\lambda = 0.5$, giving both monolingual models an equal weight.

²⁹Following (Faruqui and Dyer, 2014) we also experimented with taking one of the monolingual projected vectors as the multilingual representation and got very similar results.

³⁰We applied both protocols for the combination of three and four monolingual models and did not observe substantial improvements over two-language multilingual models.

³¹These results were averaged over 5 random samples from each of the corpora. For LI we naturally used $\lambda=0.5$. For CCA we employed the same protocol as in multilingual combination.

³²This effect is not highlighted in the table but is evident from a comparison to the numbers reported in Table 2.

³³A simple concatenation of the monolingual vectors is also an effective combination method of monolingual models, leading to improvements that are similar to what we report for LI. However, simple concatenation is effective for the BOW model only when PPMI normalization is applied to the row counts, as opposed to LI which is effective regardless of this step. We therefore focus on LI, the more robust method.

(b) the correlation of monolingual and multilingual VSM predictions, produced with varios training languages, with human judgments.

In future work we intend to extend our inquiry to relations beyond word association and similarity and to a larger number of TLs and JLs. We further intend to explore more advanced methods for multilingual VSM construction. Finally, we would like to go beyond quantitative analysis and identify qualitative patterns in our data. Our ultimate goal is to construct VSMs that directly account for the relations between their TL(s) and potential human JLs.

References

- [Al-Rfou et al.2013] Rami Al-Rfou, Bryan Perozzi, and Steven Skiena. 2013. Polyglot: Distributed word representations for multilingual nlp. In *Proc. of CoNLL*.
- [Baroni et al.2012] Marco Baroni, Raffaella Bernardi, Ngoc-Quynh Do, and Chung-chieh Shan. 2012. Entailment above the word level in distributional semantics. In *Proc. of EACL*.
- [Baroni et al.2014] Marco Baroni, Georgiana Dinu, and Germán Kruszewski. 2014. Don't count, predict! a systematic comparison of context-counting vs. context-predicting semantic vectors. In *Proc. of ACL*.
- [Bengio et al.2003] Yoshua Bengio, Réjean Ducharme, Pascal Vincent, and Christian Jauvin. 2003. A neural probabilistic language model. *JMLR*.
- [Bruni et al.2012] Elia Bruni, Gemma Boleda, Marco Baroni, and Nam Khanh Tran. 2012. Distributional semantics in technicolor. In *Proc. of ACL*.
- [Camacho-Collados et al.2015] José Camacho-Collados, Mohammad Taher Pilehvar, and Roberto Navigli. 2015. A unified multilingual semantic representation of concepts. *Proc. of ACL*.
- [Church and Hanks1990] Kenneth Ward Church and Patrick Hanks. 1990. Word association norms, mutual information, and lexicography. *Comput. Linguist.*, 16(1):22–29.
- [Collobert and Weston2008] Ronan Collobert and Jason Weston. 2008. A unified architecture for natural language processing: Deep neural networks with multitask learning. In *Proc. of ICML*.
- [Collobert et al.2011] Ronan Collobert, Jason Weston, Léon Bottou, Michael Karlen, Koray Kavukcuoglu, and Pavel Kuksa. 2011. Natural language processing (almost) from scratch. *JMLR*, 12:2493–2537.
- [Coulmance et al.2015] Jocelyn Coulmance, Jean-Marc Marty, Guillaume Wenzek, and Amine Benhalloum. 2015. Trans-gram, fast cross-lingual wordembeddings. In *Proc. of EMNLP (short papers)*.

- [Faruqui and Dyer2014] Manaal Faruqui and Chris Dyer. 2014. Improving vector space word representations using multilingual correlation. In *Proc. of EACL*.
- [Finkelstein et al.2001] Lev Finkelstein, Evgeniy Gabrilovich, Yossi Matias, Ehud Rivlin, Zach Solan, Gadi Wolfman, and Eytan Ruppin. 2001. Placing search in context: The concept revisited. In *Proc. of WWW*.
- [Gurevych2005] Iryna Gurevych. 2005. Using the structure of a conceptual network in computing semantic relatedness. In *Proc. of IJCNLP*.
- [Hardoon et al.2004] David Hardoon, Sandor Szedmak, and John Shawe-Taylor. 2004. Canonical correlation analysis: An overview with application to learning methods. *Neural computation*, 16(12):2639–2664.
- [Harris1954] Zellig Harris. 1954. Distributional structure. *Word*.
- [Hassan and Mihalcea2009] Samer Hassan and Rada Mihalcea. 2009. Cross-lingual semantic relatedness using encyclopedic knowledge. In *Proc. of EMNLP*.
- [Hermann and Blunsom2014a] Karl Moritz Hermann and Phil Blunsom. 2014a. Multilingual Distributed Representations without Word Alignment. In *Proceedings* of *ICLR*.
- [Hermann and Blunsom2014b] Karl Moritz Hermann and Phil Blunsom. 2014b. Multilingual models for compositional distributed semantics. In *Proc. of ACL*.
- [Hill et al.2014a] Felix Hill, Roi Reichart, and Anna Korhonen. 2014a. Multi-modal models for concrete and abstract concept meaning. *Transactions of the Association for Computational Linguistics*, 2(10):285–296.
- [Hill et al.2014b] Felix Hill, Roi Reichart, and Anna Korhonen. 2014b. Simlex-999: Evaluating semantic models with (genuine) similarity estimation. arXiv:1408.3456 [cs.CL].
- [Huang et al.2012] Eric H Huang, Richard Socher, Christopher D Manning, and Andrew Y Ng. 2012. Improving word representations via global context and multiple word prototypes. In *Proc. of ACL*.
- [Khapra et al.2013] Mitesh M Khapra, Balaraman Ravindran, Vikas Raykar, and Amrita Saha. 2013. Multilingual deep learning. In *Proceedings of NIPS Workshop on Deep Learning*.
- [Kiela and Clark2014] Douwe Kiela and Stephen Clark. 2014. A systematic study of semantic vector space model parameters. In Proc. of the 2nd Workshop on Continuous Vector Space Models and their Compositionality (CVSC), EACL.
- [Klementiev et al.2012] Alexandre Klementiev, Ivan Titov, and Binod Bhattarai. 2012. Inducing crosslingual distributed representations of words. In *Proc. of COLING*.

- [Köper et al.2015] Maximilian Köper, Christian Scheible, and Sabine Schulte im Walde. 2015. Multilingual reliability and semantic structure of continuous word spaces. *IWCS* 2015.
- [Kočiský et al.2014] Tomáš Kočiský, Karl Moritz Hermann, and Phil Blunsom. 2014. Learning Bilingual Word Representations by Marginalizing Alignments. In *Proc. of ACL*.
- [Lauly et al.2013] Stanislas Lauly, Alex Boulanger, and Hugo Larochelle. 2013. Learning multilingual word representations using a bag-of-words autoencoder. In *Proc. of NIPS Workshop on Deep Learning*.
- [Lauly et al.2014] Stanislas Lauly, Hugo Larochelle, Mitesh M Khapra, Balaraman Ravindran, Vikas Raykar, Amrita Saha, et al. 2014. An autoencoder approach to learning bilingual word representations. In *Proc. of NIPS*.
- [Levy and Goldberg2014] Omer Levy and Yoav Goldberg. 2014. Dependency-based word embeddings. In *Proc. of ACL (Volume 2: Short Papers)*.
- [Mikolov et al.2013a] Tomas Mikolov, Kai Chen, Greg Corrado, and Jeffrey Dean. 2013a. Efficient estimation of word representations in vector space. In *Proc. of ICLR*.
- [Mikolov et al.2013b] Tomas Mikolov, Ilya Sutskever, Kai Chen, Greg S Corrado, and Jeff Dean. 2013b. Distributed representations of words and phrases and their compositionality. In *Proc. of NIPS*.
- [Mikolov et al.2013c] Tomas Mikolov, Wen-tau Yih, and Geoffrey Zweig. 2013c. Linguistic regularities in continuous space word representations. In *Proc. of NAACL-HLT*.
- [Miller and Charles1991] George A Miller and Walter G Charles. 1991. Contextual correlates of semantic similarity. *Language and cognitive processes*, 6(1):1–28.
- [Mitchell and Lapata2008] Jeff Mitchell and Mirella Lapata. 2008. Vector-based models of semantic composition. In *Proc. of ACL-HLT*. Association for Computational Linguistics.
- [Pennington et al.2014] Jeffrey Pennington, Richard Socher, and Christopher D. Manning. 2014. Glove: Global vectors for word representation. In *Proc. of EMNLP*.
- [Rubenstein and Goodenough1965] Herbert Rubenstein and John B Goodenough. 1965. Contextual correlates of synonymy. *Communications of the ACM*, 8(10):627–633.
- [Schmidt et al.2011] Sebastian Schmidt, Philipp Scholl, Christoph Rensing, and Ralf Steinmetz. 2011. Crosslingual recommendations in a resource-based learning scenario. In *Towards Ubiquitous Learning*, pages 356–369. Springer.

- [Schwartz et al.2015] Roy Schwartz, Roi Reichart, and Ari Rappoport. 2015. Symmetric pattern based word embeddings for improved word similarity prediction. In *Proc. of CoNLL*.
- [Silberer and Lapata2012] Carina Silberer and Mirella Lapata. 2012. Grounded models of semantic representation. In *Proc. of EMNLP-CoNLL*.
- [Turney and Pantel2010] Peter Turney and Patrick Pantel. 2010. From frequency to meaning: Vector space models of semantics. *Journal of artificial intelligence research*, 37(1):141–188.
- [Yang and Powers2006] Dongqiang Yang and David MW Powers. 2006. Verb similarity on the taxonomy of wordnet. In *Proc. of GWC-06*.
- [Zesch and Gurevych2006] Torsten Zesch and Iryna Gurevych. 2006. Automatically creating datasets for measures of semantic relatedness. In *Proceedings of* the Workshop on Linguistic Distances. Association for Computational Linguistics.