

Packed Compact Tries: A Fast and Efficient Data Structure for Online String Processing

Takuya Takagi¹ Shunsuke Inenaga² Kunihiro Sadakane³
Hiroki Arimura¹

¹ Graduate School of IST, Hokkaido University, Japan
{tkg, arim}@ist.hokudai.ac.jp

² Department of Informatics, Kyushu University, Japan
inenaga@inf.kyushu-u.ac.jp

³ Graduate School of Information Sci. and Tech., University of Tokyo, Japan
sada@mist.i.u-tokyo.ac.jp

Abstract

In this paper, we present a new data structure called the *packed compact trie* (*packed c-trie*) which stores a set S of k strings of total length n in $n \log \sigma + O(k \log n)$ bits of space and supports fast pattern matching queries and updates, where σ is the size of an alphabet. Assume that $\alpha = \log_\sigma n$ letters are packed in a single machine word on the standard word RAM model, and let $f(k, n)$ denote the query and update times of the dynamic predecessor/successor data structure of our choice which stores k integers from universe $[1, n]$ in $O(k \log n)$ bits of space. Then, given a string of length m , our packed c-tries support pattern matching queries and insert/delete operations in $O(\frac{m}{\alpha} f(k, n))$ worst-case time and in $O(\frac{m}{\alpha} + f(k, n))$ expected time. Our experiments show that our packed c-tries are faster than the standard compact tries (a.k.a. Patricia trees) on real data sets. As an application of our packed c-trie, we show that the sparse suffix tree for a string of length n over prefix codes with k sampled positions, such as evenly-spaced and word delimited sparse suffix trees, can be constructed online in $O((\frac{n}{\alpha} + k)f(k, n))$ worst-case time and $O(\frac{n}{\alpha} + kf(k, n))$ expected time with $n \log \sigma + O(k \log n)$ bits of space. When $k = O(\frac{n}{\alpha})$, by using the state-of-the-art dynamic predecessor/successor data structures, we obtain sub-linear time construction algorithms using only $O(\frac{n}{\alpha})$ bits of space in both cases. We also discuss an application of our packed c-tries to online LZD factorization.

1 Introduction

The trie for a set S of strings of total length n is a classical data structure which occupies $O(n \log n + n \log \sigma)$ bits of space and allows for prefix search and insertion/deletion for a given string of length m in $O(m \log \sigma)$ time, where σ is the alphabet size. The *compact trie* for S , a.k.a. *Patricia tree* [13], is a path-compressed trie where the edges in every non-branching path are merged into a single edge. By representing each edge label by a pair of positions in a string in S , the compact trie can be stored in $n \log \sigma + O(k \log n)$ bits of space, where k is the number of strings in S , retaining the same time efficiency for prefix search and insertion/deletion for a given string. Thus, compact tries have widely been used in numerous applications such as dynamic dictionary matching [9], suffix trees [15], sparse suffix trees [12], external string indexes [5], and grammar-based text compression [8].

In this paper, we show how to accelerate prefix search queries and update operations of compact tries on the standard word RAM model with machine word size $w = \log n$, still keeping $n \log \sigma + O(k \log n)$ -bit space usage. A basic idea is to use the *packed string matching* approach [4], where $\alpha = \log_\sigma n$ consecutive letters are packed in a single word and can be manipulated in $O(1)$ time. In this setting, we can read a given pattern P of length m in $O(\frac{m}{\alpha})$ time, but, during the traversal of P over a compact trie, there can be at most m branching nodes. Thus, a naïve implementation of a compact trie takes $O(\frac{m}{\log_\sigma n} + m \log \sigma) = O(m \log \sigma)$ time even in the packed matching setting.

To overcome the above difficulty, we propose how to quickly process long non-branching paths using bit manipulations, and how to quickly process dense branching subtrees using fast predecessor/successor queries and dictionary look-ups. As a result, we obtain a new fast compact trie called the *packed compact trie* (*packed c-trie*) for a dynamic set S of strings, which achieves the following efficiency:

Theorem 1 (main result). *Let $f(k, n)$ be the query and update time complexity of an arbitrary dynamic predecessor/successor data structure which occupies $O(k \log n)$ bits of space for a dynamic set of k integers from the universe $[1, n]$. Then, our packed c-trie stores a set S of k strings of total length n in $n \log \sigma + O(k \log n)$ bits of space and supports prefix search and insertion/deletion for a given string of length m in $O(\frac{m}{\alpha} f(k, n))$ worst-case time or in $O(\frac{m}{\alpha} + f(k, n))$ expected time.*

If we employ Beame and Fich’s data structure [2] or Willard’s y-fast trie [17] as the dynamic predecessor/successor data structure, we obtain the following corollary:

Corollary 2. *There exists a packed c-trie for a dynamic set S of strings which uses $n \log \sigma + O(k \log n)$ bits of space, and supports prefix search and insert/delete operations for a given string of length m in $O(\frac{m}{\alpha} \cdot \frac{\log \log k \log \log n}{\log \log \log n})$ worst-case time or in $O(\frac{m}{\alpha} + \log \log n)$ expected time.*

An interesting feature of our packed c-trie is that unlike most other (compact) tries, our packed c-trie does *not* maintain a dictionary or a search structure for the children of each node. Instead, we partition our c-trie into $\lceil h/\alpha \rceil$ levels, where h is the length of the longest string in S . Then each subtree of height α , called a *micro* c-trie, maintains a predecessor/successor dictionary that processes prefix search inside the micro c-trie. A similar technique is used in the *linked dynamic trie* [11], which is an *uncompact* trie for a dynamic set of strings.

Our experiments show that our packed c-tries are faster than Patricia trees for both construction and prefix search in almost all data sets we tested.

We also show two applications to our packed c-tries. The first application is online construction of *evenly sparse suffix trees* [12], *word suffix trees* [10] and its extension [14]. The existing algorithms for these sparse suffix trees take $O(n \log \sigma)$ worst-case time using $n \log \sigma + O(k \log n)$ bits of space, where k is the number of suffixes stored in the output sparse suffix tree. Using our packed c-tries, we achieve $O((\frac{n}{\alpha} + k) \frac{\log \log k \log \log n}{\log \log \log n})$ worst-case construction time and $O(\frac{n}{\alpha} + k \log \log n)$ expected construction time. The former is sublinear in n when $k = O(\frac{n}{\alpha})$ and $\sigma = \text{polylog}(n)$, the latter is sublinear in n when $k = o(\frac{n}{\log \log n})$ and $\sigma = \text{polylog}(n)$. To achieve these results, we show that in our packed c-trie, prefix searches and insertion operations can be started not only from the root but from *any* node. This capability is necessary for online sparse suffix tree construction, since during the suffix link traversal we have to insert new leaves from non-root internal nodes.

The second application is online computation of the *LZ-Double factorization* [8] (*LZDF*), a state-of-the-art online grammar-based text compressor. Goto et al. [8] presented a Patricia-tree based algorithm which computes the LZDF of a given string T of length n in $O(k(M + \min\{k, M\} \log \sigma))$ worst-case time using $O(n \log \sigma)$ bits of space, where $k \leq n$ is the number of factors and $M \leq n$ is the length of the longest factor. Using our packed c-tries, we achieve a good expected performance with $O(k(\frac{M}{\alpha} + f(k, n)))$ time for LZDF.

All the proofs omitted due to lack of space can be found in Appendix.

Related work. Belazzougui et al. [3] proposed a *randomized compact trie* called the *signed dynamic z-fast trie*, which stores a dynamic set S of k strings in $n \log \sigma + O(k \log n)$ bits of space. Given a string of length m , the signed dynamic z-fast trie supports prefix search in $O(\frac{m}{\alpha} + \log m)$ worst-case time *only with high probability*, and supports insert/delete operations in $O(\frac{m}{\alpha} + \log m)$ expected time *only with high probability*.¹ On the other hand, our packed c-trie always return the correct answer for prefix search, and always insert/delete a given string correctly, in the bounds stated in Theorem 1 and Corollary 2.

Andersson and Thorup [1] proposed the *exponential search tree* which uses $n \log \sigma + O(k \log n)$ bits of space, and supports prefix search and insert/delete operations in $O(m + \sqrt{\frac{\log k}{\log \log k}})$ worst-case time. Each node v of the exponential search tree stores a constant-time look-up dictionary for some children of v and a dynamic predecessor/successor for the other children of v . This implies that given a string of length m , at most m nodes in the search path for the string must be processed one by one, and hence packing $\alpha = \log_{\sigma} n$ letters in a single word does not speed-up prefix searches or updates on the exponential search tree.

Fischer and Gawrychowski [6] proposed the *wexponential search tree*, which uses $n \log \sigma + O(k \log n)$ bits of space, and supports prefix search and insert/delete operations in $O(m + \frac{(\log \log \sigma)^2}{\log \log \log \sigma})$ worst-case time. When $\sigma = \text{polylog}(n)$, our packed c-trie achieves the worst-case bound $O(m \frac{\log \sigma \log \log k \log \log n}{\log n \log \log \log n}) = O(m \frac{(\log \log n)^2}{\log n \log \log \log n}) = O(o(1)m)$, whereas the wexponential search tree requires $O(m + \frac{(\log \log \log n)^2}{\log \log \log \log n})$ time².

¹The $O(\log m)$ expected bound for insertion/deletion stated in [3] assumes that the prefix search for the string has already been performed.

²For sufficiently long patterns of length $m = \Theta(n)$, our packed c-trie achieves worst-case *sublinear* $o(n)$ time while the

2 Preliminaries

Let Σ be the alphabet of size σ . An element of Σ^* is called a string. For any string X of length n , $|X|$ denotes its length, namely $|X| = n$. We denote the empty string by ε . For any $1 \leq i \leq n$, $X[i]$ denotes the i th character of X . For any $1 \leq i \leq j \leq |X|$, $X[i, j]$ denotes the substring $X[i] \cdots X[j]$. For convenience, $X[i, j] = \varepsilon$ for $i > j$. For any strings X, Y , $LCP(X, Y)$ denotes the longest common prefix of X and Y .

Throughout this paper, the base of the logarithms will be 2, unless otherwise stated. For any integers $i \leq j$, $[i, j]$ denotes the interval $\{i, i+1, \dots, j\}$. Our model of computation is the standard word RAM of word size $w = \log n$ bits. For simplicity, we assume that w is a multiple of $\log \sigma$, so $\alpha = \log_\sigma n$ letters are packed in a single word. Since we can read w bits in constant time, we can read and process α consecutive letters in constant time.

Let $S = \{X_1, \dots, X_k\}$ be a set of k non-empty strings of total length n . In this paper, we consider dynamic data structures for S which allows us fast prefix searches of given patterns over strings in S , and fast insertion/deletion of strings to/from S .

Suppose S is prefix-free. The *trie* of S is a tree such that each edge is labeled by a single letter, the labels of the out-going edges of each node are distinct, and there is a one-to-one correspondence between the strings in S and the leaves, namely, for each $X_i \in S$ there exists a unique path from the root to a leaf that spells out X_i .

The *compact trie* \mathcal{T}_S of S is a path-compressed trie obtained by contracting a non-branching path into a single edge. Namely, in \mathcal{T}_S , each edge is labeled by a non-empty substring of T , each internal node has at least two children, the out-going edges from each node begin with distinct letters, and each edge label x is encoded by a triple $\langle i, a, b \rangle$ such that $x = X_i[a, b]$ for some $1 \leq i \leq k$ and $1 \leq a \leq b \leq |X_i|$. The *length* of an edge e , denoted $|e|$, is the length of its label string. Let $root(\mathcal{T}_S)$ denote the root of the compact trie \mathcal{T}_S . For any node v , let $parent(v)$ denotes its parent. For convenience, let \perp be an auxiliary node such that $parent(root(\mathcal{T}_S)) = \perp$. We also assume that the edge from \perp to $root(\mathcal{T}_S)$ is labeled by an arbitrary letter. For any node v , let $str(v)$ denotes the string obtained by concatenating the edge labels from the root to v . We assume that each node v stores $|str(v)|$.

Let s be a prefix of any string in S . Let v be the shallowest node of \mathcal{T}_S such that s is a suffix of $str(v)$ (notice s can be equal to $str(v)$), and let $u = parent(v)$. The *locus* of string s in the compact trie \mathcal{T}_S is a pair $\phi = (e, h)$, where e is the edge from u to v and h ($1 \leq h \leq |e|$) is the offset from u , namely, $h = |s| - |str(u)|$.³ We extend the str function to locus ϕ , so that $str(\phi) = s$. The *string depth* of locus ϕ is $d(\phi) = |str(\phi)|$. We say that a string P is *recognized* by \mathcal{T}_S iff there is a locus ϕ with $str(\phi) = P$.

Our input is a dynamic set of strings which allows for insertion and deletion of strings. We thus consider the following query and operations on dynamic compact tries.

- **LPS**(ϕ, P): Given a locus in \mathcal{T}_S and a pattern string P , it returns the locus $\hat{\phi}$ of string $str(\phi)Q$ in \mathcal{T}_S , where Q is the longest prefix of P for which $str(\phi)Q$ is recognized by \mathcal{T}_S . When $\phi = ((\perp, root(\mathcal{T}_S)), 1)$, then the query is known as the *longest prefix search* for the pattern P in the compact trie.
- **Insert**(ϕ, X): Given a locus ϕ in \mathcal{T}_S and a string X , it inserts a new leaf which corresponds to a new string $str(\phi)X \in S$ into the compact trie, from the given locus ϕ . When there is no node at the locus $\hat{\phi} = \text{LPS}(\phi, X)$, then a new node is created at $\hat{\phi}$ as the parent of the leaf. When $\phi = ((\perp, root(\mathcal{T}_S)), 1)$, then this is standard insertion of string X to \mathcal{T}_S .
- **Delete**(X_i): Given a string $X_i \in S$, it deletes the leaf node ℓ_i . If the out-degree of the parent v of ℓ_i becomes 1 after the deletion of ℓ_i , then the in-coming and out-going edges of v are merged into a single edge, and v is also deleted.

For a dynamic set $I \subseteq [1, n]$ of k integers of $w = \log n$ bits each, *dynamic predecessor data structures* (e.g., [2, 3, 18]) efficiently support predecessor query $\text{Pred}(X) = \max(\{Y \in I \mid Y \leq X\} \cup \{0\})$, successor query $\text{Succ}(X) = \min(\{Y \in I \mid Y \leq X\} \cup \{n+1\})$, and insert/delete operations for I . Let $f(k, n)$ be the time complexity of for predecessor/successor queries and insert/delete operations of an arbitrary dynamic predecessor/successor data structure which occupies $O(k \log n)$ bits of space. Beame and Fich's data structure [2] achieves $f(k, n) = O(\frac{(\log \log k)(\log \log n)}{\log \log \log n})$ worst-case time, while Willard's Y-fast trie [17] achieves $f(k, n) = O(\log \log n)$ expected time.

wexponential search tree requires $O(n)$ time.

³In the literature the locus is represented by (u, c, h) where c is the first letter of the label of e . Since our packed c-trie does not maintain a search structure for branches, we represent the locus directly on e .

3 Packed dynamic compact tries

In this section, we present our new dynamic compact tries called the *packed dynamic compact tries* (*packed c-tries*) for a dynamic set $S = \{X_1, \dots, X_k\}$ of k strings of total length n , which achieves the main result in Theorem 1. In the sequel, a string $X \in \Sigma^*$ is called *short* if $|X| \leq \alpha = \log_\sigma n$, and is called *long* if $|X| > \alpha$.

3.1 Micro dynamic compact tries for short strings

In this subsection, we present our data structure storing short strings. Our input is a dynamic set $S = \{X_1, \dots, X_k\}$ of k strings of total length n , such that $|X_i| \leq \alpha = \log_\sigma n$ for every $1 \leq i \leq k$. Hence it holds that $k \leq \sigma^\alpha = n$. For simplicity, we assume for now that $|X_i| = \alpha$ for every $1 \leq i \leq k$. The general case where S contains strings shorter than α will be explained later in Remark 1.

The dynamic data structure for short strings, called a *micro c-trie* and denoted by \mathcal{MT}_S , consists of the following components:

- A dynamic compact trie of height exactly α storing the set S . Let \mathcal{N} be the set of internal nodes, and let $\mathcal{L} = \{\ell_1, \dots, \ell_k\}$ be the set of k leaves such that ℓ_i corresponds to X_i for $1 \leq i \leq k$. Since every internal node is branching, $|\mathcal{N}| \leq k - 1$. Every node v of \mathcal{MT}_S explicitly stores the string $str(v)$ using $\log n$ bits. This implies that we can identify v with $str(v)$. Overall, this compact trie requires $n \log \sigma + O(k \log n)$ bits of space (including S).
- A dynamic predecessor/successor data structure \mathcal{D} which stores the set $S = \{X_1, \dots, X_k\}$ of strings in $O(k \log n)$ bits of space, where each X_i is regarded as a $\log n$ -bit integer. \mathcal{D} supports predecessor/successor queries and insert/delete operations in $f(k, n)$ time each.

It is evident that the micro c-trie requires $n \log \sigma + O(k \log n)$ bits of total space.

Lemma 1. *For any nodes u and v of the micro c-trie \mathcal{MT}_S , we can compute the lowest common ancestor $LCA(u, v)$ of u and v in $O(1)$ time.*

Proof. We pad $str(u)$ and/or $str(v)$ with an arbitrary letter c if necessary. Namely, if $|str(u)| = \alpha$ then let $P = str(u)$, and if $|str(u)| < \alpha$ then let $P = str(u)c \cdots c \in \Sigma^\alpha$. Similarly, if $|str(v)| = \alpha$ then let $Q = str(v)$, and if $|str(v)| < \alpha$ then let $Q = str(v)c \cdots c \in \Sigma^\alpha$. We compute the most significant bit (msb) of the XOR of the bit representations of P and Q . Let b the bit position of the msb, and let $z = (b - 1) / \log \sigma$. W.l.o.g. assume $|str(u)| \leq |str(v)|$.

1. If $z < str(u)$, then $str(u)[1, z] = LCP(str(u), str(v))$. In this case, there exists a branching node y such that $str(y) = str(u)[1, z]$, and hence $LCA(u, v) = y$.
2. If $z \geq str(u)$, then $str(u) = LCP(str(u), str(v))$, and hence $u = LCA(u, v)$.

Since each of P and Q is stored in a single machine word, we can compute the XOR of P and Q in $O(1)$ time. The msb can be computed in $O(1)$ time using the technique of Fredman and Willard [7]. This completes the proof. \square

Theorem 3. *The micro c-trie \mathcal{MT}_S supports $LPS(\phi, X)$ queries in $O(f(k, n))$ time.*

Proof. Our algorithm for computing $\hat{\phi} = LPS(\phi, X)$ consists of the two following steps:

First, we compute the string depth $d = d(\phi) \in [0, \alpha]$. Let $P = str(\phi)X[1.. \alpha - d(v)]$ be the prefix of $str(v)X$ of length α . Observe $d = \max\{|LCP(P, \text{Pred}(P))|, |LCP(P, \text{Succ}(P))|\}$. Given P , we compute $\text{Pred}(P)$ and $\text{Succ}(P)$ in $O(f(k, n))$ time. Then, $|LCP(P, \text{Pred}(P))|$ can be computed in $O(1)$ time by computing the msb of the XOR of the bit representations of P and $\text{Pred}(P)$, as in Lemma 1. $|LCP(P, \text{Succ}(P))|$ can be computed analogously, and thus, $d = d(\phi)$ can be computed in $O(f(k, n))$ time.

Second, we locate $e = (u, v)$. See also Fig. 1. Let $Z = P[1, d]$. Let $LB = Zc_1 \cdots c_1 \in \Sigma^\alpha$ and $UB = Zc_\sigma \cdots c_\sigma \in \Sigma^\alpha$ be the lexicographically least and greatest strings of length α with prefix Z , respectively. To locate u in \mathcal{MT}_S , we find the leftmost and rightmost leaves X_L and X_R below ϕ by $X_L = \text{Succ}(LB)$ and $X_R = \text{Pred}(UB)$. Then, the lower one of $LCA(X_{L-1}, X_L)$ and $LCA(X_R, X_{R+1})$ is the origin node u of e . The destination node v is $LCA(X_L, X_R)$. These LCAs can be computed in $O(1)$ time by Lemma 1. Finally we obtain $\phi = ((u, v), d - |str(u)|)$. Overall, this step takes $O(f(k, n))$ time. \square

Next, we explain how to support $\text{Insert}(\phi, X)$ and $\text{Delete}(X)$ operations.

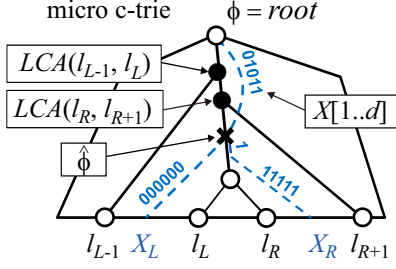


Figure 1: Given the initial locus ϕ (which is on the root in this figure) and query pattern $P = 01011010110$, the algorithm of Theorem 3 answers the $\text{LPS}(\phi, P)$ query on the micro c-trie as in this figure. The answer to the query is the locus $\hat{\phi}$ for $P[1..5] = 01011$.

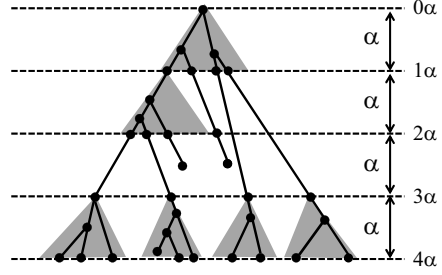


Figure 2: Micro-trie decomposition: The packed c-trie is decomposed into a number of micro c-tries (gray rectangles) each of which is of height $\alpha = \log_{\sigma} n$. Each micro-trie is equipped with a dynamic predecessor/successor data structure.

Lemma 2. *The micro c-trie \mathcal{MT}_S supports $\text{Insert}(\phi, X)$ and $\text{Delete}(X)$ operations in $O(f(k, n))$ time. We assume that $d(\phi) + |X| \leq \alpha$ so that the height of the micro compact trie will always be kept within α .*

Proof. We show how to support $\text{Insert}(\phi, X)$ in $O(f(k, n))$ time. Initially $S = \emptyset$, the micro compact trie \mathcal{MT}_S consists only of $\text{root}(\mathcal{MT}_S)$, and predecessor/successor dictionary \mathcal{D} contains no elements. When the first string X is inserted to S , then we create a leaf below the root and insert X to \mathcal{D} . Suppose that the data structure maintains a string set S with $|S| \geq 1$. To insert a string X from the given locus ϕ , we first conduct the $\text{LPS}(\phi, X)$ query of Theorem 3, and let $\hat{\phi} = (e, h)$ be the answer to the query. If $h = |e|$, then we simply insert a new leaf ℓ from the destination node of e . Otherwise, we split e at $\hat{\phi}$ and create a new node v there as the parent of the new leaf, such that $\text{str}(v) = \text{str}(\hat{\phi})$. The rest is the same as in the former case. After the new leaf is inserted, we insert $\text{str}(\phi)X$ to \mathcal{D} in $O(f(k, n))$ time.

We can support $\text{Delete}(X)$ as follows. Let ℓ_i be the leaf representing $X_i = X \in S$. If ℓ_i is a child of the root, then we simply delete ℓ_i . Otherwise, we employ the following trick: For each leaf ℓ in the micro c-trie, we maintain the rank $r(\ell)$ such that $r(\ell) = t$ iff ℓ is the t -th inserted leaf to the micro c-trie. Let ℓ_j be any sibling of ℓ_i with $j \neq i$. If $r(\ell_i) > r(\ell_j)$, then no edge labels in the path \mathcal{P} from the root to $\text{parent}(\ell_i)$ refer to positions in X_i , and hence we simply delete ℓ_i from the tree and X_i from S . If $r(\ell_i) < r(\ell_j)$, then some edge labels in path \mathcal{P} refer to positions in X_i . The important observation is that, by the way we insert strings using Insert queries above, no edge labels in \mathcal{P} refer to string X_j . Now, we *swap* the strings X_i and X_j , and delete ℓ_j from the trie and X_j from S (e.g, if $X_i = \text{aabb}$ and $X_j = \text{aaab}$, then we swap them as $X_i = \text{aaab}$ and $X_j = \text{aabb}$, and delete $X_j = \text{aabb}$). We can swap these strings in $O(1)$ time since they are of length α . When the rank value reaches $2n$ after the $2n$ -th insertion, then we re-label the ranks of all k existing leaves from 1 to k in $O(n)$ time using a bucket sort. Since $k \leq n$, the amortized cost for the re-labeling is constant. Thus, the total time cost for $\text{Delete}(X)$ is $O(f(k, n))$. \square

Remark 1. *When $d(\phi) + |X| < \alpha$, then we can support $\text{Insert}(\phi, X)$ and $\text{LPS}(\phi, X)$ as follows. When inserting X , we pad X with a special letter $\$$ which does not appear in S . Namely, we perform $\text{Insert}(\phi, X)$ operation with $X' = X\$^{\alpha-d(\phi)-|X|}$. When computing $\text{LPS}(\phi, X)$, we pad X with another special letter $\# \neq \$$ which does not appear in S . Namely, we perform $\text{LPS}(\phi, X'')$ query with $X'' = X\#^{\alpha-d(\phi)-|X|}$. This gives us the correct locus for $\text{LPS}(\phi, X)$.*

3.2 Packed dynamic compact tries for long strings

In this subsection, we present the *packed dynamic compact trie (packed c-trie)* \mathcal{PT}_S for a set S of variable-length strings of length at most $O(2^w) = O(n)$.

Micro trie decomposition. We decompose \mathcal{PT}_S into a number of micro c-tries: Let $h > \alpha$ be the length of the longest string in S . We categorize the nodes of \mathcal{PT}_S into $\lceil h/\alpha \rceil + 1$ levels: We say that a node of \mathcal{PT}_S is at level i ($0 \leq i \leq \lceil h/\alpha \rceil$) iff $|\text{str}(v)| \in [i\alpha, (i+1)\alpha - 1]$. The level of a node v is denoted by $\text{level}(v)$. A locus ϕ of \mathcal{PT}_S is called a *boundary* iff $d(\phi)$ is a multiple of α . Consider any path from $\text{root}(\mathcal{PT}_S)$ to a leaf, and assume that there is no node at some boundary $k\alpha$ on this path. We create an auxiliary node at that boundary on this path, iff there is at least one non-auxiliary (i.e., original) node at level $i-1$ or $i+1$ on this path. Let \mathcal{BN} denote the set of nodes at the boundaries, called the *boundary nodes*. For each boundary node $v \in \mathcal{BN}$, we create a micro compact trie \mathcal{MT} whose root $\text{root}(\mathcal{MT})$ is v ,

internal nodes are all descendants u of v with $level(u) = level(v)$, and leaves are all boundary descendants ℓ of v with $level(\ell) = level(v) + 1$. Notice that each boundary node is the root of a micro c-trie at its level and is also a leaf of a micro c-trie at the previous level.

Lemma 3. *The packed c-trie \mathcal{PT}_S for a prefix-free set S of k strings requires $n \log \sigma + O(k \log n)$ bits of space.*

Proof. Firstly, we show the number of auxiliary boundary nodes in \mathcal{PT}_S . At most 2 auxiliary boundary nodes are created on each *original* edge of \mathcal{PT}_S . Since there are at most $2k - 2$ original edges, the total number of auxiliary boundary nodes is at most $4k - 4$.

Since there are at most $2k - 1$ original nodes in \mathcal{PT}_S , the total number of all nodes in \mathcal{PT}_S is bounded by $6k - 5$. Clearly, the total number of *short* strings of length at most α maintained by the micro c-tries is bounded by the number of all nodes in \mathcal{PT}_S , which is $6k - 5$. Hence, the total space of the packed c-trie \mathcal{PT}_S is $n \log \sigma + O(k \log n)$ bits. \square

For any locus ϕ on the packed c-trie \mathcal{PT}_S , $ld(\phi)$ denotes the local string depth of ϕ in the micro c-trie \mathcal{MT} that contains ϕ . Namely, if $root(\mathcal{MT}) = v$, the parent of u in \mathcal{PT}_S is u , and $e = (u, v)$, then $ld(\phi) = d(\phi) - d(e, |e|)$. Prefix search queries and insert/delete operations can be efficiently supported by our packed c-trie, as follows.

Lemma 4. *The packed c-trie \mathcal{PT}_S supports $LPS(\phi, P)$ query in $O(\frac{m}{\alpha} f(k))$ worst-case time, where $m = |P| > \alpha$.*

Proof. If $m + ld(\phi) \leq \alpha$, then the bound immediately follows from Theorem 3. Now assume $m + ld(\phi) > \alpha$, and let $q = \alpha - ld(\phi) + 1$. We factorize P into $h + 1$ blocks as $p_0 = P[1, q - 1]$, $p_1 = P[q, q + \alpha - 1]$, \dots , $p_{h-1} = P[q + (h - 1)\alpha, q + h\alpha - 1]$, and $p_h = P[q + h\alpha, m]$, where $1 \leq |p_0| \leq \alpha$, $|p_i| = \alpha$ for $1 \leq i \leq h - 1$, and $1 \leq |p_h| \leq \alpha$. Note that each block can be computed in $O(1)$ time by standard bit operations. If there is a mismatch in p_0 , we are done. Otherwise, for each i in increasing order from 1 to h , we conduct $LPS(\gamma, p_i)$ query from the root γ of the corresponding micro c-trie at each level of the corresponding path starting from ϕ . This continues until either we find the first mismatch for some i , or we find complete matches for all i 's. Each LPS query with each micro c-trie takes $O(f(k, n))$ time by Theorem 3. Since $h = O(\frac{m}{\alpha})$, it takes a total of $O(\frac{m}{\alpha} f(k, n))$ time. \square

Lemma 5. *The packed c-trie \mathcal{PT}_S supports $Insert(\phi, X)$ and $Delete(X)$ operations in $O(\frac{m}{\alpha} f(k, n))$ worst-case time, where $m = |X| > \alpha$.*

Proof. To conduct $Insert(\phi, X)$ operation, we first perform $LPS(\phi, X)$ query in $O(\frac{m}{\alpha} f(k, n))$ time using Lemma 4. Let x_0, \dots, x_h be the factorization of X w.r.t. ϕ , and let x_j be the block of the factorization which contains the first mismatch. Then, we conduct $Insert(\gamma, x_j)$ operation on the corresponding micro c-trie, where γ is its root. This takes $O(f(k, n))$ time by Lemma 2. If $j = h$ (i.e. x_j is the last block in the factorization of X), then we are done. Otherwise, we create a new edge whose label is $x'_j x_{j+1} \dots x_k$, where x'_j is the suffix of X_j which begins with the mismatched position, leading to the new leaf ℓ . We create a new boundary node if necessary. These operations take $O(1)$ time each. Hence, $Insert(\phi, X)$ is supported in $O(\frac{m}{\alpha} f(k, n))$ total time.

For $Delete(X)$ operation, we perform the operation of Lemma 2 for each micro c-trie in the path from the root to the leaf representing X . Since there are at most $\frac{m}{\alpha}$ such micro c-tries, $Delete(X)$ can be supported in $O(\frac{m}{\alpha} f(k, n))$ total time. \square

Speeding-up with hashing. By augmenting each micro c-trie with a hash table storing the short strings in the trie, we can achieve a good expected performance, as follows:

Lemma 6. *The packed c-trie \mathcal{PT}_S with hashing supports $LPS(\phi, X)$ query, $Insert(\phi, X)$ and $Delete(X)$ operations in $O(\frac{m}{\alpha} + f(k, n))$ expected time.*

Proof. Let \mathcal{MT} be any micro c-trie in the packed c-trie \mathcal{PT}_S , and M the set of strings maintained by \mathcal{MT} each being of length at most α . We store all strings of M in a hash table associated to \mathcal{MT} , which supports look-ups, insertions and deletions in $O(1)$ expected time.

Let x_0, \dots, x_h be the factorization of X w.r.t. ϕ . To perform $LPS(\phi, X)$, we ask if $str(\phi)x_0$ is in the hash table of the corresponding micro c-trie. If the answer is no, the first mismatch occurs in x_0 , and the rest is the same as in Lemma 4. If the answer is yes, then for each i from 1 to h in increasing order, we ask if x_i is in the hash table of the corresponding micro c-trie, until we receive the first no with some i or we receive yes for all i 's. In the latter case, we are done. In the former case, we perform LPS query with

x_i from the root of the corresponding micro c-trie. Since we perform at most one LPS query and $O(\frac{m}{\alpha})$ look-ups for hash tables, it takes $O(\frac{m}{\alpha} + f(k, n))$ expected time. $O(\frac{m}{\alpha} + f(k, n))$ expected time bounds for $\text{Insert}(\phi, X)$ and $\text{Delete}(X)$ immediately follow from the above arguments. \square

4 Applications to online string processing

In this section, we present two applications of our packed c-tries for online string processing.

Online sparse suffix tree construction. The *suffix tree* [15] of a string T of length n is a compact trie which stores all n suffixes $\text{Suf}(T) = \{T[i..n] \mid 1 \leq i \leq n\}$ of T in $n \log \sigma + O(n \log n)$ bits. A *sparse suffix tree* for a set $K \subseteq [1, n]$ of *sampled positions* of T is a compact trie which stores only the subset $\{T[i..n] \mid i \in K\}$ of the suffixes of T beginning at the sampled positions in K . It is known that if the set K of sampled positions satisfy some properties (e.g., every r positions for some fixed $r > 1$ or the positions immediately after the word delimiters), the sparse suffix tree can be constructed in an online manner in $O(n \log \sigma)$ time and $n \log \sigma + O(n \log n)$ bits of space [12, 10, 14].

In this section, we show our packed c-tries can be used to speed up online construction and pattern matching for these sparse suffix trees. We insert the suffixes in increasing order of their beginning positions (sampled positions) to the packed c-trie. There, each input string X to $\text{Insert}(\phi, X)$ operation is given as a pair (i, j) of positions in T such that $X = T[i, j]$. In this case, Insert operation can be processed more quickly than in Lemma 4, as follows.

Lemma 7. *Given a pair (i, j) of positions in T such that $X = T[i, j]$, we can support $\text{Insert}(\phi, X)$ operation in $O(\frac{q}{\alpha} f(k, n))$ worst-case time or $O(\frac{q}{\alpha} + f(k, n))$ expected time, where q is the length of the longest prefix of X that can be spelled out from the locus ϕ .*

Theorem 4. *Using our packed c-tries, we can construct in an online manner the sparse suffix trees of [10, 12, 14] for a given text T of length n in $O((\frac{n}{\alpha} + k)f(k, n))$ worst-case time or in $O(\frac{n}{\alpha} + kf(k, n))$ expected time with $n \log \sigma + O(k \log n)$ bits of space, where k is the number of sampled positions. At any moment during the construction, pattern matching queries can be supported in $O(\frac{m}{\alpha} f(k, n))$ worst-case time or in $O(\frac{m}{\alpha} + f(k, n))$ expected time, where m is the length of the pattern.*

Online computation of LZ-Double factorization. The *LZ-Double factorization* [8] (LZDF) is a generalization of the Lempel-Ziv 78 factorization [19]. The i th factor $g_i = g_{i_1} g_{i_2}$ of the LZDF factorization of a string T of length n is the concatenation of previous factors g_{i_1} and g_{i_2} such that g_{i_1} is the longest prefix of $T[1 + \sum_{j=1}^{i-1} |g_j|, n]$ that is a previous factor (one of $\{g_1, \dots, g_{i-1}\} \cup \Sigma$), and g_{i_2} is the longest prefix of $T[1 + |g_{i_1}| + \sum_{j=1}^{i-1} |g_j|, n]$ that is a previous factor. Goto et al. [8] proposed a Patricia-tree based algorithm which computes the LZDF of a given string T of length n in $O(k(M + \min\{k, M\} \log \sigma))$ worst-case time⁴ with $O(k \log n) = O(n \log \sigma)$ bits of space⁵, where k is the number of factors and M is the length of the longest factor. Using our packed c-trie, we can achieve a good expected performance:

Theorem 5. *Using our packed c-trie, we can compute the LZDF of string T in $O(k(\frac{M}{\alpha} + f(k, n)))$ expected time with $O(n \log \sigma)$ bits of space.*

5 Experiments

In this section, we show our experimental results that compared our implementations of the packed c-trie against that of the classical c-trie (Patricia tree). In Table 1, we show the datasets and their statistics used in our experiments, where the first six datasets were from Pizza&Chili Corpus⁶, the seventh one consists of URLs in uk domain⁷, and the eighth one consists of all titles from Japanese Wikipedia⁸. The datasets were treated as binary.

We used three implementations of c-tries over the binary alphabet by the authors: an implementation CT of classical c-tries, and two simplified implementations PCT_{xor} and PCT_{hash} of our packed c-tries in Section 3 as a proof-of-concept versions. The machine word length α is 32 bits. The details are as follows: PCT_{xor} only uses the XOR-based technique of Theorem 4, and branching nodes are processed as in the

⁴Since $kM \geq n$ always holds, the n term is hidden in the time complexity.

⁵Since all the factors of the LZDF are distinct, $k = O(\frac{n}{\log_{\sigma} n})$ holds [19].

⁶Pizza&Chili Corpus, <http://pizzachili.dcc.uchile.cl>

⁷Laboratory for webalgorithmics, uk-2005.urls.gz, <http://law.di.unimi.it/datasets.php>

⁸jawiki, <https://dumps.wikimedia.org/jawiki/>

Table 1: Description of the datasets

Data set	Original alphabet size	Actual alphabet size	Total size (byte)	Number of strings	Ave. string length (bit)
DNA	4	2	52,428,800	337	1,244,600.59
DBLP	128	2	52,428,800	3,229,589	129.87
english	128	2	52,428,800	9,400,185	44.62
pitches	128	2	52,428,800	93,354	4,492.90
proteins	20	2	52,428,800	186,914	2,243.98
sources	128	2	52,428,800	5,998,228	69.93
urls	128	2	52,010,031	707,658	587.97
jawiki	$\geq 2^{16}$	2	30,414,297	1,643,827	148.02

Table 2: The summary of experimental results

Data set	Tree size (# of nodes)			Construction time (msec)			Query time (msec)		
	CT	PCT _{xor}	PCT _{hash}	CT	PCT _{xor}	PCT _{hash}	CT	PCT _{xor}	PCT _{hash}
DNA	674	674	985	14,494	15,270	18,596	6,690	7,381	5,342
DBLP	1,059,656	1,059,656	1,204,651	16,662	16,987	14,139	8,083	8,905	7,209
english	448,379	448,379	532,750	17,496	16,944	18,197	9,127	9,916	10,452
pitches	86,205	86,205	121,943	18,816	16,571	16,520	7,022	9,009	6,053
proteins	310,392	310,392	437,768	17,957	15,733	18,673	8,511	8,851	6,749
sources	1,314,571	1,314,571	1,616,872	17,398	15,929	16,892	8,111	8,444	7,852
urls	1,341,200	1,341,200	1,357,730	14,038	13,422	13,585	6,939	6,903	5,918
jawiki	2,365,821	2,365,821	3,043,817	9,440	9,116	10,107	4,477	4,661	3,962

classical c-tries. PCT_{hash} is a simplified implementation of our packed c-tries of Lemma 6 using hashing. It is equipped with hash tables for α -bits integers⁹, but without predecessor/successor data structures.

We compiled all programs with gcc 4.9.3 using -O3 option, and ran all experiments on a PC (2.8GHz Intel Core i7 processor, register size 64 bits, 16GB of memory) running on MacOS X 10.10.5, where consecutive $\alpha = 32$ bits of texts were packed into a machine word. For each dataset, we measured the following parameters: the number of nodes in the constructed c-trie (*Tree size*), the total construction time for the c-trie (*Construction time*), and the total time of pattern matching queries (*Query time*). In the last experiments, pattern strings are consist of the dataset used for construction.

In Table 2, we show our experimental results. First, we consider the first groups of columns on tree size. We observed that the number of nodes of PCT_{hash} increases from both of CT and PCT_{xor}. The gain varies from 101.3% on urls to 146.1% on DNA. This comes from the addition of boundary nodes. Next, we consider the second groups of columns on construction time. We observed that PCT_{xor} is slightly faster than the classical CT in most case. The construction time of PCT_{hash} is slightly faster against CT for DBLP, pitches, sources and urls, and slower for DNA, english, proteins and jawiki. Yet, the construction time of PCT_{hash} per node is faster than CT for all datasets. We, however, did not observe clear advantage of PCT_{hash} over PCT_{xor}. We guess that these inconsistency comes from the balance of utility and overhead of creating boundary nodes that depends on datasets. Finally, we consider the third groups of columns on query time. Among all datasets except english, PCT_{hash} is clearly faster than CT, where the former achieved 5% to 20% speed-up over the latter. This indicates that PCT_{hash} is superior to the classic c-tries in prefix search.

Overall, we conclude that one of our packed c-trie implementation PCT_{hash} achieved clear speed-up over the classical c-trie implementation in query time for most datasets. In construction time, there seems room of improvements for reducing the overhead of node and hash table creation.

⁹For hash tables, we used the *unordered_map* in C++/STL library.

References

- [1] A. Andersson and M. Thorup. Dynamic ordered sets with exponential search trees. *J. ACM*, 54(3):13, 2007.
- [2] P. Beame and F. E. Fich. Optimal bounds for the predecessor problem and related problems. *Journal of Computer and System Sciences*, 65(1):38 – 72, 2002.
- [3] D. Belazzougui, P. Boldi, and S. Vigna. Dynamic Z-fast tries. In *Proc. SPIRE 2010*, volume 6393 of *LNCS*, pages 159–172, 2010.
- [4] O. Ben-Kiki, P. Bille, D. Breslauer, L. Gasieniec, R. Grossi, and O. Weimann. Optimal packed string matching. In *Proc. FSTTCS 2011*, volume 13, pages 423–432, 2011.
- [5] P. Ferragina and R. Grossi. The string B-tree: a new data structure for string search in external memory and its applications. *J. ACM*, 46(2):236–280, 1999.
- [6] J. Fischer and P. Gawrychowski. Alphabet-dependent string searching with wexponential search trees. In *CPM 2015*, pages 160–171, 2015. Full version is available at <http://arxiv.org/abs/1302.3347>.
- [7] M. L. Fredman and D. E. Willard. Surpassing the information theoretic bound with fusion trees. *J. Comput. Syst. Sci.*, 47(3):424–436, 1993.
- [8] K. Goto, H. Bannai, S. Inenaga, and M. Takeda. LZD factorization: Simple and practical online grammar compression with variable-to-fixed encoding. In *Proc. CPM 2015*, pages 219–230, 2015.
- [9] W.-K. Hon, T.-W. Lam, R. Shah, S.-L. Tam, and J. Vitter. Succinct index for dynamic dictionary matching. In *Proc. ISAAC'09, LNCS 5878*, pages 1034–1043, 2009.
- [10] S. Inenaga and M. Takeda. On-line linear-time construction of word suffix trees. In *Proc. CPM'06*, volume 4009 of *LNCS*, pages 60–71, 2006.
- [11] J. Jansson, K. Sadakane, and W. Sung. Linked dynamic tries with applications to LZ-compression in sublinear time and space. *Algorithmica*, 71(4):969–988, 2015.
- [12] J. Kärkkäinen and E. Ukkonen. Sparse suffix trees. In *Proc. COCOON'96*, volume 1090 of *LNCS*, pages 219–230, 1996.
- [13] D. R. Morrison. PATRICIA: Practical algorithm to retrieve information coded in alphanumeric. *J. ACM*, 15(4):514–534, 1968.
- [14] T. Uemura and H. Arimura. Sparse and truncated suffix trees on variable-length codes. In *Proc. CPM'11*, volume 6661 of *LNCS*, pages 246–260, 2011.
- [15] P. Weiner. Linear pattern-matching algorithms. In *Proc. of 14th IEEE Ann. Symp. on Switching and Automata Theory*, pages 1–11, 1973.
- [16] J. Westbrook. Fast incremental planarity testing. In *ICALP 1992*, pages 342–353, 1992.
- [17] D. E. Willard. Log-logarithmic worst-case range queries are possible in space $\Theta(N)$. *Information Processing Letters*, 17:81–84, 1983.
- [18] D. E. Willard. New trie data structure which support very fast search operations. *Journal of Computer and System Sciences*, 28:379–394, 1984.
- [19] J. Ziv and A. Lempel. Compression of individual sequences via variable-length coding. *IEEE Transactions on Information Theory*, 24(5):530–536, 1978.

A Appendix

In this appendix, we show some proofs which were omitted due to lack of space.

A.1 Proof of Lemma 7

Proof. Recall the algorithm of Lemma 4. Starting at the beginning position i in T , we extract the factors of the factorization of X w.r.t. the given initial locus ϕ on the fly, one by one and from left to right. We stop the procedure as soon as we find the first mismatch. Then, we create a new leaf for the inserted string. The label of the edge leading to the new leaf is a pair of positions in T , which can be easily computed in $O(1)$ time. Clearly this gives the desired bounds. \square

A.2 Proof of Theorem 4

Proof. We explain how we can build the sparse suffix trees of [12] efficiently. For an integer parameter $r > 1$, Kärkkäinen and Ukkonen's algorithm (KU-algorithm, in short) [12] constructs the r -evenly sparse suffix tree of the input string T . KU-algorithm differs from Ukkonen's online suffix tree construction algorithm in that KU-algorithm uses r -letter suffix links, such that the suffix link of each node v is a pointer to the node u such that $str(u) = str(v)[r + 1..|str(v)|]$, but otherwise is the same as Ukkonen's algorithm. This results in a compact trie which stores the evenly-spaced $\lfloor n/r \rfloor + 1$ suffixes $T[1, n]$, $T[1 + r, n]$, \dots , $T[1 + r\lfloor n/r \rfloor, n]$ of T .

KU-algorithm scans the input string T from left to right, and when the algorithm processes the i th letter of T , the r -evenly sparse suffix tree of $T[1, i]$ is maintained. This is done by inserting the leaves into the current compact trie in increasing order of the positions the leaves correspond to. Assume that while processing the i th letter of T , the algorithm has just inserted the j th leaf ℓ_j for sampled position $1 + (j - 1)r$ of T . If the suffix $T[1 + jr, i]$ of $T[1, i]$ is not recognized by the current compact trie, then the algorithm inserts the $(j + 1)$ th leaf ℓ_{j+1} for the next sampled position $1 + jr$. This can be done as follows: For any node v , let $sl_r(v)$ denotes the r -letter suffix link of v . Let v_j be the nearest ancestor of ℓ_j for which $sl_r(v_j)$ is already defined (v_j is either $parent(\ell_j)$ or $parent(parent(\ell_j))$). We follow the suffix link and let $u_{j+1} = sl_r(v_j)$. Let ϕ_{j+1} be the locus of $str(u_{j+1})$, namely $\phi_{j+1} = (e, |e|)$ with $e = (parent(u_{j+1}), u_{j+1})$. Let $X_{j+1} = T[i - h + 1, i]$, where $h = |T[j + 1, i]| - |str(\phi_{j+1})| = i - j - |str(\phi_{j+1})|$. The leaf ℓ_{j+1} can be added to the compact trie by inserting the string X_{j+1} from the locus ϕ_{j+1} .

We apply our micro-trie decomposition to the sparse suffix tree, and use our techniques in Section 3 and in Lemma 7. Then, the total time complexity to construct the r -evenly sparse suffix tree of T is proportional to the amount of work of the Insert operations of Lemma 7 for all leaves. For each $1 \leq j \leq k$ let q_j be the length of the longest prefix of X_j that can be spelled out from ϕ_j . Now we estimate $\sum_{j=1}^k \frac{q_j}{\alpha}$. Each time we traverse an r -letter skipping suffix link, the string depth decreases by r . Since $k = \lfloor n/r \rfloor + 1$ and we traverse r -letter suffix links exactly $k - 1$ times, we can conclude that $\sum_{j=1}^k q_j = O(n)$, which implies that $\sum_{j=1}^k \frac{q_j}{\alpha} = O(n/\alpha)$. Since we perform Insert operations exactly k times, the r -evenly sparse suffix tree can be constructed in $O((\frac{n}{\alpha} + k)f(k, n))$ worst-case time or in $O(\frac{n}{\alpha} + kf(k, n))$ expected time.

The bounds for word suffix trees of Inenaga and Takeda [10] and those of suffix trees on variable-length codes of Uemura and Arimura [14] can be obtained similarly. \square

A.3 Proof of Theorem 5

Proof. Suppose we have computed the first $j - 1$ factors g_1, \dots, g_{j-1} and we are now computing the j th factor g_j . We store the previous factors g_1, \dots, g_{j-1} in our packed c-trie. In addition, for any previous factor g_i ($1 \leq i < j$), if there is no leaf or branching node which represents g_i , then we add an internal non-branching node for g_i into the packed c-trie. We mark only and all nodes which represent previous factors. To compute the j th factor $g_j = g_{j_1}g_{j_2}$, we perform LPS(r, T_j) query where r is the locus for the root and $T_j = T[1 + \sum_{i=1}^{j-1} |g_i|, n]$. Let $\hat{\phi}$ be the answer to the query. Note that $\hat{\phi}$ can be deeper than the locus for g_{j_1} , but it is always in the subtree rooted at g_{j_1} . Hence, the nearest marked ancestor (NMA) of $\hat{\phi}$ is g_{j_1} . We can compute g_{j_2} similarly. After we computed g_j , we perform Insert(r, g_j) operation and then mark the node which represents g_j .

The depth of the locus $\hat{\phi}$ is bounded by the length M of the longest factor. Hence we can reach the locus $\hat{\phi}$ in $O(\frac{M}{\alpha} + f(k, n))$ expected time using our packed c-trie. We repeat the above procedure k times. Using the semi-dynamic NMA data structure of Westbrook [16] that supports NMA queries, inserting new nodes, and marking unmarked nodes in amortized $O(1)$ time each, we obtain the desired bound. \square