

IEDC: An Integrated Approach for Overlapping and Non-overlapping Community Detection

Mahdi Hajiabadi^a, Hadi Zare^{a,*}, Hossein Bobarshad^a

^a*University of Tehran, Iran*

Abstract

Community detection is a task of fundamental importance in social network analysis that can be used in a variety of knowledge-based domains. While there exist many works on community detection based on connectivity structures, they suffer from either considering the overlapping or non-overlapping communities. In this work, we propose a novel approach for general community detection through an integrated framework to extract the overlapping and non-overlapping community structures without assuming prior structural connectivity on networks. Our general framework is based on a primary node based criterion which consists of the internal association degree along with the external association degree. The evaluation of the proposed method is investigated through the extensive simulation experiments and several benchmark real network datasets. The experimental results show that the proposed method outperforms the earlier state-of-the-art algorithms based on the well-known evaluation criteria.

Keywords: Community detection, Unsupervised learning, Social networks, Normalized mutual information, Overlapping connectivity structures, Non-overlapping community structures, Network communities

1. Introduction

Identifying communities is one of the most fundamental tasks in the network science. The detection of community structures has allowed us to study and discover the latent underlying mechanism behind the relationships of the entities of networks. Due to the importance of the communities, there has

*Corresponding author

been a wide range of different applications of community detection including cultural scene detection [1], reality epidemic spreading modeling based on community structures [2], designing network protocols in delay tolerant networks [3], the pain circulation analysis in tweeter and its effect on the pain therapy [4], detecting hierarchical structure of communities for interactive recommendation [5], the impact of physician communities in patient-centric networks on health-care issues [6], and revealing cancer drivers based on the detection of gene communities [7].

The community detection can be considered as an unsupervised learning problem. While the detection of communities is very similar to the unsupervised clustering situation, the network representation of the data resulted in the undesirable behavior of the community detection methods based on typical clustering techniques such as hierarchical algorithms [8]. On the one hand, applying the tools of network science enhanced the accuracy of the community detection algorithms. On the other hand, complexity and ill-posed essence of the community detection problem have been caused many efforts to get the better solution on a wide variety of applications [9]. There exist different categories of the community detection algorithms. The most well-known are based on the overlapping and non-overlapping structures of the communities [10]. Due to the non-overlapping assumption of the community structures in some applications and sound theoretical roots in graph theory known as graph coloring problem [9], it has been attracted many works in this category such as [11, 12, 13, 14, 15].

Generally, individuals in networks tend to belong more than one community such as the connections of a person in a social network to several groups of classmates, colleagues and friends or the relationships of a researcher to variety of fields and collaborators [16, 17]. Based on the overlapping behavior of the community structures, many works are developed to extract the hidden communities via a variety of different approaches. The examples in this category include detection of connected overlapping communities based on searching the adjacent cliques [18], edge partitioning techniques [19], label propagation algorithms [20], overlapping community detection in two-mode networks [21, 22, 23], topic oriented community detection via a link analysis approach [24], node location analysis to detect overlapping communities [25], overlapping local neighborhood ratio [26, 27], maximal subgraphs [28, 29], detecting core nodes among the communities [30], and model based clustering ideas [31, 32]. Due to the unsupervised essence of the problem, heuristic and meta-heuristic approaches are investigated to uncover the community

patterns through various heuristic fitness functions and nature-inspired algorithms [33, 34].

The earlier works on community detection are suffered from the sensitivity of the initialization of the algorithms, weak accuracy, and leading to many number of communities with singletons. Moreover, most of the earlier approaches have tried to discover the communities either based on overlapping assumption of the community structures or via non-overlapping ones. While these methods resulted in good performance on a variety of dataset adopted to the predefined assumption of the overlapping, they have failed to devise a general framework. Indeed, the communities can be formed by overlapping and non-overlapping structural elements. In this paper, we propose a novel generalized approach for community detection via a primary association node based criterion based on the combination of the internal and external association degree. The proposed approach not only considers the overlapping structures of the network communities through an external association degree, but it also applies the non-overlapping patterns of the community structures via computing the internal association degree for each members of the network. The experimental results based on extensive stochastic simulation of the networks and several benchmark network datasets verify the superiority of the proposed approach and its strength for general community detection with no specified assumption about the network structure.

In the following, related works on overlapping community detection and a basic idea of the proposed approach are presented in Section 2. The preliminary concepts and relevant definitions to our method are described in Section 3. Section 4 introduces the proposed method for community detection. We illustrate the experimental setting based on the stochastic generated networks and present the evaluation of the proposed algorithm based on the extensive simulated networks and the real benchmark networks in Section 5. Section 6 concludes the paper with some suggestions for future works on this ongoing research field.

2. Related works and basic idea

2.1. Related works

Many researches have been done on various aspects of the community detection topic. The main contributions in the community detection algorithms are initiated based on the connectivity structures of the networks, overlapping and non-overlapping ones [10]. The typical non-overlapping approaches

to community detection had been aimed at dividing the network into subnetworks with densely connected internally and weakly connected externally to the others [9], although some recent overlapping community detection works are aimed to partition the networks to subnetworks with more dense external connections and less dense internal ones [35]. While the extension of the non-overlapping methods to detect the overlapping structures would be hardly feasible for most of the algorithms (and vice versa), the primary aim of the two main paradigms is to extract the hidden community structures consisting up the overlapping and non-overlapping connectivity patterns. Moreover, the algorithms in the non-overlapping category fail to discover the overall community structures [11, 8, 9] due to algorithmic restraint and the same problems occurs for the category of overlapping algorithms [18, 36, 35, 37]. The main problems for the aforementioned methods are the high sensitivity to the connectivity structures, leading to many communities with singletons, and scalability problems for high-dimensional networks.

There exist some general community detection algorithms including the overlapping and hierarchical detection of community structures[18], the fuzzy identification of the community structures [38], optimizing several objective functions to find communities based on a general search strategy [39], interaction-based edge clustering to detect overlapping and hierarchical communities [40]. Also, there exist a variety of other works for data representation and local hidden structure detection techniques including structured subspace learning [41], structure learning based on probabilistic feature selection approach [42], subspace decomposition of the topological relationship among web pages [43], the overlapping community detection based on maximal clique approach [44] and clustering-guided sparse structural learning [45] that are related to our idea on demonstration an integrated framework to detect hidden community structures in network datasets. In the following, we describe the elements of a novel generative probabilistic approach to detect general community structures that could be a positive impact on the performance of the method when compared to the non-generative methods including [18, 38, 39] and it has less computational complexity than the [39, 40].

2.2. The basic idea of the proposed approach

The main question is how one can design a general framework to extract the community structures without either solely considering the overlapping connectivity patterns and or only the non-overlapping ones. We propose a

unified approach based on the principle of “*division of each community into the non-overlap and overlap parts*” providing a more robust –less sensitive– results as compared with the earlier works. Our idea is based on the formation of network communities by considering both of the overlapping and non-overlapping connectivity constituents. The proposed approach considers a generative stochastic modeling for the overlapping extraction of the communities and a feature extraction approach for internal community structures. Our aim is to construct a general community detection approach in a probabilistic model based framework to detect communities on overlapping and non-overlapping connectivity structures with better accuracy and acceptable computational complexity than the similar ad-hoc overlapping or non-overlapping procedures.

We design an integrated framework through an association node based approach which comprises two elements for considering the whole structure of the connectivity patterns of the network. Indeed, two parameters are regarded as the non-overlap and overlap parts of community memberships for each nodes. The first parameter “*IA*” exploits the local neighbors connectivity behavior of a given node to measure the internal association degree of that node for every community [46]. Although, internal association is suitable to detect the non-overlapping part of community, it acts poorly for covering the overlapping regions of communities. The second parameter in the proposed approach measures the amount of interactions between communities for each node of a network via a generative stochastic block-models, “*EA*”, approach[36]. So, the probability of one node belongs to the specific community depends on the neighbors of it and the interaction between communities which is calculated by the generative stochastic block-models. One node belongs to the specific community based on the following community association degree’s,

- (i) Internal association to capture the non-overlapping part of communities
- (ii) External association to uncover the overlapping part of communities

We illustrate the proposed approach in the following sections.

3. Elements of the proposed approach

Let us consider the general network with the graph representation $G = (V, E)$ where the set of nodes and edges are denoted by V and E . The

community detection problem can be stated as discovering groups of nodes like c_i that can be written as $C = c_1 \cup c_2 \cup \dots \cup c_k$. By introducing the essential concepts, we give now the relevant definitions to our proposed approach.

3.1. Internal Association for non-overlapping regions

Internal association denotes the affinity level of each node to the specific community which is defined as,

$$IA_{v_i}(c_i) = \frac{\sum_{v_j \in N(v_i)} P(v_j|c_i)}{|N(v_i)|} \quad (1)$$

where $N(v_i)$ is the neighbors of node v_i , $P(v_j|c_i)$ is the community propagation probability that node v_j belongs to community c_i which derived from the edge clustering approach [46] and $|N(v_i)|$ equals to the number of neighbors of node v_i . Intuitively, the relation (1) states that a node's level of affinity through a given community depends on the affinity levels of its neighbors with that community.

3.2. External association for overlapping regions

Block models are the significant tools in statistical theory and social network analysis to find groups of nodes with common properties [36]. According to this model, let suppose to have a network with n nodes and m edges, the aim is to find the labels of each nodes, $v_i \in \{c_i\}_1^k$ and the interaction matrix $\beta_{k \times k}$ to compute the community level interactions. Intuitively, the β_{c_1, c_2} parameter is the number of links between communities c_1 and c_2 . According to block-models, the overlapping level of two communities depends on the amount of interactions between them such that more interactions lead to more overlapping communities behavior.

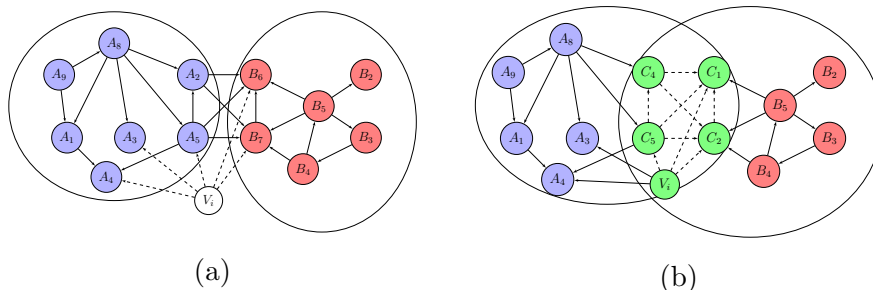


Figure 1: Handling external association degree of communities where Sub-Figure 1a shows two non-overlapping communities with high interactions will become to two overlapping communities in Sub-Figure 1b. (Green nodes are overlapping nodes.)

Figure 1 represents how higher interactions between communities results in denser overlapping areas. The block-models can be efficiently devised to detect the external association degree of each node to the other communities. The external association degree of each node is computed based on the following two-stage process,

- (i) Estimate the interaction matrix between any pair of communities
- (ii) Compute the external association degree of the given node based on the community propagation probability of its neighbors and the interaction matrix.

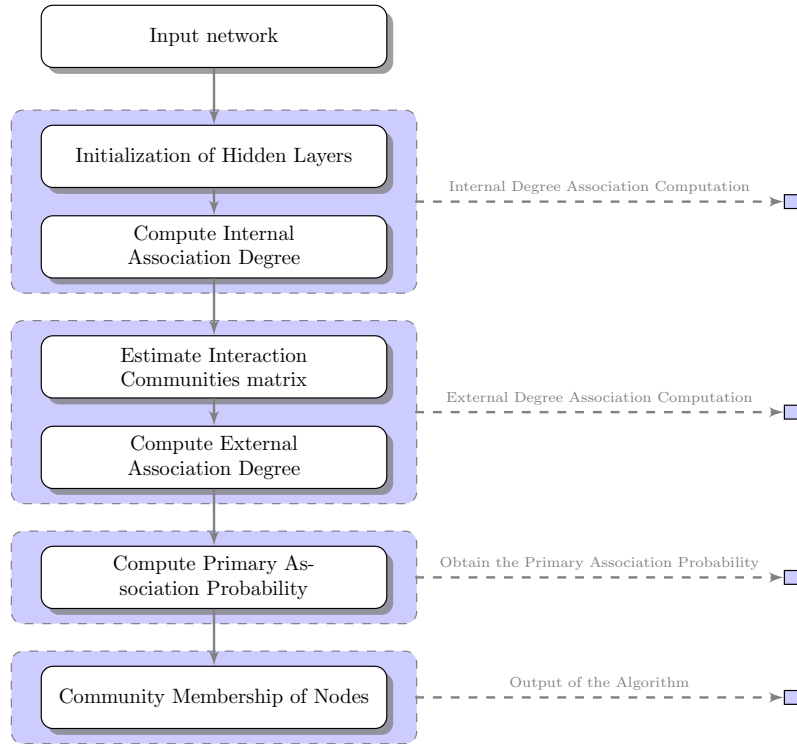


Figure 2: The flow-graph of the proposed IEDC algorithm

To detect the communities based on our proposed method, the internal association degree for each node is computed aligned with the statistical estimation of the external association degree. The flow-graph of proposed algorithm is shown in Figure 2 based on the integration of “internal and external association to detect communities”, called as *IEDC*.

4. Proposed method for overlapping community detection

The networks consist up a set of interacting communities, which is the primary assumption behind the summarization of them through the community structures. Each node of a network would have two-fold association with communities, the first is related to the internal relationship with the other nodes through a community and the second is related to the external relationship with the nodes from other communities. While, there exist a few works on the detection of the general community structures [18, 39, 40], most of the algorithms have been applied the internal or external association of the nodes to uncover the hidden communities in networks that is known as non-overlapping or overlapping techniques in the literature. We propose an integrated probabilistic method to detect the community structures via exploiting both of the internal and external association degree for each node of the network.

4.1. Integrated probabilistic approach

We proposed the following probabilistic membership criterion for each node v_i to belong community c_i ,

$$P(v_i \in c_i) = P(v_i \in c_i | N(v_i) \in c_i) + P(v_i \in c_i | N(v_i) \in c_{-i}) \quad (2)$$

$$= p_1(c_i).IA_{c_i}(v_i) + p_2(c_i).EA_{c_i}(v_i) \quad (3)$$

where $c_{-i} = \bigcup_{j=1}^k c_j \setminus c_i$ which the neighbors of v_i belong to them and $p_1(c_i)$ and $p_2(c_i)$ are the importance level of each associated component with it. The first component in (2) computes the internal association of node v_i in

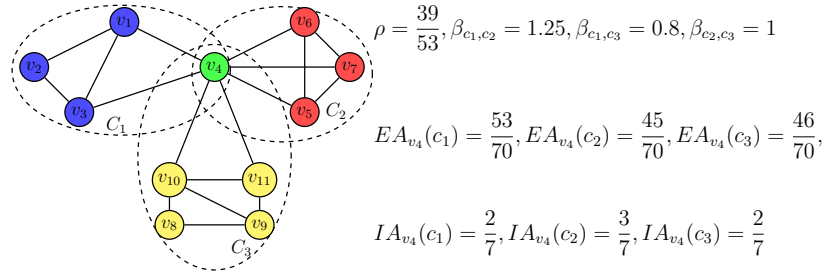


Figure 3: A network containing three communities. Green node exists in three communities c_1, c_2, c_3 . Internal association and external association of node v_4 is computed.

community c_i . The second one reveals the impact of external relationship

of communities of $N(v_i)$ with the current community where higher degree of interaction yields to more overlapping effect. We apply a generative probabilistic approach to derive the external association of each node as the second component in the main criterion (3) based on [36]. The external association of node v_i in community c_i , $EA_{c_i}(v_i)$ is defined as,

$$EA_{c_i}(v_i) = \frac{\sum_{v_j \in N(v_i)} \sum_{c_j \in C} P(v_j|c_j) \times \beta_{(c_i, c_j)}}{|N(v_i)|} \quad (4)$$

where $\beta_{(c_i, c_j)}$ is the interaction matrix between communities. The interaction matrix between any pair of communities can be statistically approximated via the maximum likelihood approach as,

$$\beta_{(c_i, c_j)} = \frac{\sum_{(v_i, v_j) \in E} \max\left(P(v_i|c_i) \times P(v_j|c_j), P(v_i|c_j) \times P(v_j|c_i)\right)}{(1 - \rho) \cdot \sum_{v_i, v_j} \max\left(P(v_i|c_i) \times P(v_j|c_j), P(v_i|c_j) \times P(v_j|c_i)\right)} \quad (5)$$

where ρ is known as the sparsity regularization factor and is computed based on Equation 6 [36],

$$\rho = \frac{\sum_{(v_i, v_j) \notin E} \sum_{c_i \in C, c_j \in C} \max\left(P(v_i|c_i) \times P(v_j|c_j), P(v_i|c_j) \times P(v_j|c_i)\right)}{\sum_{(v_i, v_j)} \sum_{c_i \in C, c_j \in C} \max\left(P(v_i|c_i) \times P(v_j|c_j), P(v_i|c_j) \times P(v_j|c_i)\right)} \quad (6)$$

Figure 3 depicts the main components in criterion (3). After computing the internal association and external association degree of each node, final propagation probability of each node depends on the importance levels p_1 and p_2 obtained based on the following equations,

$$\begin{cases} \frac{p_1(c_i)}{p_2(c_i)} = \frac{\sum_{(v_i, v_j), v_i \in c_i, v_j \in c_i} (v_i, v_j)}{\sum_{(v_i, v_j), v_i \in c_i, v_j \notin c_i} (v_i, v_j)} \\ p_1(c_i) + p_2(c_i) = 1 \end{cases} \quad (7)$$

4.2. The description of the IEDC algorithm

The details of the proposed approach is given in Algorithm (1). The Algorithm (1) initially depends on the structure of the network, number of iterations *MAXITER* for updating the propagation probability. In this algorithm, first we initialize the propagation probability of each node to each

community. The scalable edge clustering method is used for getting the initial community structure of network [46]. *InteractionMatrix* and *findFactors* are two functions for obtaining the interaction community matrix and the importance levels of internal and external association degree according to relations (5) and (7). Lines 7-22 explain the iterative framework for updating the propagation probability along with internal association degree and external association degree until to reach convergence. The *findIA* function computes the internal association degree of each node to each community according to equation (1). The *findEA* function estimates the external association degree of each node based on relation (4) and *UpdatePropagation*, updates the propagation probability according to relation (3). Finally, each node v_i will be assigned to community c_i , if the propagation probability of node v_i to community c_i is greater than *threshold* value.

4.3. The time complexity analysis of the proposed approach

The *IEDC* method is implemented on the three phases. In the first phase, the seed sets of communities are found based on the *link clustering* approach [46]. Since that the most of the real world networks have a sparse connectivity structures, the time complexity of the *link clustering* method is $O(m)$ where m is the number of links in the network. The second phase is comprised the internal association degree computation for each node of the network based on Equation 1. The time complexity of this phase depends on the number of links and communities. It will take at most $O(n \times m \times k)$ based on fully connected network assumption where n is the number of nodes and k is the number of communities. Due to the sparsity of the real networks, the computation time of the second phase is reduced to $O(m)$. Finally, the external association degree of nodes to each community is calculated based on Equation 4 in the third phase. The Equation 4 could be computed in $O(m)$ for the fixed value of β parameter. In the worst scenario updating the β parameter takes $O(n^2)$ due to the complexity of the denominator computation which it can be optimized based on decomposing Equation 5 into two factors as,

$$\sum_{v_i, v_j} (P(v_i|c_i)P(v_j|c_j)) = \sum_{(v_i, v_j) \in E} (P(v_i|c_i)P(v_j|c_j)) + \sum_{(v_i, v_j) \notin E} (P(v_i|c_i)P(v_j|c_j))$$

The first factor takes $O(E)$ and the second ones takes $O(n^2 - E)$ computation time. Finally, the upper bound of the time complexity would be $O(n^2)$.

Algorithm 1 Internal and External association to Detect Communities (IEDC)

```
1: Input:  $G = (V, E)$ ,  $MAXITER$ .
2: Output:  $F(c_i)$  Community memberships.
3: Initialize: Finding initial community propagation probability  $P(v_i|c_i)$ .
4: Compute:  $\beta(c_i, c_j) = InteractionMatrix(P, G)$ 
5: Compute:  $p_1(c_i), p_2(c_i) = findFactors(P, G)$ 
6:  $Iter \leftarrow 0$ 
7: while  $Iter < MAXITER$  do
8:    $Iter \leftarrow Iter + 1$ 
9:   for  $i = 1$  to  $N$  do
10:    for  $j = 1$  to  $k$  do
11:       $IA_{v_i}(c_j) = findIA(P, G)$ 
12:       $EA_{v_i}(c_i) = findEA(P, G, \beta)$ 
13:      Update:  $P^{update}(v_i|c_j) = UpdatePropagation(P, IA, EA, p_1, p_2)$ .
14:    end for
15:  end for
16: end while
17: for  $i = 1$  to  $N$  do
18:   for  $j = 1$  to  $k$  do
19:    if  $P(v_i|c_j) \geq threshold$  then
20:      Add:  $F[c_j] \leftarrow v_i$ 
21:    end if
22:  end for
23: end for
```

4.4. The sensitivity analysis of the IEDC algorithm

The proposed algorithm consists of the computation of internal and external association degree for each node and these computations depend on some parameters that may affect the robustness and performance of the *IEDC*. This approach recalls edge clustering technique to get the initializations of the communities memberships (also known as seed set configuration). In addition, the final probabilistic node assignment to a community requires a threshold specification. A series of experiments are conducted to testify the robustness and sensitivity of the *IEDC* to the initialization clustering step and the threshold specification in the final node membership computation. In the following, first we assess the proposed approach based on different initialization clustering techniques, then investigate the performance of the

Table 1: The information about the networks applied in the sensitivity analysis experiments

Network	Nodes.No	Links.No	Communities.No
<i>Youtube</i> [10]	1,134,890	2,987,624	8385
<i>Orkut</i> [10]	3,072,441	117,185,083	6,288,863
<i>Livejournal</i> [10]	3,997,962	34,681,189	287,512
<i>Polbooks</i> [11]	105	441	3
<i>Polblogs</i> [49]	1490	16726	2
<i>CalTech</i> [50]	769	16656	9
<i>LFR</i> [51]	1000	14782	15

other potential community detection methods along with the *IEDC* based on the same initialization strategy, and finally study the effect of various threshold selection strategies on the performance of the proposed approach.

4.4.1. The initialization analysis

We have designed a variety of experiments to assure the suitable selection of the edge clustering method [46] to give good initialization seed set assignment for the community membership of the nodes. To this aim, first the *IEDC* is tested through three well-known clustering initialization methods, including the spectral clustering method, *Spectral* [47], the conductance based method, *Conductance* [48], and the equal weight for each community assignment to the node’s approach, *equal* [36], to analyze the sensitivity of the proposed method on this initialization stage.

The real network datasets are considered ranging from small to large in Table 1, including the *YouTube*, *Orkut*, *Livejournal*, *PolBooks*, *PolBlogs*, and *CalTech*, and an artificial simulated network based on *LFR* method. It can be observed from Figure 4 that the proposed method initialized based on *Edge* clustering technique has better performance as compared with the other initialization methods. While in some datasets, the *Spectral* and *Conductance* have slightly better results, the *Edge* clustering method benefits from linear time complexity as compared to these initialization procedures. This experiment concludes that the *Edge* initialization method can be used as a suitable tool for extraction of the seed set for communities due to its better performance and less computational complexity than the others.

Moreover, we investigate the accuracy of the other community detection methods based on the same edge clustering initialization approach as well as the *IEDC* method. The three well-known community detection methods

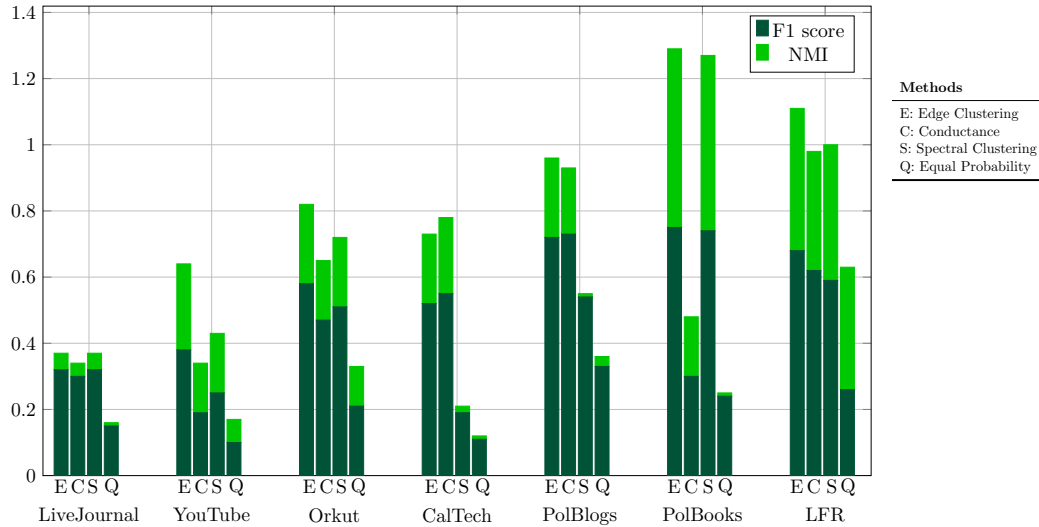


Figure 4: The effect of different clustering initialization methods on the proposed approach

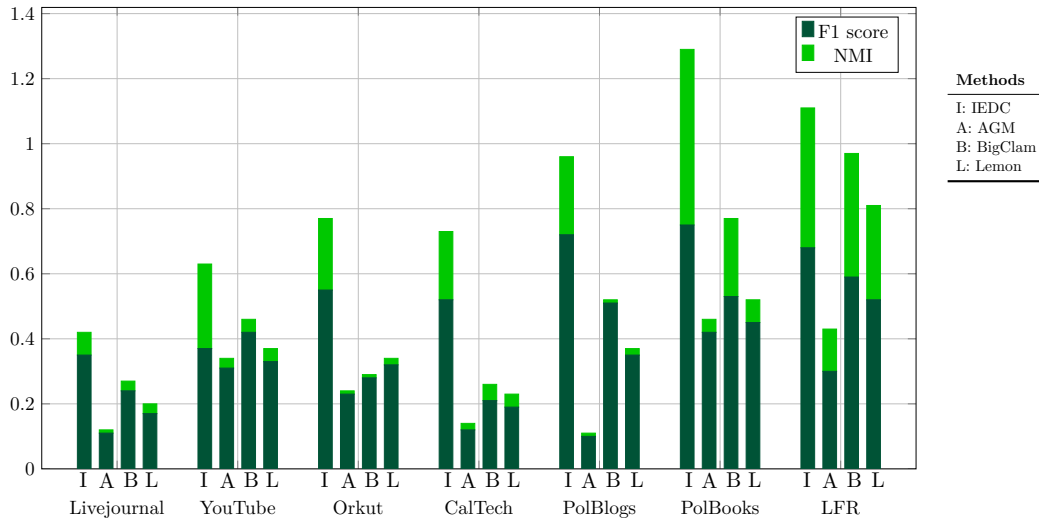


Figure 5: The comparison of initial based community detection approaches based on the same *Edge* clustering initialization procedure

AGM[35], *BigClam*[52], and *LEMON*[53] are selected among the others due to non-hierarchical type of the methods and dependency on the initial seed set of the communities. The obtained experimental results in Figure 5 based on the dataset of Table 1 reveal that the *IEDC* method outperforms the other techniques via the *NMI* and *F1 score* evaluation criteria along the same

initialization approach. Moreover, the results of the other techniques have less accuracy than their default initialization procedures. This result ensures us that the further investigation of the proposed method along the other community detection approaches via their default setting of the communities seed sets are fair enough as compared with our initialization approach.

4.4.2. The threshold parameter

The threshold selection is an important problem in supervised and unsupervised learning problems and is discussed slightly in some related community detection works [54, 55, 56]. To select a threshold without prior knowledge of the network and running multiple experiments to fine-tune the threshold selection, we have selected three different automatic strategies for threshold determination including the maximum value of membership probability among all the communities *maximum*, assigning to the community with greater membership probability than the average values for all the nodes *Average of All*, assigning to the community with greater membership probability of a node than the average values of its neighbors *Average of Neighbors*.

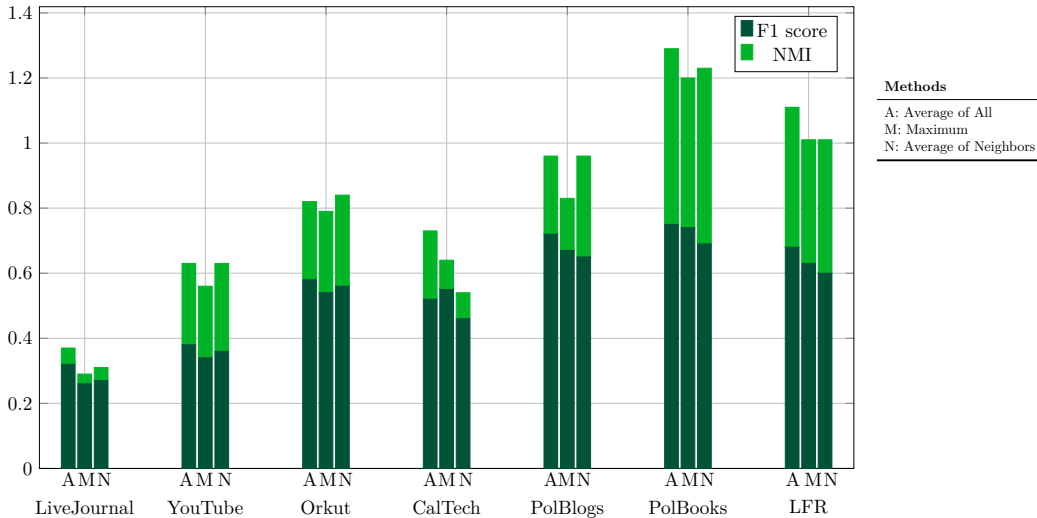


Figure 6: The investigation of different threshold selection strategies on the proposed method

Here through the experiments on the datasets of Table 1, we investigate the effects of different threshold choices on the performance of *IEDC* algorithm. The results in Figure 6 show that the proposed method is not highly

sensitive to these threshold choices. Furthermore, the *IEDC* had slightly better performance based on *Average of All* threshold strategy than the others. Hence *Average of All* is given as the default choice for threshold setting in our proposed configuration.

5. Experiments

We have used a bunch of artificial generated networks and benchmark real datasets to analyze the *IEDC* algorithm. At first, the proposed method is examined through extensive simulated artificial networks. Then, the accuracy of *IEDC* is compared with the earlier well-known algorithms based on real network datasets.

5.1. Evaluation criteria

The performance of the applied algorithms in our study are investigated based on two well-known evaluation criteria, the *F1 score* and the Normalized Mutual Information (NMI), [9]. *F1 score* measures the correctly classified members in each community based on the ground-truth information. *NMI* criterion measures the similarity of the detected communities and the ground truth communities based on mutual information theoretic tools. There exist a variety of other evaluation criteria for community detection tasks including the maximization of the modularity function to detect the non-overlapping community structures [11] and modification of the modularity criteria to discover the overlapping community structures [57]. One can see [58] for the exact definitions of the aforementioned criteria.

5.2. Artificial networks generation

To generate the artificial networks satisfying in a wide variety of situations, two well-known approaches are exploited here, the Mixed Membership Stochastic Block-models approach, named as *MMSB* [36] and the LFR method [51].

Table 2: The details of artificial networks generation based on MMSB method

Nodes.No	Links.No	Communities.No	Modularity	Type (dense/sparse)	Hyperparameter
100	1021	5	0.71	Sparse	0.003
100	1277	5	0.37	Dense	0.03
200	4635	11	0.26	Dense	0.05
200	2224	11	0.71	Sparse	0.002
500	6074	32	0.32	Dense	0.02
500	4277	32	0.81	Sparse	0.001

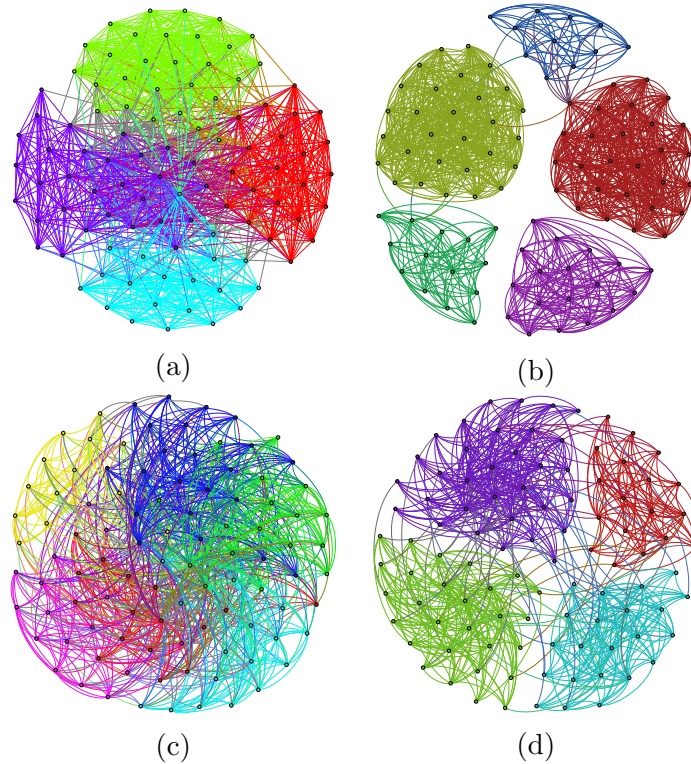


Figure 7: Artificial networks generation according to LFR and MMSB methods with 100 nodes. 7a and 7b show Dense and Sparse overlap communities with MMSB with $\alpha = 0.001$ and $\alpha = 0.07$. 7c and 7d represent Dense and Sparse overlap communities with LFR according to Table 3.

To study the performance of the IEDC algorithm versus the other algorithms, the networks are artificially generated with two general scenarios, sparse and dense overlap community structures e.g. see Figure 7.

Table 3: The characterization of LFR procedure for network generation

Nodes.No	Links.No	Communities.No	Modularity	Type	Mixing	Overlapping of nodes
100	963	6	0.336	Dense	0.3	20
100	727	4	0.605	Sparse	0.1	10
200	1924	10	0.277	Dense	0.5	40
200	1503	11	0.6	Sparse	0.2	20
500	6123	16	0.306	Dense	0.5	100
500	6224	16	0.61	Sparse	0.2	50

The MMSB procedure for network generation is built upon in a probabilistic vein such that the link formation between two nodes p and q within a network, denoted by $Y(p, q)$, are assumed to be distributed as,

$$Y(p, q) \sim \text{Bernoulli}(Z_{p \rightarrow q}^T \beta Z_{p \leftarrow q}) \quad (8)$$

where β is a community interaction matrix and Z is a multinomial distribution as,

$$\begin{aligned} Z_{p \rightarrow q} &\sim \text{Multinomial}(\vec{\pi}_q) \\ \vec{\pi}_p &\sim \text{Dirichlet}(\vec{\alpha}) \end{aligned}$$

The parameter α controls the overlapping behavior of communities. While the decreasing the value of α near to 0 resulted in formation of networks with sparse overlapping behavior of community structures, the increasing value of α near to 1 tends to formation of dense overlapping community structures within a network. The different behavior of α are shown in Figure 7. Due to the complexity of different behavior of α , the *modularity* metric applies to categorize the levels of overlapping behavior among the communities [11]. Based on our experimental studies, the modularity values greater than 0.5 leads to formation of sparse overlapping communities and the modularity values less than 0.4 resulted in dense overlap community structures. Table 2 shows the characteristics of generated networks according to the MMSB simulation approach.

The LFR procedure is a standard framework for generating benchmark artificial networks to test the community detection algorithms [51]. Similar to the MMSB approach, the LFR generated networks are divided into two types of sparse and dense overlapping communities according to the modularity metric. The details of network generation through the LFR approach is given in Table (3). The two typical generated networks with the LFR is shown in Figure 7.

5.3. Experimental results based on artificial networks

Initially, the conductance measure is used to justify the performance of the proposed algorithm based on the generated networks with the scenarios described in Subsection 5.2. Then the *IEDC* algorithm is evaluated through the *MMSB* generated networks to check the feasibility of the approach. Finally, we represent the evaluation results of the proposed approach based on the *LFR* to generate the artificial networks for community detection tasks through the state-of-the-arts community detection algorithms.

In addition, we evaluate the *IEDC* algorithm with *MMSB* and *AGM* through the conductance measure depicted in Figures 8. The conductance measure is defined for the i -th community in a network as the ratio between the cut size of that community and the least number of links incident on either set c_i or $V \setminus c_i$ [48],

$$Cond(c_i) = \frac{\text{cut}(c_i)}{\min \left(\text{links}(c_i, V), \text{links}(V \setminus c_i, V) \right)} \quad (9)$$

where the $\text{links}(c_i, V)$ is defined the sum of edge weights between node sets c_i and V . The probability of leaving the community by a one-step walk beginning from the smaller set between c_i and $V \setminus c_i$ can be interpreted as the conductance of that community. Intuitively, the conductance measures the proportion of external edges of a community versus the total degree of that community [58]. The successful minimization of the conductance would be effectively resulted in the two requirement of community structure, including well-separated from the rest of the network (small numerator) and large internal density (large denominator). On the one hand, this measure is relatively insensitive to the size of the communities due to the proportional dependency of both the numerator and the denominator to the number of nodes in a given community [59]. On the other hand, by increasing the number of communities it would be resulted in the community structures with fewer number of edges in each community and vice versa [48]. Therefore, we have used a modified version of the conductance measure for overall comparison among different community structures as the average of conductance of the communities in a partition of the network. The detailed study in [59] have shown that the minimum conductance size versus the number of nodes in a community have a characteristic shape for a partition, the decreasing behavior until $k \approx 100$ nodes, and then increasing monotonically for larger

subgraphs. Based on the correspondence between the size and the number of communities, the average of conductance measure for a partition is plotted against the number of communities in hopes of appearance a similar characteristic curve. Intuitively, the conductance level of networks tends to have a general curve where initially it has a decreasing behavior versus to the increasing values of number of communities, and after some stage, the conductance level gradually raised with the increasing number of communities.

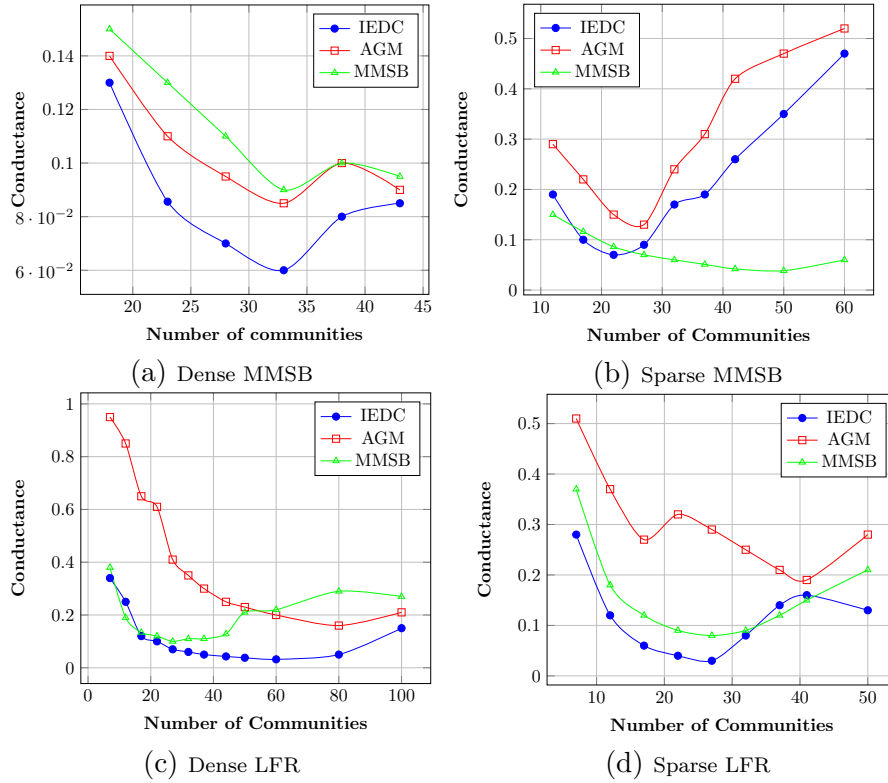


Figure 8: The Conductance measure based on the number of communities in the simulated networks. Sub-figures 8a and 8b show the Conductance level on the MMSB network generation with 500 nodes with dense and sparse overlapping communities assumption. Sub-figures 8c and 8d present the conductance level of the LFR networks with dense and sparse overlapping assumption.

We exploit the conductance measure versus the number of communities to evaluate the proposed method. The results in Figures 8a and 8b, show us the power of the *IEDC* method based on the conductance evaluation criterion for the MMSB network generation procedure as compared with the other

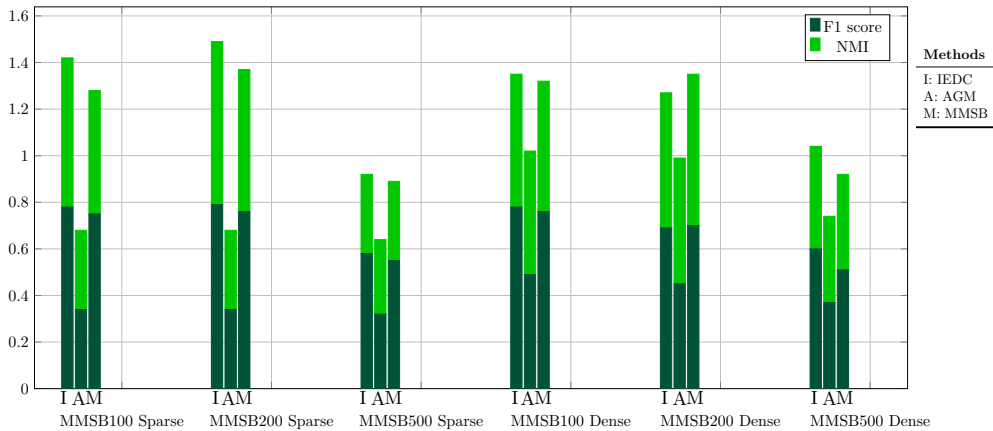


Figure 9: The $F1$ score and NMI evaluation criteria based on running the algorithms on the MMSB simulated networks.

Table 4: Overview of the state-of-the-art algorithm

Methods	Description	Reference
MMSB	Find Overlapping community	[36]
AGM	Find Overlapping community	[35]
BigClam	Find Overlapping community	[52]
SLPA	Find Overlapping community	[60]
OSLOM	Find Overlapping Community, Hierarchies and community dynamics	[61]
COPRA	Find Overlapping community by label propagation	[62]
Louvain	Heuristic method for finding non-overlapping community	[13]
COMBO	A general approach to detect the overlapping and non-overlapping communities	[39]
NISE	Find Overlapping community based on the seed set expansion	[37]

methods. On the MMSB generated networks, the *IEDC* behavior is very similar to the *AGM* method. The Figures 8c and 8d, present the results of the conductance measure for the LFR network generation procedure on the three studied methods, where the *IEDC* seems to behave more normally as compared to the *MMSB* and *AGM* due to the well-shape of the *IEDC* curve in these cases to the recommended conductance shape [48].

We perform the initial feasibility and justification of the proposed approach through *MMSB* generated networks based on the NMI and $F1$ score as standard quantitative evaluation criteria. Figure 9 shows the NMI and $F1$ score results for simulated networks with *MMSB* generation procedures based on Table 2. We observe that the proposed method performs superior or equally for most of the cases in sparse and overlap generated networks in the *MMSB* generation scenario's.

The *LFR* is known as the standard simulation procedure to test the community detection algorithms. We employ several state-of-the-art community detection algorithms to examine the *IEDC* approach including the scalable version of the *AGM*, *BigClam* [35], greedy hierarchical method based on modularity maximization, *Louvain* [13], label propagation based approach, *COPRA* [62], Speaker-listener Label Propagation Algorithm, *SLPA* [60] and Order statistics local optimization method, *Oslom* [61], optimize multiple objective functions based on a general search strategy, *COMBO* [39], and Neighborhood-Inflated Seed Expansion technique, *NISE* [37] summarized in Table 4. The results for *LFR* generated networks are represented in Figure 10 based on the characteristics in Table 3. The attained *NMI* and *F1 score* results shows that the *IEDC* outperforms the state-of-the-art community detection algorithms on Table 4 for the whole simulation scenarios except the sparse generated network with 500 nodes. These results have shown that the strength of the proposed approach to detect the community structures based on the *LFR* benchmark community detection framework.

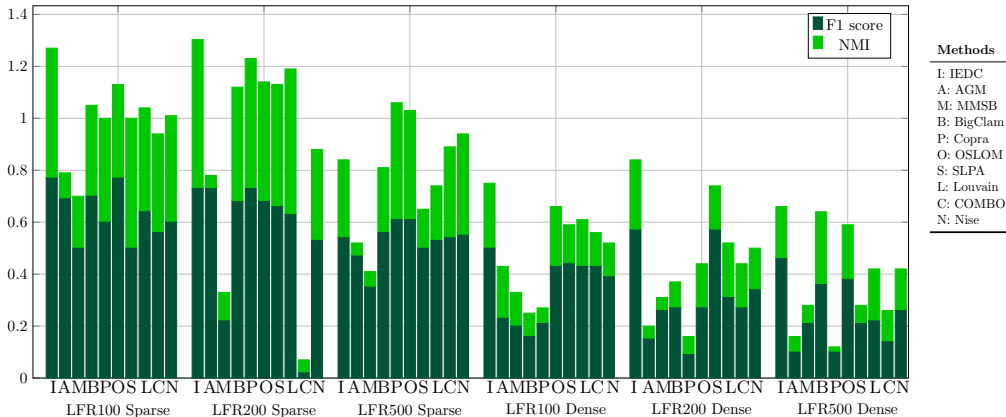


Figure 10: The *NMI* and *F1 score* evaluation results on the *LFR* simulated networks based on the well-known community detection algorithms in Table 4.

5.4. Experiments on real network data-sets

The proposed method is compared with the state-of-the-art community detection algorithms through a variety of benchmark real networks. We use two evaluation criteria *NMI* and *F1 score* to examine the proposed approach on the real networks. To more clarify, we categorize the networks under study to the non-overlapping and overlapping ones based on the ground truth

Table 5: The networks with non-overlapping community structures

Network	Nodes.No	Links.No	Communities.No
<i>Football</i> [8]	115	616	12
<i>Polbooks</i> [11]	105	441	3
<i>Polblogs</i> [49]	1490	16726	2
<i>CalTech</i> [50]	769	16656	9
<i>Rice</i> [50]	4087	184828	10

information about the community structures and report the results separately in the following subsections.

5.4.1. Networks with non-overlapping community structures

Multiple real network datasets in Table 5 with non-overlapping community structures are used to evaluate the proposed method. The experimental results are shown in Figure 11 based on two well-known evaluation criteria.

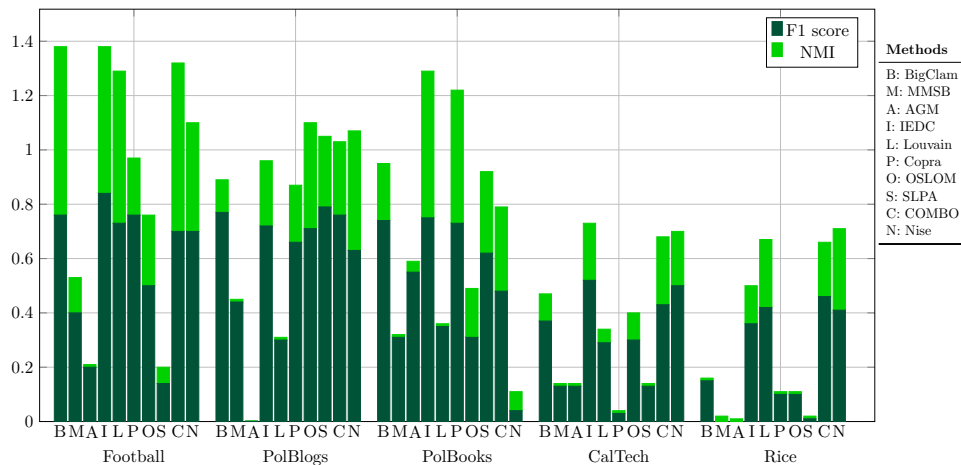


Figure 11: The results of $F1$ score and NMI criteria on networks in Table 5 with non-overlapping community structures.

According to Figure 11, *IEDC* performs slightly better or equally than the other algorithms based on $F1$ score and NMI on the *Polbooks*, *CalTech* and *Football*. In addition, the proposed method shows slightly weaker results on *Rice* and *Polblogs* based on $F1$ score and weak performance via NMI . The attained results show that the *IEDC* approach is able to detect non-overlapping community structures with suitable accuracy as compared with the other well-known algorithms based on 5 different network datasets.

Table 6: Characteristics of real world networks with overlapping community structures.

Network	Node.No	Links.No	Communities.No	Type
<i>BlogCatalog</i>	10312	667,966	39	<i>Large</i>
<i>Facebook</i> [63]	4089	170,174	193	<i>Large</i>
<i>DBLP</i> [10]	317080	1,049,866	13477	<i>Huge</i>
<i>Youtube</i> [10]	1,134,890	2,987,624	8385	<i>Huge</i>
<i>Orkut</i> [10]	3,072,441	117,185,083	6,288,863	<i>Huge</i>
<i>Livejournal</i> [10]	3,997,962	34,681,189	287,512	<i>Huge</i>

5.4.2. Networks with overlapping community structures

We describe the characteristics of 6 real network datasets in Table 6 with overlapping community structures. The community detection algorithms in Table 4 are used to examine the proposed approach with the exclusion of *AGM* and *MMSB* algorithms due to the non-scalable and heavy time-consuming of these procedures for the large networks. The experimental results on overlapping network datasets are represented in Figure 11 based on *NMI* and *F1 score* evaluation criteria. Due to the facing of the huge networks with overlapping community structures and non-scalability running property of the baseline algorithms on these large networks in Table 6 (except the *BigClam* method), we have exploited a community-based sampling strategy to obtain overlapping subgraph communities in each networks [52]. To sample a subnetwork with overlapping community structures, a random node u in a network G is selected subject to the constraint that it belongs to at least two communities. We then take the subnetwork of G comprising all the nodes that share at least one community membership with the node u . We created 100 subnetworks for the huge specified networks and reported the average result based on these subnetworks.

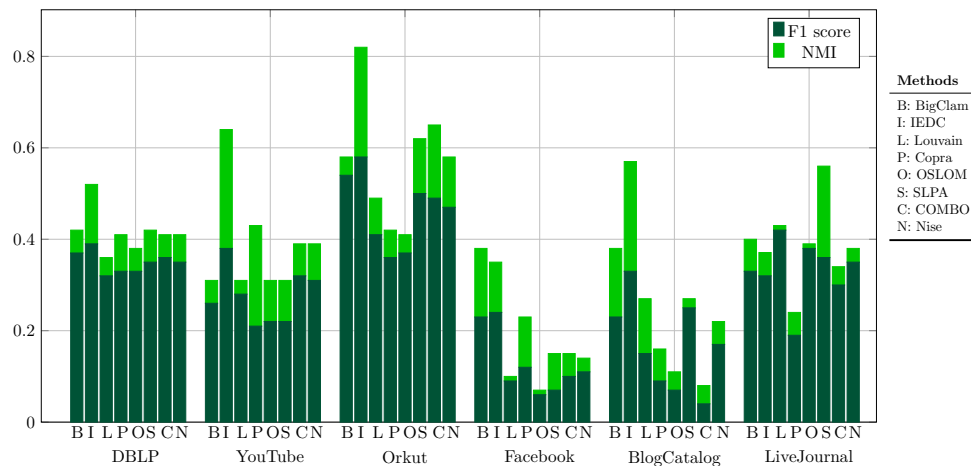


Figure 12: The results of $F1$ score and NMI criteria on the real world networks in Table 6 with overlapping community structures.

The Figure 12 depicts the NMI and $F1$ score results for the networks described in Table 6. According to Figure 12, *IEDC* performs better than the other algorithms based on $F1$ score on *BlogCatalog*, *DBLP*, *YouTube* and *Orkut* and slightly weak results on the *Livejournal*. The results based on NMI metric reveals that the *IEDC* achieves better results than the others on the *BlogCatalog*, *DBLP*, *YouTube*, and *Orkut*, also weaker results than the others on the *Livejournal* and *Facebook*. On *Orkut* network, *IEDC* attained two times better result versus the top result of the other methods.

6. Conclusion and future works

In this paper we developed a novel generalized community detection approach to discover the communities with overlapping and non-overlapping connectivity structures. We have designed our *IEDC* algorithm based on a primary node based criterion via the internal and external association degree computation for each node to detect communities. We tested the proposed method on extensive simulation experiments with two artificial generative procedure, the *LFR* and the *MMSB* procedures. The attained results on extensive simulated networks through two generative scenarios via the NMI , $F1$ score and conductance measure as the evaluation criteria showed us the superior performance and feasibility of our proposed method as compared with the well-known algorithms. We have used a bunch of real network datasets with different overlapping community structures and a variety of small

to huge benchmark networks. The experimental results verified the benefits of the *IEDC* approach and its strengths for general community detection versus to the earlier state-of-the-art network communities algorithms. There exist several directions for future works on this field including,

- Perform theoretical analysis of the proposed approach via the probabilistic method.
- Study the other properties of the networks under study such as core-periphery based on the *IEDC*.
- Use the profile information or attributes of each node along with the structure of network to detect generalized community structures.

References

References

- [1] M. Hamdaqa, L. Tahvildari, N. LaChapelle, B. Campbell, Cultural scene detection using reverse Louvain optimization, *Science of Computer Programming* 95, Part 1 (2014) 44–72. doi:10.1016/j.scico.2014.01.006.
- [2] G. Ren, X. Wang, Epidemic spreading in time-varying community networks, *Chaos: An Interdisciplinary Journal of Nonlinear Science* 24 (2) (2014) 023116. doi:10.1063/1.4876436.
- [3] Z. Lu, X. Sun, Y. Wen, G. Cao, T. L. Porta, Algorithms and Applications for Community Detection in Weighted Networks, *IEEE Transactions on Parallel and Distributed Systems* 26 (11) (2015) 2916–2926. doi:10.1109/TPDS.2014.2370031.
- [4] P. J. Tighe, R. C. Goldsmith, M. Gravenstein, H. R. Bernard, R. B. Fillingim, The Painful Tweet: Text, Sentiment, and Community Structure Analyses of Tweets Pertaining to Pain, *Journal of Medical Internet Research* 17 (4). doi:10.2196/jmir.3769.
- [5] F. Chen, K. Li, Detecting hierarchical structure of community members in social networks, *Knowledge-Based Systems* 87 (2015) 3–15. doi:10.1016/j.knosys.2015.05.026.

- [6] S. Uddin, Exploring the impact of different multi-level measures of physician communities in patient-centric care networks on healthcare outcomes: A multi-level regression approach, *Scientific Reports* 6. doi:10.1038/srep20222.
- [7] L. Cantini, E. Medico, S. Fortunato, M. Caselle, Detection of gene communities in multi-networks reveals cancer drivers, *Scientific Reports* 5 (2015) 17386. doi:10.1038/srep17386.
- [8] M. Girvan, M. E. Newman, Community structure in social and biological networks, *Proceedings of the national academy of sciences* 99 (12) (2002) 7821–7826.
- [9] S. Fortunato, Community detection in graphs, *Physics Reports* 486 (3) (2010) 75–174.
- [10] J. Yang, J. Leskovec, Defining and evaluating network communities based on ground-truth, *Knowledge and Information Systems* 42 (1) (2015) 181–213.
- [11] M. E. Newman, Modularity and community structure in networks, *Proceedings of the National Academy of Sciences* 103 (23) (2006) 8577–8582.
- [12] F. Radicchi, C. Castellano, F. Cecconi, V. Loreto, D. Parisi, Defining and identifying communities in networks, *Proceedings of the National Academy of Sciences of the United States of America* 101 (9) (2004) 2658–2663. doi:10.1073/pnas.0400054101.
- [13] V. D. Blondel, J.-L. Guillaume, R. Lambiotte, E. Lefebvre, Fast unfolding of communities in large networks, *Journal of Statistical Mechanics: Theory and Experiment* 2008 (10) (2008) P10008.
- [14] P. D. Meo, E. Ferrara, G. Fiumara, A. Provetti, Generalized Louvain method for community detection in large networks, in: *2011 11th International Conference on Intelligent Systems Design and Applications (ISDA)*, 2011, pp. 88–93. doi:10.1109/ISDA.2011.6121636.
- [15] H. Zardi, L. B. Romdhane, An $O(n^2)$ algorithm for detecting communities of unbalanced sizes in large scale social networks, *Knowledge-Based Systems* 37 (2013) 19–36. doi:10.1016/j.knosys.2012.05.021.

- [16] J. Xie, S. Kelley, B. K. Szymanski, Overlapping Community Detection in Networks: The State-of-the-art and Comparative Study, *ACM Comput. Surv.* 45 (4) (2013) 43:1–43:35. doi:10.1145/2501654.2501657.
- [17] W. Ren, G. Yan, X. Liao, L. Xiao, Simple probabilistic algorithm for detecting community structure, *Physical Review. E, Statistical, Non-linear, and Soft Matter Physics* 79 (3 Pt 2) (2009) 036111. doi:10.1103/PhysRevE.79.036111.
- [18] A. Lancichinetti, S. Fortunato, J. Kertesz, Detecting the overlapping and hierarchical community structure of complex networks, *New Journal of Physics* 11 (3) (2009) 033015. doi:10.1088/1367-2630/11/3/033015.
- [19] Y.-Y. Ahn, J. P. Bagrow, S. Lehmann, Link communities reveal multi-scale complexity in networks, *Nature* 466 (7307) (2010) 761–764.
- [20] W. Liu, X. Jiang, M. Pellegrini, X. Wang, Discovering communities in complex networks by edge label propagation, *Scientific Reports* 6. doi:10.1038/srep22470.
- [21] Y. Cui, X. Wang, Uncovering overlapping community structures by the key bi-community and intimate degree in bipartite networks, *Physica A: Statistical Mechanics and its Applications* 407 (2014) 7–14. doi:10.1016/j.physa.2014.03.077.
- [22] Y. Cui, X. Wang, Detecting one-mode communities in bipartite networks by bipartite clustering triangular, *Physica A: Statistical Mechanics and its Applications* 457 (2016) 307–315. doi:10.1016/j.physa.2016.03.002.
- [23] X. Wang, X. Qin, Asymmetric intimacy and algorithm for detecting communities in bipartite networks, *Physica A: Statistical Mechanics and its Applications* 462 (2016) 569–578. doi:10.1016/j.physa.2016.06.096.
URL <http://www.sciencedirect.com/science/article/pii/S0378437116303715>
- [24] Z. Zhao, S. Feng, Q. Wang, J. Z. Huang, G. J. Williams, J. Fan, Topic oriented community detection through social objects and link analysis in social networks, *Knowledge-Based Systems* 26 (2012) 164–173. doi:10.1016/j.knosys.2011.07.017.

- [25] W. Zhi-Xiao, L. Ze-chao, D. Xiao-fang, T. Jin-hui, Overlapping community detection based on node location analysis, *Knowledge-Based Systems* 105 (2016) 225–235. doi:10.1016/j.knosys.2016.05.024.
- [26] J. Eustace, X. Wang, Y. Cui, Community detection using local neighborhood in complex networks, *Physica A: Statistical Mechanics and its Applications* 436 (2015) 665–677. doi:10.1016/j.physa.2015.05.044.
- [27] J. Eustace, X. Wang, Y. Cui, Overlapping community detection using neighborhood ratio matrix, *Physica A: Statistical Mechanics and its Applications* 421 (2015) 510–521. doi:10.1016/j.physa.2014.11.039.
- [28] Y. Cui, X. Wang, J. Eustace, Detecting community structure via the maximal sub-graphs and belonging degrees in complex networks, *Physica A: Statistical Mechanics and its Applications* 416 (2014) 198–207. doi:10.1016/j.physa.2014.08.050.
- [29] Y. Cui, X. Wang, J. Li, Detecting overlapping communities in networks using the maximal sub-graph and the clustering coefficient, *Physica A: Statistical Mechanics and its Applications* 405 (2014) 85–91. doi:10.1016/j.physa.2014.03.027.
- [30] X. Wang, J. Li, Detecting communities by the core-vertex and intimate degree in complex networks, *Physica A: Statistical Mechanics and its Applications* 392 (10) (2013) 2555–2563. doi:10.1016/j.physa.2013.01.039.
- [31] M. S. Handcock, A. E. Raftery, J. M. Tantrum, Model-based clustering for social networks, *Journal of the Royal Statistical Society: Series A (Statistics in Society)* 170 (2) (2007) 301–354. doi:10.1111/j.1467-985X.2007.00471.x.
- [32] H. Sun, J. Huang, X. Zhang, J. Liu, D. Wang, H. Liu, J. Zou, Q. Song, IncOrder: Incremental density-based community detection in dynamic networks, *Knowledge-Based Systems* 72 (2014) 1–12. doi:10.1016/j.knosys.2014.07.015.
- [33] C. Liu, J. Liu, Z. Jiang, A Multiobjective Evolutionary Algorithm Based on Similarity for Community Detection From Signed Social Networks, *IEEE Transactions on Cybernetics* 44 (12) (2014) 2274–2287. doi:10.1109/TCYB.2014.2305974.

- [34] K. Bijari, H. Zare, H. Veisi, H. Bobarshad, Memory-enriched big bangbig crunch optimization algorithm for data clustering, *Neural Computing and Applications* (2016) 1–11doi:10.1007/s00521-016-2528-9.
URL <http://link.springer.com/article/10.1007/s00521-016-2528-9>
- [35] J. Yang, J. Leskovec, Community-affiliation graph model for overlapping network community detection, in: *Data Mining (ICDM), 2012 IEEE 12th International Conference on*, IEEE, 2012, pp. 1170–1175.
- [36] E. M. Airoldi, D. M. Blei, S. E. Fienberg, E. P. Xing, Mixed Membership Stochastic Blockmodels, *Journal of Machine Learning Research* 9 (Sep) (2008) 1981–2014.
- [37] J. Whang, D. Gleich, I. Dhillon, Overlapping Community Detection Using Neighborhood-Inflated Seed Expansion, *IEEE Transactions on Knowledge and Data Engineering* 28 (5) (2016) 1272–1284. doi:10.1109/TKDE.2016.2518687.
- [38] P. G. Sun, L. Gao, S. Shan Han, Identification of overlapping and non-overlapping community structure by fuzzy clustering in complex networks, *Information Sciences* 181 (6) (2011) 1060–1071. doi:10.1016/j.ins.2010.11.022.
- [39] S. Sobolevsky, R. Campari, A. Belyi, C. Ratti, General optimization technique for high-quality community detection in complex networks, *Physical Review E* 90 (1) (2014) 012811. doi:10.1103/PhysRevE.90.012811.
- [40] P. Kim, S. Kim, Detecting overlapping and hierarchical communities in complex network using interaction-based edge clustering, *Physica A: Statistical Mechanics and its Applications* 417 (2015) 46–56. doi:10.1016/j.physa.2014.09.035.
- [41] Z. Li, J. Liu, J. Tang, H. Lu, Robust Structured Subspace Learning for Data Representation, *IEEE Transactions on Pattern Analysis and Machine Intelligence* 37 (10) (2015) 2085–2098. doi:10.1109/TPAMI.2015.2400461.

- [42] H. Zare, M. Niazi, Relevant based structure learning for feature selection, *Engineering Applications of Artificial Intelligence* 55 (2016) 93–102. doi:10.1016/j.engappai.2016.06.001.
- [43] J. Eustace, X. Wang, J. Li, Approximating web communities using subspace decomposition, *Knowledge-Based Systems* 70 (2014) 118–127. doi:10.1016/j.knosys.2014.06.017.
- [44] J. Li, X. Wang, Y. Cui, Uncovering the overlapping community structure of complex networks by maximal cliques, *Physica A: Statistical Mechanics and its Applications* 415 (2014) 398–406. doi:10.1016/j.physa.2014.08.025.
- [45] Z. Li, J. Liu, Y. Yang, X. Zhou, H. Lu, Clustering-Guided Sparse Structural Learning for Unsupervised Feature Selection, *IEEE Transactions on Knowledge and Data Engineering* 26 (9) (2014) 2138–2150. doi:10.1109/TKDE.2013.65.
- [46] L. Tang, X. Wang, H. Liu, Scalable Learning of Collective Behavior, *IEEE Transactions on Knowledge and Data Engineering* 24 (6) (2012) 1080–1091. doi:10.1109/TKDE.2011.38.
- [47] M. E. J. Newman, Modularity and community structure in networks, *Proceedings of the National Academy of Sciences* 103 (23) (2006) 8577–8582. doi:10.1073/pnas.0601602103.
- [48] D. F. Gleich, C. Seshadhri, Vertex neighborhoods, low conductance cuts, and good seeds for local community methods, in: *Proceedings of the 18th ACM SIGKDD International Conference on Knowledge Discovery and Data Mining*, ACM, 2012, pp. 597–605.
- [49] L. A. Adamic, N. Glance, The political blogosphere and the 2004 US election: Divided they blog, in: *Proceedings of the 3rd International Workshop on Link Discovery*, ACM, 2005, pp. 36–43.
- [50] A. L. Traud, P. J. Mucha, M. A. Porter, Social structure of Facebook networks, *Physica A: Statistical Mechanics and its Applications* 391 (16) (2012) 4165–4180.

- [51] A. Lancichinetti, S. Fortunato, F. Radicchi, Benchmark graphs for testing community detection algorithms, *Physical review E* 78 (4) (2008) 046110.
- [52] J. Yang, J. Leskovec, Overlapping community detection at scale: A nonnegative matrix factorization approach, in: *Proceedings of the Sixth ACM International Conference on Web Search and Data Mining*, ACM, 2013, pp. 587–596.
- [53] Y. Li, K. He, D. Bindel, J. E. Hopcroft, Uncovering the small community structure in large networks: A local spectral approach, in: *Proceedings of the 24th International Conference on World Wide Web*, ACM, 2015, pp. 658–668.
- [54] D. Hric, R. K. Darst, S. Fortunato, Community detection in networks: Structural communities versus ground truth, *Physical Review E* 90 (6) (2014) 062805. doi:10.1103/PhysRevE.90.062805.
- [55] Z. Ding, X. Zhang, D. Sun, B. Luo, Overlapping Community Detection based on Network Decomposition, *Scientific Reports* 6. doi:10.1038/srep24115.
- [56] B. S. Rees, K. B. Gallagher, Overlapping community detection using a community optimized graph swarm, *Social Network Analysis and Mining* 2 (4) (2012) 405–417. doi:10.1007/s13278-012-0050-3.
- [57] J. Li, X. Wang, J. Eustace, Detecting overlapping communities by seed community in weighted complex networks, *Physica A: Statistical Mechanics and its Applications* 392 (23) (2013) 6125–6134. doi:10.1016/j.physa.2013.07.066.
- [58] S. Fortunato, D. Hric, Community detection in networks: A user guide, arXiv:1608.00163 [physics]arXiv:1608.00163.
- [59] J. Leskovec, K. J. Lang, A. Dasgupta, M. W. Mahoney, Community structure in large networks: Natural cluster sizes and the absence of large well-defined clusters, *Internet Mathematics* 6 (1) (2009) 29–123.
- [60] J. Xie, B. K. Szymanski, Towards linear time overlapping community detection in social networks, in: *Advances in Knowledge Discovery and Data Mining*, Springer, 2012, pp. 25–36.

- [61] A. Lancichinetti, F. Radicchi, J. J. Ramasco, S. Fortunato, Finding statistically significant communities in networks, *PloS one* 6 (4) (2011) e18961.
- [62] S. Gregory, Finding overlapping communities in networks by label propagation, *New Journal of Physics* 12 (10) (2010) 103018. doi: 10.1088/1367-2630/12/10/103018.
- [63] J. Leskovec, J. J. Mcauley, Learning to discover social circles in ego networks, in: *Advances in Neural Information Processing Systems*, 2012, pp. 539–547.