

# An integrated magnetometry platform with stackable waveguide-assisted detection channels for sensing arrays

Michael Hoese,<sup>1,\*</sup> Michael K. Koch,<sup>1,2,\*</sup> Vibhav Bharadwaj,<sup>3</sup> Johannes Lang,<sup>1</sup> John P. Hadden,<sup>4</sup> Reina Yoshizaki,<sup>5</sup> Argyro N. Giakoumaki,<sup>3</sup> Roberta Ramponi,<sup>3</sup> Fedor Jelezko,<sup>1,2</sup> Shane M. Eaton,<sup>3</sup> and Alexander Kubanek<sup>1,2,†</sup>

<sup>1</sup>*Institute for Quantum Optics, Ulm University, D-89081 Ulm, Germany*

<sup>2</sup>*Center for Integrated Quantum Science and Technology (IQst), Ulm University, D-89081 Ulm, Germany*

<sup>3</sup>*Institute for Photonics and Nanotechnologies (IFN) - CNR,  
Piazza Leonardo da Vinci, 32, Milano, 20133, Italy*

<sup>4</sup>*School of Physics and Astronomy, Cardiff University, Cardiff CF24 3AA, United Kingdom*

<sup>5</sup>*Department of Mechanical Engineering, School of Engineering,  
The University of Tokyo, Tokyo, 113-8656, Japan*

(Dated: December 7, 2020)

The negatively-charged  $NV^-$ -center in diamond has shown great success in nanoscale, high-sensitivity magnetometry. Efficient fluorescence detection is crucial for improving the sensitivity. Furthermore, integrated devices enable practicable sensors. Here, we present a novel architecture which allows us to create  $NV^-$ -centers a few nanometers below the diamond surface, and at the same time in the mode field maximum of femtosecond-laser-written type-II waveguides. We experimentally verify the coupling efficiency, showcase the detection of magnetic resonance signals through the waveguides and perform first proof-of-principle experiments in magnetic field and temperature sensing. The sensing task can be operated via the waveguide without direct light illumination through the sample, which marks an important step for magnetometry in biological systems which are fragile to light. In the future, our approach will enable the development of two-dimensional sensing arrays facilitating spatially and temporally correlated magnetometry.

## INTRODUCTION

Quantum sensing performed with negatively-charged nitrogen vacancy centers ( $NV^-$ -centers) in diamond has successfully measured strain [1], temperature [2] and magnetic fields [3–5] at the nanoscale and with high sensitivity.  $NV^-$ -based magnetometry is widely applied to characterize biological samples such as cells [6] or novel materials [7, 8]. The combination with atomic-force microscopy has revolutionized scanning-probe magnetometry [9, 10] with applications in material science and life sciences. Advanced photonics could further improve the performance in terms of losses, signal-to-noise and operation speed [11, 12] and includes integration into optical fibers [13, 14], diamond nanopillar arrays [15, 16] and integrated photonics [17–19]. The latter enables, in addition, the realization of compact devices. In this context, femtosecond-laser-writing is an outstanding fabrication method that does not rely on lithography steps and has, in particular, the capability to fabricate three-dimensional structures. Using diamond as photonics host offers the additional advantage that  $NV^-$ -centers can directly be integrated into the photonic device. Laser-written, type-II waveguides in diamond have recently been developed [20, 21] and show great potential to efficiently interface  $NV^-$ -centers. Thereby, a focused laser beam creates two nearby lines of reduced refractive index, where the stressed region between the two lines serves as waveguide. The controlled creation of defect centers has been demonstrated with ion implantation [22] and laser-writing [23–25]. However, until today there is no strategy

that enables deterministic post-processing of each waveguide in a three-dimensional platform, a problem that becomes even more challenging when color centers are required close to the diamond surface as it is the case for  $NV^-$ -based magnetometry.

Here, we present a novel approach that is capable of functionalizing each waveguide in a three-dimensional architecture individually with  $NV^-$ -centers as depicted in figure 1(a). After laser-writing the waveguides, we create  $NV^-$ -centers through shallow-implantation of nitrogen ions on the front facet of the diamond photonics platform. The implantation depth of a few nanometers below the diamond surface enables the combination of efficient photon routing through diamond waveguides with sensing tasks on the diamond surface. Our architecture separates the optical access to the  $NV^-$ -centers from the object to be sensed by excitation and detection through the waveguides. Therefore, good sensing performance can be achieved without the need of light exposure through the sample. Ultimately, the architecture can be extended into a two-dimensional sensing array with potential for time-resolved and spatially-correlated magnetometry in material and life sciences.

In the following, we discuss the working principle of our sensing device and characterize the waveguide-assisted optical access. Then, we perform first proof-of-principle magnetic field and temperature sensing with ensembles of  $NV^-$ -centers. We compare the sensor performance with respect to the state-of-the-art.

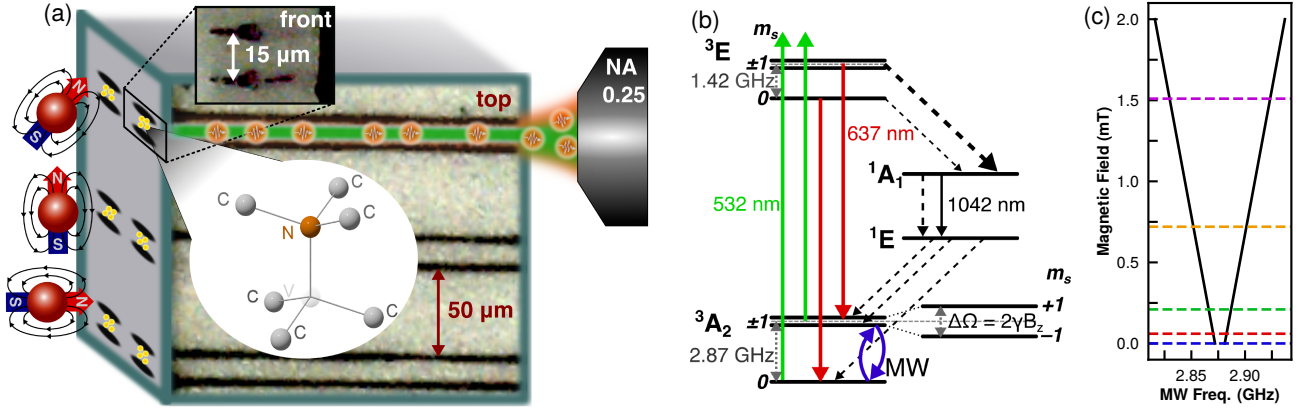


FIG. 1. (a) Sketch of the waveguide-assisted sensor array. Shallow-implanted  $\text{NV}^-$ -centers act as local magnetometers on the diamond surface. The  $\text{NV}^-$ -centers are optically accessed by means of laser-written type-II waveguides and low-NA optics. The architecture can be extended to sensor arrays. The sketch incorporates microscope images of the waveguides in top and front view. (b) Level scheme and dynamics of the  $\text{NV}^-$ -center as utilized to perform ODMR spectroscopy. Dashed arrows depict phonon transitions and bold arrows photon transitions, respectively. The arrow width reflects the interaction strength. (c) Model for the splitting of the  $m_s = \pm 1$  ground states with increasing magnetic field. The dashed lines indicate the magnetic field strengths that we apply in the experiments to perform ODMR scans.

### WORKING PRINCIPLE

Type-II waveguides are written in a CVD grown electronic grade diamond slab ( $2 \text{ mm} \times 2 \text{ mm} \times 0.3 \text{ mm}$ ) with pulsed laser illumination at  $515 \text{ nm}$ , with a repetition rate of  $500 \text{ kHz}$ , pulse width of  $300 \text{ fs}$  and laser power of  $100 \text{ mW}$ . The laser beam is focused into the sample through a high-NA objective ( $1.25\text{NA}$ ,  $100\times$ ) to create type-II waveguides of  $2 \text{ mm}$  length, according to the size of the diamond, in depths ranging from  $5 \mu\text{m}$  to  $25 \mu\text{m}$  below the top diamond surface. The waveguide depths are measured from the surface to the center of the modification. The type-II waveguide width of  $15 \mu\text{m}$  (center to center transverse spacing between the two laser modification tracks as shown in fig. 1(a) front view) is optimized for single-mode, low-loss light transmission between  $630 \text{ nm}$  and  $740 \text{ nm}$  according to the  $\text{NV}^-$ -center sideband emission. In order to functionalize the waveguides with  $\text{NV}^-$ -centers, we shallow implant Nitrogen ions into the front facet of the waveguides followed by subsequent annealing at  $1000^\circ\text{C}$ . Further details on the fabrication can be found in the methods section.

The  $\text{NV}^-$ -centers spin-state, a spin-1 system in its ground and excited states, can be detected optically via magnetic resonance spectroscopy (ODMR) [26], as sketched in figure 1(b). Shelving from  $m_s = \pm 1$  states induces optical pumping and allows to read out the state via measurement of the fluorescence intensity. The microwave (MW) resonance frequency decreases from  $2.88 \text{ GHz}$  at cryogenic temperatures to  $2.87 \text{ GHz}$  at room temperature thereby enabling, in principle, temperature sensing over a large temperature range although the sensitivity decreases at low temperatures. In a magnetic field the degeneracy of the  $m_s = \pm 1$  states lifts due

to a magnetic field dependent splitting of  $\Delta\Omega = 2\gamma B_z$ , with the gyromagnetic ratio  $\gamma = 28 \text{ GHz T}^{-1}$ , of the two states. As a result, the ODMR resonance dip splits into two, one for each spin state, thus enabling inference of the magnetic field strength. Figure 1(c) illustrates the magnetic field dependent splitting. Here, the degeneracy is already lifted at zero-field due to residual strain in the diamond lattice [27, 28]. For continuous ODMR (CW-ODMR) measurements, the overall sensitivity to DC magnetic fields [29],

$$\eta_{\text{DC}} = \frac{\hbar}{g_e \mu_B \sqrt{N} \tau}, \quad (1)$$

depends on the number of  $\text{NV}^-$ -centers  $N$  with coherence time  $\tau$ . Thereby,  $g_e = 2.0$  denotes the electron  $g$ -factor,  $\mu_B$  the Bohr magneton and  $\hbar$  the Planck constant. One way to improve the overall sensitivity is to increase  $N$ . This can either be done by increasing the density of  $\text{NV}^-$ -centers or by enlarging the sensing volume. However, progressing to large sensing volumes remains challenging. The efficient extraction of photons out of the diamond host from a large ensemble of  $\text{NV}^-$ -centers distributed over a large sensing area is an outstanding problem. We therefore begin with the benchmarking of the device detection efficiency with respect to conventional, well-established confocal ODMR-measurements. We then extrapolate the overall sensitivity of the device by taking into account the large  $\text{NV}^-$  ensemble that is addressable via the waveguide mode.

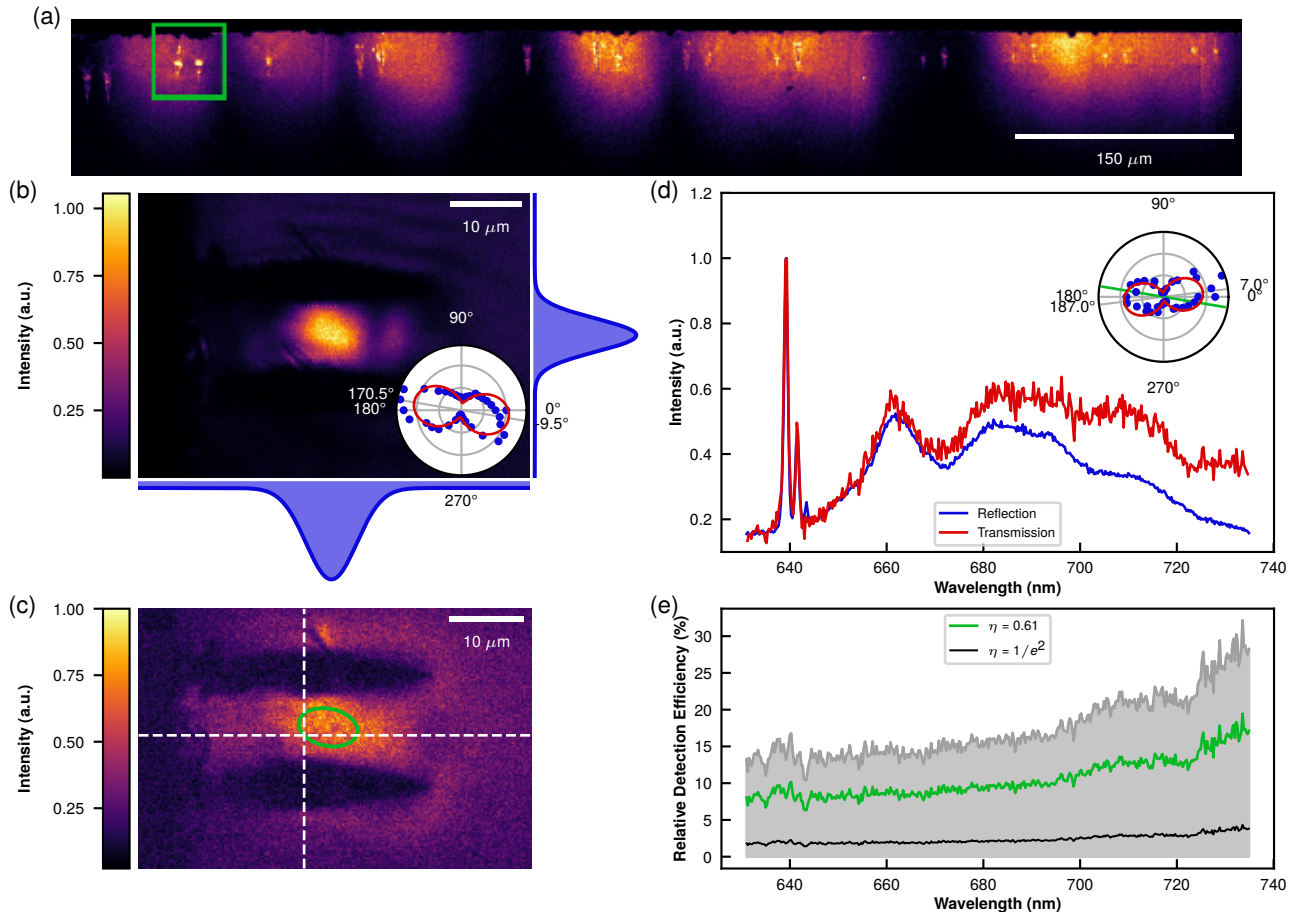


FIG. 2. (a) Confocal scan showing the fluorescence spots of the shallow-implanted  $\text{NV}^-$ -centers on the front facet of the sample. The leftmost waveguide (marked with a green box) is studied in the following. (b) Mode shape of the waveguide (WG). The shape of the waveguide mode is revealed by laterally scanning a 738 nm laser while recording the collected counts in transmission. The two intersections at the side show the corresponding 2D-Gaussian fit to the WG mode. The corresponding mode-polarization contrast is shown in the lower right corner. Note that the image is rotated by  $90^\circ$  with respect to panel (a). (c)  $\text{NV}^-$  transmission through the waveguide. We excite the  $\text{NV}^-$ -centers off-resonantly with 532 nm laser light from the front and collect the transmitted signal. Laterally scanning the excitation laser resembles the waveguide mode in transmission. The intersection of the dashed lines denotes the position which is at 61% of the maximum of the WG mode (green ellipse). (d) The PL spectra in reflection and transmission are compared. The exposure time of the transmission measurement is ten times larger than for the measurement in reflection. Both spectra are normalized to the ZPL. The inset shows the ZPL polarization measured in transmission through the waveguide, which resembles the waveguide mode polarization (marked as green line). (e) We extract the wavelength specific optical detection efficiency of the  $\text{NV}^-$  ensemble to the waveguide mode by comparing the transmitted PL spectrum with the fluorescence in reflection and by accounting for losses that occur until detection. The green curve is the inferred efficiency for a  $\text{NV}^-$  ensemble located at 61% of the optimal coupling corresponding to the green ellipse in (c). The black lines marks the  $1/e^2$ -profile of the Gaussian mode.

### WAVEGUIDE-ASSISTED OPTICAL ACCESS

We first compare the detected signal through the waveguide with the confocal detection. Therefore, we excite a confocal spot of the  $\text{NV}^-$  ensemble and simultaneously measure the transmission signal through the waveguide and the confocal signal in reflection. We examine the transmission properties for waveguides at a depth of  $20\ \mu\text{m}$  below the diamond surface with well-isolated waveguide modes. A confocal scan of the wave-

guide front facet, depicted in figure 2(a), shows the bright areas where  $\text{NV}^-$ -centers have been created. The areas around waveguide walls appear brighter indicating an increased number of  $\text{NV}^-$ -centers. In this study, we focus on the leftmost waveguide (green box). To characterize the transmission of the waveguide, we map the mode-excitation shown in figure 2(b) by laterally scanning a 738 nm laser while recording the maximum transmission signal. The 2D-Gaussian mode profile is projected onto the horizontal and vertical coordinate axes. We obtain

a similar mode profile when exciting the  $NV^-$  centers with 532 nm laser light and collecting the fluorescence in transmission through the waveguide while laterally scanning the excitation laser (see figure 2(c)). We note that the transmitted fluorescence resembles the mode profile, although the front facet is homogeneously covered with  $NV^-$ -centers (see confocal scan in fig. 2(a)). We conclude that  $NV^-$  emission is guided through the waveguide.

In order to benchmark the detection efficiency of the waveguide-assisted optical access, we first compare the photoluminescence (PL) spectrum from the  $NV^-$  ensemble in confocal configuration with the spectrum acquired in transmission through the waveguide as shown in figure 2(d). Note that in order to clearly determine the  $NV^-$  emission we cooled the sample to cryogenic temperatures. The resulting PL spectra, both in transmission and reflection, reveal the characteristic zero-phonon line (ZPL) and phonon-sideband (PSB) emission of  $NV^-$ -centers. Here, intensities are normalized with respect to the ZPL emission for sake of clarity. The first thing to notice is that the polarization pattern of the waveguide mode, shown in the inset of figure 2(b), yields a distinct polarization contrast which matches the polarization of the waveguided  $NV^-$ -fluorescence within  $\approx 16.5^\circ$ . From the measured transmission and reflection spectra we extract the ODMR-signal detection efficiency of our waveguide-assisted sensor with respect to conventional confocal measurements.

Figure 2(e) illustrates the ratio of transmitted signal versus confocal detection which we refer to as relative detection efficiency. The relative efficiency evidences the challenge to extract photons from a large detection volume with respect to a resolution limited spot. The waveguide transmission losses are disregarded in this comparison and will be considered later together with the absolute detection efficiency. The green curve marks the detection efficiency for a  $NV^-$  sub-ensemble that is not perfectly centered compared to the waveguide mode (see fig. 2(c) green circle and dashed white cross for the excitation point), resulting in a reduction of the intensity by the factor 0.61 compared to the maximum at optimal position. We calculate relative detection efficiencies ranging from 8% at 660 nm to more than 15% at 735 nm. The grey curve gives the efficiency for an ideally coupled  $NV^-$ -center located at the maximum of the waveguide mode, yielding ideal relative detection efficiencies up to 30% at 735 nm. The grey shaded area indicates all possible detection efficiencies from ideally to completely uncoupled ensembles. The black line marks the  $1/e^2$ -profile of the Gaussian mode that will be excited when operating the sensor through the waveguide. The figure illustrates the large sensing area of up to  $105 \mu\text{m}^2$  per waveguide mode with an average relative detection efficiency of 10.4% for the large ensemble of  $NV^-$ -center which is addressed via the waveguide mode.

We now quote the absolute detection efficiency taking

into account the waveguide transmission losses including the outcoupling efficiency of up to 79.8%, or 6.95 dB, which is comparable to values reported for type-II waveguide in diamond [20, 30]. The absolute detection efficiency of the confocal collection behind the objective is 2.5% corresponding to an absolute detection efficiency of 0.05% through the waveguides when averaged over the  $1/e^2$ -area of the Gaussian mode. The waveguide detection efficiency corresponds to a waveguide coupling efficiency of 0.3% in agreement with estimated coupling efficiencies for individual  $NV^-$ -centers in laser-written waveguides [24] of 0.1%. In future designs, shorter waveguides and improved outcoupling performance will increase transmission, thus leading to higher detection efficiencies.

While the detection efficiency of a confocally excited  $NV^-$ -center ensemble is, as expected, decreased with respect to conventional confocal detection, the large number of addressable  $NV^-$ -centers via the waveguide mode increases the achievable overall sensitivity. We extrapolate the increased number of  $NV^-$ -centers that is accessible via the waveguide mode by comparing the mode field area of  $105 \mu\text{m}^2$  with the confocal spot size of  $0.062 \mu\text{m}^2$ . Taking into account the homogeneous distribution of  $NV^-$ -centers over the entire waveguide mode, we expect an increase in the number of addressed  $NV^-$ -centers  $N$  by a factor of 1690. Compared to conventional confocal detection, the sensitivity thus improves by a factor of 41 according to the  $\sqrt{N}$ -dependency.

## SENSOR PERFORMANCE

In the following, we study the sensing performance of our device. All measurements are performed at room temperature although the sensor can be operated over a large temperature range. We excite the  $NV^-$ -ensemble with off-resonant (532 nm) laser light, which is coupled from the back side into the waveguide. The  $NV^-$ -signal is also read out through the waveguide in order to keep the front facet of the diamond sensing area, which contains the shallow-implanted  $NV^-$ -ensemble, fully accessible. Figure 3(a) shows a confocal scan of the diamond backside with the low-NA objective used for incoupling of excitation light and read-out of  $NV^-$ -signal through the waveguide. The waveguide mode is clearly resolved including the waveguide walls confining the mode, which appear dark. The spectrum of the waveguide-assisted emission resembles the spectrum of the  $NV^-$ -ensemble, as highlighted by comparison with a standard confocal spectrum of the ensemble in figure 3(b). The background spectrum is shown in red and is recorded spatially shifted from the waveguide mode.

We now utilize the  $NV^-$ -ensemble as magnetic field sensor by exploiting its ODMR-signal. Therefore, we apply a MW field to the sample and vary an external

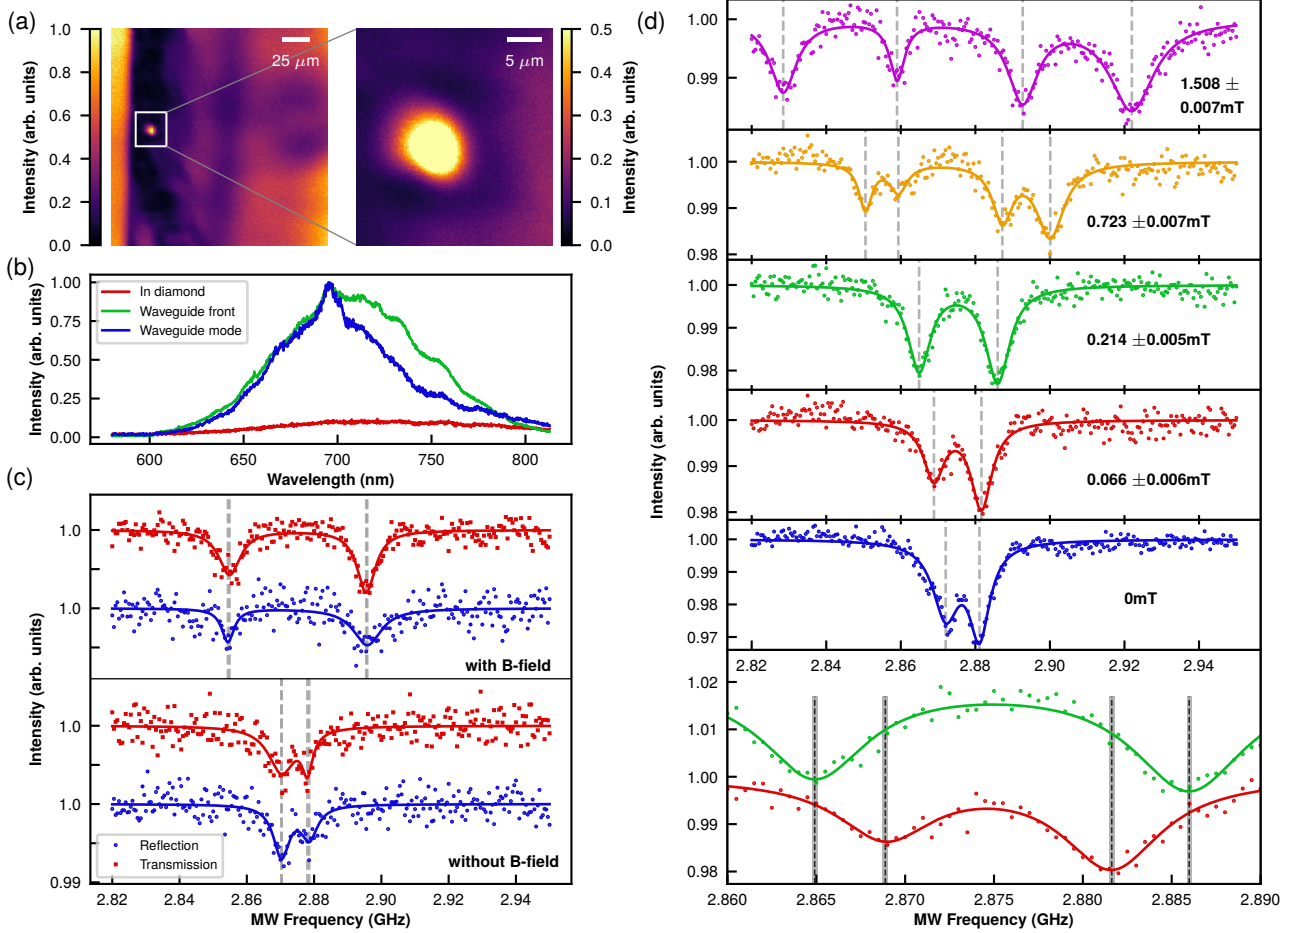


FIG. 3. (a) Confocal scan of the backside of the sample with a low-NA objective and a zoomed-in view of the waveguide mode. (b) Comparison of the PL spectra in transmission (blue) and reflection (green) of the waveguide mode as well as the transmitted signal outside the waveguide mode which we assign to the background signal (red). (c) Comparison of the ODMR spectrum at zero magnetic field and with applied magnetic field detected in confocal configuration (blue, reflection) and in transmission through the waveguide (red, transmission). (d) ODMR scans with varying magnetic field strengths between 0 mT and 1.508 mT. The lowest plot is a zoom-in comparing the ODMR scans at 0.066 mT and 0.214 mT. We infer the magnetic field sensitivity from the accuracy of the resonance frequency extracted from the Lorentzian fits.

magnetic field by approaching the sensor with a permanent magnet. Varying the MW frequency reveals the characteristic dips in the fluorescence signal, as shown in figure 3(c). First, we compare the ODMR signal at zero magnetic field detected in standard confocal configuration with the transmission through the waveguide. Both signals reveal two characteristic dips separated by 9 MHz due to strain induced by the laser-written waveguides [31], residual strain in the diamond lattice [27, 28] and also background magnetic field from the environment. An applied magnetic field increases the splitting between the two dips as shown in fig. 3(c), both in transmission and reflection. Figure 3(d) shows the increased splitting with increasing magnetic field strength. At higher magnetic fields, each dip splits into two, since the  $NV^-$ -centers experience different magnetic fields de-

pending on their orientation in the crystal lattice [32]. We use the gyromagnetic ratio of an  $NV^-$ -center,  $\gamma = \frac{g_e \mu_B}{\hbar} = 28 \text{ GHz T}^{-1}$ , in order to calculate the splitting due to an applied magnetic field  $B$  along the  $NV^-$ -center axis as  $\Delta\Omega = 2\gamma B_z$  [33]. From the spin Hamiltonian of the  $NV^-$ -center,

$$H = D \left( S_z^2 - \frac{1}{3} (S(S+1)) \right) + E (S_x^2 - S_y^2) + g_e \mu_B \mathbf{B} \cdot \mathbf{S}, \quad (2)$$

we deduce the magnetic field [5] as

$$(g_e \mu_B B)^2 = \frac{1}{3} (\nu_1^2 + \nu_2^2 - \nu_1 \nu_2 - D^2) - E^2. \quad (3)$$

The zero field splitting parameter is given as  $D$  and a nonzero  $E$  incorporates additional splitting of the two

dips, located at MW frequencies  $\nu_1$  and  $\nu_2$  at zero magnetic field due to strain. The zero-field splitting could be further increased by the earth magnetic field. In our case, the ODMR measurements yield effective magnetic fields between 0.066 mT and 1.508 mT along the NV<sup>-</sup>-center axis, respectively.

Our measurements showcase the ability to measure magnetic fields with an accuracy better than 6  $\mu$ T with our device. The lowest panel of figure 3(d) illustrates the fitted peak positions together with their error margins that are now used to estimate the overall magnetic field sensitivity. The two measurements are performed at 0.066 mT and 0.214 mT applied magnetic field, respectively, with two clearly separated peak positions. Their fit error margins are still significantly separated. We calculate the error of the magnetic field difference of the two measurements including their fit errors. With these fit errors as reference, we estimate that magnetic field differences of 6  $\mu$ T can be resolved with our device. The sensitivity  $\eta_{\text{DC}}$  of our magnetometer device to DC magnetic fields for continuous ODMR measurements (CW-ODMR) can be calculated as [34]

$$\eta_{\text{DC}} = \frac{\Delta\nu}{\gamma C \sqrt{I_{\text{PL}}}}, \quad (4)$$

where  $\Delta\nu$  denotes the full-width-half-maximum (FWHM) linewidth of the ODMR-dip,  $C$  the ODMR-contrast and  $I_{\text{PL}}$  the detected PL intensity in counts per second. In our typical 30 min CW-ODMR measurements, we reach sensitivities up to 36  $\mu\text{T Hz}^{-1/2}$  in confocal configuration and 62  $\mu\text{T Hz}^{-1/2}$  when detecting the ODMR-signal through waveguide transmission, which correspond to FWHMs of 7.5 MHz in both cases. Hereby, different count rates and PL contrasts lead to differing sensitivities. These sensitivities are similar to hybrid approaches creating integrated quantum sensors [13, 14]. In the future, measuring the time-resolved photon noise on the point of maximal slope of the ODMR-signal will yield more accurate sensitivity estimation. Furthermore, the sensitivity can be increased when using pulsed ODMR or Ramsey spectroscopy techniques [35]. Moreover, our measurement device works reliably over more than 20 hours and the minimal measurement times for a full MW frequency scan can be reduced to less than 40 seconds with our settings [36].

We now investigate the performance of our device as a temperature sensor by exploiting the temperature-dependence of the zero-field splitting (ZFS). Therefore, we heat the sample from room temperature (294 K) up to 324 K and measure ODMR without applying an external magnetic field. To analyze the change of the axial and transverse ZFS parameters,  $D$  and  $E$ , we follow studies of NV<sup>-</sup>-ensembles in bulk diamond [37]. Linear fits to the data (see fig. 4(a)) reveal gradients of  $\frac{dD}{dT} = -40 \pm 18 \text{ kHz K}^{-1}$  and  $\frac{dE}{dT} = -8 \pm 15 \text{ kHz K}^{-1}$ , respectively.  $\frac{dD}{dT}$  deviates from values in literature [37] by

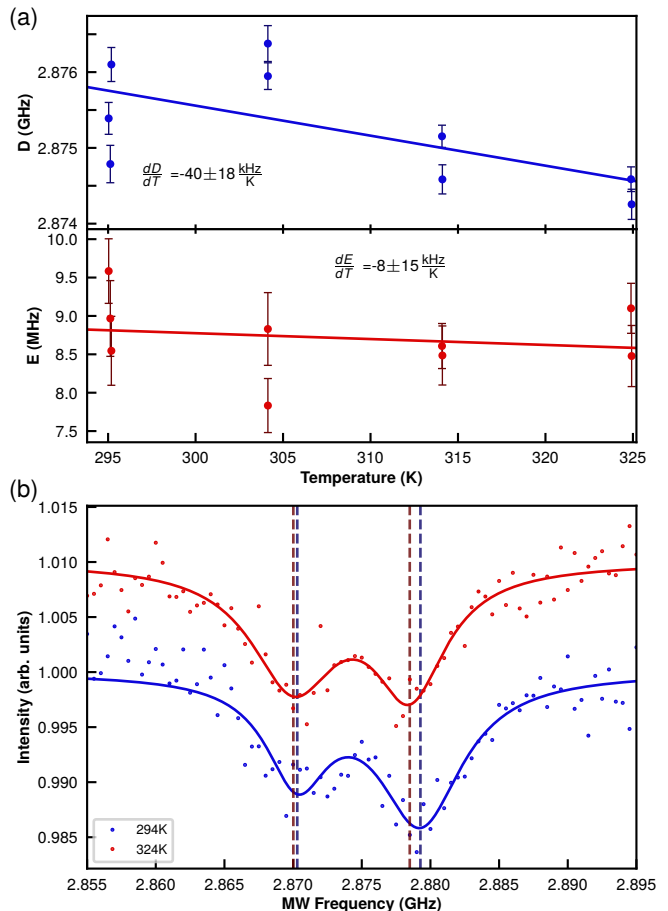


FIG. 4. (a) T-dependence of the axial and transverse ZFS parameters  $D$  and  $E$ . (b) ODMR scans at temperatures of 294 K and 324 K are used to illustrate temperature sensitivity of the ZFS parameters.

roughly a factor 1.5. We tentatively ascribe this difference to a non-linear systematic temperature difference between the diamond sensor and the heater (together with the heat sensor) below the sample holder. Thereby, we systematically overestimate temperatures larger than 294 K. However, the trend of  $\frac{dE}{dT}$  agrees with literature studies [37]. A comparison of ODMR measurements at different temperatures underpins this finding (see fig. 4(b)). Note that the accessible temperature range for our device is only limited by the heating capabilities in our current setup and potentially covers the scale from high temperatures to cryogenic temperatures.

## DISCUSSION AND OUTLOOK

Summarizing, we present a novel architecture for an integrated magnetometer based on NV<sup>-</sup>-centers shallowly implanted in the field maximum of fs-laser-written type-II waveguides in diamond. We benchmark the waveguiding and coupling efficiency of the NV<sup>-</sup>-centers in trans-

mission as well as the performance of the platform as magnetic field and temperature sensor. We benchmark the magnetic field sensitivity to at least  $36 \mu\text{T Hz}^{-1/2}$ . Nevertheless, sensitivities below picotesla in bulk diamond [38, 39] provide a perspective for future improvements regarding  $\text{NV}^-$ -center creation and ODMR detection techniques, for example operating at the highest sensitivity point (at the maximum slope of the ODMR line). The waveguide-assisted excitation and detection enables separation of the sensor operation from the sensing task making samples accessible which are fragile to light illumination, such as paramagnetic labels and biomolecules which are not photo-stable. The device is compatible with a large temperature regime from cryogenic temperatures to high temperatures. The access to cryogenic temperatures could prove versatile when studying open questions in material science such as superconductivity.

Furthermore, due to the three-dimensional laser-writing capabilities [40–42], the sensor can be extended to two-dimensional sensor arrays. The large area with accessible  $\text{NV}^-$ -centers can be used in the future to achieve large filling factors of two-dimensional sensing arrays. The  $1/e^2$  mode area on the front facet covers about one half of the total waveguide area. Assuming densely packed lines of waveguides, where two horizontal waveguides share one laser written side-wall and two vertical waveguides are slightly spaced to avoid coupling, results in overall filling factors on the sensing surface of about 0.2. Each waveguide could be accessed individually and detect local temperatures and magnetic fields. The waveguide array could be operated simultaneously, thus allowing imaging of spatially resolved magnetic field distributions and their time dynamics in extension to probing magnetism [43] or antiferromagnetic order [44] via scanning nanoprobe. Our sensing chips could take up a similar role such as CCD-camera chips with applications in spatially and temporally correlated measurement in material and life sciences. Furthermore, the combination with laser-written microfluidic channels [45] could provide perspectives towards on-chip quantum sensing of liquids.

## METHODS

### Waveguide fabrication

The femtosecond laser used for waveguide writing in diamond was a Yb:KGW Fiber Laser (Bluecut, Menlosystems) with 300-fs pulse duration, 515-nm wavelength (frequency doubled using an LBO crystal), focused with a 1.25-NA oil immersion lens (RMS100 $\times$ -O 100 $\times$  Olympus Plan Achromat Oil Immersion Objective, 100 $\times$  oil immersion, Olympus). Polished 2 mm  $\times$  2 mm  $\times$  0.3 mm synthetic single-crystal diamond samples (type II, electronic grade with nitrogen impurities  $< 5$  ppb) were used.

The sample was placed on a computer-controlled, 3-axis motion stage (ANT130 series, Aerotech) to translate the sample relative to the laser to form the desired photonic structures. The polarization of the incident laser was perpendicular to the scan direction.

### $\text{NV}^-$ -center creation

The  $\text{NV}^-$  sensor used in this work was fabricated by ion implantation on the front facet of a commercial type IIa diamond substrate. Using a home built low energy ion implanter equipped with a Wien mass filter as well as an Einzel lens for beam focusing, nitrogen ions of energy 5 keV were implanted at a dose of  $5 \times 10^{11} \frac{^{15}\text{N}^+}{\text{cm}^2}$  and a beam diameter of approximately 100  $\mu\text{m}$ . Subsequently, the substrate was annealed in ultra-high vacuum (UHV) for 3 h at 1000  $^\circ\text{C}$  to form  $\text{NV}^-$ -centers. The ramp up time was 7  $\frac{^\circ\text{C}}{\text{min}}$  with an intermediate soak for 1 h at 500  $^\circ\text{C}$ . Between all processing steps, the substrate was boiled several hours in a 1:1:1 mixture of sulphuric, perchloric and nitric acid to remove any organic or graphitic residues from the surfaces of the diamond. Details on the annealing and ion implantation setups for sensor fabrication can be found in [46].

### Confocal setup

The sample was mounted in a liquid helium, continuous flow cryostat enabling operation temperatures down to 5 K. The temperature of the sample could further be varied and controlled with a heater which was in thermal contact with the device. The waveguides could be accessed via a high-NA (0.9) objective from one side of the diamond slab containing the  $\text{NV}^-$ -centers and from the backside with a low-NA (0.25) objective to collect the transmission through the waveguide. The objectives were mounted on movable stages for optimization of the in- and outcoupling. Thereby, we combined a standard confocal setup in front with additional waveguide transmission detection at the back of the sample. The characterization of the emitters could therefore be done in standard confocal spectroscopy. For measuring waveguide losses in our setup, we coupled light through the waveguides with a second low-NA objective and detect light transmitted through the waveguide at the back. The  $\text{NV}^-$ -center ensemble could also be excited directly with a high-NA objective while simultaneously reading out through the waveguide with low-NA objective. For CW-ODMR measurements we spanned a wire with 20  $\mu\text{m}$  diameter close to the  $\text{NV}^-$  ensemble to deliver the MW signal, which were generated by a vector signal generator (Rohde & Schwarz SMIQ 03). Typical CW-ODMR scans in our setting took 30 min to ensure good signal to noise. A single measurement consisted of many repeated

quick scans (around 7 s) over a chosen frequency range. We then averaged over the ensemble of fast scans to get a result for the 30 min CW-ODMR scan.

## ACKNOWLEDGMENTS

The authors would like to thank Felix Breuning for experimental support in the beginning of the project. IFN-CNR is grateful for technical assistance from Erasmus students Marie Dartiguelongue and H elo ise Raugel. IFN-CNR and UUlM are grateful for support from the H2020 Marie Curie ITN project LasIonDef (GA n.956387). A.K. acknowledges support of the European Regional Development Fund (EFRE) program Baden-W urttemberg. M.K.K. and A.K. acknowledge support of IQst. M.H. acknowledges support from the Studienstiftung des deutschen Volkes. V.B. is thankful for financial support from the ERC project PAIDEIA GA n.816313. A. G. is thankful for support from the Lombardy Region Project sPATIALS3, cofunded by POR FESR 2014-2020 Call HUB Ricerca e Innovazione and the H2020 Marie Curie ITN project PHOTOTRAIN (GA n.722591).

## AUTHOR CONTRIBUTIONS

M.H., M.K.K., V.B., S.M.E and A.K. conceived the project. M.H. and M.K.K. performed and analyzed all PL and ODMR measurements. V.B., J.P.H., R.Y., A.N.G., R.R. and S.M.E. produced the laser-written WG in diamond, which were implanted and annealed by J.L. and F.J. to create NV<sup>-</sup>-centers. All authors discussed the results. M.H., M.K.K. and A.K. wrote the manuscript, which was discussed and edited by all authors.

---

\* M.H. and M.K.K. contributed equally to this work.

† Corresponding author: alexander.kubanek@uni-ulm.de

- [1] M. W. Doherty, V. V. Struzhkin, D. A. Simpson, L. P. McGuinness, Y. Meng, A. Stacey, T. J. Karle, R. J. Hemley, N. B. Manson, L. C. L. Hollenberg, and S. Prawer, Electronic properties and metrology applications of the diamond nv<sup>-</sup> center under pressure, *Phys. Rev. Lett.* **112**, 047601 (2014).
- [2] T. Plakhotnik, M. W. Doherty, J. H. Cole, R. Chapman, and N. B. Manson, All-optical thermometry and thermal properties of the optically detected spin resonances of the nv<sup>-</sup> center in nanodiamond, *Nano Letters* **14**, 4989 (2014).
- [3] J. R. Maze, P. L. Stanwix, J. S. Hodges, S. Hong, J. M. Taylor, P. Cappellaro, L. Jiang, M. G. Dutt, E. Togan, A. Zibrov, *et al.*, Nanoscale magnetic sensing with an individual electronic spin in diamond, *Nature* **455**, 644 (2008).
- [4] J. Taylor, P. Cappellaro, L. Childress, L. Jiang, D. Budker, P. Hemmer, A. Yacoby, R. Walsworth, and M. Lukin, High-sensitivity diamond magnetometer with nanoscale resolution, *Nature Physics* **4**, 810 (2008).
- [5] G. Balasubramanian, I. Chan, R. Kolesov, M. Al-Hmoud, J. Tisler, C. Shin, C. Kim, A. Wojcik, P. R. Hemmer, A. Krueger, *et al.*, Nanoscale imaging magnetometry with diamond spins under ambient conditions, *Nature* **455**, 648 (2008).
- [6] G. Kucsko, P. C. Maurer, N. Y. Yao, M. Kubo, H. J. Noh, P. K. Lo, H. Park, and M. D. Lukin, Nanometre-scale thermometry in a living cell, *Nature* **500**, 54 (2013).
- [7] S. Kolkowitz, A. Safira, A. A. High, R. C. Devlin, S. Choi, Q. P. Unterreithmeier, D. Patterson, A. S. Zibrov, V. E. Manucharyan, H. Park, and M. D. Lukin, Probing johnson noise and ballistic transport in normal metals with a single-spin qubit, *Science* **347**, 1129 (2015).
- [8] I. Lovchinsky, J. D. Sanchez-Yamagishi, E. K. Urbach, S. Choi, S. Fang, T. I. Andersen, K. Watanabe, T. Taniguchi, A. Bylinskii, E. Kaxiras, P. Kim, H. Park, and M. D. Lukin, Magnetic resonance spectroscopy of an atomically thin material using a single-spin qubit, *Science* **355**, 503 (2017).
- [9] C. Degen, Scanning magnetic field microscope with a diamond single-spin sensor, *Applied Physics Letters* **92**, 243111 (2008).
- [10] P. Maletinsky, S. Hong, M. S. Grinolds, B. Hausmann, M. D. Lukin, R. L. Walsworth, M. Loncar, and A. Yacoby, A robust scanning diamond sensor for nanoscale imaging with single nitrogen-vacancy centres, *Nature Nanotechnology* **7**, 320 (2012).
- [11] M. Atat ure, D. Englund, N. Vamivakas, S.-Y. Lee, and J. Wrachtrup, Material platforms for spin-based photonic quantum technologies, *Nature Reviews Materials* **3**, 38 (2018).
- [12] D. D. Awschalom, R. Hanson, J. Wrachtrup, and B. B. Zhou, Quantum technologies with optically interfaced solid-state spins, *Nature Photonics* **12**, 516 (2018).
- [13] Y. Ruan, D. A. Simpson, J. Jeske, H. Ebendorff-Heidepriem, D. W. Lau, H. Ji, B. C. Johnson, T. Ohshima, S. Afshar, L. Hollenberg, *et al.*, Magnetically sensitive nanodiamond-doped tellurite glass fibers, *Scientific Reports* **8**, 1 (2018).
- [14] D. Bai, M. H. Huynh, D. A. Simpson, P. Reineck, S. A. Vahid, A. D. Greentree, S. Foster, H. Ebendorff-Heidepriem, and B. C. Gibson, Fluorescent diamond microparticle doped glass fiber for magnetic field sensing, *APL Materials* **8**, 081102 (2020).
- [15] L. Hanlon, V. Gautam, J. D. A. Wood, P. Reddy, M. S. J. Barson, M. Niihori, A. R. J. Silalahi, B. Corry, J. Wrachtrup, M. J. Sellars, V. R. Daria, P. Maletinsky, G. J. Stuart, and M. W. Doherty, Diamond nanopillar arrays for quantum microscopy of neuronal signals, *Neurophotonics* **7**, 035002 (2020).
- [16] T. M. Babinec, B. J. M. Hausmann, M. Khan, Y. Zhang, J. R. Maze, P. R. Hemmer, and M. Loncar, A diamond nanowire single-photon source, *Nature Nanotechnology* **5**, 195 (2010).
- [17] D. Englund, B. Shields, K. Rivoire, F. Hatami, J. Vuckovic, H. Park, and M. D. Lukin, Deterministic coupling of a single nitrogen vacancy center to a photonic crystal cavity, *Nano Letters* **10**, 3922–3926 (2010).



- [18] K. G. Fehler, A. P. Ovyvan, N. Gruhler, W. H. P. Pernice, and A. Kubanek, Efficient Coupling of an Ensemble of Nitrogen Vacancy Center to the Mode of a High-Q, Si<sub>3</sub>N<sub>4</sub> Photonic Crystal Cavity, *ACS Nano* **13**, 6891 (2019).
- [19] J. Olthaus, P. P. J. Schrinner, D. E. Reiter, and C. Schuck, Optimal photonic crystal cavities for coupling nanoemitters to photonic integrated circuits, *Advanced Quantum Technologies* **3**, 1900084 (2020).
- [20] B. Sotillo, V. Bharadwaj, J. P. Hadden, M. Sakakura, A. Chiappini, T. T. Fernandez, S. Longhi, O. Jedrkiewicz, Y. Shimotsuma, L. Criante, R. Osellame, G. Galzerano, M. Ferrari, K. Miura, R. Ramponi, P. E. Barclay, and S. M. Eaton, Diamond photonics platform enabled by femtosecond laser writing, *Scientific Reports* **6**, 35566 (2016).
- [21] S. M. Eaton, J. P. Hadden, V. Bharadwaj, J. Forneris, F. Picollo, F. Bosia, B. Sotillo, A. N. Giakoumaki, O. Jedrkiewicz, A. Chiappini, M. Ferrari, R. Osellame, P. E. Barclay, P. Olivero, and R. Ramponi, Quantum micro-nano devices fabricated in diamond by femtosecond laser and ion irradiation, *Advanced Quantum Technologies* **2**, 1900006 (2019).
- [22] T. Schröder, M. E. Trusheim, M. Walsh, L. Li, J. Zheng, M. Schukraft, A. Sipahigil, R. E. Evans, D. D. Sukachev, C. T. Nguyen, *et al.*, Scalable focused ion beam creation of nearly lifetime-limited single quantum emitters in diamond nanostructures, *Nature Communications* **8**, 1 (2017).
- [23] Y.-C. Chen, P. S. Salter, S. Knauer, L. Weng, A. C. Frangeskou, C. J. Stephen, S. N. Ishmael, P. R. Dolan, S. Johnson, B. L. Green, G. W. Morley, M. E. Newton, J. G. Rarity, M. J. Booth, and J. M. Smith, Laser writing of coherent colour centres in diamond, *Nature Photonics* **11**, 77 (2017).
- [24] J. P. Hadden, V. Bharadwaj, B. Sotillo, S. Rampini, R. Osellame, J. D. Witmer, H. Jayakumar, T. T. Fernandez, A. Chiappini, C. Armellini, M. Ferrari, R. Ramponi, P. E. Barclay, and S. M. Eaton, Integrated waveguides and deterministically positioned nitrogen vacancy centers in diamond created by femtosecond laser writing, *Optics Letters* **43**, 3586 (2018).
- [25] Y.-C. Chen, B. Griffiths, L. Weng, S. S. Nicley, S. N. Ishmael, Y. Lekhai, S. Johnson, C. J. Stephen, B. L. Green, G. W. Morley, M. E. Newton, M. J. Booth, P. S. Salter, and J. M. Smith, Laser writing of individual nitrogen-vacancy defects in diamond with near-unity yield, *Optica* **6**, 662 (2019).
- [26] F. Jelezko, T. Gaebel, I. Popa, A. Gruber, and J. Wrachtrup, Observation of coherent oscillations in a single electron spin, *Phys. Rev. Lett.* **92**, 076401 (2004).
- [27] Y. Kubo, F. R. Ong, P. Bertet, D. Vion, V. Jacques, D. Zheng, A. Dréau, J.-F. Roch, A. Auffeves, F. Jelezko, J. Wrachtrup, M. F. Barthe, P. Bergonzo, and D. Esteve, Strong coupling of a spin ensemble to a superconducting resonator, *Phys. Rev. Lett.* **105**, 140502 (2010).
- [28] M. W. Doherty, F. Dolde, H. Fedder, F. Jelezko, J. Wrachtrup, N. B. Manson, and L. C. L. Hollenberg, Theory of the ground-state spin of the nv<sup>-</sup> center in diamond, *Phys. Rev. B* **85**, 205203 (2012).
- [29] D. Budker and M. Romalis, Optical magnetometry, *Nature Physics* **3**, 227 (2007).
- [30] B. Sotillo, V. Bharadwaj, J. Hadden, S. Rampini, A. Chiappini, T. Fernandez, C. Armellini, A. Serpengüzel, M. Ferrari, P. Barclay, R. Ramponi, and S. Eaton, Visible to Infrared Diamond Photonics Enabled by Focused Femtosecond Laser Pulses, *Micromachines* **8**, 60 (2017).
- [31] B. Sotillo, A. Chiappini, V. Bharadwaj, J. P. Hadden, F. Bosia, P. Olivero, M. Ferrari, R. Ramponi, P. E. Barclay, and S. M. Eaton, Polarized micro-Raman studies of femtosecond laser written stress-induced optical waveguides in diamond, *Applied Physics Letters* **112**, 031109 (2018).
- [32] Y. Matsuzaki, H. Morishita, T. Shimooka, T. Tashima, K. Kakuyanagi, K. Semba, W. Munro, H. Yamaguchi, N. Mizuochi, and S. Saito, Optically detected magnetic resonance of high-density ensemble of nv<sup>-</sup> centers in diamond, *Journal of Physics: Condensed Matter* **28**, 275302 (2016).
- [33] A. Kuwahata, T. Kitaizumi, K. Saichi, T. Sato, R. Igarashi, T. Ohshima, Y. Masuyama, T. Iwasaki, M. Hatano, F. Jelezko, *et al.*, Magnetometer with nitrogen-vacancy center in a bulk diamond for detecting magnetic nanoparticles in biomedical applications, *Scientific Reports* **10**, 1 (2020).
- [34] L. Rondin, J.-P. Tetienne, T. Hingant, J.-F. Roch, P. Maletinsky, and V. Jacques, Magnetometry with nitrogen-vacancy defects in diamond, *Reports on Progress in Physics* **77**, 056503 (2014).
- [35] E. V. Levine, M. J. Turner, P. Kehayias, C. A. Hart, N. Langellier, R. Trubko, D. R. Glenn, R. R. Fu, and R. L. Walsworth, Principles and techniques of the quantum diamond microscope, *Nanophotonics* **8**, 1945 (2019).
- [36] Details see supplementary information.
- [37] V. M. Acosta, E. Bauch, M. P. Ledbetter, A. Waxman, L.-S. Bouchard, and D. Budker, Temperature dependence of the nitrogen-vacancy magnetic resonance in diamond, *Phys. Rev. Lett.* **104**, 070801 (2010).
- [38] T. Wolf, P. Neumann, K. Nakamura, H. Sumiya, T. Ohshima, J. Isoya, and J. Wrachtrup, Subpicotesla diamond magnetometry, *Phys. Rev. X* **5**, 041001 (2015).
- [39] I. Fescenko, A. Jarmola, I. Savukov, P. Kehayias, J. Smits, J. Damron, N. Ristoff, N. Mosavian, and V. M. Acosta, Diamond magnetometer enhanced by ferrite flux concentrators, *Phys. Rev. Research* **2**, 023394 (2020).
- [40] T. Kononenko, V. Konov, S. Pimenov, N. Rossukanyi, A. Rukovichnikov, and V. Romano, Three-dimensional laser writing in diamond bulk, *Diamond and Related Materials* **20**, 264 (2011).
- [41] A. Courvoisier, M. J. Booth, and P. S. Salter, Inscription of 3D waveguides in diamond using an ultrafast laser, *Applied Physics Letters* **109**, 031109 (2016).
- [42] J. Gong, K. Ansari, and J. A. van Kan, Design and fabrication of three-dimensional single-mode waveguide arrays in bulk diamond through direct focused proton beam implantation, *Optical Materials* **99**, 109527 (2020).
- [43] L. Thiel, Z. Wang, M. Tschudin, D. Rohner, I. Gutiérrez-Lezama, N. Ubrig, M. Gibertini, E. Giannini, A. Morpurgo, and P. Maletinsky, Probing magnetism in 2d materials at the nanoscale with single spin microscopy, *Science* **364**, 973 (2019).
- [44] I. Gross, W. Akhtar, V. Garcia, L. J. Martínez, S. Chouaieb, K. Garcia, C. Carrétéro, A. Barthélémy, P. Appel, P. Maletinsky, J.-V. Kim, J. Y. Chauleau, N. Jaouen, M. Viret, M. Bibes, A. Fusil, and V. Jacques, Real-space imaging of non-collinear antiferromagnetic order with a single-spin magnetometer, *Nature* **549**, 252 (2017).

- [45] V. Bharadwaj, O. Jedrkiewicz, J. P. Hadden, B. Sotillo, M. R. Vázquez, P. Dentella, T. T. Fernandez, A. Chiappini, A. N. Giakoumaki, T. Le Phu, M. Bollani, M. Ferrari, R. Ramponi, P. E. Barclay, and S. M. Eaton, Femtosecond laser written photonic and microfluidic circuits in diamond, *Journal of Physics: Photonics* **1**, 022001 (2019).
- [46] J. Lang, S. Häußler, J. Fuhrmann, R. Waltrich, S. Laddha, J. Scharpf, A. Kubanek, B. Naydenov, and F. Jelezko, Long optical coherence times of shallow-implanted, negatively charged silicon vacancy centers in diamond, *Applied Physics Letters* **116**, 064001 (2020).