

A NOTE ON RANDOMIZED KACZMARZ ALGORITHM FOR SOLVING DOUBLY-NOISY LINEAR SYSTEMS

EL HOUCINE BERGOU ^{*}, SOUMIA BOUCHEROUITE [†], ARITRA DUTTA [‡], XIN LI [§],
AND ANNA MA [¶]

Abstract. Large-scale linear systems, $Ax = b$, frequently arise in practice and demand effective iterative solvers. Often, these systems are noisy due to operational errors or faulty data-collection processes. In the past decade, the randomized Kaczmarz (RK) algorithm has been studied extensively as an efficient iterative solver for such systems. However, the convergence study of RK in the noisy regime is limited and considers measurement noise in the right-hand side vector, b . Unfortunately, in practice, that is not always the case; the coefficient matrix A can also be noisy. In this paper, we analyze the convergence of RK for noisy linear systems when the coefficient matrix, A , is corrupted with both additive and multiplicative noise, along with the noisy vector, b . In our analyses, the quantity $\tilde{R} = \|\tilde{A}^\dagger\|_2^2 \|\tilde{A}\|_F^2$ influences the convergence of RK, where \tilde{A} represents a noisy version of A . We claim that our analysis is robust and realistically applicable, as we do not require information about the noiseless coefficient matrix, A , and considering different conditions on noise, we can control the convergence of RK. We substantiate our theoretical findings by performing comprehensive numerical experiments.

Key words. Noisy linear systems, Randomized Kaczmarz algorithm, Iterative method, Generalized inverse, Perturbation analysis, Least Squares solutions, Singular value decomposition.

1. Introduction. In the digitized era, large-scale linear systems occur frequently in different research fields, including parameters estimation and inverse problems (e.g., the coefficient matrices in computed tomography applications can have $\sim 10^9$ entries; see [1]) [42, 2], numerical solutions for PDEs (e.g., the most extensive numerical simulation of a turbulent fluid uses about 5×10^{10} grid points) [8, 3], generalized regression analysis in computer vision on high-resolution images or videos (characterized by a large number of rows, in the order of $\sim 10^5$ and more; see [21, 20]), meteorological predictions [11, 4, 43], and many more. However, dimensionality is not the only curse of these complex linear systems; they are also poorly conditioned, which demands efficient solution strategies [10, 9]. Moreover, the data-curation process adds noise to the original data due to diverse operational errors. E.g., seismic and micro-seismic data collected using passive seismic techniques often differ from the true ones and lead to misinterpretation [22]. Furthermore, stochastic differential equations (SDEs) are increasingly used and adopted to analyze many physical phenomena [32, 29], and noise may enter the system due to “internal degrees of freedom or as random variations of some external control parameters” [19]. As another example, in oil and gas industries, large saddle-point systems that arise from the numerical discretization of certain PDEs (e.g., a mixed-finite element discretization of a Poisson problem on a series of triangular meshes [9, 15]) can inherently be corrupted by additive or multiplicative noise [40, 19].

Instead of noiseless linear system

$$(1.1) \quad Ax = b,$$

^{*}School of Computer Science, Mohammed VI Polytechnic University, Morocco; elhoucine.bergou@um6p.ma.

[†]School of Computer Science, Mohammed VI Polytechnic University, Morocco; soumia.boucherouite@um6p.ma.

[‡]Department of Mathematics, Department of Computer Science, University of Central Florida, USA; aritra.dutta@ucf.edu.

[§]Department of Mathematics, University of Central Florida, USA; xin.li@ucf.edu.

[¶]Department of Mathematics, University of California, Irvine, USA; anna.ma@uci.edu.

it is, therefore, more realistic to analyze *corrupted and doubly-noisy*¹ *linear systems*. That is, we assume to have access to the noisy versions of *both* A and b , denoted as $\tilde{A} \in \mathbb{R}^{m \times n}$ and $\tilde{b} \in \mathbb{R}^m$, respectively. Note that the doubly-noisy linear system

$$(1.2) \quad \tilde{A}x \approx \tilde{b},$$

is not necessarily consistent. We assume that there is an underlying consistent noiseless linear system (1.1).

The Kaczmarz method [28] is a popular algorithm for solving systems of linear equations. When applied to (1.2), it proceeds iteratively as follows

$$(1.3) \quad x_{k+1} = x_k - \frac{\tilde{a}_{i(k)}^\top x_k - \tilde{b}_{i(k)}}{\|\tilde{a}_{i(k)}\|^2} \tilde{a}_{i(k)},$$

where $k \geq 0$ is the iteration counter, \tilde{a}_i^T is the i^{th} row of the matrix \tilde{A} , \tilde{b}_i is the i^{th} element of the vector, \tilde{b} . If $i(k)$ is chosen randomly with replacement based on some probability distribution, then (1.3) represents the *randomized Kaczmarz algorithm* (RK) [39, 5, 36].

In this paper, we consider both the *classic additive noise* as well as *multiplicative noise*. Motivated by the multiplicative perturbation theory [13], we recognize that certain structured least square problems, e.g., those involving Vandermonde or Cauchy matrices [16], are often highly ill-conditioned and have multiplicative backward errors [14]. Therefore, we consider *multiplicative noise* that transforms the matrix, A to $\tilde{A} = (I_m + E)A(I_n + F) \in \mathbb{R}^{m \times n}$, where I_m and I_n are identity matrices from the space \mathbb{R}^m and \mathbb{R}^n , respectively. In both the additive and multiplicative error settings on A , we consider additive error on the right-hand side vector $\tilde{b} = b + \epsilon$.

1.1. Contributions and organization. The remainder of this paper is organized as follows. Section 1.3 presents an overview of the related works. In Section 2, we present a simple analysis for the convergence of RK in the setting of additive noise on the coefficient matrix A by using the perturbation bounds of the Moore–Penrose inverse [44]. In Section 3, we present an analysis of the convergence of iteration by directly analyzing RK on doubly-noisy linear systems. Finally, Section 4 presents the numerical experiments which support our theoretical findings.

Our main contributions can be summarized as follows:

- To the best of our knowledge, this work is the first effort to systematically analyze RK for doubly-noisy linear systems, i.e., when the coefficient matrix, A is corrupted with additive or multiplicative noise and the right-hand side is corrupted with additive noise; see Section 2 and Section 3.
- In the setting in which the linear system is only corrupted by right-hand side noise, our bounds produce comparable bounds to that in existing work; see Section 1.3 and Corollary 3.5.
- Finally, in Section 4, we perform extensive numerical experiments to validate our theoretical results.

1.2. Notation. The i^{th} component of a vector x is denoted as x_i , while x^\top denotes the transpose of x . The column space or the range of a matrix A is defined by $\text{range}(A)$. By A^\dagger , we denote the (Moore-Penrose)-pseudoinverse of a matrix, $A \in \mathbb{R}^{m \times n}$. Let $x_{\text{LS}} := A^\dagger b$. As it is well-known, $x_{\text{LS}} \in \text{argmin}_x \|Ax - b\|^2$, and it

¹Here, we use the term “doubly-noisy” to distinguish from the classical “noisy” linear systems, where only the right-hand side vector, b , is noisy.

Quantity	Linear system	Rate	Horizon	Reference
$\mathbb{E}[\ x_k - x_{\text{LS}}\ ^2]$	$Ax \approx b + \epsilon$	$(1 - \frac{1}{R})$	$R \left(\max_i \frac{\epsilon_i}{\ A_i\ } \right)^2$	[34]
$\mathbb{E}[\ x_k - x_{\text{LS}}\ ^2]$	$Ax \approx b + \epsilon$	$(1 - \frac{1}{R})$	$\frac{\ \epsilon\ ^2}{\sigma_{\min}^2(A)}$	Theorem 2.1; see [46]
$\mathbb{E}\ x_k - x_{\text{LS}}\ $	$(A + E)x \approx b + \epsilon$	$(1 - \frac{1}{\tilde{R}})^{\frac{1}{2}}$	$\frac{2\ x_{\text{LS}}\ \ A^\dagger\ \ E\ }{1 - \ A^\dagger\ \ E\ } + \frac{\ \epsilon\ }{\sigma_{\min}(A)}$	Theorem 2.5; this paper
$\mathbb{E}[\ x_k - x_{\text{LS}}\ ^2]$	$(A + E)x \approx b + \epsilon$	$(1 - \frac{1}{\tilde{R}})$	$\frac{\ Ex_{\text{LS}} - \epsilon\ ^2}{\sigma_{\min}^2(A)}$	Theorem 3.1, this paper
$\mathbb{E}[\ x_k - x_{\text{LS}}\ ^2]$	$(I_m + E)A(I_n + F)x \approx b + \epsilon$	$(1 - \frac{1}{\tilde{R}})$	$\frac{\ \Delta Ax_{\text{LS}} - \epsilon\ ^2}{\sigma_{\min}^2(A)}$	Corollary 3.6, this paper

Table 1: Summary of RK applied to noisy linear systems. In each row, we assume that $Ax = b$ is a consistent linear system and we define $R = \|A^\dagger\|_2^2 \|A\|_F^2$ and $\tilde{R} = \|\tilde{A}^\dagger\|_2^2 \|\tilde{A}\|_F^2$. Note that, $\Delta A = (EA + AF + EAF)$.

is the solution with the minimal norm. We will also need $x_{\text{NLS}} := \tilde{A}^\dagger \tilde{b}$ to denote the least squares solution to the *doubly-noisy* linear system $\tilde{A}x \approx \tilde{b}$, and $x_{\text{PNLS}} := \tilde{A}^\dagger b$ for the least squares solution to the *partially noisy* linear system, $\tilde{A}x \approx b$.

For a matrix, $A \in \mathbb{R}^{m \times n}$ by $\sigma_i(A)$ we denote its i^{th} largest singular value, while $\sigma_{\min}(A)$ is the smallest nonzero singular value, and $\sigma_{\max}(A) = \sigma_1$ is the largest singular value. We denote the ℓ_2 -norm of a vector, x , and the spectral norm of a matrix, A , by $\|x\|$ and $\|A\|$, respectively. For the Frobenius norm of a matrix A , we use $\|A\|_F$.

1.3. Brief literature review. The Kaczmarz algorithm (KA) [28] was proposed by Stefan Kaczmarz, and Strohmer and Vershynin proposed and analyzed its randomized variant, RK [39]. Due to its simplicity and low-memory footprint, many works have considered RK in different settings since then. E.g., in [41, 27], the authors propose an RK-type algorithm for solving the phase retrieval problem. [23, 6] study the interplay between RK using greedy and random row select. Many works have proposed variations of RK, including block-wise selection methods, e.g., [35, 33, 18]; quantile-based methods for sparse corruptions in b , e.g., [26, 24, 38]; and variations for when x is assumed to be sparse [31, 30, 37].

In addition, previous works have also considered RK applied to noisy linear systems. The first such work was [34], which proved that the RK algorithm experiences a convergence horizon for depending on the noisy vector ϵ . Jarman and Needell in [26] proposed quantile-RK for the setting $E = 0$ and $\tilde{b} = b + \epsilon$, where ϵ is a sparse corruption vector. When $E = 0$ and ϵ has no structural assumptions, Needell proved that the RK convergences in expectation to within a convergence horizon of $R\gamma^2$, where $R = \|A^\dagger\|_2^2 \|A\|_F^2$ is a scaled condition number of A and $\gamma = \max_i \epsilon_i / \|a_i\|_2$ [34]. Needell and Tropp later improved this convergence horizon for standardized matrices (row-normalized) to $\|\epsilon\|_2^2 \|A^\dagger\|^2$ [35]. The result was further generalized by Zouzias and Freris [46] who showed a convergence horizon of $\|\epsilon\|^2 \|A^\dagger\|^2$ for any matrix A . In the same work, Zouzias and Freris proposed the randomized extended Kaczmarz algorithm (REK) which was introduced to handle noise in the right-hand side vector

\tilde{b} , and has been shown to converge to the least squares solution for noisy linear systems [46, 17]. Note that the REK algorithm, and its variations [7, 45, 18], require not only rows of the matrix A , but columns of A as well, which may not be feasible in all applications. We refer to Table 1 for an overview of these results.

2. Perturbation Analysis. The Moore–Penrose inverse or generalized inverse [44] is well-studied and plays a crucial role in matrix theory and numerical analysis. We can use the perturbation bounds of the Moore–Penrose inverse [44] of matrix A to quickly arrive at some convergence bounds for RK for doubly-noisy systems but under more restrictive conditions than one may desire. In this section, we show how far perturbation analysis could take us in convergence analysis. In contrast to our main result in Section 3, this analysis will require stronger assumptions on the noisy matrix E and, under certain conditions, obtain weaker convergence bounds than we can get by directly analyzing RK on doubly-noisy linear systems.

We start with the convergence result of RK proved by Strohmer and Vershynin in [39, Theorem 2] for the noiseless system, $Ax = b$, and by Zouzias and Freris in [46, Theorem 3.7] for the noisy system, $Ax \approx \tilde{b}$. Let $R = \|A^\dagger\|_2^2 \|A\|_F^2$.

THEOREM 2.1. ([39, 46]) *Set x_0 to be any vector in the row space of A , that is, $x_0 \in \text{range}(A^\top)$.*

(I) *Let x_k be the iterate of RK applied to the noiseless system $Ax = b$. Assume that $Ax = b$ is consistent and let $x_{\text{LS}} = A^\dagger b$. Then*

$$(2.1) \quad \mathbb{E}\|x_k - x_{\text{LS}}\|^2 \leq \left(1 - \frac{1}{R}\right)^k \|x_0 - x_{\text{LS}}\|^2.$$

(II) *Let x_k be the iterate of RK applied to the noisy system $Ax \approx b + \epsilon$, where we assume that $Ax = b$ is consistent with $x_{\text{LS}} = A^\dagger b$. Then*

$$(2.2) \quad \mathbb{E}\|x_k - x_{\text{LS}}\|^2 \leq \left(1 - \frac{1}{R}\right)^k \|x_0 - x_{\text{LS}}\|^2 + \frac{\|\epsilon\|^2}{\sigma_{\min}^2(A)}.$$

In what follows, we attempt to obtain convergence bounds for RK applied to the doubly-noisy system using Theorem 2.1, properties of the generalized inverse, and the perturbation theory, so that the bounds are in terms of $\tilde{R} = \|\tilde{A}^\dagger\|_2^2 \|\tilde{A}\|_F^2$.

First, we recall a classical, intermediate result from [14, 12] to quantify the difference between the least squares solution of the noiseless system, $Ax = b$, and the noisy system, $(A + E)x = b + \epsilon$.

LEMMA 2.2. (c.f. [12, Theorem 1.4.6], [14]) *Let $\text{rank}(A) = \text{rank}(A + E)$ and $\|A^\dagger\| \|E\| < 1$. Let $Ax = b$ be consistent. Denote $x_{\text{LS}} := A^\dagger b$ and $x_{\text{NLS}} := (A + E)^\dagger(b + \epsilon)$. Then*

$$\|x_{\text{NLS}} - x_{\text{LS}}\| \leq \frac{\|x_{\text{LS}}\|}{1 - \|A^\dagger\| \|E\|} \left(2\|A^\dagger\| \|E\| + \frac{\|A^\dagger\| \|\epsilon\|}{\|x_{\text{LS}}\|}\right).$$

Now, we can quantify the difference between x_{LS} and the iterates generated by (1.3) as follows.

THEOREM 2.3. *Let $\text{rank}(A) = \text{rank}(A + E)$ and $\|A^\dagger\| \|E\| < 1$. Let x_k be defined in (1.3). Suppose the doubly-noisy linear system, $\tilde{A}x = \tilde{b}$, and the noiseless system, $Ax = b$, are consistent. Then*

$$\mathbb{E}\|x_k - x_{\text{LS}}\| \leq \left(1 - \frac{1}{R}\right)^{k/2} \|x_0 - x_{\text{NLS}}\| + \frac{\|x_{\text{LS}}\|}{1 - \|A^\dagger\| \|E\|} \left(2\|A^\dagger\| \|E\| + \frac{\|A^\dagger\| \|\epsilon\|}{\|x_{\text{LS}}\|}\right),$$

where $\tilde{R} = \|\tilde{A}^\dagger\|_2^2 \|\tilde{A}\|_F^2$, $x_{\text{LS}} = A^\dagger b$, and $x_{\text{NLS}} = (A + E)^\dagger (b + \epsilon)$.

Proof. The result can be obtained by using the triangle inequality and then using Theorem 2.1 and Lemma 2.2. That is,

$$\begin{aligned} \mathbb{E}\|x_k - x_{\text{LS}}\| &\leq \mathbb{E}\|x_k - x_{\text{NLS}}\| + \|x_{\text{NLS}} - x_{\text{LS}}\| \\ &\leq \left(1 - \frac{1}{\tilde{R}}\right)^{k/2} \|x_0 - x_{\text{NLS}}\| + \|x_{\text{NLS}} - x_{\text{LS}}\|. \end{aligned}$$

In the second inequality, we apply the bound from (I) in Theorem 2.1 to the noisy system $\tilde{A}x = \tilde{b}$ which is consistent by the assumption. Bounding $\|x_{\text{NLS}} - x_{\text{LS}}\|$ by using Lemma 2.2, obtains the desired result. \square

We note that for the particular case when $E = 0$, we get a weaker bound compared to RK applied to the consistent system, $Ax = \tilde{b}$ in Theorem 2.1 (I). This observation suggests that combining perturbation theory with triangle inequality will result in losing the sharpness of the bounds, and an alternative analysis for stronger bounds is required. We provide such analysis in Section 3.

Further, one can quantify the difference between x_{LS} and the iterates generated by (1.3), via considering the intermediate solution, x_{PNLS} which is the least squares solution to the *partially noisy* linear system, $(A + E)x \approx b$. We start with a bound on the error between the solution to the noiseless system and the least squares solution to the partially noisy system:

LEMMA 2.4. (c.f. [12, Theorem 1.4.6], [14]) Let $\text{rank}(A) = \text{rank}(A + E)$ and $\|A^\dagger\| \|E\| < 1$. Let $Ax = b$ be consistent. Denote $x_{\text{LS}} := A^\dagger b$ and $x_{\text{PNLS}} := (A + E)^\dagger b$. Then $\|x_{\text{PNLS}} - x_{\text{LS}}\| \leq \frac{2\|x_{\text{LS}}\| \|A^\dagger\| \|E\|}{1 - \|A^\dagger\| \|E\|}$.

THEOREM 2.5. Let $\text{rank}(A) = \text{rank}(A + E)$ and $\|A^\dagger\| \|E\| < 1$. Let x_{k+1} be defined in (1.3). Suppose the partially noisy linear system, $\tilde{A}x = b$, and the noiseless system, $Ax = b$, are consistent. Then

$$\mathbb{E}\|x_k - x_{\text{LS}}\| \leq \left(1 - \frac{1}{\tilde{R}}\right)^{k/2} \|x_0 - x_{\text{PNLS}}\| + \frac{2\|x_{\text{LS}}\| \|A^\dagger\| \|E\|}{1 - \|A^\dagger\| \|E\|} + \frac{\|\epsilon\|}{\sigma_{\min}(\tilde{A})},$$

where $\tilde{R} = \|\tilde{A}^\dagger\|_2^2 \|\tilde{A}\|_F^2$, $x_{\text{LS}} = A^\dagger b$, and $x_{\text{PNLS}} := (A + E)^\dagger b$.

Proof. The result can be obtained by using the triangle inequality and then using Theorem 2.1 and Lemma 2.4. \square

3. Main Results. We obtained the results in Section 2 by using the known estimate of the least squares solutions of the doubly-noisy and the noiseless systems. Although we arrived at some interesting bounds, Theorem 2.3 and 2.5 are restrictive due to two reasons: (i) In both Theorems, we require either of the noisy systems, doubly or partial, to be consistent, which may not be realistic. (ii) In both theorems, we require the matrices, A and $A + E$ to have the same rank, i.e., E cannot change the rank of A , and connected to the original matrix A via $\|A^\dagger\| \|E\| < 1$. The rank change may be a restrictive condition, especially if A is only approximately low rank. Therefore, a natural question is: *Can we avoid these issues altogether?* Theorem 3.1 answers this.

The result in Theorem 3.1 directly connects the iterates, x_k , of RK applied to the doubly-noisy linear system, $\tilde{A}x \approx \tilde{b}$ to x_{LS} without going through either x_{NLS} or x_{PNLS} . Thus, it will not need the consistency of the noisy system. We only

require *consistency* of the original noiseless system, $Ax = b$, which is a mild condition. Moreover, we dispense any restriction on the noise term, that is, E does not need to be acute, and $\|A^\dagger\| \|E\| < 1$ does not need to hold. An immediate consequence is that we do not have to worry about the rank change of \tilde{A} due to noisy perturbation, E .

THEOREM 3.1. *Let x_k be the iterate of RK applied to the doubly-noisy linear system, $\tilde{A}x \approx \tilde{b}$, with $x_0 - x_{\text{LS}} \in \text{range}(\tilde{A}^\top)$. Assume the noiseless system $Ax = b$ is consistent with $x_{\text{LS}} = A^\dagger b$. Then*

$$(3.1) \quad \mathbb{E} \|x_k - x_{\text{LS}}\|^2 \leq \left(1 - \frac{1}{\tilde{R}}\right)^k \|x_0 - x_{\text{LS}}\|^2 + \frac{\|Ex_{\text{LS}} - \epsilon\|^2}{\sigma_{\min}^2(\tilde{A})},$$

where $\tilde{R} = \|\tilde{A}^\dagger\|_2^2 \|\tilde{A}\|_F^2$.

Proof. We start with (1.3) and write

$$\begin{aligned} x_{k+1} &= x_k - \frac{\tilde{a}_{i(k)}^\top x_k - \tilde{b}_{i(k)}}{\|\tilde{a}_{i(k)}\|^2} \tilde{a}_{i(k)} \\ &= x_k - \frac{\tilde{a}_{i(k)}^\top (x_k - x_{\text{LS}}) + E_{i(k)} x_{\text{LS}} - \epsilon_{i(k)}}{\|\tilde{a}_{i(k)}\|^2} \tilde{a}_{i(k)}. \end{aligned}$$

Thus, we have

$$\begin{aligned} x_{k+1} - x_{\text{LS}} &= x_k - x_{\text{LS}} - \frac{\tilde{a}_{i(k)}^\top (x_k - x_{\text{LS}}) + E_{i(k)} x_{\text{LS}} - \epsilon_{i(k)}}{\|\tilde{a}_{i(k)}\|^2} \tilde{a}_{i(k)} \\ &= \left(I - \frac{\tilde{a}_{i(k)} \tilde{a}_{i(k)}^\top}{\|\tilde{a}_{i(k)}\|^2} \right) (x_k - x_{\text{LS}}) + \frac{E_{i(k)} x_{\text{LS}} - \epsilon_{i(k)}}{\|\tilde{a}_{i(k)}\|^2} \tilde{a}_{i(k)}. \end{aligned}$$

Note that the two terms, $\left(I - \frac{\tilde{a}_{i(k)} \tilde{a}_{i(k)}^\top}{\|\tilde{a}_{i(k)}\|^2} \right) (x_k - x_{\text{LS}})$ and $\frac{E_{i(k)} x_{\text{LS}} - \epsilon_{i(k)}}{\|\tilde{a}_{i(k)}\|^2} \tilde{a}_{i(k)}$ are orthogonal; moreover, the matrix, $\left(I - \frac{\tilde{a}_{i(k)} \tilde{a}_{i(k)}^\top}{\|\tilde{a}_{i(k)}\|^2} \right)$ is a projection matrix. That is, $\left(I - \frac{\tilde{a}_{i(k)} \tilde{a}_{i(k)}^\top}{\|\tilde{a}_{i(k)}\|^2} \right)^2 = \left(I - \frac{\tilde{a}_{i(k)} \tilde{a}_{i(k)}^\top}{\|\tilde{a}_{i(k)}\|^2} \right)$. Hence, we obtain

$$\|x_{k+1} - x_{\text{LS}}\|^2 = \left\| \left(I - \frac{\tilde{a}_{i(k)} \tilde{a}_{i(k)}^\top}{\|\tilde{a}_{i(k)}\|^2} \right) (x_k - x_{\text{LS}}) \right\|^2 + \left\| \frac{E_{i(k)} x_{\text{LS}} - \epsilon_{i(k)}}{\|\tilde{a}_{i(k)}\|^2} \tilde{a}_{i(k)} \right\|^2,$$

which can be simplified to

$$\|x_{k+1} - x_{\text{LS}}\|^2 = (x_k - x_{\text{LS}})^\top \left(I - \frac{\tilde{a}_{i(k)} \tilde{a}_{i(k)}^\top}{\|\tilde{a}_{i(k)}\|^2} \right) (x_k - x_{\text{LS}}) + \frac{(E_{i(k)} x_{\text{LS}} - \epsilon_{i(k)})^2}{\|\tilde{a}_{i(k)}\|^2}.$$

Now, taking expectation on $i(k)$ conditioning with x_k to get

$$\mathbb{E} [\|x_{k+1} - x_{\text{LS}}\|^2 | x_k] = (x_k - x_{\text{LS}})^\top \left(I - \frac{\tilde{A}^\top \tilde{A}}{\|\tilde{A}\|_F^2} \right) (x_k - x_{\text{LS}}) + \frac{\|Ex_{\text{LS}} - \epsilon\|^2}{\|\tilde{A}\|_F^2}.$$

Note that, for calculating expectation in the last term, we consider the sampling of each row occurs with probability, $p_{i(k)} = \frac{\|\tilde{a}_{i(k)}\|^2}{\sum_{i(k)=1}^m \|\tilde{a}_{i(k)}\|^2} = \frac{\|\tilde{a}_{i(k)}\|^2}{\|\tilde{A}\|^2}$. This sampling rule is similar to that of Strohmer and Vershynin [39].

Since $x_0 - x_{\text{LS}} \in \text{range}(\tilde{A}^\top)$, which would imply $x_k - x_{\text{LS}} \in \text{range}(\tilde{A}^\top)$, the first term could be bounded by

$$\left(1 - \frac{\sigma_{\min}^2(\tilde{A})}{\|\tilde{A}\|_F^2}\right) \|x_k - x_{\text{LS}}\|^2.$$

Repeatedly using the inequality completes the proof. \square

Remark 3.2. In our analysis, the quantity, $\tilde{R} = \|\tilde{A}^\dagger\|_2^2 \|\tilde{A}\|_F^2$, influences the convergence of noisy RK, not $R = \|A^\dagger\|_2^2 \|A\|_F^2$. This is expected as the convergence rate of RK applied to doubly-noisy linear systems will depend on the scaled conditioning of the noisy system, not the noiseless system, since RK has no way to distinguish between A and \tilde{A} within its iterates.

To compare the convergence horizon of Theorem 3.1 and Theorem 2.5, we need an additional proposition. Weyl's inequality [25] gives the perturbation bound between a Hermitian matrix and its perturbed form in terms of their eigenvalues. However, for any general matrix, the following singular value perturbation result can be obtained from Weyl's inequalities for eigenvalues of Hermitian matrices.

PROPOSITION 3.3. [25, Corollary 7.3.5.] *Let $A, E \in \mathbb{C}^{m \times n}$ and $r = \min\{m, n\}$. Let $\sigma_1(A) \geq \dots \geq \sigma_r(A)$, and $\sigma_1(A + E) \geq \dots \geq \sigma_r(A + E)$ be the nonincreasingly ordered singular values of A and $A + E$, respectively. Then $|\sigma_i(A + E) - \sigma_i(A)| \leq \|E\|$ for $1 \leq i \leq r$.*

For our case, $A, E \in \mathbb{R}^{m \times n}$. From the above proposition, if $\text{rank}(A) = \text{rank}(A + E)$, for $1 \leq i \leq r$, we have $-\|E\| \leq \sigma_i(A + E) - \sigma_i(A) \leq \|E\|$, which gives $\sigma_{\min}(A) - \|E\| \leq \sigma_{\min}(A + E) < 2\sigma_{\min}(A)$. Therefore, under this scenario, we can compare the convergence horizon of Theorem 3.1 and Theorem 2.5.

Remark 3.4. The convergence horizon resulting from Theorem 3.1 is (without considering the squares)²:

$$\frac{\|Ex_{\text{LS}} - \epsilon\|}{\sigma_{\min}(\tilde{A})}.$$

If $2\sigma_{\min}(\tilde{A}) > \sigma_{\min}(A) - \|E\|$, we can arrive at a better convergence horizon in Theorem 3.1 than that of Theorem 2.5. Comparing the bounds we have that the horizon in Theorem 2.5 is:

$$\frac{2\|x_{\text{LS}}\|\|E\|}{\sigma_{\min}(A) - \|E\|} + \frac{\|\epsilon\|}{\sigma_{\min}(\tilde{A})}$$

Thus, we have that:

$$\frac{\|Ex_{\text{LS}} - \epsilon\|}{\sigma_{\min}(\tilde{A})} \leq \frac{\|E\|\|x_{\text{LS}}\|}{\sigma_{\min}(\tilde{A})} + \frac{\|\epsilon\|}{\sigma_{\min}(\tilde{A})} \leq \frac{2\|E\|\|x_{\text{LS}}\|}{\sigma_{\min}(A) - \|E\|} + \frac{\|\epsilon\|}{\sigma_{\min}(\tilde{A})}.$$

When there is no noise in the coefficient matrix, that is, $E = 0$, Theorem 3.1 obtains the same convergence bounds as Theorem 3.7 in [46]; see Theorem 2.1 (II) in this work.

²We can get directly the unsquared form of the inequality by using Jensen's inequality.

COROLLARY 3.5. *Set $E = 0$. Let $x_0 \in \text{range}(A^\top)$ and assume the noiseless system $Ax = b$ is consistent. Then*

$$(3.2) \quad \mathbb{E}\|x_k - x_{\text{LS}}\|^2 \leq \left(1 - \frac{1}{R}\right)^k \|x_0 - x_{\text{LS}}\|^2 + \frac{\|\epsilon\|^2}{\sigma_{\min}^2(A)},$$

where $R = \|A^\dagger\|_2^2 \|A\|_F^2$.

Multiplicative Noise. As a consequence of Theorem 3.1, we can immediately obtain bounds for multiplicative noise. For multiplicative noise, we consider the following linear system

$$(3.3) \quad (I_m + E)A(I_n + F)x \approx b + \epsilon,$$

where $(I_m + E)$ and $(I_n + F)$ are nonsingular. In this case, we cast: $\tilde{A} = (I_m + E)A(I_n + F) = A + EA + AF + EAF = A + \Delta A$, where $\Delta A = EA + AF + EAF$ and $\tilde{b} = b + \epsilon$.

COROLLARY 3.6. (*Multiplicative Noise*) *Let x_k be the iterate of RK applied to the doubly-noisy linear system, $\tilde{A}x \approx \tilde{b}$, with $x_0 - x_{\text{LS}} \in \text{range}(\tilde{A}^\top)$ and $\tilde{A} = (I_m + E)A(I_n + F) = A + EA + AF + EAF = A + \Delta A$, such that $(I_m + E)$ and $(I_n + F)$ are nonsingular. Assume the noiseless system $Ax = b$ is consistent. Then*

$$(3.4) \quad \mathbb{E}\|x_k - x_{\text{LS}}\|^2 \leq \left(1 - \frac{1}{\tilde{R}}\right)^k \|x_0 - x_{\text{LS}}\|^2 + \frac{\|\Delta Ax_{\text{LS}} - \epsilon\|^2}{\sigma_{\min}^2(\tilde{A})},$$

where $\tilde{R} = \|\tilde{A}^\dagger\|_2^2 \|\tilde{A}\|_F^2$.

Remark 3.7. With proper modifications on the previously mentioned *reference systems* for multiplicative noise (see Section 1.2), similar to the additive noise case, by using perturbation analysis, we can quantify the difference between x_{LS} and the iterates generated by (1.3) via x_{NLS} . We can use Theorem 4.1 from [14] that quantifies the difference between x_{NLS} and x_{LS} for multiplicative noise and is valid for perturbation of any size. If the noisy linear system, (1.2) is consistent, then we have

$$\mathbb{E}\|x_{k+1} - x_{\text{LS}}\| \leq \left(1 - \frac{1}{\tilde{R}}\right)^{k/2} \|x_0 - x_{\text{NLS}}\| + e_1 \|x_{\text{LS}}\| + e_2 \|A^\dagger\| \|b\|,$$

where $e_1 = \sqrt{\|F\|^2 + \|(I + F)^{-1}F\|^2}$ and $e_2 = (1 + e_1) \left(\frac{\epsilon}{\|b\|} + \left(1 + \frac{\epsilon}{\|b\|}\right) \sqrt{\|E\|^2 + \|(I + E)^{-1}E\|^2}\right)$.

3.1. Using noise to speed up RK. Suppose we are interested in finding a solution to the noiseless system, $Ax = b$ (assuming that A and b are known) as in (1.1). In this case, we know that the convergence rate for RK in solving (1.1) is $\rho = 1 - \frac{1}{R}$. However, Theorem 3.1 tells us, for noisy systems as in (1.2), the convergence rate for RK in solving (1.2) is $\tilde{\rho} = 1 - \frac{1}{\tilde{R}}$. This leads us to an interesting fact: *If we have a rough approximation of the singular values, then one can inject noise and speed up the convergence at the beginning of the optimization and then return back to the exact system after some iterations.* In other words, we can incorporate *additive preconditioners* to speed up the convergence of our iterative method. In what follows, we illustrate the above hypothesis with a simple example.

A proof-of-concept example. Let $A \in \mathbb{R}^{m \times n}$ be given matrix of rank r . Let $A = U\Sigma V^\top$ be its SVD, where $U \in \mathbb{R}^{m \times r}$ and $V \in \mathbb{R}^{n \times r}$ are column orthonormal matrices and $\Sigma = \text{diag}(\sigma_1, \sigma_2, \dots, \sigma_r) \in \mathbb{R}^{r \times r}$ be a diagonal matrix with nonincreasingly ordered singular values of A along the diagonal. We can write $A = \sum_{i=1}^r \sigma_i u_i v_i^\top$, where u_i and v_i are left and right singular vectors, respectively. Set $E = (\sigma_{r-1} - \sigma_r) u_r v_r^\top$, and therefore, $\tilde{A} = A + E$. Based on this, we have $R = \frac{\sum_{i=1}^r \sigma_i^2}{\sigma_r^2}$, $\tilde{R} = \frac{\sum_{i=1}^{r-1} \sigma_i^2 + \sigma_{r-1}^2}{\sigma_{r-1}^2}$, $\sigma_{\min}^2(\tilde{A}) = \sigma_{r-1}^2$, and $\|E\|^2 = (\sigma_{r-1} - \sigma_r)^2$.

On one hand, if RK is applied on a consistent noiseless system, $Ax = b$, we have:

$$\mathbb{E}\|x_k - x_{\text{LS}}\|^2 \leq \left(1 - \frac{1}{R}\right)^k \|x_0 - x_{\text{LS}}\|^2.$$

Hence, for the expected squared approximation error to reach a tolerance $\tau > 0$, we need

$$K \geq \frac{\log\left(\frac{\tau}{\|x_0 - x_{\text{LS}}\|^2}\right)}{\log(1 - 1/R)}$$

iterations. On the other hand, if RK is applied to the doubly-noisy system, $\tilde{A}x = b$, from Theorem 3.1 we have:

$$\mathbb{E}\|x_k - x_{\text{LS}}\|^2 \leq \left(1 - \frac{1}{\tilde{R}}\right)^k \|x_0 - x_{\text{LS}}\|^2 + \frac{\|Ex_{\text{LS}} - \epsilon\|^2}{\sigma_{r-1}^2(\tilde{A})}.$$

Letting $\tau_0 = \frac{\|Ex_{\text{LS}} - \epsilon\|^2}{\sigma_{r-1}^2(\tilde{A})}$ (the convergence horizon from Theorem 3.1), for the expected, squared approximation error to reach a given tolerance $\tau > \tau_0$, we require

$$K \geq \frac{\log\left(\frac{\tau - \tau_0}{\|x_0 - x_{\text{LS}}\|^2}\right)}{\log\left(1 - 1/\tilde{R}\right)}$$

iterations.

Let us take a toy example. If we consider $\Sigma = \text{diag}(3 \ 3 \ 1)$, $\|x_{\text{LS}}\| = 1$, and $\|x_0 - x_{\text{LS}}\|^2 \approx 10^6$, RK on noiseless system $Ax = b$ needs almost $K \geq 269$ iterations to reach an accuracy of $\epsilon = 0.5$, while RK on noisy system $\tilde{A}x = b$ needs only $K \geq 40$ to reach the same accuracy.

4. Numerical Results. In this section, we report our numerical results on the convergence of the RK algorithm on doubly-noisy linear systems, where both the coefficients matrix, A , and the measurement vector, b , are corrupted by noise. We empirically validate our theoretical results and compare our bounds of Theorems 2.5 and 3.1 in the additive case and evaluate the bound of Corollary 3.6 in the multiplicative case under various noise magnitudes.

Construction of Consistent Linear Systems. We generate the elements of the coefficients matrix, A , as follows: for a given dimension, (m, n) , and rank $r = \text{rank}(A)$, we choose $\sigma_1(A)$ and $\sigma_r(A)$ as the maximum and the minimum nonzero singular values of A . We construct A as $A = U\Sigma V^\top$, where $U \in \mathbb{R}^{m \times r}$ and $V \in \mathbb{R}^{n \times r}$. The entries of U and V are generated from the standard Gaussian distribution, and then, the columns are orthonormalized. The matrix, Σ is an $r \times r$ diagonal matrix

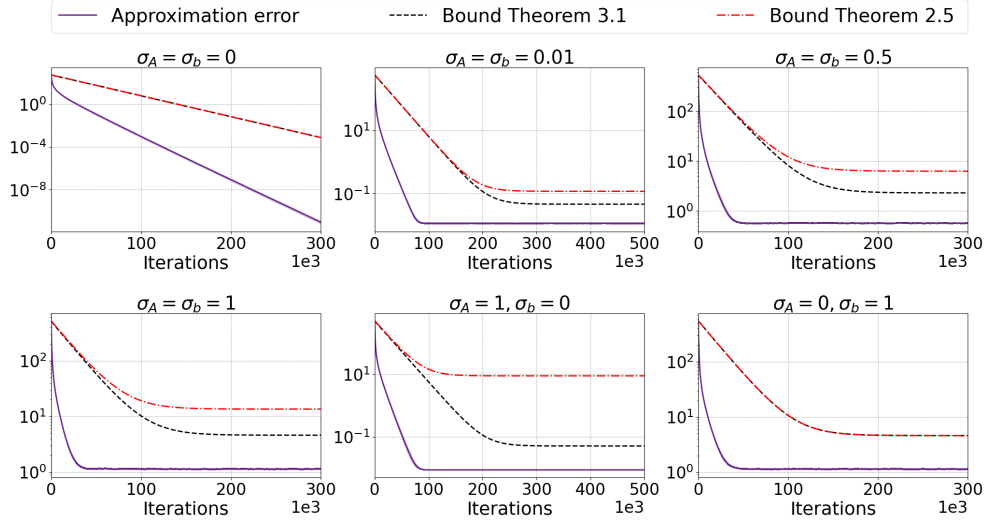


Fig. 1: Approximation error, $\|x_k - x_{\text{LS}}\|$, and the theoretical bounds of Theorems 2.5 and 3.1 for RK on a noisy linear system. $Ax = b$ and $\tilde{A}x = b$ are consistent with $m = 500$, $n = 300$, $r = 300$, $\kappa_A = 10$, $\sigma_r(A) = 5$, and $\sigma_1(A) = 50$. The entries of ϵ are generated from the standard Normal distribution.

whose diagonal entries are distinct numbers (evenly or randomly spaced) chosen over the interval $[\sigma_r(A), \sigma_1(A)]$. As long as the singular values are distinct, the empirical results and conclusions about the behavior of the RK in the presence of noise are similar. To construct a consistent linear system, we set the measurement vector, $b \in \text{range}(A)$. Note that $x_{\text{LS}} = A^\dagger b$.

Construction of Doubly-Noisy Linear Systems. Given A and b from the consistent linear system constructed above, we construct the noisy data, \tilde{A} and \tilde{b} , as: (i) $\tilde{A} = A + \sigma_A E$, in the additive noise case, and (ii) $\tilde{A} = (I + \sigma_A E)A(I + \sigma_A F)$, in the multiplicative noise case. We construct $\tilde{b} = b + \sigma_b \epsilon$. Note that $\sigma_A, \sigma_b \geq 0$ are the noise magnitudes. To evaluate the bound of Theorem 2.5, we construct a consistent partially noisy linear system, $\tilde{A}x = b$, using noise E that satisfies the condition, $\|A^\dagger\| \|E\| < 1$.

In all the experiments, we average the performance of RK over 10 trials for each (σ_A, σ_b) pair. The starting point, $x_0 \in \text{range}(\tilde{A}^\top)$, and in each experiment, we start from the same x_0 . The shaded regions in the graphs are given by $\mu \pm 0.5\sigma$, where μ is the mean and $\sigma > 0$ is the standard deviation of the squared approximation error. In Section 4.1, we report the results for the additive noise. In Section 4.2, we show the results for multiplicative noise. Finally, in Section 4.3, we present some initial empirical results to validate our remark regarding RK and additive preconditioners; see Section 3.1.

4.1. Additive noise. Figure 1 shows the average empirical approximation error, $\|x_k - x_{\text{LS}}\|^2$ across iterations and the theoretical bound provided in Theorem 3.1 for different σ_A and σ_b . With added noise, RK converges to within a neighborhood of x_{LS} , the solution of the noiseless linear system, $Ax = b$. The larger the noise, the further the RK iterates from x_{LS} . That is, $\|x_k - x_{\text{LS}}\|^2$ increases as the noise magnitudes

σ_A	σ_b	$\kappa_{\tilde{A}}$	\tilde{R}^2	Theoretical convergence	Empirical convergence
				horizon	horizon
0	0	10	11113.545	0	0
0	1	10	11113.545	514.925	38.951
0.005	0.005	9.984	11100.081	4.276	0.328
0.01	0.01	9.961	11052.639	17.011	1.3
0.05	0.05	9.759	10342.253	385.304	30.795
0.1	0.1	9.792	10060.141	1365.144	97.023
0.5	0.5	7.35	5331.502	4704.919	284.78
1	1	7.682	5796.306	6182.523	310.019
1	0	7.682	5796.306	6130.259	310.388
20	20	7.264	5114.528	5866.31	312.153

Table 2: Effect of the noise on different quantities.

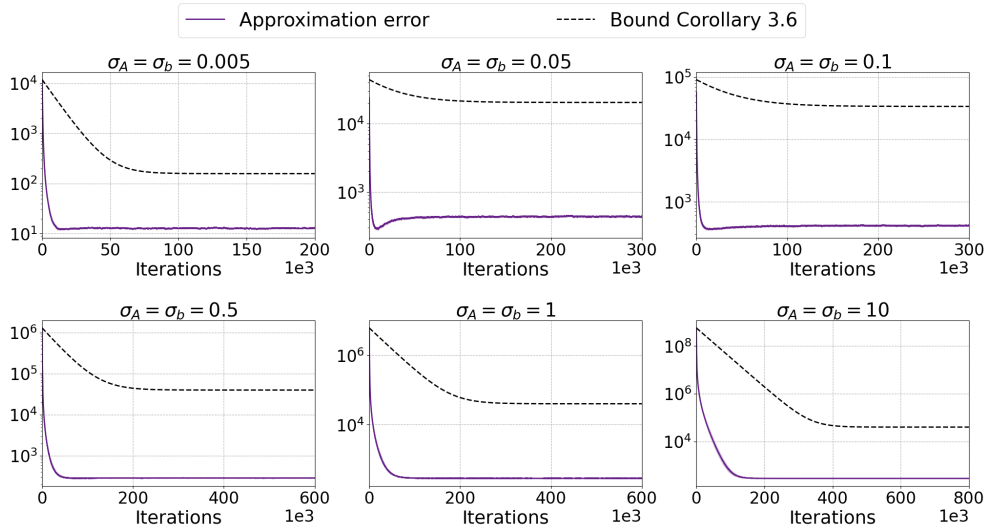


Fig. 2: Approximation error, $\|x_k - x_{\text{LS}}\|^2$, and the theoretical bound of Corollary 3.6 for RK on a noisy linear system. $Ax = b$ is consistent with $m = 500$, $n = 300$, $r = 300$, $\kappa_A = 10$, $\sigma_r(A) = 1$, and $\sigma_1(A) = 10$. The entries of E and ϵ are generated from the standard normal distribution, $F = 0$.

(σ_A, σ_b) increase. E.g., for $\sigma_A = \sigma_b = 0.01$, $\|x_K - x_{\text{LS}}\|^2$ is below 0.1, while for $\sigma_A = \sigma_b = 0.5$, $\|x_K - x_{\text{LS}}\|^2$ is around 1. Increasing the noise also increases the convergence horizon, and the theoretical bound becomes less sharp. Note that in the noise-free case ($\sigma_A = \sigma_b = 0$), we validate the existing results about the convergence of RK to x_{LS} .

Table 2 shows the effect of changing noise magnitudes on the following quantities: The condition number of \tilde{A} denoted by $\kappa_{\tilde{A}}$, the square of the scaled condition number, \tilde{R} , of the noisy matrix, the theoretical convergence horizon, $\frac{\|Ex_{\text{LS}} - \epsilon\|^2}{\sigma_{\min}^2(\tilde{A})}$, and the empirical convergence horizon computed experimentally by $\mathbb{E}\|x_K - x_{\text{LS}}\|^2$ at the

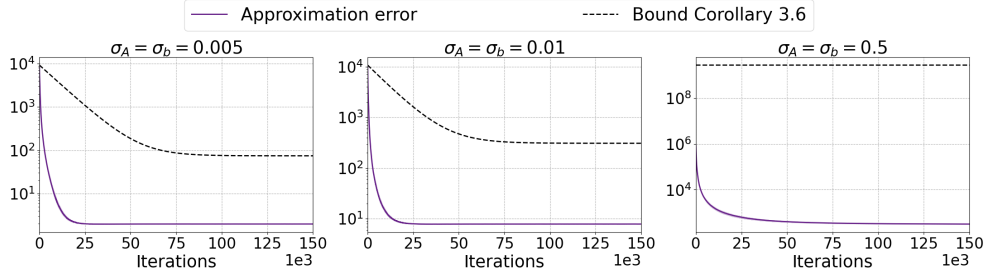


Fig. 3: Approximation error, $\|x_k - x_{LS}\|^2$, and the theoretical bound of Corollary 3.6 for RK on a noisy linear system. $Ax = b$ is consistent with $m = 500$, $n = 300$, $r = 300$, $\kappa_A = 10$, $\sigma_r(A) = 1$, and $\sigma_1(A) = 10$. The entries of F and ϵ are generated from the standard Normal distribution, and $E = 0$.

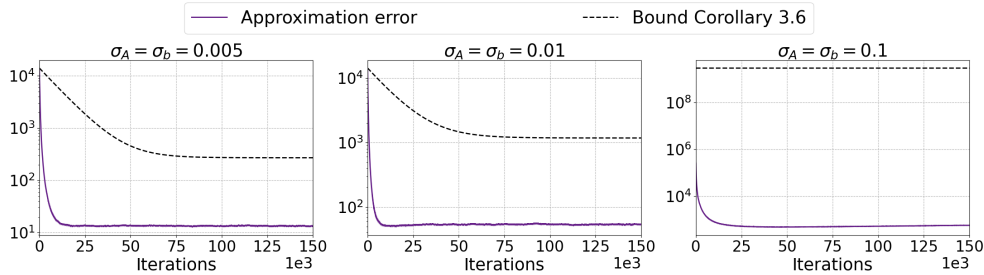


Fig. 4: Approximation error, $\|x_k - x_{LS}\|^2$, and the theoretical bound of Corollary 3.6 for RK on a noisy linear system. $Ax = b$ is consistent with $m = 500$, $n = 300$, $r = 300$, $\kappa_A = 10$, $\sigma_r(A) = 1$, and $\sigma_1(A) = 10$. The entries of F , E , and ϵ are generated from the standard Normal distribution.

last iteration $K = 3 \times 10^5$.³ The results in the table show that increasing the noise increases the condition number of the coefficient matrix and decreases the value of \tilde{R} , which results in a faster convergence rate. However, this is at the cost of accuracy as both the theoretical and empirical convergence horizons grow as the noise levels increase.

In addition, in Figure 1, we compare the bounds of Theorems 2.5 and 3.1 in the case of noise $\sigma_A E$ satisfying assumptions of Theorem 2.5. We can see that the bound of Theorem 3.1 is better than that of Theorem 2.5, which validates our theoretical results stated in Remark 3.4.

4.2. Multiplicative Noise. Figures 2–4 show the approximation error, $\|x_k - x_{LS}\|^2$ vs. iterations alongside the theoretical bound provided in Corollary 3.6 for various values of σ_A and σ_b . Figures 2 and 3 show the results when $F = 0$ and $E = 0$, respectively; Figure 4 shows the results for the general case, $F \neq 0$ and $E \neq 0$. In all cases, RK converges to a vector that is in a neighborhood of x_{LS} , similar to

³The empirical convergence horizon is given by $\mathbb{E}\|x_K - x_{LS}\|^2 - \left(1 - \frac{1}{\tilde{R}}\right)^K \|x_0 - x_{LS}\|^2$. However, at iteration $K = 3 \times 10^5$, $\left(1 - \frac{1}{\tilde{R}}\right)^K \|x_0 - x_{LS}\|^2 \approx 0$.

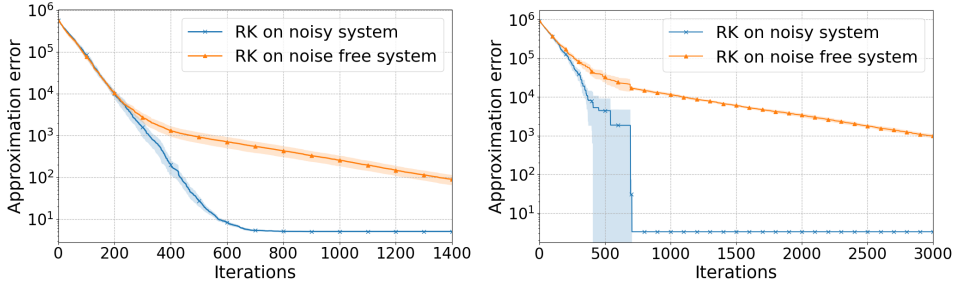


Fig. 5: Approximation error, $\|x_k - x_{LS}\|^2$, for RK on noise-free system $Ax = b$, and on noisy system $\tilde{A}x = b$. On the left: $m = 100$, $n = 50$, $r = 50$, $R = 785$ and $\tilde{R} = 50$. On the right $m = 100$, $n = 100$, $r = 100$, $R = 1585$ and $\tilde{R} = 100$. For both cases $\sigma_r(A) = 1$, and $\sigma_i(A) = 4$ for $i = 1, \dots, r - 1$.

the additive noise case, and the radius of the neighborhood increases as the noise magnitudes (σ_A, σ_b) increase. The curves of the theoretical bound from the figures show that increasing the noise affects the theoretical convergence horizon, and that is particularly due to the right-hand noise, F .

4.3. Additive Preconditioner. Figure 5 shows preliminary numerical results of the additive preconditioner described in Section 3.1. We design the noise, E as explained in Section 3.1. RK was applied to the noise-free system and the noisy system. We observe that at the beginning of the optimization process, RK applied on the noisy system, $\tilde{A}x = b$ rapidly decreases the approximation error compared to the noise-free system. However, noise-free RK continues to minimize the approximation error while noisy RK becomes stationary. This phenomenon illustrates the benefit of adding a well-crafted noise to the matrix A to speed up the convergence at the beginning of the optimization process. Then one needs to switch back to the noise-free system to continue decreasing the approximation error, $\|x_k - x_{LS}\|^2$.

Acknowledgments. Aritra Dutta acknowledges being an affiliated researcher at the Pioneer Centre for AI, Denmark.

REFERENCES

- [1] <http://www.fips.fi/dataset.php>. Open X-ray Tomographic Datasets—Finnish Inverse Problem Society (FIPS).
- [2] F. ALLGÖWER, T. A. BADGWELL, J. S. QIN, J. B. RAWLINGS, AND S. J. WRIGHT, *Nonlinear predictive control and moving horizon estimation—An introductory overview*, in *Advances in Control*, Springer, 1999, pp. 391–449.
- [3] H. ANTIL, D. KOURI, M. D. LACASSE, AND D. RIDZAL, *Frontiers in PDE-Constrained Optimization*, vol. 163 of *The IMA Volumes in Mathematics and its Applications*, Springer, New York, NY, USA, 2016.
- [4] M. ASCH, M. BOCQUET, AND M. NODET, *Data Assimilation: Methods, Algorithms, and Applications*, Society for Industrial and Applied Mathematics, Philadelphia, PA, 2016.
- [5] Z.-Z. BAI AND W.-T. WU, *On greedy randomized Kaczmarz method for solving large sparse linear systems*, *SIAM Journal on Scientific Computing*, 40 (2018), pp. 592–606.
- [6] Z.-Z. BAI AND W.-T. WU, *On relaxed greedy randomized Kaczmarz methods for solving large sparse linear systems*, *Applied Mathematics Letters*, 83 (2018), pp. 21–26.
- [7] Z.-Z. BAI AND W.-T. WU, *On partially randomized extended Kaczmarz method for solving large sparse overdetermined inconsistent linear systems*, *Linear Algebra and its Applications*, 578 (2019), pp. 225–250.

- [8] Y. BAR-SINAI, S. HOYER, J. HICKEY, AND M. P. BRENNER, *Learning data-driven discretizations for partial differential equations*, Proceedings of the National Academy of Sciences, 116 (2019), pp. 15344–15349.
- [9] M. BENZI, G. H. GOLUB, AND J. LIESEN, *Numerical solution of saddle point problems*, Acta Numerica, 14 (2005), pp. 1–137.
- [10] E. BERGOU, S. GRATTON, AND J. TSHIMANGA, *The exact condition number of the truncated singular value solution of a linear ill-posed problem*, SIAM Journal on Matrix Analysis and Applications, 35 (2014), pp. 1073–1085.
- [11] E. BERGOU, S. GRATTON, AND L. N. VICENTE, *Levenberg-Marquardt methods based on probabilistic gradient models and inexact subproblem solution, with application to data assimilation*, SIAM/ASA Journal on Uncertainty Quantification, 4 (2016), pp. 924–951.
- [12] Å. BJÖRCK, *Numerical methods for least squares problems*, SIAM, 1996.
- [13] L.-X. CAI, W.-W. XU, AND W. LI, *Additive and multiplicative perturbation bounds for the Moore–Penrose inverse*, Linear Algebra and its Applications, 434 (2011), pp. 480–489.
- [14] N. CASTRO-GONZÁLEZ, F. M. DOPICO, AND J. M. MOLERA, *Multiplicative perturbation theory of the Moore–Penrose inverse and the least squares problem*, Linear Algebra and its Applications, 503 (2016), pp. 1–25.
- [15] J. CHIU, L. DAVIDSON, A. DUTTA, J. GOU, K. C. LOY, M. THOM, AND D. TRENÉV, *Efficient and robust solution strategies for saddle-point systems*, (2014). Technical Report, University of Minnesota. Institute for Mathematics and its Applications.
- [16] Z. DRMAC, I. MEZIC, AND R. MOHR, *On least squares problems with certain Vandermonde–Khatri–Rao structure with applications to DMD*, SIAM Journal on Scientific Computing, 42 (2020), pp. A3250–A3284.
- [17] K. DU, *Tight upper bounds for the convergence of the randomized extended Kaczmarz and Gauss–Seidel algorithms*, Numerical Linear Algebra and its Applications, 26 (2019), p. e2233.
- [18] K. DU, W.-T. SI, AND X.-H. SUN, *Randomized extended average block Kaczmarz for solving least squares*, SIAM Journal on Scientific Computing, 42 (2020), pp. A3541–A3559.
- [19] Q. DU AND T. ZHANG, *Numerical approximation of some linear stochastic partial differential equations driven by special additive noises*, SIAM Journal on Numerical Analysis, 40 (2002), pp. 1421–1445.
- [20] A. DUTTA AND X. LI, *Weighted low rank approximation for background estimation problems*, in Proceedings of the IEEE International Conference on Computer Vision Workshops, 2017, pp. 1853–1861.
- [21] A. DUTTA AND P. RICHTÁRIK, *Online and batch supervised background estimation via ℓ_1 regression*, in IEEE Winter Conference on the Applications of Computer Vision, 2019, pp. 541–550.
- [22] W. GAJEK AND M. MALINOWSKI, *Errors in microseismic events locations introduced by neglecting anisotropy during velocity model calibration in downhole monitoring*, Journal of Applied Geophysics, 184 (2021), p. 104222.
- [23] J. HADDOCK AND A. MA, *Greed works: An improved analysis of sampling Kaczmarz–Motzkin*, SIAM Journal on Mathematics of Data Science, 3 (2021), pp. 342–368.
- [24] J. HADDOCK, D. NEEDELL, E. REBROVA, AND W. SWARTWORTH, *Quantile-based iterative methods for corrupted systems of linear equations*, SIAM Journal on Matrix Analysis and Applications, 43 (2022), pp. 605–637.
- [25] R. A. HORN AND C. R. JOHNSON, *Matrix analysis*, Cambridge university press, second ed., 2012.
- [26] B. JARMAN AND D. NEEDELL, *QuantileRK: Solving Large-Scale Linear Systems with Corrupted, Noisy Data*, in 2021 55th Asilomar Conference on Signals, Systems, and Computers, IEEE, 2021, pp. 1312–1316.
- [27] H. JEONG AND C. S. GÜNTÜRK, *Convergence of the randomized Kaczmarz method for phase retrieval*, arXiv preprint arXiv:1706.10291, (2017).
- [28] S. KARZMARZ, *Angenaherte auflösung von systemen linearer glei-chungen*, Bulletin International de l’Académie Polonaise des Sciences et des Lettres. Classe des Sciences Mathématiques et Naturelles. Série A, Sciences Mathématiques, (1937), pp. 355–357.
- [29] J. B. KELLER AND R. BELLMAN, *Stochastic equations and wave propagation in random media*, vol. 16, American Mathematical Society Providence, RI, 1964.
- [30] Y. LEI AND D.-X. ZHOU, *Learning theory of randomized sparse Kaczmarz method*, SIAM Journal on Imaging Sciences, 11 (2018), pp. 547–574.
- [31] D. A. LORENZ, S. WENGER, F. SCHÖPFER, AND M. MAGNOR, *A sparse Kaczmarz solver and a linearized Bregman method for online compressed sensing*, in 2014 IEEE International Conference on Image Processing, IEEE, 2014, pp. 1347–1351.

- [32] L. MACHIELS AND M. DEVILLE, *Numerical simulation of randomly forced turbulent flows*, Journal of Computational Physics, 145 (1998), pp. 246–279.
- [33] I. NECOARA, *Faster randomized block Kaczmarz algorithms*, SIAM Journal on Matrix Analysis and Applications, 40 (2019), pp. 1425–1452.
- [34] D. NEEDELL, *Randomized Kaczmarz solver for noisy linear systems*, BIT Numerical Mathematics, 50 (2010), pp. 395–403.
- [35] D. NEEDELL AND J. A. TROPP, *Paved with good intentions: Analysis of a randomized block Kaczmarz method*, Linear Algebra and its Applications, 441 (2014), pp. 199–221.
- [36] A. N. SAHU, A. DUTTA, A. TIWARI, AND P. RICHTÁRIK, *On the convergence analysis of asynchronous SGD for solving consistent linear systems*, Linear Algebra and its Applications, 663 (2023), pp. 1–31.
- [37] F. SCHÖPFER AND D. A. LORENZ, *Linear convergence of the randomized sparse Kaczmarz method*, Mathematical Programming, 173 (2019), pp. 509–536.
- [38] S. STEINERBERGER, *Quantile-based random Kaczmarz for corrupted linear systems of equations*, Information and Inference: A Journal of the IMA, 12 (2023), pp. 448–465.
- [39] T. STROHMER AND R. VERSHYNIN, *A randomized Kaczmarz algorithm with exponential convergence*, Journal of Fourier Analysis and Applications, 15 (2009), pp. 262–278.
- [40] A. TAMBUE AND J. M. T. NGNOTCHOUYE, *Weak convergence for a stochastic exponential integrator and finite element discretization of stochastic partial differential equation with multiplicative & additive noise*, Applied Numerical Mathematics, 108 (2016), pp. 57–86.
- [41] Y. S. TAN AND R. VERSHYNIN, *Phase retrieval via randomized Kaczmarz: Theoretical guarantees*, Information and Inference: A Journal of the IMA, 8 (2019), pp. 97–123.
- [42] A. TARANTOLA, *Inverse Problem Theory and Methods for Model Parameter Estimation*, SIAM, Philadelphia, 2005.
- [43] Y. TRÉMOLET, *Model-error estimation in 4D-Var*, Quarterly Journal of the Royal Meteorological Society, 133 (2007), pp. 1267–1280.
- [44] P.-Å. WEDIN, *Perturbation theory for pseudo-inverses*, BIT Numerical Mathematics, 13 (1973), pp. 217–232.
- [45] W.-T. WU, *On two-subspace randomized extended Kaczmarz method for solving large linear least-squares problems*, Numerical Algorithms, 89 (2022), pp. 1–31.
- [46] A. ZOUZIAS AND N. M. FRERIS, *Randomized extended Kaczmarz for solving least squares*, SIAM Journal on Matrix Analysis and Applications, 34 (2013), pp. 773–793.