

# Quantum Algorithms for Nonlinear Dynamics: Revisiting Carleman Linearization with No Dissipative Conditions

Hsuan-Cheng Wu<sup>\*1</sup>, Jingyao Wang<sup>†2</sup>, and Xiantao Li<sup>‡1</sup>

<sup>1</sup>Department of Mathematics, The Pennsylvania State University, University Park,  
Pennsylvania 16802, USA

<sup>2</sup>Institute for Interdisciplinary Information Sciences, Tsinghua University, Beijing, China

May 22, 2024

## Abstract

In this paper, we explore the embedding of nonlinear dynamical systems into linear ordinary differential equations (ODEs) via the Carleman linearization method. Under dissipative conditions, numerous previous works have established rigorous error bounds and linear convergence for Carleman linearization, which have facilitated the identification of quantum advantages in simulating large-scale dynamical systems. Our analysis extends these findings by exploring error bounds beyond the traditional dissipative condition, thereby broadening the scope of quantum computational benefits to a new class of dynamical regimes. This novel regime is defined by a resonance condition, and we prove how this resonance condition leads to a linear convergence with respect to the truncation level  $N$  in Carleman linearization. We support our theoretical advancements with numerical experiments on a variety of models, including the Burgers' equation, Fermi-Pasta-Ulam (FPU) chains, and the Korteweg-de Vries (KdV) equations, to validate our analysis and demonstrate the practical implications.

## 1 Introduction

Nonlinear dynamical systems are ubiquitous in most scientific domains. The ability to simulate large-scale dynamical systems is crucial in predicting and controlling the dynamical behavior of the system. This paper is concerned with the problem of designing quantum algorithms for solving dynamical systems, which might have the advantage when treating large-scale problems. Although many efficient quantum algorithms have been developed for linear ODE systems [3, 5, 6, 9, 14, 22, 26], algorithms for nonlinear dynamical systems with quantum advantage are much more difficult to construct. One regime where such an advantage has been identified is dissipative dynamics, where the real part of the eigenvalues of the Jacobian  $F_1$  at an equilibrium is strictly negative, i.e., there exists a  $\sigma > 0$ ,

$$\operatorname{Re}(\lambda_j) \leq -\sigma < 0, \quad \text{for all the eigenvalues.} \quad (1)$$

---

\*wu.hsuanheng@psu.edu

†jingyao-21@mails.tsinghua.edu.cn

‡Xiantao.Li@psu.edu

In particular, for Carleman linearization [7], global-in-time error bound has been proved [2, 15, 32] with a convergence rate

$$R_d = \mathcal{O}\left(\frac{\mu\|F_2\|}{\sigma}\right), \quad (2)$$

with  $\|F_2\|$  being the level of nonlinearity and  $\mu$  representing the magnitude of the solution. The analysis in [32] also included external force. The quantum advantage then comes from the ability to efficiently simulate the resulting linear ODE system, a subject that has been relatively well-studied [3, 5, 6, 9, 14, 22, 26, 21, 23].

Meanwhile, dynamical systems with some or all eigenvalues having zero real part are plentiful. The most recognizable example is Hamiltonian systems, which play a central role in many aspects of modern physics. The ability to treat such dynamical systems will certainly expand the scope of quantum computing algorithms. The lower bound from Liu et al. [32] suggests that outside the dissipative regime, the Carleman linearization might not provide a convergent approximation, and quantum algorithms will generally not offer an advantage. On the other hand, there might be a subclass of non-dissipative dynamical systems for which a quantum advantage still exists. The purpose of this paper is to present a convergence analysis for Carleman linearization without the dissipative condition. One of our key contributions is the identification of another type of condition, called the *no-resonance condition*, motivated by the theory of dynamical systems [25]. Roughly speaking, this condition states that any one eigenvalue can not coincide with an integer combination of other eigenvalues. We quantify such condition by introducing a resonance parameter  $\Delta$ . We prove the linear convergence of Carleman linearization with a convergence rate given by

$$R_r = \mathcal{O}\left(\frac{\mu\|F_2\|}{\Delta}\right). \quad (3)$$

Therefore, for non-dissipative systems,  $\Delta$  in Eq. (3) plays a similar role to  $|\sigma|$  in the convergence rate in the dissipative regime Eq. (2).

Resonance properties play a crucial role in the long-time behavior of dynamical systems, including phenomena such as bifurcation, chaos, and energy transport [10, 25]. Important examples include Fermi-Pasta-Ulam (FPU) chains [34], the nonlinear Schrödinger equation [4], and the Korteweg-de Vries (KdV) equation [18]. Therefore, it should not come as a surprise that such properties play a role in an approximation scheme. On the other hand, due to their widespread occurrence in physics and engineering, developing quantum algorithms for these systems could significantly expand the scope of applications in quantum computing and create new paradigms for simulating complex dynamical systems.

The idea behind Carleman linearization [7] can be quickly illustrated using an ODE system with quadratic nonlinearity,

$$\frac{d}{dt}\mathbf{x} = F_1\mathbf{x} + F_2\mathbf{x} \otimes \mathbf{x}, \mathbf{x}(0) = \mathbf{x}_{in}. \quad (4)$$

Here  $\mathbf{x} \in \mathbb{R}^n$ , and  $\mathbf{x} \otimes \mathbf{x} (= \mathbf{x}^{\otimes 2}) \in \mathbb{R}^{n^2}$  denotes the tensor product of the two vectors. Meanwhile,  $F_1 \in \mathbb{R}^{n \times n}$  is the Jacobian of the vector field at the equilibrium (here the origin), and  $F_2 : \mathbb{R}^{n^2} \rightarrow \mathbb{R}^n$

embodies the coefficient of the quadratic term. Using Carleman linearization, one gets [2, 7, 37]

$$\frac{d}{dt} \begin{pmatrix} \mathbf{x} \\ \mathbf{x}^{\otimes 2} \\ \vdots \\ \mathbf{x}^{\otimes(N-1)} \\ \mathbf{x}^{\otimes N} \end{pmatrix} = \mathbf{A} \begin{pmatrix} \mathbf{x} \\ \mathbf{x}^{\otimes 2} \\ \vdots \\ \mathbf{x}^{\otimes(N-1)} \\ \mathbf{x}^{\otimes N} \end{pmatrix} + \begin{pmatrix} 0 \\ 0 \\ \vdots \\ 0 \\ A_{N,N+1} \mathbf{x}^{\otimes(N+1)} \end{pmatrix}. \quad (5)$$

Due to the quadratic nonlinearity, the matrix  $\mathbf{A}$  is block upper triangular,

$$\mathbf{A} = \begin{pmatrix} A_{1,1} & A_{1,2} & 0 & 0 & \cdots & 0 & 0 \\ 0 & A_{2,2} & A_{2,3} & 0 & \cdots & 0 & 0 \\ 0 & 0 & A_{3,3} & A_{3,4} & \ddots & \vdots & \vdots \\ 0 & 0 & & A_{4,4} & \ddots & \vdots & \vdots \\ \vdots & \vdots & \vdots & \vdots & \ddots & \vdots & \vdots \\ 0 & 0 & 0 & 0 & \cdots & A_{N-1,N-1} & A_{N-1,N} \\ 0 & 0 & 0 & 0 & \cdots & 0 & A_{N,N} \end{pmatrix} \quad (6)$$

where the blocks are defined as,

$$\begin{aligned} A_{j,j} &= \sum_{i=1}^{j-1} I^{\otimes i} \otimes F_1 \otimes I^{\otimes(j-1-i)} \in \mathbb{R}^{n^j \times n^j}, \\ A_{j,j+1} &= \sum_{i=1}^{j-1} I^{\otimes i} \otimes F_2 \otimes I^{\otimes(j-1-i)} \in \mathbb{R}^{n^j \times n^{j+1}}. \end{aligned} \quad (7)$$

$I$  refers to the identity matrix acting on  $\mathbb{R}^n$ . General nonlinear ODE systems where the vector field is a polynomial can be reduced to the quadratic form in Eq. (5), as illustrated in [15].

To obtain a finite ODE system, we truncate the system by neglecting the last term in Eq. (5), yielding,

$$\frac{d}{dt} \begin{pmatrix} \mathbf{y}_1 \\ \mathbf{y}_2 \\ \vdots \\ \mathbf{y}_N \end{pmatrix} = \mathbf{A} \begin{pmatrix} \mathbf{y}_1 \\ \mathbf{y}_2 \\ \vdots \\ \mathbf{y}_N \end{pmatrix}, \quad (8)$$

where  $\mathbf{y}_j \in \mathbb{R}^{n^j}$  takes the position of  $\mathbf{x}^{\otimes j}$ ;  $\mathbf{y}_j(0) = \mathbf{x}_{in}^{\otimes j}$ . In particular, we will regard the first block entry  $\mathbf{y}_1(t)$  as an approximation to  $\mathbf{x}(t)$ .

The analysis [2, 15, 32] of the error due to the finite truncation has been mostly based on the assumption that the eigenvalues of  $F_1$  have negative real parts (1), and when such condition does not hold, the linear convergence was only proved for short time, which significantly limits the applicability of the algorithms. Here we propose a different type of condition, which can go well beyond the dissipative regime (1).

**Assumption 1.** Assume that  $F_1$  is diagonalizable and it has eigenvalues  $\{\lambda_1, \dots, \lambda_n\}$  with non-positive real parts:  $\text{Re}(\lambda_j) \leq 0$ . In addition, for any  $i \in [n]$ ,

$$\lambda_i \neq \sum_{j=1}^n m_j \lambda_j \quad \forall m_j \in \mathbb{Z} \text{ and } m_j \geq 0 \text{ s.t. } \sum_{j=1}^n m_j \geq 2. \quad (9)$$

More precisely, we assume that  $\Delta > 0$ , defined as follows,

$$\Delta := \inf_{k \in [n]} \inf_{\substack{m_j \geq 0 \\ \sum_{j=1}^n m_j \geq 2}} \left| \lambda_k - \sum_{i=1}^n m_i \lambda_i \right|. \quad (10)$$

In the theory of dynamical systems [25], the first part of the assumption comes from stability consideration, but we do not rule out non-hyperbolic equilibrium points. Meanwhile, the condition in Eq. (9) is known as the no-resonance condition. When  $\lambda_i = \sum_{j=1}^n m_j \lambda_j$  for some  $m_j \geq 0$  and  $\sum_{j=1}^n m_j = m \geq 2$ , we call the corresponding eigen modes a resonance of order  $m$ . One implication of such conditions is that a nonlinear dynamical system can be reduced to a linear ODE system, or a nonlinear ODE system with much fewer terms, via a polynomial transformation. The corresponding reduced form is known as the normal form. The connection of such reduction with the Carleman linearization has been noted in [37].

To quantify such resonance property and how this condition determines the error in the Carleman linearization in Eq. (8), we refer to  $\Delta$  as the *resonance parameter*. Our main result can be summarized as follows,

**Theorem 1.1.** *Assume that the solution of the nonlinear ODE in Eq. (4) satisfies a uniform-in-time bound in  $t \in [0, T]$ ,*

$$\|\mathbf{x}(t)\| \leq \mu, \quad (11)$$

and  $F_1$  fulfills *Assumption 1*. Then the error in the Carleman linearization can be bounded by,

$$\|\mathbf{x}(T) - \mathbf{y}_1(T)\| \leq CNTR_r^{N-1}, \quad R_r := \frac{4e\mu\|F_2\|}{\Delta}. \quad (12)$$

Notice that the convergence rate  $R_r$  is independent of  $T$ . This result suggests the choice of  $N = \mathcal{O}\left(\frac{\log \frac{T}{\epsilon}}{\log \frac{1}{R_r}}\right)$  in order to keep the truncation error to within a tolerance  $\epsilon > 0$ .

**The complexity of the quantum algorithm.** One approach to solve the ODEs from the  $N$ -th truncation Eq. (8) of the Carleman system is by using a time discretization in conjunction with quantum linear solvers, e.g., [5]. Due to the fact that the quantum linear solvers incur a complexity that only scales logarithmically with the dimension [8, 17], this approach can offer exponential speedup for large-dimensional dynamical systems. Liu et al. [32] chose the Euler’s method as an example which has first order and the final query complexity to  $A$  of the quantum algorithm has a scaling (aside from logarithmic factors) of  $\tilde{\mathcal{O}}\left(\frac{qT^2}{\epsilon}\right)$ , where  $q = \frac{\|\mathbf{y}(0)\|}{\|\mathbf{y}(T)\|}$ . Krovi [26] combined high-order ODE solvers and obtained a quantum algorithm with complexity  $\tilde{\mathcal{O}}(qT\|A\|\alpha)$ , where  $q = \frac{\max_{t \in [0, T]} \|\mathbf{y}(t)\|}{\|\mathbf{y}(T)\|}$  and  $\alpha = \max_{t \in [0, T]} \|\exp(-tA)\|$ . See [14] for a detailed discussion about various quantum ODE solvers.

**Related works.** Quantum algorithms based on Carleman linearization have been extended to fluid mechanics problems [19, 30], chemical kinetics [1] and reaction-diffusion equations [31]. On the theoretical side, Carleman linearization can be extended to dynamical systems where the vector field admits a polynomial approximation [2, 36]. The work [2] shares similar objectives as this paper. Their main assumption 3.1 is essentially the dissipative condition in (1). They also established an

error bound without this assumption (Theorem 3.1), but the linear convergence with respect to  $N$  only holds for short time, which is similar to the observation in Forets and Pouly [15] and Liu et al. [32].

There have been numerous attempts to extend the Carleman linearization to non-dissipative systems [1, 35]. However, the explicit error bounds have not been provided in these works. Lewis et al. [29] identified certain chaotic dynamical systems where quantum advantage does not exist, which extends the lower bound in [32]. Meanwhile, there are other linear embedding schemes [13, 16]. It is likely that the error bounds for these embedding schemes also require spectral properties of the dynamical system.

Joseph [24] proposed to map nonlinear ODEs to a linear PDE that governs the time evolution of the probability density function. The work of Jin and Liu [20] follows a similar track, but focused on the computation of observables. In this approach, the overall complexity has at least a polynomial dependence on the dimension  $n$ .

The remainder of this paper is structured as follows: Section 2 details our analysis of the truncation errors resulting from Carleman linearization, including an in-depth investigation of the eigenvectors associated with matrix  $\mathbf{A}$ . Subsequently, in Section 3, we present a series of numerical experiments conducted on various nonlinear dynamical systems.

## 2 Error Analysis of Carleman Linearization

Recall that  $\mathbf{A}$  is the matrix from the Carleman linearization Eq. (6), and  $\mathbf{y}(t)$  represents the corresponding solution:

$$\frac{d}{dt}\mathbf{y}(t) = \mathbf{A}\mathbf{y}(t). \quad (13)$$

To prepare for the error analysis, we follow [15, 32] and define,

$$\boldsymbol{\eta} = (\boldsymbol{\eta}_1, \boldsymbol{\eta}_2, \dots, \boldsymbol{\eta}_N), \quad \boldsymbol{\eta}_j(t) := \mathbf{x}^{\otimes j}(t) - \mathbf{y}_j(t). \quad (14)$$

We notice that by choosing proper initial conditions for  $\mathbf{y}(0)$ , we get  $\boldsymbol{\eta}(0) = 0$ . In addition, it satisfies a non-homogeneous ODE with the same matrix  $\mathbf{A}$ ,

$$\frac{d}{dt}\boldsymbol{\eta}(t) = \mathbf{A}\boldsymbol{\eta}(t) + \begin{pmatrix} 0 \\ 0 \\ \vdots \\ 0 \\ A_{N,N+1}\mathbf{x}^{\otimes(N+1)} \end{pmatrix}. \quad (15)$$

Therefore, the final error that needs to be estimated is  $\boldsymbol{\eta}_1(t)$ .

### 2.1 A direct estimate using nested integrals.

We begin with some observations on the spectral properties of  $\mathbf{A}$ .

**Lemma 2.1.** *Assume that  $F_1$  has eigenvalues  $\{\lambda_1, \dots, \lambda_n\}$ , then the eigenvalues  $\mathbf{A}$  are given by,*

$$\left\{ \sum_{k=1}^n m_k \lambda_k \mid m_k \in \mathbb{N} \cup \{0\} \text{ and } \sum_{k=1}^n m_k \leq N \right\}.$$

In addition, if  $F_1$  is diagonalizable with the real part of the eigenvalues being non-positive, then each block  $A_{j,j}$  is a stable matrix, in that its eigenvalues have non-positive real parts, and those eigenvalues with zero real parts have the geometric multiplicity being 1.

*Proof.* Note that  $\mathbf{A}$  is a block upper triangular matrix; therefore, the eigenvalues of  $\mathbf{A}$  are the union of the eigenvalues of the diagonal blocks  $A_{j,j}$ . Further, notice that,

$$A_{j,j} = F_1 \otimes I^{\otimes(j-1)} + I \otimes F_1 \otimes I^{\otimes(j-2)} + \dots + I^{\otimes(j-1)} \otimes F_1.$$

Since eigenvalues of Kronecker product matrices are the product of eigenvalues of the matrices we immediately have the eigenvalues  $\sum_{k=1}^j \lambda_{i_k}$ , where  $i_k \in [n]$ . Let  $\mathbf{v}_j, j = 1, 2, \dots, n$  be the eigenvectors of  $F_1$ . Then the corresponding eigenvector of this eigenvalue is  $\mathbf{v}_{i_1} \otimes \mathbf{v}_{i_2} \otimes \mathbf{v}_{i_3} \otimes \dots \otimes \mathbf{v}_{i_j}$ . As a result, all eigenvalues of  $A_{j,j}$  have non-positive real part with geometric multiplicity being 1, which shows the stability of the matrix  $A_{j,j}$ .  $\square$

Since  $F_1$  is diagonalizable, i.e.,

$$F_1 = W\Lambda W^{-1} \quad (16)$$

with the diagonal matrix  $\Lambda$  containing the eigenvalues, we can perform a similar transformation using  $W$  and reduce  $F_1$  to  $\Lambda$ . This is equivalent to applying a similar transformation to  $\mathbf{A}$  in Eq. (8) using a block diagonal matrix with diagonals  $W, W^{\otimes 2}, \dots, W^{\otimes N}$ , which also reduces the diagonal blocks of  $\mathbf{A}$  to diagonal matrices. For simplicity of the presentation, we simply assume  $F_1 = \Lambda$  for now, and incorporate this similar transformation later in the main theorem.

**Theorem 2.2.** *Assume that  $\|\mathbf{x}(t)\| \leq \mu$  for all  $t \geq 0$ , and  $F_1$  is diagonalizable with the real part of the eigenvalues being non-positive. Then the following error bound holds,*

$$\|\boldsymbol{\eta}_1(T)\| \leq \mu(\mu T \|F_2\|)^N. \quad (17)$$

*Proof.* We start with the first equation in Eq. (13) and apply the variation of constant formula,

$$\begin{aligned} \boldsymbol{\eta}_1(t) &= \int_0^t e^{(t-t_1)A_{1,1}} A_{1,2} \boldsymbol{\eta}_2(t_1) dt_1 \\ &= \int_0^t \int_0^{t_1} e^{(t-t_1)A_{1,1}} A_{1,2} e^{(t_1-t_2)A_{2,2}} A_{2,3} \boldsymbol{\eta}_2(t_2) dt_2 dt_1. \end{aligned}$$

The first matrix exponentials only involve  $F_1$ . From the stability result in Lemma 2.1, the matrix exponential is uniformly bounded in time. For the second matrix exponential, we apply Lemma 2.1 again and still obtain the uniform boundedness in time. Therefore, by repeating these steps, we have

$$\begin{aligned} \|\boldsymbol{\eta}_1(t)\| &\leq \int_0^t \int_0^{t_1} \dots \int_0^{t_{N-1}} \|A_{1,2}\| \|A_{2,3}\| \dots \|A_{N-1,N}\| \|\boldsymbol{\eta}_N(t_{N-1})\| dt_{N-1} \dots dt_2 dt_1 \\ &\leq \int_0^t \dots \int_0^{t_N} \|A_{1,2}\| \dots \|A_{N-1,N}\| \|\boldsymbol{\eta}_N(t_{N-1})\| N \|F_2\| \|\mathbf{x}(t_N)\|^{N+1} dt_N \dots dt_2 dt_1 \\ &\leq \mu(t \|F_2\| \mu)^N. \end{aligned} \quad (18)$$

Here the nested integral is reduced to  $\frac{t^N}{N!}$ .  $\square$

This result has been established in [32, Eq. (62)] (and a similar result in [15, Theorem 4.3]). We included the proof here to provide a comparison with the proof for the non-dissipative case in the next section, where the convergence rate is independent of  $T$ . In particular, this estimate suggests without dissipative structures in  $F_1$ , a linear convergence can only be guaranteed for a short time. In the next section, we will provide analysis using the non-resonance condition Eq. (9), which can hold even without the dissipative condition.

## 2.2 Improved estimates using the non-resonance condition

We first give a high-level description of the analysis. Assume that  $F_1$  has been mapped to a diagonal matrix by a similar transformation and that  $\mathbf{A}$  admits a diagonalization  $VDV^{-1} = \mathbf{A}$  (see Lemma 2.1), then we can write the solution of the error equation Eq. (13) as,

$$\boldsymbol{\eta}(t) = \int_0^t V e^{\tau D} \boldsymbol{\zeta}(t - \tau) d\tau, \quad \boldsymbol{\zeta}(t - \tau) := V^{-1} \begin{pmatrix} 0 \\ \vdots \\ 0 \\ A_{N,N+1} \mathbf{x}^{\otimes(N+1)}(t - \tau) \end{pmatrix}. \quad (19)$$

In light of Lemma 2.1, we have  $\|e^{\tau D}\| \leq 1$  due to stability, and as a result, we have a time-independent bound on the matrix exponential. It remains to estimate the bound of the rest of the terms. In particular, since  $V$  and  $V^{-1}$  are time-independent, we will not encounter a nested integral and a  $t^N$  term in the error bound. Furthermore, we notice that  $V$  is block upper triangular and the diagonals can be set to identity matrices. As a result,  $\forall t \geq 0$ , we have,

$$\|\boldsymbol{\eta}(t)\| \leq \int_0^t \|\boldsymbol{\zeta}_1\| + \|V_{12}\| \|\boldsymbol{\zeta}_2\| + \cdots + \|V_{1N}\| \|\boldsymbol{\zeta}_N\| d\tau. \quad (20)$$

Therefore the problem depends critically on the structure of the eigenvectors in  $V$ .

Toward this end, we observe that  $\mathbf{A}$  is block bi-diagonal, and we proceed to analyze the structure of the eigenvectors. Since the eigenvalues of  $\mathbf{A}$  coincide with the union of those eigenvalues of  $A_{j,j}$ , the problem can be reduced to,

$$\begin{bmatrix} \ddots & \vdots & \vdots & \vdots & \vdots & \vdots & \vdots \\ \cdots & 0 & A_{j-2,j-2} & A_{j-2,j-1} & 0 & 0 & \cdots \\ \cdots & 0 & 0 & A_{j-1,j-1} & A_{j-1,j} & 0 & \cdots \\ \cdots & 0 & 0 & 0 & A_{j,j} & A_{j,j+1} & \cdots \\ \vdots & \vdots & \vdots & \vdots & \vdots & \vdots & \ddots \end{bmatrix} \begin{bmatrix} \mathbf{w}_1 \\ \vdots \\ \mathbf{w}_{j-2} \\ \mathbf{w}_{j-1} \\ \mathbf{w}_j \\ 0 \\ \vdots \end{bmatrix} = \lambda \begin{bmatrix} \mathbf{w}_1 \\ \vdots \\ \mathbf{w}_{j-2} \\ \mathbf{w}_{j-1} \\ \mathbf{w}_j \\ 0 \\ \vdots \end{bmatrix}. \quad (21)$$

Since we have assumed that  $F_1$  is diagonal, the eigenvectors are simply the standard basis vectors  $\mathbf{e}_i$  in  $\mathbb{R}^n$ . From the  $j$ -th component, we have  $A_{j,j} \mathbf{w}_j = \lambda \mathbf{w}_j$ . Therefore,

$$\lambda = \lambda_{i_1} + \lambda_{i_2} + \cdots + \lambda_{i_j}, \quad \mathbf{w}_j = \mathbf{e}_{i_1} \otimes \mathbf{e}_{i_2} \otimes \cdots \otimes \mathbf{e}_{i_j}, \quad (22)$$

for some tuple  $i_1, i_2, \dots, i_j \in [n]$ .

A back substitution yields

$$\begin{aligned}
\mathbf{w}_{j-1} &= (\lambda I - A_{j-1,j-1})^{-1} A_{j-1,j} \mathbf{w}_j \\
&= (\lambda I - A_{j-1,j-1})^{-1} \left( (F_2 \mathbf{e}_{i_1} \otimes \mathbf{e}_{i_2}) \otimes \mathbf{e}_{i_3} \otimes \cdots \otimes \mathbf{e}_{i_j} \right. \\
&\quad \left. + \cdots + \mathbf{e}_{i_1} \otimes \mathbf{e}_{i_2} \otimes \cdots \otimes \mathbf{e}_{i_{j-2}} (F_2 \mathbf{e}_{i_{j-1}} \otimes \mathbf{e}_{i_j}) \right).
\end{aligned} \tag{23}$$

By spectral decomposition, we have,

$$A_{j-1,j-1} = \sum_{i'_1, i'_2, \dots, i'_{j-1}} (\lambda_{i'_1} + \lambda_{i'_2} + \cdots + \lambda_{i'_{j-1}}) \left( \mathbf{e}_{i'_1} \otimes \mathbf{e}_{i'_2} \otimes \cdots \otimes \mathbf{e}_{i'_{j-1}} \right) \left( \mathbf{e}_{i'_1} \otimes \mathbf{e}_{i'_2} \otimes \cdots \otimes \mathbf{e}_{i'_{j-1}} \right)^T. \tag{24}$$

The summation here is over  $i'_1, i'_2, \dots, i'_{j-1} \in [n]$ .

First, for simplicity, assume that  $A_{j,j}$  and  $A_{j-1,j-1}$  do not share eigenvalues, i.e.,  $\lambda I - A_{j-1,j-1}$  is invertible. Then one has

$$\begin{aligned}
(\lambda I - A_{j-1,j-1})^{-1} &= \sum_{i'_1, i'_2, \dots, i'_{j-1}} \frac{1}{\lambda - (\lambda_{i'_1} + \lambda_{i'_2} + \cdots + \lambda_{i'_{j-1}})} \\
&\quad \times \left( \mathbf{e}_{i'_1} \otimes \cdots \otimes \mathbf{e}_{i'_{j-1}} \right) \left( \mathbf{e}_{i'_1} \otimes \cdots \otimes \mathbf{e}_{i'_{j-1}} \right)^T.
\end{aligned} \tag{25}$$

To simplify notations, let us define,

$$\boldsymbol{\xi}_k = F_2 \mathbf{e}_{i_k} \otimes \mathbf{e}_{i_{k+1}}, \tag{26}$$

and examine,

$$(\lambda I - A_{j-1,j-1})^{-1} \boldsymbol{\xi}_1 \otimes \mathbf{e}_{i_3} \otimes \cdots \otimes \mathbf{e}_{i_j} = \sum_{i'_1} \frac{1}{\lambda_{i_1} + \lambda_{i_2} - \lambda_{i'_1}} \mathbf{e}_{i'_1} (\mathbf{e}_{i'_1}^T \boldsymbol{\xi}_1) \otimes \mathbf{e}_{i_3} \otimes \cdots \otimes \mathbf{e}_{i_j}. \tag{27}$$

Here due to the orthogonality of the eigenvectors, we had to set  $i'_2 = i_3, \dots, i'_{j-1} = i_j$  to get a nonzero inner product between  $\mathbf{e}_{i'_1} \otimes \mathbf{e}_{i'_2} \otimes \cdots \otimes \mathbf{e}_{i'_{j-1}}$  and  $\boldsymbol{\xi}_1 \otimes \mathbf{e}_{i_3} \otimes \cdots \otimes \mathbf{e}_{i_j}$ .

Finally, due to the tensor product form, we can limit the summation to  $\mathbf{e}_{i'_1} \mathbf{e}_{i'_1}^T$ . Therefore we can collect these terms and define,

$$G_{12} = \sum_{i'_1} \frac{1}{\lambda_{i_1} + \lambda_{i_2} - \lambda_{i'_1}} \mathbf{e}_{i'_1} \mathbf{e}_{i'_1}^T = \left[ (\lambda_{i_1} + \lambda_{i_2}) I - F_1 \right]^{-1}. \tag{28}$$

By repeating this argument, we find that,

$$\begin{aligned}
\mathbf{w}_{j-1} &= G_{12} \boldsymbol{\xi}_1 \otimes \mathbf{e}_{i_3} \otimes \mathbf{e}_{i_4} \otimes \cdots \otimes \mathbf{e}_{i_j} \\
&\quad + \mathbf{e}_{i_1} \otimes G_{23} \boldsymbol{\xi}_2 \otimes \mathbf{e}_{i_4} \otimes \cdots \otimes \mathbf{e}_{i_j} \\
&\quad + \mathbf{e}_{i_1} \otimes \mathbf{e}_{i_2} \otimes G_{34} \boldsymbol{\xi}_3 \otimes \mathbf{e}_{i_5} \otimes \cdots \otimes \mathbf{e}_{i_j} \\
&\quad + \cdots \\
&\quad + \mathbf{e}_{i_1} \otimes \mathbf{e}_{i_2} \otimes \cdots \otimes \mathbf{e}_{i_{j-2}} \otimes G_{j-1,j} \boldsymbol{\xi}_{j-1}.
\end{aligned} \tag{29}$$



The first subtlety in this analysis comes from the careful organization of the many terms that emerge, e.g., from applying the  $j-2$  terms in  $A_{j-2,j-1}$  when computing  $A_{j-2,j-1}\mathbf{w}_{j-1}$ . Intuitively, we apply  $F_2$  to consecutive vectors in Eq. (29). When these two consecutive vectors are the eigenvectors, e.g.,  $\mathbf{e}_{i_k} \otimes \mathbf{e}_{i_{k+1}}$ , we obtain  $\boldsymbol{\xi}_k$ . Meanwhile, one of the vectors can also be  $\boldsymbol{\xi}$ . In this case, we will use a pairing scheme, illustrated as follows,

$$\begin{array}{ccccccccccc}
\boxed{\mathbf{e}_{i_1}} & \boxed{\mathbf{e}_{i_2}} & \cdots & \boxed{G_{k,k+1}\boldsymbol{\xi}_k} & \boxed{\mathbf{e}_{i_{k+2}}} & \boxed{\mathbf{e}_{i_{k+3}}} & \cdots & \boxed{\mathbf{e}_{i_j}} & & & \\
\boxed{\mathbf{e}_{i_1}} & \boxed{\mathbf{e}_{i_2}} & \cdots & \boxed{\mathbf{e}_{i_k}} & \boxed{G_{k+1,k+2}\boldsymbol{\xi}_{k+1}} & \boxed{\mathbf{e}_{i_{k+3}}} & \cdots & \boxed{\mathbf{e}_{i_j}} & & & \\
& & & F_2\left( & & & & \right) & & & 
\end{array} \tag{30}$$

Motivated by this observation, we generalize the definition of  $\boldsymbol{\xi}$  in Eq. (26) as follows,

**Definition 2.3.** Let  $\boldsymbol{\xi}_m^{(k)} \in \mathbb{R}^n$  be defined recursively as follows,

$$\begin{aligned}
\boldsymbol{\xi}_m^{(0)} &= \mathbf{e}_{i_m}, \\
\boldsymbol{\xi}_m^{(k)} &= \sum_{a=0}^{k-1} F_2\left(G_{p_m}\boldsymbol{\xi}_m^{(a)} \otimes G_{p_m+a+1}\boldsymbol{\xi}_{m+a+1}^{(k-a)}\right) \quad \text{for all } k \geq 1.
\end{aligned} \tag{31}$$

Here  $G_{p_m}$  is a generalization of Eq. (28) and it will be defined later. With these definitions and lengthy calculations, we have,

$$\begin{aligned}
A_{j-2,j-1}\mathbf{w}_{j-1} &= \sum_{k=1}^{j-3} \sum_{k'=k+2}^{j-2} \left[ \mathbf{e}_{i_1} \otimes \mathbf{e}_{i_{k-2}} G_{k,k+1}\boldsymbol{\xi}_k^{(1)} \otimes \cdots \otimes \mathbf{e}_{i_{k'-1}} \otimes \boldsymbol{\xi}_{k'}^{(1)} \otimes \mathbf{e}_{i_{k'+2}} \otimes \cdots \otimes \mathbf{e}_{i_j} \right. \\
&\quad \left. + \mathbf{e}_{i_1} \otimes \mathbf{e}_{i_{k-2}}\boldsymbol{\xi}_k^{(1)} \otimes \cdots \otimes \mathbf{e}_{i_{k'-1}} \otimes G_{k',k'+1}\boldsymbol{\xi}_{k'}^{(1)} \otimes \mathbf{e}_{i_{k'+2}} \otimes \cdots \otimes \mathbf{e}_{i_j} \right] \\
&\quad + \boldsymbol{\xi}_1^{(2)} \otimes \mathbf{e}_{i_4} \otimes \mathbf{e}_{i_5} \cdots \otimes \mathbf{e}_{i_j} \\
&\quad + \mathbf{e}_{i_1} \otimes \boldsymbol{\xi}_2^{(2)} \otimes \mathbf{e}_{i_5} \otimes \cdots \otimes \mathbf{e}_{i_j} \\
&\quad \cdots \\
&\quad + \mathbf{e}_{i_1} \otimes \mathbf{e}_{i_2} \otimes \cdots \otimes \mathbf{e}_{i_{j-3}} \otimes \boldsymbol{\xi}_{j-2}^{(2)}.
\end{aligned} \tag{32}$$

The other technical subtlety in the analysis comes from the inversion of  $\lambda I - A_{j-2,j-2}$  as well as the inversion of such matrices in the subsequent steps. In the previous step, the existence of the inverse is guaranteed by the no-resonance condition (9), which can be seen in the definition Eq. (28). However, the matrix inverse in later steps will require the Fredholm alternative. To elaborate on this point, we first notice that,

$$(\lambda I - A_{j-2,j-2})\mathbf{w}_{j-2} = A_{j-2,j-1}\mathbf{w}_{j-1}. \tag{33}$$

The matrix on the left hand side has eigenvalues  $\lambda - \lambda_{i'_1} - \lambda_{i'_2} - \cdots - \lambda_{i'_{j-2}}$ , which might become zero even under the no-resonance condition (9). Let us first examine a term from Eq. (32) that involves  $\boldsymbol{\xi}^{(2)}$ , e.g., we can study the following linear system,

$$(\lambda I - A_{j-2,j-2})\mathbf{w} = \mathbf{b}, \quad \mathbf{b} := \boldsymbol{\xi}_1^{(2)} \otimes \mathbf{e}_{i_4} \otimes \mathbf{e}_{i_5} \cdots \otimes \mathbf{e}_{i_j}.$$

Since  $A_{j-2,j-2}$  is diagonal, the left and right eigenvectors coincide, and the left eigenvectors associated with the eigenvalue  $\lambda - \lambda_{i'_1} - \lambda_{i'_2} - \cdots - \lambda_{i'_{j-2}}$  is  $\mathbf{z} := \mathbf{e}_{i'_1} \otimes \mathbf{e}_{i'_2} \otimes \cdots \otimes \mathbf{e}_{i'_{j-2}}$ . We claim that

if this eigenvalue is zero, then this corresponding eigenvector must be orthogonal to the vector on the right hand side of the above equation. In fact,  $\mathbf{z} \cdot \mathbf{b} \neq 0$  only when  $i'_2 = i_4$ ,  $i'_3 = i_5, \dots$  and  $i'_{j-2} = i_j$ . In this case, the eigenvalue becomes  $\lambda_{i_1} + \lambda_{i_2} + \lambda_{i_3} - \lambda_{i'_1}$ , which can not be zero due to the no-resonance condition in Eq. (9), and leads to a contradiction.

Let us examine another type of terms in Eq. (32), by considering,

$$(\lambda I - A_{j-2, j-2}) \mathbf{w} = \mathbf{b}, \quad \mathbf{b} := G_{12} \boldsymbol{\xi}_1^{(1)} \otimes \boldsymbol{\xi}_3^{(1)} \otimes \mathbf{e}_{i_5} \otimes \dots \otimes \mathbf{e}_{i_j} + \boldsymbol{\xi}_1^{(1)} \otimes G_{34} \boldsymbol{\xi}_3^{(1)} \otimes \mathbf{e}_{i_5} \otimes \dots \otimes \mathbf{e}_{i_j}.$$

In this case, in the eigenvectors, we must choose  $i'_3 = i_5, \dots$  and  $i'_{j-2} = i_j$ . Therefore, the eigenvalue is reduced to  $(\lambda_{i_1} + \lambda_{i_2} + \lambda_{i_3} + \lambda_{i_4}) - (\lambda_{i'_1} + \lambda_{i'_2})$ , which might be zero even under the condition (9). It is enough to examine the first two dimensions. We notice that,

$$\mathbf{e}_{i'_1}^T G_{12} = \frac{1}{\lambda_{i_1} + \lambda_{i_2} - \lambda_{i'_1}} \mathbf{e}_{i'_1}^T, \quad \mathbf{e}_{i'_2}^T G_{34} = \mathbf{e}_{i'_1}^T \frac{1}{\lambda_{i_3} + \lambda_{i_4} - \lambda_{i'_2}} \mathbf{e}_{i'_1}^T.$$

Therefore, in this case, the inner product with the right hand side becomes

$$\mathbf{z} \cdot \mathbf{b} = \frac{(\lambda_{i_1} + \lambda_{i_2} + \lambda_{i_3} + \lambda_{i_4}) - (\lambda_{i'_1} + \lambda_{i'_2})}{(\lambda_{i_1} + \lambda_{i_2} - \lambda_{i'_1})(\lambda_{i_3} + \lambda_{i_4} - \lambda_{i'_2})} \mathbf{e}_{i'_1} \cdot \boldsymbol{\xi}_1^{(1)} \mathbf{e}_{i'_2} \cdot \boldsymbol{\xi}_3^{(1)} = 0,$$

if  $\mathbf{z}$  is in the null space. Therefore, the Fredholm alternative still applies. By applying the same argument to all the terms in Eq. (32), we find a solution for  $\mathbf{w}_{j-2}$ ,

$$\begin{aligned} \mathbf{w}_{j-2} &= \sum_{k_1=1}^{j-3} \sum_{k_2=k_1+2}^{j-2} \mathbf{e}_{i_1} \otimes \mathbf{e}_{i_{k_1-1}} G_{k_1, k_1+1} \boldsymbol{\xi}_{k_1}^{(1)} \otimes \dots \otimes \mathbf{e}_{i_{k_2-1}} \otimes G_{k_2, k_2+1} \boldsymbol{\xi}_{k_2}^{(1)} \otimes \mathbf{e}_{i_{k_2+2}} \otimes \dots \otimes \mathbf{e}_{i_j} \\ &\quad + G_{123} \boldsymbol{\xi}_1^{(2)} \otimes \mathbf{e}_{i_4} \otimes \mathbf{e}_{i_5} \dots \otimes \mathbf{e}_{i_j} \\ &\quad + \mathbf{e}_{i_1} \otimes G_{234} \boldsymbol{\xi}_2^{(2)} \otimes \mathbf{e}_{i_5} \otimes \dots \otimes \mathbf{e}_{i_j} \\ &\quad \dots \\ &\quad + \mathbf{e}_{i_1} \otimes \mathbf{e}_{i_2} \otimes \dots \otimes \mathbf{e}_{i_{j-3}} \otimes G_{j-2, j-1, j} \boldsymbol{\xi}_{j-2}^{(2)}. \end{aligned} \tag{34}$$

Here  $G_{123}$  and similar matrices are defined as follows,

**Definition 2.4.** Let  $p_r(m_i, k_i) = m_i : (m_i + k_i) := \{m_i, m_i + 1, \dots, m_i + k_i\}$  for  $i \in [N]$ . Let  $G \in \mathbb{C}^{n \times n}$  be defined as follows,

$$G_{i_k: i'_k} = \left( (\lambda_{i_k} + \dots + \lambda_{i'_k}) I - F_1 \right)^{-1}. \tag{35}$$

From the no-resonance condition (9), we immediately have,

**Lemma 2.5.** The matrices  $G$ 's in Eq. (35) are well defined, and they are uniformly bounded,

$$\|G\| \leq \frac{1}{\Delta}. \tag{36}$$

*Proof.* From the definition, for any natural numbers  $i_r < i'_r$ , we have

$$\|G_{i_r: i'_r}\| = \frac{1}{\inf_{k \in [n]} (\lambda_{i_r} + \dots + \lambda_{i'_r}) I - \lambda_k}.$$

Note that

$$0 < \Delta \leq \inf_{k \in [n]} |(\lambda_{i_r} + \dots + \lambda_{i'_r})I - \lambda_k|.$$

Then we conclude that

$$\|G_{i_r:i'_r}\| \leq \frac{1}{\Delta}.$$

□

**Lemma 2.6.** *Let  $\mathbf{w}$  be the eigenvector from Eq. (21) with  $j = N$ . Under the no-resonance condition (9), the components of  $\mathbf{w}$  can be written as,*

$$\mathbf{w}_{N-k} = \sum_{k_1+\dots+k_N=k} \sum_{m_1, \dots, m_N} \mathcal{L}(G_{p_1} \boldsymbol{\xi}_{m_1}^{(k_1)}, \dots, G_{p_N} \boldsymbol{\xi}_{m_N}^{(k_N)}) \quad (37)$$

for  $k = 1, \dots, N-1$ . Here the operator  $\mathcal{L}(G_{p_1} \boldsymbol{\xi}_{m_1}^{(k_1)}, \dots, G_{p_N} \boldsymbol{\xi}_{m_N}^{(k_N)})$  is defined by starting with the string  $\mathbf{e}_{i_1} \otimes \mathbf{e}_{i_2} \otimes \dots \otimes \mathbf{e}_{i_N}$ , then replace  $\mathbf{e}_{i_{m_1}} \otimes \dots \otimes \mathbf{e}_{i_{m_1+k_1-1}}$  with  $G_{p_1} \boldsymbol{\xi}_{m_1}^{(k_1)}$ , and replace  $\mathbf{e}_{i_{m_2}} \otimes \dots \otimes \mathbf{e}_{i_{m_2+k_2-1}}$  with  $G_{p_2} \boldsymbol{\xi}_{m_2}^{(k_2)}$ ,  $\dots$ , and so on.

The proof, due to the lengthy calculations, is deferred to [Appendix A](#).

Due to the upper triangular structure of  $\mathbf{A}$ , this formula can be extended to other eigenvectors,

**Theorem 2.7.** *For any fixed  $j = 1, \dots, N$ , we have*

$$\mathbf{w}_{j-k} = \sum_{k_1+\dots+k_j=k} \sum_{m_1, \dots, m_j} \mathcal{L}(G_{p_1} \boldsymbol{\xi}_{m_1}^{(k_1)}, \dots, G_{p_j} \boldsymbol{\xi}_{m_j}^{(k_j)}). \quad (38)$$

*Proof.* The proof directly follows from [Lemma 2.6](#). □

We now move on to estimate these components of the eigenvectors.

**Lemma 2.8.** *Under the assumption that*

$$\|G\| \leq \frac{1}{\Delta}, \quad (39)$$

the vectors  $\boldsymbol{\xi}^{(k)}$  have the following bound,

$$\|\boldsymbol{\xi}^{(k)}\| \leq \frac{\|F_2\|^k}{\Delta^{k-1}} \frac{(2k)!}{(k+1)!k!}. \quad (40)$$

*Proof.* Using the recursion relation (73), together with the Catalan sequence, we deduce this bound. Specifically, we can assume that bound that,

$$\|\boldsymbol{\xi}^{(k)}\| \leq \alpha_k,$$

and from (73), we get,

$$\alpha_{c+1} \leq \sum_{i=0}^c \alpha_i \alpha_{c-i},$$

which forms the Catalan sequence. □

We can now use the general expression in Eq. (38) and find a bound,

$$\|\mathbf{w}_{j-k}\| \leq \left(\frac{\|F_2\|}{\Delta}\right)^k \sum_{\substack{k_1+k_2+\dots+k_r=k \\ r=j-k}} \frac{(2k_1)!}{(k_1+1)!k_1!} \frac{(2k_2)!}{(k_2+1)!k_2!} \dots \frac{(2k_r)!}{(k_r+1)!k_r!}. \quad (41)$$

Here  $k_1, k_2, \dots, k_r$  can be zero, in which case, the vector  $\boldsymbol{\xi}$  coincides with an eigenvector  $e_i$ .

**Lemma 2.9.** *The vector  $\mathbf{w}_{j-k}$  in Eq. (38) is bounded by,*

$$\|\mathbf{w}_{j-k}\| \leq \left(\frac{\|F_2\|}{\Delta}\right)^k \binom{j+k}{k} \frac{j-k}{j+k}. \quad (42)$$

*Proof.* We first notice that the right hand side of Eq. (41) is the sum of products of Cartalan numbers. Using the generating function, we have the bound. A detailed proof is provided in Appendix B.  $\square$

This will become the bound on the block of the matrix that contains the eigenvalue.

**Theorem 2.10.** *Let  $\mathbf{A}$  be the matrix from Carleman's linearization in Eq. (6). Assume that  $F_1 = \Lambda$  with  $\Lambda$  being diagonal and containing the eigenvalues. Under the no-resonance condition (9),  $\mathbf{A}$  is diagonalizable,*

$$\mathbf{A}V = DV, \quad (43)$$

where  $D$  is diagonal,

$$D = \begin{bmatrix} \Lambda & & & & \\ & \Lambda \otimes I + I \otimes \Lambda & & & \\ & & \Lambda \otimes I \otimes I + I \otimes \Lambda \otimes I + I \otimes I \otimes \Lambda & & \\ & & & \ddots & \\ & & & & \ddots \end{bmatrix}. \quad (44)$$

In addition, the matrix  $V$  that contains the eigenvectors can be partitioned in the same way as  $\mathbf{A}$  as a block upper triangular matrix, with diagonal blocks being the identity matrices with the same dimension as those in  $\mathbf{A}$ . Furthermore, the blocks of  $V$  has the following bound:  $\forall k \leq j$

$$\|V_{kj}\| \leq \left(\frac{\|F_2\|}{\Delta}\right)^{j-k} \binom{2j-k}{j-k}. \quad (45)$$

*Proof.* The fact that when no resonance is present,  $\mathbf{A}$  is diagonalizable has been noted in [37]. For the eigenvalues obtained from each block  $A_{j,j}$ , since the eigenvectors in Eq. (22) are linearly independent, the resulting eigenvectors  $\mathbf{w}$  constructed from previous Lemmas are linearly independent as well. Meanwhile, it is possible for two diagonal blocks, e.g.,  $A_{j,j}$  and  $A_{m,m}$  for some  $1 < j < m$  to have common eigenvalues. But since the eigenvectors computed in the previous Lemma from  $A_{j,j}$  have zero entries in the  $m$ th block, they are also linearly independent from those eigenvectors constructed from  $A_{m,m}$ . The rest of the Theorem follows from Lemma 2.9.  $\square$

A simple upper bound for this, using the inequality,  $\binom{n}{k} \leq \left(\frac{en}{k}\right)^k$ , is

$$\|V_{kj}\| \leq \left(\frac{2e\|F_2\|}{\Delta}\right)^{j-k}. \quad (46)$$

We now proceed to estimate  $\zeta$  in Eq. (19).

**Lemma 2.11.** *The vector  $\zeta$  can be partitioned into blocks according to the Carleman linearization,*

$$\begin{bmatrix} \zeta_1 \\ \zeta_2 \\ \vdots \\ \zeta_{\ell-1} \\ \zeta_N \end{bmatrix} \quad (47)$$

and the blocks obey the following the bounds

$$\|\zeta_j\| \leq \left( \frac{4e\|F_2\|}{\Delta} \right)^{N-j}. \quad (48)$$

*Proof.* By back substitution, we have,

$$\zeta_j = \sum_{j < j_1 < j_2 < \dots < j_r < N} V_{j,j_1} V_{j_1,j_2} \dots V_{j_r,\ell} \zeta_N. \quad (49)$$

Using the bound in (46), we find that,

$$\|\zeta_j\| = \sum_{j < j_1 < j_2 < \dots < j_r < N} \left( \frac{2e\|F_2\|}{\Delta} \right)^{N-j} = \left( \frac{4e\|F_2\|}{\Delta} \right)^{N-j}.$$

Here we used the fact that  $\sum_{j < j_1 < j_2 < \dots < j_r < N} 1 = 2^{N-j}$ .  $\square$

As a result,  $\forall t \geq 0$ , we have,

$$\begin{aligned} \|\boldsymbol{\eta}(t)\| &\leq \|\zeta_1\| + \|V_{12}\| \|\zeta_2\| + \dots + \|V_{1N}\| \|\zeta_N\| \\ &\leq \left( \frac{4e\|F_2\|}{\Delta} \right)^{N-1} + \frac{2e\|F_2\|}{\Delta} \left( \frac{4e\|F_2\|}{\Delta} \right)^{N-2} + \dots + \left( \frac{2e\|F_2\|}{\Delta} \right)^{N-1}. \end{aligned} \quad (50)$$

Collecting these results, we state the main theorem,

**Theorem 2.12.** *Assume that the solution of the nonlinear ODE satisfies a uniform-in-time bound,*

$$\|\boldsymbol{x}(t)\| \leq \mu, \quad \forall t \in [0, T], \quad (51)$$

and  $F_1$  involves no resonant modes. Then the error in the Carleman linearization can be bounded by,

$$\|\boldsymbol{x}(T) - \boldsymbol{y}_1(T)\| \leq CNTR_r^{N-1}, \quad R_r := \frac{4e\mu\|F_2\|_W}{\Delta}. \quad (52)$$

The constant  $C = \|W\|$  with  $W$  containing the eigenvectors of  $F_1$ , i.e.,  $F_1 = W\Lambda W^{-1}$ . It is independent of the level of the Carleman linearization. In addition,  $\|F_2\|_W := \|W^{-1}F_2W \otimes W\|$ . This incorporates the similar transformation (16) that reduced  $F_1$  to  $\Lambda$ .

**Remark 2.13.** *For Hamiltonian systems, the eigenvalues of  $F_1$  are purely imaginary, i.e.,  $\pm i\omega_j$ . Then no-resonance condition (9) implies that any two diagonal blocks,  $A_{j,j}$  and  $A_{k,k}$  with  $k > j$ , do not share eigenvalues. Therefore, it is not necessary to involve Fredholm alternative condition in the proof.*

**Remark 2.14.** In the dissipative regime,  $\|e^{tD}\| \leq e^{-\sigma t}$ , the error bound becomes

$$\|\mathbf{x}(T) - \mathbf{y}_1(T)\| \leq CN \frac{1 - e^{-\sigma T}}{\sigma} \mathbf{R}_r^{N-1}. \quad (53)$$

In this case, the dependence on  $\alpha$  is weaker.

**Remark 2.15.** Some ODEs come with zero eigenvalues that correspond to translational symmetry or the application of the periodic boundary conditions. This implies that  $\mathbf{v}^T \mathbf{x}(t)$  is a first integral for some vector  $\mathbf{v}$ , implying that,

$$\mathbf{v} \in (\text{Range}(F_1))^\perp, \quad \mathbf{v} \in (\text{Range}(F_2))^\perp. \quad (54)$$

Although the presence of the zero eigenvalues obviously leads to a resonance, i.e.,  $\lambda_i = \lambda_i + m \times 0$  for any  $\lambda_i$  and any positive integer  $m$ , these resonance modes can be easily separated. For example, when  $\sum_{i=1}^n x_i$  is a first integral, then one can apply a coordinate transformation and reduce the ODEs to an  $(n-1)$ -dimensional ODE system, while still in the form (4), i.e.,

$$\frac{d}{dt} \tilde{\mathbf{x}} = \tilde{F}_1 \tilde{\mathbf{x}} + \tilde{F}_2 \tilde{\mathbf{x}} \otimes \tilde{\mathbf{x}}. \quad (55)$$

In addition, one can use (54) and show that the Carleman system Eq. (8) is exactly equivalent to the Carleman system derived from Eq. (55). As a result, such zero eigenvalues can be removed from the error analysis.

**Remark 2.16.** When the no-resonance condition (9) is violated, the analysis has to be modified accordingly. First, when the resonance occurs at an order higher than  $N$ , i.e.,  $\sum m_j > N$ , then the current analysis still applies straightforwardly. Secondly, the presence of the resonant modes within the truncation order  $N$  might introduce repeated eigenvalues with geometric multiplicity greater than  $m > 1$ . As a result, the matrix exponential in Eq. (19) will introduce a polynomial growth  $O(t^m)$ . Therefore, if  $m \ll N$ , it is still possible to get an error rate independent of  $T$ .

## 3 Numerical Results

### 3.1 Carleman linearization for Burgers' equation

Our first numerical test is performed on the Burgers' equation, a standard example for a nonlinear PDE

$$u_t + cuu_x = u_{xx}, \quad x \in \left[-\frac{1}{2}, \frac{1}{2}\right]. \quad (56)$$

We introduce a parameter  $c > 0$  here to test the effect of the nonlinearity. By assuming a homogeneous Dirichlet boundary condition, and applying an upwind scheme (e.g., when  $u \geq 0$ ) [28], we can reduce the PDE to a nonlinear ODE system,

$$\begin{aligned} \frac{d}{dt} u_j &= -c \frac{u_j^2 - u_{j-1}^2}{2\Delta x} + \frac{u_{j+1} - 2u_j + u_{j-1}}{\Delta x^2}, \quad j = 1, 2, \dots, n \\ u_0 &= u_{n+1} = 0. \end{aligned} \quad (57)$$

The grid size is  $\Delta x = \frac{1}{n}$ .

As a result of this semi-discrete approximation, we arrive at a nonlinear ODE system in the form of (4). In particular,  $F_1$  is the standard tri-diagonal matrix. In addition,  $F_2$  is 1-sparse with only the following non-zero entry.

$$(F_2)_{i,(i,i)} = -\frac{c}{2\Delta x} \quad \text{for all } 1 \leq i \leq n.$$

$$(F_2)_{i,(i-1,i-1)} = \frac{c}{2\Delta x} \quad \text{for all } 2 \leq i \leq n.$$

In the numerical tests, we initialize the Burgers' equation by a bell-shaped profile,

$$u(x, 0) = -\tan^{-1}\left(20\left(x - \frac{1}{4}\right)\right) + \tan^{-1}\left(20\left(x + \frac{1}{4}\right)\right). \quad (58)$$

The solution at later times is displayed in Fig. 1, which shows decay due to the smoothing from the viscosity term.

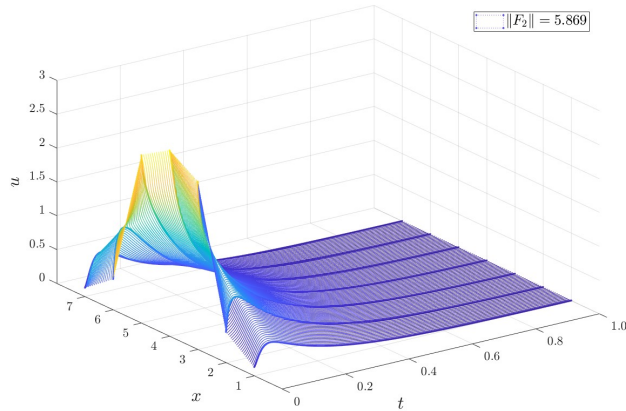


Figure 1: Solution of the Burgers' equation (56) in the time interval  $[0, 1]$ . The solutions are obtained using the 4th-order Runge-Kutta methods applied to the nonlinear ODEs (57).

We first pick  $n = 7$ , which is a relatively small system compared to the numerical tests in [32]. But we extend the Carleman linearization (6) to much higher levels up to  $N = 8$ . Our first test focuses on the effect of the level of nonlinearity, indicated by  $\|F\|_2$ . This is confirmed by the numerical results in Fig. 2: weaker nonlinearity induces smaller truncation error, and when  $\|F\|_2$  is too large, the approximation from the Carleman linearization begins to diverge. For the setup of our numerical experiments, the parameter  $R_d \approx 0.8223\|F\|_2$  can be much greater than 1 in the numerical experiments. Nevertheless, the Carleman linearization still converges, which was also observed in [32]. This could be attributed to the smoothing effect, which can be seen from Fig. 1: the solution decays over time, which in light of (18), can make the error much smaller. Another option to reduce the parameter  $R_d$  is to adjust the real part of the eigenvalues of  $F_1$ . Toward this end, we shift the eigenvalues of  $F_1$  toward zero by adding  $\beta I$  to  $F_1$ . By choosing  $\beta = 5$ , the eigenvalue with the smallest absolute value is  $\lambda = -0.48$ . We can see from Fig. 2 that the error from Carleman linearization begins to diverge when  $\|F_2\| \approx 11.74$ . On one hand, this highlights

the importance of the dissipative condition (1). On the other hand, it also shows that Carleman linearization still converges when an eigenvalue is very close to zero.

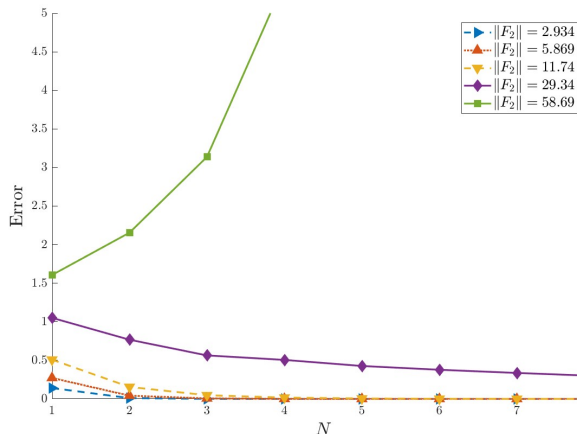


Figure 2: The Carleman linearization error for the Burgers' equation in the time interval  $[0, 1]$  for different truncation level  $N \leq 8$  with different level of nonlinearity, indicated by  $\|F\|_2$ , which is controlled by changing  $c$  in Eq. (57).

The analysis in [15, 32] (also see Eq. (18)) suggests a small error for a short time  $T$ . To test this, we fix  $\|F_2\| = 5.869$  and examine the error of Carleman linearization using  $L^\infty$  norm in time. We observe from Fig. 4 that for shorter times, the error is indeed small. However, the error begins to saturate for longer time intervals.

Finally, we consider a larger ODE system from (56) using a finer spatial discretization with  $n = 31$ . The corresponding parameter is  $R_d = 1.145\|F_2\|$ . By comparing the previous results in Fig. 2 with discretization  $n = 7$  with results shown Fig. 5, we can see the point for  $\|F_2\|$  when the error begins to diverge is larger.

### 3.2 Carleman linearization for the KdV equation

In this section, we provide numerical results from simulating the KdV equation,

$$u_t + cuu_x = -u_{xxx}, \quad x \in \left(-\frac{1}{2}, \frac{1}{2}\right), \quad t > 0. \quad (59)$$

In contrast to the dissipation in the Burgers' equation Eq. (56), the KdV equation involves a third-order derivative, introducing a dispersive regularization [27]. To convert the PDE to the nonlinear ODE system, we use the following discretization,

$$\frac{d}{dt}u_j = -c \frac{u_j^2 - u_{j-1}^2}{2\Delta x} - \frac{u_{j+2} - 2u_{j+1} + 2u_{j-1} - u_{j-2}}{2\Delta x^3}. \quad (60)$$

For simplicity, we employ periodic boundary conditions. Notice that Eq. (60) is no longer dissipative. The eigenvalues of  $F_1$  are purely imaginary and the criterion using  $R_d$  in [32] does not apply.



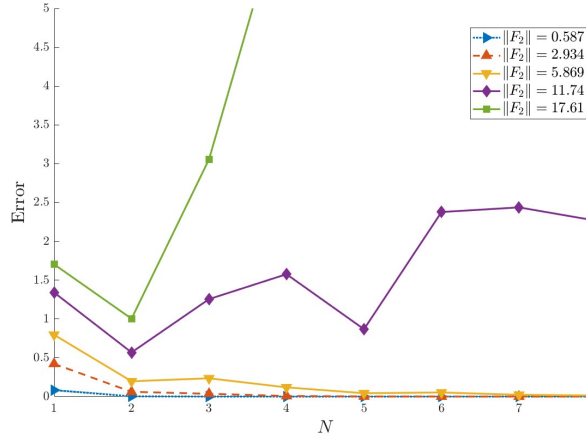


Figure 3: The Carleman linearization error for the Burgers' equation in the time interval  $[0, 1]$  for different truncation level  $N$  for different  $\|F\|_2$ , which is varied by changing  $c$  in Eq. (57). Here we add a  $\beta I$  term to  $F_1$  in Eq. (57) so that the leading eigenvalue is close to zero.

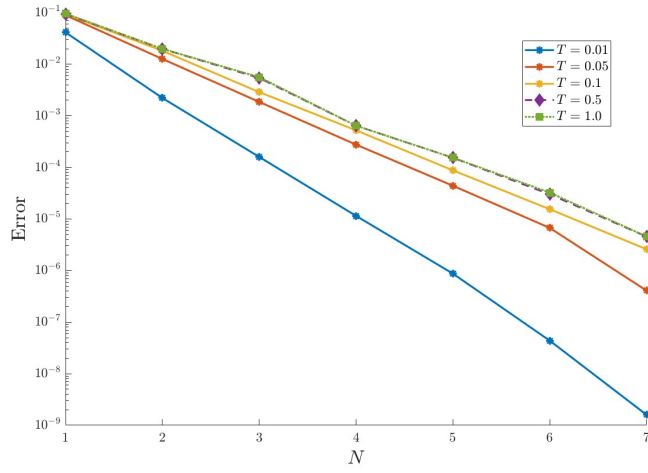


Figure 4: The Carleman linearization error for the Burgers' equation for different truncation levels  $N$  and different time durations  $T$ . Here we set  $\|F_2\| = 5.869$ .

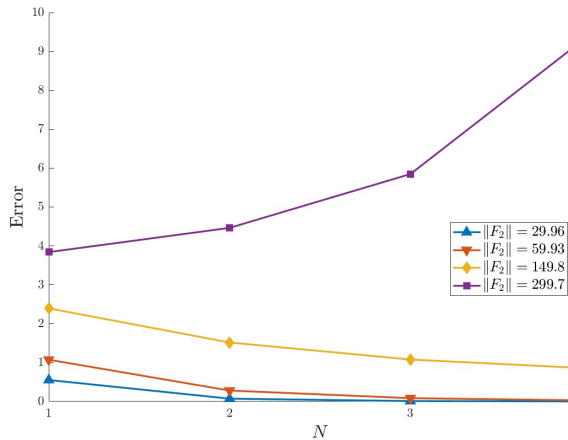


Figure 5: The Carleman linearization error for the Burgers' equation in the time interval  $[0, 0.5]$  for different truncation level  $N \leq 4$  with different level of nonlinearity, indicated by  $\|F\|_2$ , which is controlled by changing  $c$  in Eq. (57). Here we set  $n = 31$ .

Similar to the setup of the numerical experiments for the Burgers' equation, we begin by selecting a modest system size of  $n = 7$ , focusing on the Carleman linearization (6) up to level  $N = 8$ . The solution to the KdV equation, initialized via Eq. (58), is depicted in Fig. 6, where one can observe a soliton-like propagation through the system within the time interval  $[0, 0.1]$  and under the periodic boundary condition. In particular, unlike the solution of the Burgers' equation in Fig. 1, the solution of the KdV equation does not exhibit a decay.

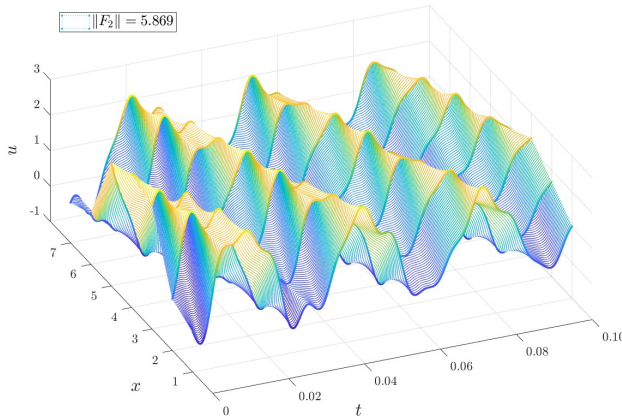


Figure 6: Solution of the KdV Eq. (59) in the time interval  $[0, 0.1]$ . The solutions are obtained by using the 4th-order Runge-Kutta methods applied to the nonlinear ODEs (60).

Next, we investigate the error due to the nonlinearity for various simulation durations, quantified by the  $L^\infty$  norm over time. By tuning the parameter  $c$  in Eq. (59), we can adjust the level of the nonlinearity, and the results are illustrated in Fig. 7. It is clear that even without the dissipative

condition (1), the Carleman linearization still converges when  $\|F_2\|$  is sufficiently small. To compare to the analysis in [Theorem 1.1](#), we calculated the parameter  $R_r = 2.2029\|F_2\|$ . In light of [Remark 2.15](#), we neglected the zero eigenvalues when computing the resonance parameter  $\Delta$  in [Eq. \(10\)](#). Due to the lack of dissipation, we attribute the observed convergence to the resonance condition (9).

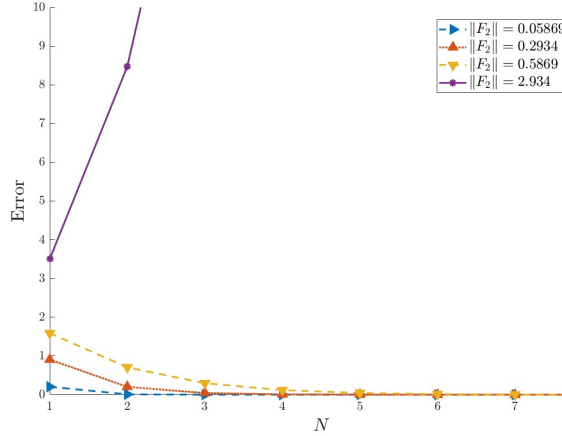


Figure 7: The Carleman linearization error for the KdV equation in the time interval  $[0, 0.1]$  for different truncation level  $N \leq 8$  with different level of nonlinearity, indicated by  $\|F\|_2$ , which is controlled by changing  $c$  in [Eq. \(60\)](#).

To examine the impact of total duration  $T$ , we fixed  $\|F_2\| = 0.5869$ . We observe in [Fig. 8](#) that the error grows with total duration, while the convergence with truncation level is still markedly evident.

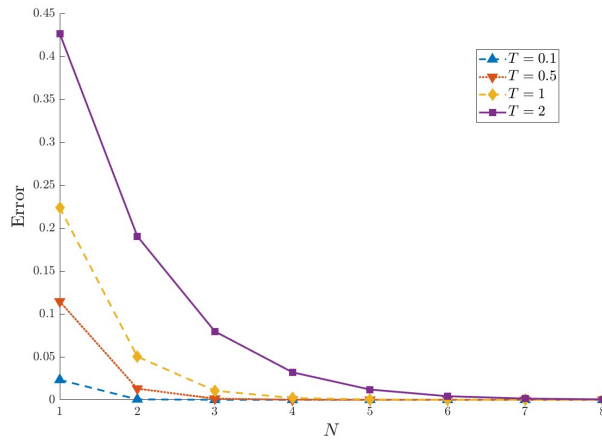


Figure 8: The Carleman linearization error for the KdV equation for different truncation level  $N$  and different time durations  $T$ . Here we set  $\|F_2\| = 0.5869$ .

In [Fig. 9](#), we consider a spatial discretization with  $n = 31$ . Due to the memory constraint, we

only performed the simulations up to  $N = 4$ . Compared to the results in Fig. 7, we observe that the basic pattern between the error and  $\|F_2\|$  is still the same, though with this larger discretized system, the tipping point for the error to diverge is different. This is because in this case the grid size is reduced, and the coefficient  $c$  we use in Eq. (60) is larger.

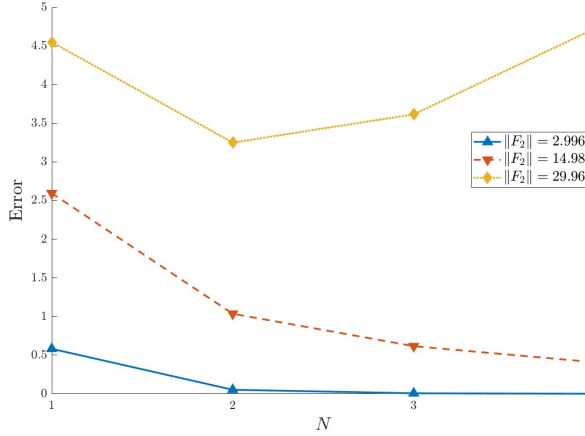


Figure 9: The Carleman linearization error for the KdV equation discretized with  $n = 31$  grid points. The error is shown in the time interval  $[0, 0.1]$  for different truncation level  $N \leq 4$  with different levels of nonlinearity, indicated by  $\|F\|_2$ .

### 3.3 Carleman linearization for the Fermi-Pasta-Ulam (FPU) dynamics

Our next example is the Fermi-Pasta-Ulam (FPU) chain model, which is a foundational example in nonlinear dynamics and statistical mechanics for the study of chaos [34], thermodynamic properties [11] and phonon transport [12]. FPU chain model consists of a one-dimensional chain of particles connected by linear and nonlinear springs. For  $i = 1, \dots, p$ , the governing equations for the atomic displacement, denoted by  $u_i$ , are given by

$$\frac{d^2 u_i}{dt^2} = k(u_{i+1} - 2u_i + u_{i-1}) + \alpha(u_{i+1} - u_i)^3 - \alpha(u_i - u_{i-1})^3. \quad (61)$$

Here we set the mass  $m = 1$  and impose Dirichlet boundary conditions  $u_0 = u_{p+1} = 0$ . To express the ODEs in a first-order form, we define

$$\mathbf{x} = (u_1, u_2, \dots, u_{p-1}, u_p, \dot{u}_1, \dot{u}_2, \dots, \dot{u}_{p-1}, \dot{u}_p)^T, \quad (62)$$

where  $p$  is the number of moving particles. Due to the linear and cubic terms in Eq. (61), one can rewrite the equations of motion as follows,

$$\frac{d}{dt} \mathbf{x} = F_1 \mathbf{x} + F_3 \mathbf{x} \otimes \mathbf{x} \otimes \mathbf{x}. \quad (63)$$

Here  $F_1 \in \mathbb{R}^{2p \times 2p}$  is a sparse matrix. For the nonzero entries, we have

$$\begin{aligned} (F_1)_{i,i} &= 1, (F_1)_{i+p,i} = -2k, & \forall 1 \leq i \leq p \\ (F_1)_{i+p,i+1} &= k, & \forall 1 \leq i \leq p-1 \\ (F_1)_{i+p,i-1} &= k, & \forall 2 \leq i \leq p. \end{aligned}$$

Therefore,  $F_1$  is in the form of

$$F_1 = \begin{pmatrix} 0 & 0 & 0 & \cdots & 0 & 1 & 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & \cdots & 0 & 0 & 1 & 0 & 0 & 0 \\ 0 & 0 & 0 & \cdots & 0 & 0 & 0 & \ddots & 0 & 0 \\ 0 & 0 & 0 & \cdots & 0 & 0 & 0 & 0 & 1 & 0 \\ 0 & 0 & 0 & \cdots & 0 & 0 & 0 & 0 & 0 & 1 \\ -2k & k & \cdots & 0 & 0 & 0 & 0 & 0 & \cdots & 0 \\ k & -2k & k & 0 & 0 & 0 & 0 & 0 & \cdots & 0 \\ 0 & 0 & \ddots & 0 & 0 & 0 & 0 & 0 & \cdots & 0 \\ 0 & 0 & \cdots & -2k & k & 0 & 0 & 0 & \cdots & 0 \\ 0 & 0 & \cdots & k & -2k & 0 & 0 & 0 & \cdots & 0 \end{pmatrix}. \quad (64)$$

Notice that  $F_1$  has imaginary eigenvalues that are proportional to the frequency of the chain. In addition, we removed the zero frequency by using Dirichlet boundary conditions.

Note that  $F_3 \in \mathbb{R}^{2p \times (2p)^3}$ , we denote  $(i, j, k)$  to be the column of  $F_3$  acting on  $\mathbf{x}_i \otimes \mathbf{x}_j \otimes \mathbf{x}_k$ , then  $F_3$  is sparse with the following non-zero elements.

$$(F_3)_{i+p,(i,i,i)} = -2\alpha, \quad \text{for any } 1 \leq i \leq p.$$

For any  $1 \leq i \leq p-1$ ,

$$\begin{cases} (F_3)_{i+p,(i+1,i+1,i+1)} = (F_3)_{i+p,(i,i,i+1)} = (F_3)_{i+p,(i,i+1,i)} = (F_3)_{i+p,(i+1,i,i)} = \alpha, \\ (F_3)_{i+p,(i+1,i+1,i)} = (F_3)_{i+p,(i,i+1,i+1)} = (F_3)_{i+p,(i+1,i,i+1)} = -\alpha. \end{cases}$$

For any  $2 \leq i \leq p$ ,

$$\begin{cases} (F_3)_{i+p,(i-1,i-1,i-1)} = (F_3)_{i+p,(i,i,i-1)} = (F_3)_{i+p,(i,i-1,i)} = (F_3)_{i+p,(i-1,i,i)} = \alpha, \\ (F_3)_{i+p,(i-1,i-1,i)} = (F_3)_{i+p,(i,i-1,i-1)} = (F_3)_{i+p,(i-1,i,i-1)} = -\alpha. \end{cases}$$

This is constructed from the condition that  $(F_3 \mathbf{x} \otimes \mathbf{x} \otimes \mathbf{x})_{p+i} = \alpha(u_{i+1} - u_i)^3 - \alpha(u_i - u_{i-1})^3$ .

With the model fully described, we now write down the Carleman linearization for equation (63)

$$\frac{d}{dt} \begin{pmatrix} \mathbf{y}_1 \\ \mathbf{y}_2 \\ \mathbf{y}_3 \\ \mathbf{y}_4 \\ \vdots \\ \mathbf{y}_N \end{pmatrix} = \begin{pmatrix} A_{1,1} & 0 & A_{1,3} & 0 & \cdots & 0 & 0 \\ 0 & A_{2,2} & 0 & A_{2,4} & \cdots & 0 & 0 \\ 0 & 0 & A_{3,3} & 0 & \ddots & \vdots & \vdots \\ 0 & 0 & 0 & A_{4,4} & \ddots & \vdots & \vdots \\ \vdots & \vdots & \vdots & \vdots & \ddots & \vdots & \vdots \\ 0 & 0 & 0 & 0 & \cdots & A_{N-1,N-1} & 0 \\ 0 & 0 & 0 & 0 & \cdots & 0 & A_{N,N} \end{pmatrix} \begin{pmatrix} \mathbf{y}_1 \\ \mathbf{y}_2 \\ \mathbf{y}_3 \\ \mathbf{y}_4 \\ \vdots \\ \mathbf{y}_N \end{pmatrix}. \quad (65)$$

where  $A_{j,j} = \sum_{i=1}^{j-1} I^{\otimes i} \otimes F_1 \otimes I^{\otimes j-1-i}$  and  $A_{j,j+2} = \sum_{i=1}^{j-1} I^{\otimes i} \otimes F_3 \otimes I^{\otimes j-1-i}$ . Due to the cubic nonlinearity, the off-diagonal blocks are shifted toward the upper right corner. In the following, we show that this system can be converted into our standard form Eq. (4) when  $N$  is even.

**Proposition 3.1.** *When the truncation level  $N$  is even, the system of Carleman linearized FPU chain model (65) is equivalent to the Carleman linearization of a quadratic ODE system (5).*

*Proof.* The main observation is that the Carleman system of FPU chain model is decoupled, i.e., the even level and the odd level will not affect each other. So we can write down separately the ODE formula

$$\begin{aligned}\frac{d}{dt}\mathbf{y}_1 &= A_{1,1}\mathbf{y}_1 + A_{1,3}\mathbf{y}_3, \\ \frac{d}{dt}\mathbf{y}_2 &= A_{2,2}\mathbf{y}_2 + A_{2,4}\mathbf{y}_4.\end{aligned}$$

We first show that the above equations can be turned into one quadratic ODE formula. For this purpose, we define  $\hat{F}_1$  and  $\hat{F}_2$  such that

$$\frac{d}{dt} \begin{pmatrix} \mathbf{y}_1 \\ \mathbf{y}_2 \end{pmatrix} = \hat{F}_1 \begin{pmatrix} \mathbf{y}_1 \\ \mathbf{y}_2 \end{pmatrix} + \hat{F}_2 \begin{pmatrix} \mathbf{y}_1 \\ \mathbf{y}_2 \end{pmatrix} \otimes \begin{pmatrix} \mathbf{y}_1 \\ \mathbf{y}_2 \end{pmatrix}, \quad (66)$$

where

$$\hat{F}_1 \begin{pmatrix} \mathbf{y}_1 \\ \mathbf{y}_2 \end{pmatrix} = \begin{pmatrix} A_{1,1}\mathbf{y}_1 \\ A_{2,2}\mathbf{y}_2 \end{pmatrix}, \hat{F}_2 \begin{pmatrix} \mathbf{y}_1 \\ \mathbf{y}_2 \end{pmatrix} \otimes \begin{pmatrix} \mathbf{y}_1 \\ \mathbf{y}_2 \end{pmatrix} = \begin{pmatrix} A_{1,3}\mathbf{y}_3 \\ A_{2,4}\mathbf{y}_4 \end{pmatrix}. \quad (67)$$

We can easily find the corresponding  $\hat{F}_1$ ,

$$\hat{F}_1 = \begin{pmatrix} A_{1,1} & 0 \\ 0 & A_{2,2} \end{pmatrix}. \quad (68)$$

If we denote  $\hat{F}_2 \begin{pmatrix} \mathbf{y}_1 \\ \mathbf{y}_2 \end{pmatrix} \otimes \begin{pmatrix} \mathbf{y}_1 \\ \mathbf{y}_2 \end{pmatrix} = \sum_{i,j=1,2} (\hat{F}_2)_{i,j} \mathbf{y}_i \otimes \mathbf{y}_j = \sum_{i,j,k=1,2} (\hat{F}_2)_{k,(i,j)} \mathbf{y}_k$ , then  $\hat{F}_2$  only contains the following non-zero entries,

$$\begin{cases} (\hat{F}_2)_{1,(1,2)} = (\hat{F}_2)_{1,(2,1)} = \frac{1}{2}A_{1,3}, \\ (\hat{F}_2)_{2,(2,2)} = A_{2,4}. \end{cases}$$

For any level of truncation that is not the last two levels, we denote  $\hat{I} = I^{\otimes 3}$  and  $\hat{A}_{j,j} = \sum_{i=1}^{j-1} \hat{I}^{\otimes i} \otimes \hat{F}_1 \otimes \hat{I}^{\otimes j-1-i}$  and  $\hat{A}_{j,j+1} = \sum_{i=1}^{j-1} \hat{I}^{\otimes i} \otimes \hat{F}_2 \otimes \hat{I}^{\otimes j-1-i}$  so that  $\forall 1 \leq j < \frac{N}{2}$ , the two original equations for the levels  $2j-1$  and  $2j$  can be represented by

$$\frac{d}{dt} \begin{pmatrix} \mathbf{y}_{2j-1} \\ \mathbf{y}_{2j} \end{pmatrix} = \hat{A}_{j,j} \begin{pmatrix} \mathbf{y}_1 \\ \mathbf{y}_2 \end{pmatrix}^{\otimes j} + \hat{A}_{j,j+1} \begin{pmatrix} \mathbf{y}_1 \\ \mathbf{y}_2 \end{pmatrix}^{\otimes j+1}. \quad (69)$$

For the last two original truncation levels  $N-1$  and  $N$ , the original formula (65) turns into,

$$\begin{aligned}\frac{d}{dt}\mathbf{y}_{N-1} &= A_{N-1,N-1}\mathbf{y}_N, \\ \frac{d}{dt}\mathbf{y}_N &= A_{N,N}\mathbf{y}_N.\end{aligned}$$

which can be combined into

$$\frac{d}{dt} \begin{pmatrix} \mathbf{y}_{N-1} \\ \mathbf{y}_N \end{pmatrix} = \hat{A}_{\frac{N}{2}, \frac{N}{2}} \begin{pmatrix} \mathbf{y}_1 \\ \mathbf{y}_2 \end{pmatrix}^{\otimes N}. \quad (70)$$

□

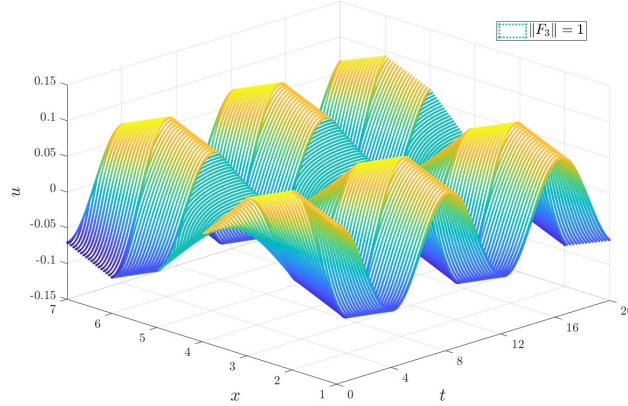


Figure 10: The displacement part of the solution of the FPU chain model (61) in the time interval  $[0, 20]$ .

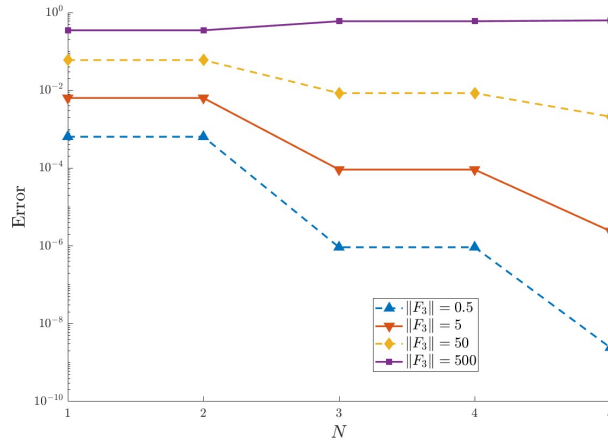


Figure 11: The Carleman linearization error for the FPU chain model in Eq. (61) in the time interval  $[0, 10]$  for different truncation level  $N \leq 5$  with different level of nonlinearity, indicated by  $\|F\|_3$ , which is controlled by changing  $\alpha$  in Eq. (61).

In the numerical tests, we initialize the FPU chain by a sinusoidal function,

$$\begin{cases} u(x, 0) &= \frac{1}{10} \sin\left(\frac{2\pi x}{p+1}\right), \\ \frac{d}{dt}u(x, 0) &= 0. \end{cases} \quad (71)$$

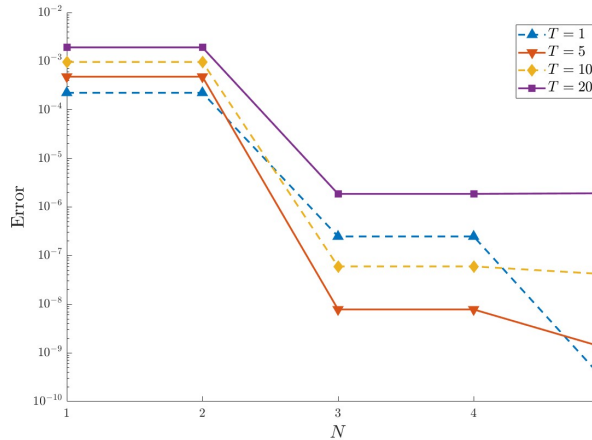


Figure 12: The Carleman linearization error for the FPU chain model in Eq. (61) for different truncation levels  $N$  and different time duration  $T$ . Here we set  $\|F_3\| = 1$ .

We choose  $k = 1$  and set the length of the chain to  $p = 7$ , and test the Carleman linearization up to level  $N = 5$ . The snapshots of the exact solution are displayed in Fig. 10. Unlike the solution to the Burgers' equation depicted in Fig. 1, the solution to the FPU equation under these settings exhibits persistent oscillations.

To assess the impact of nonlinearity on error across various simulation durations, we tune the parameter  $\alpha$  in Eq. (61). The error from the Carleman linearization for each choice of  $\alpha$  is shown in Fig. 11. We observed that even in the absence of dissipative conditions (1), the Carleman linearization converges when  $\|F_3\|$  remains sufficiently small, and divergence from the exact solution is observed for stronger nonlinearity. With numerical calculations, we find that this FPU chain is non-resonant, but with a small resonance parameter  $\Delta = 2.3444 \times 10^{-4}$ . Therefore it is quite remarkable that the Carleman linearization still shows convergence for modest nonlinearity.

We also studied the influence of total time duration  $T$  by keeping  $\|F_3\| = 1$ . The numerical results, as shown in Fig. 12, suggest that the error over a longer time interval often grows with  $T$  (with a few exceptions), but the growth does not seem to be exponential.

## 4 Summary and discussions

In this paper, we have identified a new regime for dynamical systems where Carleman linearization can achieve linear convergence with the truncation level  $N$ . This discovery can be utilized to establish an efficient quantum algorithm. The key to this convergence is a resonance parameter  $\Delta$ , which, in the error bound, functions similarly to the dissipative parameter in previous analyses of the dissipative regime. However, these two regimes are not mutually exclusive; both dissipation and dispersion can be at play simultaneously. Additionally, our numerical results suggest that the current error bounds are likely pessimistic. For instance, the sparsity of  $F_2$  has not been taken into account. There are other linear embedding schemes [13, 16] for reducing nonlinear dynamical systems to linear ODEs. Extending the current analysis to study the truncation error of those schemes is another interesting direction to explore.



We have kept the focus of this paper mainly on the analysis of the error from the Carleman linearization. The actual implementation of the algorithm should also involve the preparation of  $\mathbf{y}(0)$ , a quantum algorithm for linear ODEs, and efficient algorithms for the measurements of quantities of interest. We refer readers to [26, 31, 32] and the references therein for the discussions of these aspects. It is also important to point out that the present approach and analysis are not limited to ODEs. Rather, such ODEs can arise from the semi-discrete approximations of many PDEs. The Burgers and KdV equations are already two important examples of this kind.

Our analysis primarily focuses on the dynamical systems described in Eq. (4), where there exists a stable equilibrium at  $\mathbf{x} = 0$ . Additionally, we can introduce an external force  $F_0$ , as discussed in [32]. When  $F_0$  is sufficiently small, it merely shifts the equilibrium point, allowing the same analytical approach to remain applicable. However, the situation becomes more complex when the system is exploring multiple equilibrium points, necessitating a different analytical framework. Moreover, even in scenarios involving a single equilibrium, the occurrence of resonance can induce chaotic behavior, as illustrated in examples from [33, Chap. 7]. In such instances, any approximation method must contend with rapidly growing errors. Considering that the optimal complexity of a quantum algorithm for solving a linear ordinary differential equation (ODE) system, particularly via the Carleman linearization method, increases linearly with time  $T$ , it appears challenging for Carleman linearization to achieve fast or even any convergence in these contexts. This perspective is consistent with the insights presented in [29].

## A Proof of Lemma 2.6

*Proof.* We first suppose  $A_{i,i}$  and  $A_{j,j}$  do not share the same eigenvalues. We can assume  $N$  is an even number, so  $\frac{N}{2} = \lfloor \frac{N}{2} \rfloor$ . The case when  $N$  is odd can be proved similarly. Denote  $s = \frac{N}{2}$ . For the case  $1 \leq k \leq s$ , we rewrite Eq. (37) into

$$\begin{aligned}
\mathbf{w}_{j-k} &= \sum_{m_1=1}^{j-k} \mathcal{L}(G_{p_{m_1}} \boldsymbol{\xi}_{m_1}^{(k)}) \\
&+ \chi_{k \geq 2} \sum_{m_1=1}^{j-k-1} \left( \sum_{m_2=m_1+k}^{j-1} \mathcal{L}(G_{p_{m_1}} \boldsymbol{\xi}_{m_1}^{(k-1)}, G_{p_{m_2}} \boldsymbol{\xi}_{m_2}^{(1)}) + \sum_{m_2=m_1+2}^{j-k+1} \mathcal{L}(G_{p_{m_1}} \boldsymbol{\xi}_{m_1}^{(1)}, G_{p_{m_2}} \boldsymbol{\xi}_{m_2}^{(k-1)}) \right) \\
&+ \chi_{k \geq 3} \sum_{m_1=1}^{j-k-1} \left( \sum_{m_2=m_1+k-1}^{j-2} \mathcal{L}(G_{p_{m_1}} \boldsymbol{\xi}_{m_1}^{(k-2)}, G_{p_{m_2}} \boldsymbol{\xi}_{m_2}^{(2)}) + \sum_{m_2=m_1+3}^{j-k+2} \mathcal{L}(G_{p_{m_1}} \boldsymbol{\xi}_{m_1}^{(2)}, G_{p_{m_2}} \boldsymbol{\xi}_{m_2}^{(k-2)}) \right) \\
&+ \chi_{k \geq 3} \sum_{m_1=1}^{j-k-2} \left( \sum_{m_2=m_1+k-1}^{j-3} \sum_{m_3=m_2+2}^{j-1} \mathcal{L}(G_{p_{m_1}} \boldsymbol{\xi}_{m_1}^{(k-2)}, G_{p_{m_2}} \boldsymbol{\xi}_{m_2}^{(1)}, G_{p_{m_3}} \boldsymbol{\xi}_{m_3}^{(1)}) \right. \\
&\quad + \sum_{m_2=m_1+2}^{j-k} \sum_{m_3=m_2+k-1}^{j-1} \mathcal{L}(G_{p_{m_1}} \boldsymbol{\xi}_{m_1}^{(1)}, G_{p_{m_2}} \boldsymbol{\xi}_{m_2}^{(k-2)}, G_{p_{m_3}} \boldsymbol{\xi}_{m_3}^{(1)}) \\
&\quad \left. + \sum_{m_2=m_1+2}^{j-k} \sum_{m_3=m_2+2}^{j-k+2} \mathcal{L}(G_{p_{m_1}} \boldsymbol{\xi}_{m_1}^{(1)}, G_{p_{m_2}} \boldsymbol{\xi}_{m_2}^{(1)}, G_{p_{m_3}} \boldsymbol{\xi}_{m_3}^{(k-2)}) \right) \\
&+ \chi_{k \geq 4} \sum_{m_1=1}^{j-k-1} \left( \sum_{m_2=m_1+k-2}^{j-3} \mathcal{L}(G_{p_{m_1}} \boldsymbol{\xi}_{m_1}^{(k-3)}, G_{p_{m_2}} \boldsymbol{\xi}_{m_2}^{(3)}) + \sum_{m_2=m_1+4}^{j-k+3} \mathcal{L}(G_{p_{m_1}} \boldsymbol{\xi}_{m_1}^{(3)}, G_{p_{m_2}} \boldsymbol{\xi}_{m_2}^{(k-3)}) \right) \\
&+ \dots \\
&+ \chi_{k=s} \sum_{m_1=1}^{j-k-s+1} \sum_{m_2=m_1+2}^{j-k-s+3} \dots \sum_{m_k=j-1}^{j-1} \mathcal{L}(G_{p_{m_1}} \boldsymbol{\xi}_{m_1}^{(1)}, \dots, G_{p_{m_k}} \boldsymbol{\xi}_{m_k}^{(1)})
\end{aligned} \tag{72}$$

The indicator function simply indicates which terms will appear depending on the value of  $k$ .

The proof is by induction. For the base cases  $\mathbf{w}_{N-1}$  and  $\mathbf{w}_{N-2}$ , we know they are in the form from previous calculations, in particular [Eqs. \(29\)](#) and [\(34\)](#). Assume that the formula holds true for all  $k = 1, \dots, c$ , where  $c < s - 1$ . We proceed by picking out the next equation in [Eq. \(21\)](#) by back substitution,

$$\begin{aligned}
A_{j-c-1, j-c-1} \mathbf{w}_{j-c-1} + A_{j-c-1, j-c} \mathbf{w}_{j-c} &= \lambda \mathbf{w}_{j-c-1} \\
\implies (\lambda I - A_{j-c-1, j-c-1}) \mathbf{w}_{j-c-1} &= A_{j-c-1, j-c} \mathbf{w}_{j-c} \\
&= \left( \sum_{k=0}^{j-c-2} I^{\otimes j-c-2-k} \otimes F_2 \otimes I^{\otimes k} \right) \mathbf{w}_{j-c}.
\end{aligned}$$

Now we try to find the form of  $A_{j-c-1, j-c} \mathbf{w}_{j-c}$ . For any  $r \in \{1, \dots, N - c - 1\}$ . Fix  $j = N$ , i.e.,

we work with the last block in Eq. (21), and we have

$$\begin{aligned}
\xi_{m_r}^{(c+1)} &= F_2 \left( G_{p_{m_r}} \xi_{m_r}^{(c)} \otimes \mathbf{e}_{i_{m_r+c+1}} + \mathbf{e}_{i_{m_r}} \otimes G_{p_{m_r+1}} \xi_{m_r+1}^{(c)} \right) \\
&+ F_2 \left( G_{p_{m_r}} \xi_{m_r}^{(c-1)} \otimes G_{p_{m_r+c}} \xi_{m_r+c}^{(1)} + G_{p_{m_r}} \xi_{m_r}^{(1)} \otimes G_{p_{m_r+2}} \xi_{m_r+2}^{(c-1)} \right) \\
&+ F_2 \left( G_{p_{m_r}} \xi_{m_r}^{(c-2)} \otimes G_{p_{m_r+c-1}} \xi_{m_r+c-1}^{(2)} + G_{p_{m_r}} \xi_{m_r}^{(2)} \otimes G_{p_{m_r+3}} \xi_{m_r+3}^{(c-2)} \right) \\
&+ \dots \\
&= \sum_{a=0}^c F_2 \left( G_{p_{m_r}} \xi_{m_r}^{(a)} \otimes G_{p_{m_r+a+1}} \xi_{m_r+a+1}^{(c-a)} \right)
\end{aligned} \tag{73}$$

As a result, we find that  $A_{j-c-1, j-c} \mathbf{w}_{j-c}$  has a term in the following form,

$$\sum_{k=1}^{j-c-1} \mathcal{L} \left( \xi_k^{(c+1)} \right).$$

Eq. (73) presented the case where two consecutive vectors at position  $m_r$  with orders adding up to  $c$ . Now we may look at the case where the orders sum up to  $c-1$ . Then similarly, we get  $\xi_{m_r}^{(c)}$ . From the induction assumption, there exists another vector  $G_{m'_r} \xi_{m'_r}^{(1)}$ . Therefore, we have  $\mathcal{L}(\xi_{m_r}^{(c)}, G_{m'_r} \xi_{m'_r}^{(1)})$ . We pair this case together with the case where at position  $m_r$  the term has order  $c$  but  $F_2$  applies to the vector that has order 1. From these observation, we find that  $A_{j-c-1, j-c} \mathbf{w}_{j-c}$  has a term

$$\sum_{r=1}^{j-c-2} \sum_{r'=r+c+1}^{l-1} \left( \mathcal{L}(\xi_{m_r}^{(c)}, G_{p_{m'_r}} \xi_{m'_r}^{(1)}) + \mathcal{L}(G_{p_{m_r}} \xi_{m_r}^{(c)}, \xi_{m'_r}^{(1)}) \right).$$

We repeat this argument and get the remaining terms in  $A_{j-c-1, j-c} \mathbf{w}_{j-c}$ . Note that

$$\mathbf{w}_{j-c-1} = (\lambda I - A_{j-c-1, j-c-1})^{-1} A_{j-c-1, j-c} \mathbf{w}_{j-c}$$

The invertibility of  $(\lambda I - A_{j-c-1, j-c-1})$  follows from the assumption of  $\sigma(A_{j,j}) \cap \sigma(A_{j-k, j-k}) = \phi$  for all  $k$ . Next we look at  $(\lambda I - A_{j-c-1, j-c-1})^{-1} \sum_{r=1}^{l-c-1} \mathcal{L}(\xi_r^{(c+1)})$ . By spectrum decomposition of matrix  $(\lambda I - A_{j-c-1, j-c-1})^{-1}$ , we have

$$\begin{aligned}
&(\lambda I - A_{j-c, j-c})^{-1} (\mathbf{e}_{i_1} \otimes \dots \otimes \mathbf{e}_{i_{r-1}} \otimes \xi_r^{(c+1)} \otimes \dots \otimes \mathbf{e}_{i_j}) \\
&= \mathbf{e}_{i_1} \otimes \dots \otimes \mathbf{e}_{i_{r-1}} \otimes G_{r:(r+c+1)} \xi_r^{(c+1)} \otimes \dots \otimes \mathbf{e}_{i_j} \\
&= \mathcal{L}(G_{p_r} \xi_r^{(c+1)}).
\end{aligned}$$

Therefore,

$$(\lambda I - A_{j-c-1, j-c-1})^{-1} \sum_{r=1}^{l-c-1} \mathcal{L}(\xi_r^{(c+1)}) = \sum_{r=1}^{l-c-1} \mathcal{L}(G_{p_r} \xi_r^{(c+1)})$$

Now we prove that for every  $1 \leq a < c+1$ , we have

$$(\lambda I - A_{j-c-1, j-c-1})^{-1} \left( \mathcal{L}(G_{p_r} \xi_r^{(c+1-a)}, \xi_q^{(a)}) + \mathcal{L}(\xi_r^{(c+1-a)}, G_{p_q} \xi_q^{(a)}) \right) = \mathcal{L}(G_{p_r} \xi_r^{(c+1-a)}, G_{p_q} \xi_q^{(a)}).$$

A direct calculation shows that,

$$\begin{aligned}
& (\lambda I - A_{j-c-1, j-c-1})^{-1} \left( \mathcal{L}(G_{p_r} \boldsymbol{\xi}_r^{(c+1-a)}, \boldsymbol{\xi}_q^{(a)}) \right) \\
&= \sum_{\lambda_{i'_k}} \frac{1}{\lambda - (\lambda_{i'_1} + \dots + \lambda_{i'_{j-c-1}})} \left( \prod_{k=1}^{j-c-1} \mathbf{e}_{i'_k} \right) \left( \prod_{k=1}^{j-c-1} \mathbf{e}_{i'_k} \right)^T \\
& \quad \mathbf{e}_{i_1} \otimes \dots \otimes \mathbf{e}_{i_{r-1}} \otimes G_{p_r} \boldsymbol{\xi}_r^{(c+1-a)} \otimes \dots \otimes \boldsymbol{\xi}_q^{(a)} \otimes \dots \otimes \mathbf{e}_{i_j}.
\end{aligned}$$

In order to make it nonzero, we must require that

$$\mathbf{e}_{i_1} = \mathbf{e}_{i'_1}, \dots, \mathbf{e}_{i_{r-1}} = \mathbf{e}_{i'_{r-1}}, \mathbf{e}_{i_{r+c-a+2}} = \mathbf{e}_{i'_{r+1}}, \dots, \mathbf{e}_{i_{q-1}} = \mathbf{e}_{i'_{q-1}},$$

and

$$\mathbf{e}_{i_{q+a+1}} = \mathbf{e}_{i'_{q+1}}, \dots, \mathbf{e}_{i_j} = \mathbf{e}_{i'_{j-c-1}}.$$

Then the above equation is equivalent to

$$\begin{aligned}
& (\lambda I - A_{j-c-1, j-c-1})^{-1} \left( \mathcal{L}(G_{p_r} \boldsymbol{\xi}_r^{(c-a)}, \boldsymbol{\xi}_q^{(a)}) \right) \\
&= \sum_{\lambda_{i'_r}, \lambda_{i'_q}} \frac{1}{(\lambda_{i_r} + \dots + \lambda_{i_{r+c+1-a}} + \lambda_{i_q} + \dots + \lambda_{i_{q+a}}) - (\lambda_{i_{r'}} + \lambda_{i_{q'}})} \\
& \quad (\mathbf{e}_{i_{r'}} \otimes \mathbf{e}_{i_{q'}}) (\mathbf{e}_{i_r} \otimes \mathbf{e}_{i_q})^T G_{p_r} \boldsymbol{\xi}_r^{(c+1-a)} \otimes \boldsymbol{\xi}_q^{(a)} \\
&= \sum_{\lambda_{i'_r}, \lambda_{i'_q}} \frac{1}{(\lambda_{i_r} + \dots + \lambda_{i_{r+c+1-a}} + \lambda_{i_q} + \dots + \lambda_{i_{q+a}}) - (\lambda_{i_{r'}} + \lambda_{i_{q'}})} \\
& \quad (\mathbf{e}_{i_{r'}} \otimes \mathbf{e}_{i_{q'}}) \left( \mathbf{e}_{i_{r'}}^T G_{p_r} \boldsymbol{\xi}_r^{(c+1-a)} \right) \otimes \left( \mathbf{e}_{i_{q'}}^T \boldsymbol{\xi}_q^{(a)} \right) \\
&= \sum_{\lambda_{i'_r}, \lambda_{i'_q}} \frac{1}{(\lambda_{i_r} + \dots + \lambda_{i_{r+c+1-a}} + \lambda_{i_q} + \dots + \lambda_{i_{q+a}}) - (\lambda_{i_{r'}} + \lambda_{i_{q'}})} (\mathbf{e}_{i_{r'}} \otimes \mathbf{e}_{i_{q'}}) \mathbf{e}_{i_{r'}}^T \\
& \quad \frac{1}{(\lambda_{i_r} + \dots + \lambda_{i_{r+c+1-a}}) - \lambda_{i'_{r'}}} \boldsymbol{\xi}_r^{(c+1-a)} \otimes \mathbf{e}_{i_{q'}}^T \boldsymbol{\xi}_q^{(a)}.
\end{aligned}$$

Similarly, we have

$$\begin{aligned}
& (\lambda I - A_{j-c-1, j-c-1})^{-1} \left( \mathcal{L}(\boldsymbol{\xi}_r^{(c-a)}, G_{p_q} \boldsymbol{\xi}_q^{(a)}) \right) \\
&= \sum_{\lambda_{i'_r}, \lambda_{i'_q}} \frac{1}{(\lambda_{i_r} + \dots + \lambda_{i_{r+c+1-a}} + \lambda_{i_q} + \dots + \lambda_{i_{q+a}}) - (\lambda_{i_{r'}} + \lambda_{i_{q'}})} \\
& \quad (\mathbf{e}_{i_{r'}} \otimes \mathbf{e}_{i_{q'}}) (\mathbf{e}_{i_r} \otimes \mathbf{e}_{i_q})^T \boldsymbol{\xi}_r^{(c+1-a)} \otimes G_{p_q} \boldsymbol{\xi}_q^{(a)} \\
&= \sum_{\lambda_{i'_r}, \lambda_{i'_q}} \frac{1}{(\lambda_{i_r} + \dots + \lambda_{i_{r+c+1-a}} + \lambda_{i_q} + \dots + \lambda_{i_{q+a}}) - (\lambda_{i_{r'}} + \lambda_{i_{q'}})} \\
& \quad (\mathbf{e}_{i_{r'}} \otimes \mathbf{e}_{i_{q'}}) \mathbf{e}_{i_{r'}}^T \boldsymbol{\xi}_r^{(c+1-a)} \otimes \frac{1}{(\lambda_{i_q} + \dots + \lambda_{i_{q+a}}) - \lambda_{i'_{q'}}} \mathbf{e}_{i_{q'}}^T \boldsymbol{\xi}_q^{(a)}.
\end{aligned}$$

By collecting these terms, we arrive at,

$$\begin{aligned}
& (\lambda I - A_{j-c-1, j-c-1})^{-1} \left( \mathcal{L}(G_{p_r} \boldsymbol{\xi}_r^{(c-a)}, \boldsymbol{\xi}_q^{(a)}) + \mathcal{L}(G_{p_r} \boldsymbol{\xi}_r^{(c+1-a)}, \boldsymbol{\xi}_q^{(a)}) \right) \\
&= \sum_{\lambda'_r} \frac{1}{(\lambda_{i_r} + \dots + \lambda_{i_r+c+1-a}) - \lambda_{i'_r}} (\mathbf{e}_{i'_r} \otimes \mathbf{e}_{i'_q}) (\mathbf{e}_{i_r} \otimes \mathbf{e}_{i_q})^T \boldsymbol{\xi}_r^{(c+1-a)} \otimes \boldsymbol{\xi}_q^{(a)} + \\
&\quad \sum_{\lambda'_q} \frac{1}{(\lambda_{i_q} + \dots + \lambda_{i_q+a}) - \lambda_{i'_q}} (\mathbf{e}_{i'_r} \otimes \mathbf{e}_{i'_q}) (\mathbf{e}_{i_r} \otimes \mathbf{e}_{i_q})^T \boldsymbol{\xi}_r^{(c+1-a)} \otimes \boldsymbol{\xi}_q^{(a)} \\
&= \mathcal{L}(G_{p_r} \boldsymbol{\xi}_r^{(c+1-a)}, G_{p_q} \boldsymbol{\xi}_q^{(a)}).
\end{aligned}$$

Therefore, for  $a = 1, \dots, \lfloor \frac{c}{2} \rfloor$ , we know  $\mathbf{w}_{j-k}$  with  $k = c + 1$  contains

$$\begin{aligned}
& \sum_{m_1=1}^{j-k-1} \left( \sum_{m_2=m_1+k}^{j-1} \mathcal{L}(G_{p_{m_1}} \boldsymbol{\xi}_{m_1}^{(k-1)}, G_{p_{m_2}} \boldsymbol{\xi}_{m_2}^{(1)}) + \sum_{m_2=m_1+2}^{j-k+1} \mathcal{L}(G_{p_{m_1}} \boldsymbol{\xi}_{m_1}^{(1)}, G_{p_{m_2}} \boldsymbol{\xi}_{m_2}^{(k-1)}) \right) \\
&+ \sum_{m_1=1}^{j-k-1} \left( \sum_{m_2=m_1+k-1}^{j-2} \mathcal{L}(G_{p_{m_1}} \boldsymbol{\xi}_{m_1}^{(k-2)}, G_{p_{m_2}} \boldsymbol{\xi}_{m_2}^{(2)}) + \sum_{m_2=m_1+3}^{j-k+2} \mathcal{L}(G_{p_{m_1}} \boldsymbol{\xi}_{m_1}^{(2)}, G_{p_{m_2}} \boldsymbol{\xi}_{m_2}^{(k-2)}) \right) \\
&\dots \\
&+ \sum_{m_1=1}^{j-k-1} \left( \sum_{m_2=m_1+k-\lfloor \frac{c}{2} \rfloor+1}^{j-\lfloor \frac{c}{2} \rfloor} \mathcal{L}(G_{p_{m_1}} \boldsymbol{\xi}_{m_1}^{(k-\lfloor \frac{c}{2} \rfloor)}, G_{p_{m_2}} \boldsymbol{\xi}_{m_2}^{(\lfloor \frac{c}{2} \rfloor)}) \right. \\
&\quad \left. + \sum_{m_2=m_1+\lfloor \frac{c}{2} \rfloor+1}^{j-k+\lfloor \frac{c}{2} \rfloor} \mathcal{L}(G_{p_{m_1}} \boldsymbol{\xi}_{m_1}^{(\lfloor \frac{c}{2} \rfloor)}, G_{p_{m_2}} \boldsymbol{\xi}_{m_2}^{(k-\lfloor \frac{c}{2} \rfloor)}) \right).
\end{aligned}$$

With similar arguments and using spectral decomposition and pairing terms, we can show that for any  $k_1 + \dots + k_s = c + 1$  and  $k_1, \dots, k_s \geq 1$ .

$$\begin{aligned}
& (\lambda I - A_{j-k-1, j-k-1})^{-1} \sum_{p(\boldsymbol{\xi}^{(k_1)})} \mathcal{L}(\boldsymbol{\xi}_{m_1}^{(k_1)}, G_{p_{m_2}} \boldsymbol{\xi}_{m_2}^{(k_2)}, \dots, G_{p_{m_s}} \boldsymbol{\xi}_{m_s}^{(k_s)}) \\
&= \mathcal{L}(G_{p_{m_1}} \boldsymbol{\xi}_{m_1}^{(k_1)}, G_{p_{m_2}} \boldsymbol{\xi}_{m_2}^{(k_2)}, \dots, G_{p_{m_s}} \boldsymbol{\xi}_{m_s}^{(k_s)}).
\end{aligned}$$

Therefore, we see that when  $k = c + 1$ ,  $\mathbf{w}_{j-k}$  still satisfies [Eq. \(72\)](#). By induction, the proof for the case  $1 \leq k \leq s$  is done.

Now we look at the case  $s \leq k \leq N - 1$ .

$$\begin{aligned}
\mathbf{w}_s &= \sum_{m_1=1}^{j-s} \mathcal{L}(G_{p_{m_1}} \boldsymbol{\xi}_{m_1}^{(s)}) \\
&+ \sum_{m_1=1}^{j-s-1} \left( \sum_{m_2=m_1+s}^{j-1} \mathcal{L}(G_{p_{m_1}} \boldsymbol{\xi}_{m_1}^{(s-1)}, G_{p_{m_2}} \boldsymbol{\xi}_{m_2}^{(1)}) + \sum_{m_2=m_1+2}^{j-s+1} \mathcal{L}(G_{p_{m_1}} \boldsymbol{\xi}_{m_1}^{(1)}, G_{p_{m_2}} \boldsymbol{\xi}_{m_2}^{(s-1)}) \right) \\
&+ \sum_{m_1=1}^{j-s-1} \left( \sum_{m_2=m_1+s-1}^{j-2} \mathcal{L}(G_{p_{m_1}} \boldsymbol{\xi}_{m_1}^{(s-2)}, G_{p_{m_2}} \boldsymbol{\xi}_{m_2}^{(2)}) + \sum_{m_2=m_1+3}^{j-k+2} \mathcal{L}(G_{p_{m_1}} \boldsymbol{\xi}_{m_1}^{(2)}, G_{p_{m_2}} \boldsymbol{\xi}_{m_2}^{(s-2)}) \right) \\
&+ \sum_{m_1=1}^{j-s-2} \left( \sum_{m_2=m_1+s-1}^{j-3} \sum_{m_3=m_2+2}^{j-1} \mathcal{L}(G_{p_{m_1}} \boldsymbol{\xi}_{m_1}^{(s-2)}, G_{p_{m_2}} \boldsymbol{\xi}_{m_2}^{(1)}, G_{p_{m_3}} \boldsymbol{\xi}_{m_3}^{(1)}) \right. \\
&\quad + \sum_{m_2=m_1+2}^{j-s} \sum_{m_3=m_2+s-1}^{j-1} \mathcal{L}(G_{p_{m_1}} \boldsymbol{\xi}_{m_1}^{(1)}, G_{p_{m_2}} \boldsymbol{\xi}_{m_2}^{(s-2)}, G_{p_{m_3}} \boldsymbol{\xi}_{m_3}^{(1)}) \\
&\quad \left. + \sum_{m_2=m_1+2}^{j-s} \sum_{m_3=m_2+2}^{j-s+2} \mathcal{L}(G_{p_{m_1}} \boldsymbol{\xi}_{m_1}^{(1)}, G_{p_{m_2}} \boldsymbol{\xi}_{m_2}^{(1)}, G_{p_{m_3}} \boldsymbol{\xi}_{m_3}^{(s-2)}) \right) \\
&+ \sum_{m_1=1}^{j-s-1} \left( \sum_{m_2=m_1+s-2}^{j-3} \mathcal{L}(G_{p_{m_1}} \boldsymbol{\xi}_{m_1}^{(s-3)}, G_{p_{m_2}} \boldsymbol{\xi}_{m_2}^{(3)}) + \sum_{m_2=m_1+4}^{j-s+3} \mathcal{L}(G_{p_{m_1}} \boldsymbol{\xi}_{m_1}^{(3)}, G_{p_{m_2}} \boldsymbol{\xi}_{m_2}^{(s-3)}) \right) \\
&+ \dots \\
&+ \sum_{m_1=1}^1 \sum_{m_2=m_1+2}^3 \dots \sum_{m_k=j-1}^{j-1} \mathcal{L}(G_{p_{m_1}} \boldsymbol{\xi}_{m_1}^{(1)}, \dots, G_{p_{m_k}} \boldsymbol{\xi}_{m_k}^{(1)}).
\end{aligned}$$

By the steps of

$$\mathbf{w}_{j-k-1} = (\lambda I - A_{j-k-1, j-k-1})^{-1} A_{j-k-1, j-k} \mathbf{w}_{j-k},$$

we find that the order a of  $\boldsymbol{\xi}^{(a)}$  still sums up to  $k$  for each  $\mathbf{w}_{j-k}$ . Therefore, [Eq. \(37\)](#) still holds.

Thus, the proof is completed under the assumption that  $\sigma(A_{i,i}) \cap \sigma(A_{j,j}) = \phi$  for all  $i < k$ . Now we show that the assumption can be removed by using Fredholm alternative. As can be seen from [\(28\)](#),  $(\lambda - A_{j-1, j-1})$  is always invertible under the nonresonance condition. Equation [\(34\)](#) shows that Fredholm alternative works for  $k = 2$ . Assume that  $\lambda I - A_{j-k, j-k}$  is psuedo-invertible for  $k = 1, \dots, c$  (i.e., fulfilling the Fredholm alternative). Consider the next case where  $k = c + 1$ :

$$(\lambda I - A_{j-k, j-k}) \mathbf{w}_{j-k} = A_{j-k, j-k+1} \mathbf{w}_{j-k+1},$$

where  $(\lambda I - A_{j-k, j-k})$  has a nontrivial null space. Denote  $\mathbf{h} = \mathbf{e}_{i'_1} \otimes \dots \otimes \mathbf{e}_{i'_{j-k}}$ , an eigenvector of  $\lambda I - A_{j-k, j-k}$ . Note that  $\mathbf{w}_{j-k+1}$  follows the form of [Eq. \(72\)](#). Thus,  $A_{j-c-1, j-c} \mathbf{w}_{j-c}$  follows the pattern,

$$\sum_{k=1}^{j-c-1} \mathcal{L}(\boldsymbol{\xi}_k^{(c+1)}), \quad \sum_{r=1}^{j-c-2} \sum_{r'=r+c+1}^{l-1} \left( \mathcal{L}(\boldsymbol{\xi}_{m_r}^{(c)}, G_{p_{m_r'}} \boldsymbol{\xi}_{m_r'}^{(1)}) + \mathcal{L}(G_{p_{m_r}} \boldsymbol{\xi}_{m_r}^{(c)}, \boldsymbol{\xi}_{m_r'}^{(1)}) \right), \quad \dots$$

Let us first look at the term  $\mathcal{L}\left(\xi_1^{(c+1)}\right) = \xi_1^{(c+1)} \otimes \mathbf{e}_{i_{c+3}} \otimes \cdots \otimes \mathbf{e}_{i_j}$ . If  $\mathbf{h} \cdot \mathcal{L}\left(\xi_1^{(c+1)}\right) \neq 0$ , then  $\mathbf{e}_{i'_2} = \mathbf{e}_{i_{c+3}}$ ,  $\mathbf{e}_{i'_3} = \mathbf{e}_{i_{c+4}}, \dots, \mathbf{e}_{i'_{j-c-1}} = \mathbf{e}_{i_j}$ , which leads to  $\mathbf{e}_{i'_2} = \mathbf{e}_{i_{c+3}}$ ,  $\lambda_{i'_3} = \lambda_{i_{c+4}}, \dots, \lambda_{i'_{j-c-1}} = \lambda_{i_j}$ . Then

$$\lambda = \lambda_{i_1} + \cdots + \lambda_{i_j} = \lambda_{i'_1} + \cdots + \lambda_{i'_{j-c-1}} \implies \lambda'_i = \lambda_{i_1} + \cdots + \lambda_{i_{c+1}}$$

contradicting the nonresonance condition. Similarly, we conclude that  $\mathbf{h} \cdot \sum_{k=1}^{j-c-1} \mathcal{L}\left(\xi_k^{(c+1)}\right) = 0$ .

Next we look at the term  $\mathcal{L}(\xi_{m_r}^{(c)}, G_{p_{m_r}} \xi_{m_r}^{(1)}) + \mathcal{L}(G_{p_{m_r}} \xi_{m_r}^{(c)}, \xi_{m_r}^{(1)})$ . Using the same argument as in Eq. (34), we know  $\mathbf{h} \cdot \mathcal{L}(G_{p_{m_r}} \xi_{m_r}^{(c)}, \xi_{m_r}^{(1)}) = 0$ . Now we claim that

$$\begin{aligned} \mathbf{h} \cdot \left( \mathcal{L}(G_{1:c} \xi_1^{(c-1)}, G_{c+1, c+2} \xi_{c+1}^{(1)}, \xi_{c+3}^{(1)}) + \mathcal{L}(\xi_1^{(c-1)}, G_{c+1, c+2} \xi_{c+1}^{(1)}, G_{c+3, c+4} \xi_{c+3}^{(1)}) \right. \\ \left. + \mathcal{L}(G_{1:c} \xi_1^{(c-1)}, \xi_{c+1}^{(1)}, G_{c+3, c+4} \xi_{c+3}^{(1)}) \right) = 0. \end{aligned} \quad (74)$$

Notice that

$$\begin{aligned} \mathcal{L}(G_{1:c} \xi_1^{(c-1)}, G_{c+1, c+2} \xi_{c+1}^{(1)}, \xi_{c+3}^{(1)}) &= G_{1:c} \xi_1^{(c-1)} \otimes G_{c+1, c+2} \xi_{c+1}^{(1)} \otimes \xi_{c+3}^{(1)} \otimes \cdots \otimes \mathbf{e}_{i_j}, \\ \mathcal{L}(\xi_1^{(c-1)}, G_{c+1, c+2} \xi_{c+1}^{(1)}, G_{c+3, c+4} \xi_{c+3}^{(1)}) &= \xi_1^{(c-1)} \otimes G_{c+1, c+2} \xi_{c+1}^{(1)} \otimes G_{c+3, c+4} \xi_{c+3}^{(1)} \otimes \cdots \otimes \mathbf{e}_{i_j}, \\ \mathcal{L}(G_{1:c} \xi_1^{(c-1)}, \xi_{c+1}^{(1)}, G_{c+3, c+4} \xi_{c+3}^{(1)}) &= G_{1:c} \xi_1^{(c-1)} \otimes \xi_{c+1}^{(1)} \otimes G_{c+3, c+4} \xi_{c+3}^{(1)} \otimes \cdots \otimes \mathbf{e}_{i_j}. \end{aligned}$$

Thus we require  $e_{i'_4} = e_{i_{c+4}}, \dots, e_{i'_{j-c-1}} = e_{i_j}$  for the inner product not be zero. Then

$$\begin{aligned} \mathbf{h} \cdot \mathcal{L}(G_{1:c} \xi_1^{(c-1)}, G_{c+1, c+2} \xi_{c+1}^{(1)}, \xi_{c+3}^{(1)}) \\ = \mathbf{h} \cdot G_{1:c} \xi_1^{(c-1)} \otimes G_{c+1, c+2} \xi_{c+1}^{(1)} \otimes \xi_{c+3}^{(1)} \otimes \cdots \otimes \mathbf{e}_{i_j} \\ = \frac{1}{\lambda_{i_1} + \cdots + \lambda_{i_c} - \lambda_{i'_1}} \mathbf{e}_{i'_1}^T \xi_1^{(c-1)} \cdot \frac{1}{\lambda_{i_{c+1}} + \lambda_{i_{c+2}} - \lambda_{i'_2}} \mathbf{e}_{i'_2}^T \xi_{c+1}^{(1)} \cdot \mathbf{e}_{i'_3}^T \xi_{c+3}^{(1)} \end{aligned} \quad (75)$$

Similarly, we obtain,

$$\begin{aligned} \mathbf{h} \cdot \mathcal{L}(\xi_1^{(c-1)}, G_{c+1, c+2} \xi_{c+1}^{(1)}, G_{c+3, c+4} \xi_{c+3}^{(1)}) \\ = \mathbf{e}_{i'_1}^T \xi_1^{(c-1)} \cdot \frac{1}{\lambda_{i_{c+1}} + \lambda_{i_{c+2}} - \lambda_{i'_2}} \mathbf{e}_{i'_2}^T \xi_{c+1}^{(1)} \cdot \frac{1}{\lambda_{i_{c+3}} + \lambda_{i_{c+4}} - \lambda_{i'_3}} \mathbf{e}_{i'_3}^T \xi_{c+3}^{(1)}, \end{aligned}$$

and

$$\begin{aligned} \mathbf{h} \cdot \mathcal{L}(G_{1:c} \xi_1^{(c-1)}, \xi_{c+1}^{(1)}, G_{c+3, c+4} \xi_{c+3}^{(1)}) \\ = \frac{1}{\lambda_{i_1} + \cdots + \lambda_{i_c} - \lambda_{i'_1}} \mathbf{e}_{i'_1}^T \xi_1^{(c-1)} \cdot \mathbf{e}_{i'_2}^T \xi_{c+1}^{(1)} \cdot \frac{1}{\lambda_{i_{c+3}} + \lambda_{i_{c+4}} - \lambda_{i'_3}} \mathbf{e}_{i'_3}^T \xi_{c+3}^{(1)}, \end{aligned}$$

As a result, the left hand side of Eq. (74) can be simplified to

$$\frac{(\lambda_{i_1} + \cdots + \lambda_{i_{c+4}}) - (\lambda_{i'_1} + \lambda_{i'_2} + \lambda_{i'_3})}{(\lambda_{i_1} + \cdots + \lambda_{i_c} - \lambda_{i'_1})(\lambda_{i_{c+1}} + \lambda_{i_{c+2}} - \lambda_{i'_2})(\lambda_{i_{c+3}} + \lambda_{i_{c+4}} - \lambda_{i'_3})} \mathbf{e}_{i'_1}^T \xi_1^{(c-1)} \mathbf{e}_{i'_2}^T \xi_{c+1}^{(1)} \mathbf{e}_{i'_3}^T \xi_{c+3}^{(1)} = 0. \quad (76)$$

One may prove for the general case using similar pairing techniques. Thus, psuedo-inverse of  $\lambda I - A_{j-k, j-k}$  always exists for any  $k = 1, \dots, j-1$ .  $\square$

## B Proof of Lemma 2.9

Notice that right hand side of Eq. (41) is

$$\left(\frac{\|F_2\|}{\Delta}\right)^k \sum_{\substack{k_1+k_2+\dots+k_r=k \\ r=j-k}} C(k_1)C(k_2)\cdots C(k_r),$$

where  $C(k_i)$  is the Catalan numbers for  $i = 1, \dots, r$ . This product can be conveniently recovered from the generating function for Catalan numbers, given by [38],

$$G(x) = \sum_{n=0}^{\infty} \binom{2n}{n} \frac{x^n}{n+1} = \frac{1 - \sqrt{1-4x}}{2x}.$$

Then the coefficient of  $x^k$  in  $\left(\frac{1-\sqrt{1-4x}}{2x}\right)^r$  coincides with the sum of the product,

$$\sum_{\substack{k_1+k_2+\dots+k_r=k \\ r=j-k}} C(k_1)C(k_2)\cdots C(k_r),$$

As a result, we have the explicit formula,

$$\sum_{\substack{k_1+k_2+\dots+k_r=k \\ r=j-k}} C(k_1)C(k_2)\cdots C(k_r) = \frac{r}{2k+r} \binom{2k+r}{k} = \frac{j-k}{j+k} \binom{j+k}{k},$$

which follows from Lagrange Inversion Theorem. Thus, Lemma 2.9 holds.

## References

- [1] Takaki Akiba, Youhi Morii, and Kaoru Maruta. Carleman linearization approach for chemical kinetics integration toward quantum computation. *Scientific Reports*, 13(1):3935, 2023.
- [2] Arash Amini, Cong Zheng, Qiyu Sun, and Nader Motee. Carleman linearization of nonlinear systems and its finite-section approximations. *arXiv preprint arXiv:2207.07755*, 2022.
- [3] Dong An, Jin-Peng Liu, and Lin Lin. Linear combination of Hamiltonian simulation for non-unitary dynamics with optimal state preparation cost. *arXiv preprint arXiv:2303.01029*, 2023.
- [4] Joackim Bernier, Erwan Faou, and Benoit Grebert. Rational normal forms and stability of small solutions to nonlinear schrödinger equations. *Annals of PDE*, 6(2):14, 2020.
- [5] Dominic W Berry, Andrew M Childs, Aaron Ostrander, and Guoming Wang. Quantum algorithm for linear differential equations with exponentially improved dependence on precision. *Communications in Mathematical Physics*, 356(3):1057–1081, 2017.
- [6] Dominic W Berry and Pedro Costa. Quantum algorithm for time-dependent differential equations using dyson series. *arXiv preprint arXiv:2212.03544*, 2022.



- [7] Torsten Carleman. Application de la théorie des équations intégrales linéaires aux systèmes d'équations différentielles non linéaires. 1932.
- [8] Andrew M Childs, Robin Kothari, and Rolando D Somma. Quantum algorithm for systems of linear equations with exponentially improved dependence on precision. *SIAM Journal on Computing*, 46(6):1920–1950, 2017.
- [9] Andrew M Childs and Jin-Peng Liu. Quantum spectral methods for differential equations. *arXiv preprint arXiv:1901.00961*, 2019.
- [10] S-N Chow and Jack K Hale. *Methods of bifurcation theory*, volume 251. Springer Science & Business Media, 2012.
- [11] Thierry Cretegny, Thierry Dauxois, Stefano Ruffo, and Alessandro Torcini. Localization and equipartition of energy in the  $\beta$ -fpu chain: Chaotic breathers. *Physica D: Nonlinear Phenomena*, 121(1-2):109–126, 1998.
- [12] Abhishek Dhar. Heat transport in low-dimensional systems. *Advances in Physics*, 57(5):457–537, 2008.
- [13] Alexander Engel, Graeme Smith, and Scott E Parker. Linear embedding of nonlinear dynamical systems and prospects for efficient quantum algorithms. *Physics of Plasmas*, 28(6), 2021.
- [14] Di Fang, Lin Lin, and Yu Tong. Time-marching based quantum solvers for time-dependent linear differential equations. *Quantum*, 7:955, 2023.
- [15] Marcelo Forets and Amaury Pouly. Explicit error bounds for carleman linearization. *arXiv preprint arXiv:1711.02552*, 2017.
- [16] Dimitrios Giannakis, Abbas Ourmazd, Philipp Pfeffer, Jörg Schumacher, and Joanna Slawinska. Embedding classical dynamics in a quantum computer. *Physical Review A*, 105(5):052404, 2022.
- [17] Aram W. Harrow, Avinatan Hassidim, and Seth Lloyd. Quantum algorithm for solving linear systems of equations. *Physical Review Letters*, 103(15):150502, October 2009. arXiv: 0811.3171.
- [18] Y Hiraoka and Y Kodama. Normal form and solitons. In *Integrability*, pages 175–214. Springer, 2009.
- [19] Wael Itani, Katepalli R Sreenivasan, and Sauro Succi. Quantum algorithm for lattice boltzmann (qalb) simulation of incompressible fluids with a nonlinear collision term. *Physics of Fluids*, 36(1), 2024.
- [20] Shi Jin and Nana Liu. Quantum algorithms for computing observables of nonlinear partial differential equations. *arXiv preprint arXiv:2202.07834*, 2022.
- [21] Shi Jin, Nana Liu, and Chuwen Ma. On schrödingerization based quantum algorithms for linear dynamical systems with inhomogeneous terms. *arXiv preprint arXiv:2402.14696*, 2024.

- [22] Shi Jin, Nana Liu, and Yue Yu. Quantum simulation of partial differential equations via Schrödingerisation. *arXiv:2212.13969*, 2022.
- [23] Shi Jin, Nana Liu, and Yue Yu. Quantum simulation of partial differential equations via Schrödingerisation: technical details. *arXiv:2212.14703*, 2022.
- [24] Ilon Joseph. Koopman–von neumann approach to quantum simulation of nonlinear classical dynamics. *Physical Review Research*, 2(4):043102, 2020.
- [25] Anatole Katok, AB Katok, and Boris Hasselblatt. *Introduction to the modern theory of dynamical systems*. Number 54. Cambridge university press, 1995.
- [26] Hari Krovi. Improved quantum algorithms for linear and nonlinear differential equations. *arXiv preprint arXiv:2202.01054*, 2022.
- [27] Peter D Lax and C David Levermore. The small dispersion limit of the korteweg-de vries equation. i. *Communications on Pure and Applied Mathematics*, 36(3):253–290, 1983.
- [28] Randall J LeVeque and Randall J Leveque. *Numerical methods for conservation laws*, volume 214. Springer, 1992.
- [29] Dylan Lewis, Stephan Eidenbenz, Balasubramanya Nadiga, and Yiğit SubaşI. Limitations for quantum algorithms to solve turbulent and chaotic systems. *arXiv preprint arXiv:2307.09593*, 2023.
- [30] Xiangyu Li, Xiaolong Yin, Nathan Wiebe, Jaehun Chun, Gregory K Schenter, Margaret S Cheung, and Johannes Müllenstädt. Potential quantum advantage for simulation of fluid dynamics. *arXiv preprint arXiv:2303.16550*, 2023.
- [31] Jin-Peng Liu, Dong An, Di Fang, Jiasu Wang, Guang Hao Low, and Stephen Jordan. Efficient quantum algorithm for nonlinear reaction–diffusion equations and energy estimation. *Commun. Math. Phys.*, 404(arXiv: 2205.01141):963–1020, 2023.
- [32] Jin-Peng Liu, Herman Øie Kolden, Hari K Krovi, Nuno F Loureiro, Konstantina Trivisa, and Andrew M Childs. Efficient quantum algorithm for dissipative nonlinear differential equations. *Proceedings of the National Academy of Sciences*, 118(35):e2026805118, 2021.
- [33] Edward Ott. *Chaos in dynamical systems*. Cambridge university press, 2002.
- [34] Bob Rink. Symmetry and resonance in periodic fpu chains. *Communications in Mathematical Physics*, 218:665–685, 2001.
- [35] Sauro Succi, Claudio Sanavio, Riccardo Scatamacchia, and Carlo De Falco. Three carleman routes to the quantum simulation of classical fluids. *arXiv preprint arXiv:2402.16686*, 2024.
- [36] Amit Surana, Abeynaya Gnanasekaran, and Tuhin Sahai. An efficient quantum algorithm for simulating polynomial differential equations. *arXiv preprint arXiv:2212.10775*, 2022.
- [37] Christos A Tsiligiannis and Gerasimos Lyberatos. Normal forms, resonance and bifurcation analysis via the carleman linearization. *Journal of mathematical analysis and applications*, 139(1):123–138, 1989.

- [38] Conghui Xie and Yuan He. New expressions for sums of products of the catalan numbers. *Axioms*, 10(4):330, 2021.