


x86/ARM assembly including byte markers

```
xorl %eax, %eax
movl $111,%ebx #START MARKER
.byte 100,103,144 #START MARKER
.L22:
vmovapd 0(%r13,%rax),%ymm0
vfmadd213pd (%r14,%rax),%ymm1,%ymm0
vmovapd %ymm0, (%r12,%rax)
addq $32,%rax
cmpq %rax,%r15
jne .L22
.L18:
ldr q2, [x20, x0]
ldr q1, [x21, x0]
fmla v1.2d, v2.2d, v0.2d
str q1, [x19, x0]
add x0, x0, #16
cmp x22, x0
bne .L18
mov x1, #222 //END MARKER
.byte 100,103,144 #END MARKER
movq %rcx,%rax
cmpq %rcx,%rbx
je .L24
.L20:
cmp x24, x25
beq .L20
```




Generic Port Model

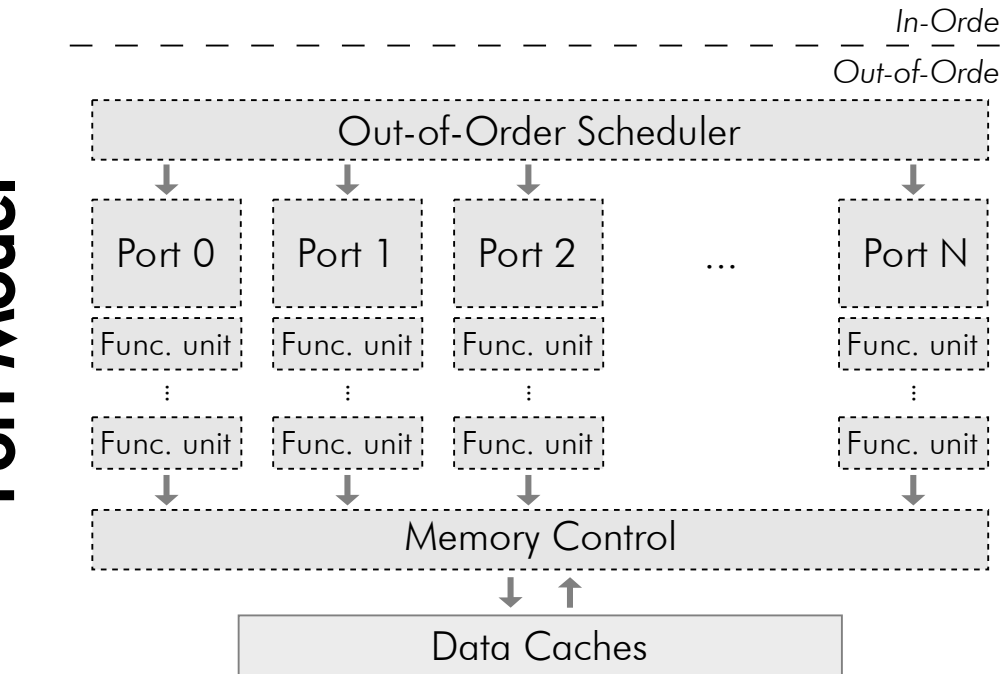

Machine Files/ Databases

mnemonic	- name: vfmadd213pd
specific operand description	operands:
	- class: "memory"
	base: "gpr"
	offset: ~
	index: "gpr"
	scale: 1
	source: true
	destination: false
	- class: "register"
	name: "ymm"
performance information	source: true
	destination: false
	- class: "register"
	name: "ymm"
	source: true
	destination: true
	throughput: 0.5
	latency: 4.0 # 0 DV 1 2 D 3 D 4 5 6 7
	port_pressure: [0.5,0,0.5,0.5,0.5,0.5,0.5,0.5,0,0,0,0]

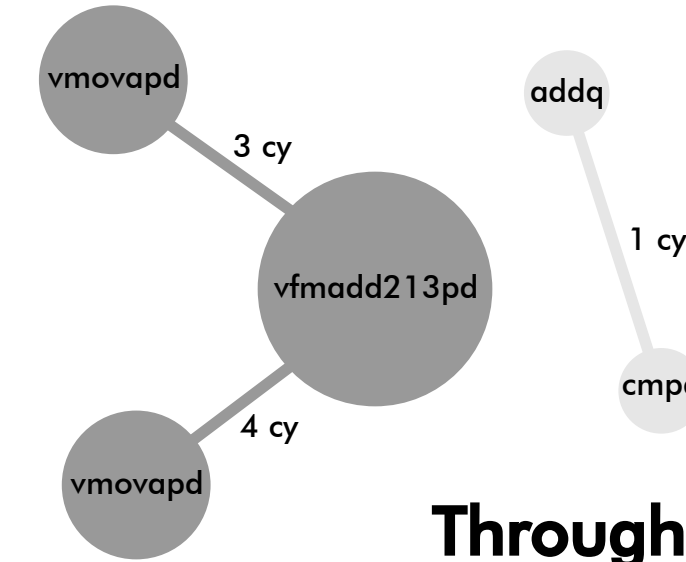

Throughput and Critical Path Analysis

Throughput Analysis

* - Instruction not bound to a port

Port Pressure in cycles											
	0	- DV	1	2	- 2D	3	- 3D	4	5	6	7
179											
180				0.50	0.50	0.50	0.50				
181	0.50		0.50	0.50	0.50	0.50	0.50				
182				0.50		0.50		1.00			
183	0.25		0.25						0.25	0.25	
184	0.25		0.25						0.25	0.25	
185											
1.00 1.00 1.50 1.00 1.50 1.00 1.00 0.50 0.50											

Critical Path Analysis

```
180 | 4.0 | | vmovapd 0(%r13,%rax), %ymm0
181 | 4.0 | | vfmadd213pd (%r14,%rax), %ymm1, %ymm0
182 | 5.0 | | vmovapd %ymm0, (%r12,%rax)
```

13.0

Loop-Carried Dependencies Analysis Report

```
183 | 1.0 | addq $32, %rax | [183]
```