

Entropic Out-of-Distribution Detection

David Macêdo, *Member, IEEE*, Tsang Ing Ren, *Member, IEEE*, Cleber Zanchettin, *Member, IEEE*,
Adriano L. I. Oliveira, *Senior Member, IEEE*, and Teresa Ludermir, *Senior Member, IEEE*,

Abstract—In this paper, we argue that the unsatisfactory out-of-distribution (OOD) detection performance of neural networks is mainly due to the SoftMax loss anisotropy and propensity to produce low entropy probability distributions in disagreement with the principle of maximum entropy. Current out-of-distribution (OOD) detection approaches usually do not directly fix the SoftMax loss drawbacks but rather build techniques to circumvent it. Unfortunately, those methods usually produce undesired side effects (e.g., classification accuracy drop, additional hyperparameters, slower inferences, and collecting extra data). In the opposite direction, we propose replacing SoftMax loss with a novel loss function that does not suffer from the mentioned weaknesses. The proposed IsoMax loss is isotropic (exclusively distance-based) and provides high entropy posterior probability distributions. Replacing the SoftMax loss by IsoMax loss requires no model or training changes. Additionally, the models trained with IsoMax loss produce as fast and energy-efficient inferences as those trained using SoftMax loss. Further, no classification accuracy drop is observed. The proposed method does not rely on outlier/background data, hyperparameter tuning, temperature calibration, feature extraction, metric learning, adversarial training, ensemble procedures, or generative models. Our experiments showed that IsoMax loss works as a seamless SoftMax loss drop-in replacement that significantly improves neural networks OOD detection performance. Therefore, it may be used as a baseline OOD detection approach to be combined with current or future OOD detection techniques to achieve even higher results.

Index Terms—Out-of-Distribution Detection, Isotropy Maximization Loss, Maximum Entropy Principle, Entropic Score

I. INTRODUCTION

NEURAL networks have been used as classifiers in a wide range of applications. Their design usually considers that the model receives an instance of one of the trained classes at inference. If this holds, neural networks commonly present satisfactory performance. However, in real-world applications, this assumption may not be fulfilled.

The ability to detect whether an input applied to a neural network does not represent an example of the trained classes is essential to applications in medicine, finance, agriculture, and engineering. In such situations, it is better to have a system able to acknowledge that the sample should not be classified. The rapid adoption of neural networks in modern applications makes the development of such capability a primary necessity from a practical point of view. This problem has been studied under many similar nomenclatures, such as open set recognition [5], [6] and open-world recognition [7], [8].

Recently, Hendrycks and Gimpel [1] defined out-of-distribution (OOD) detection as the task of evaluating whether

David Macêdo, Tsang Ing Ren, Cleber Zanchettin, Adriano L. I. Oliveira, and Teresa Ludermir are with the Centro de Informática, Universidade Federal de Pernambuco, Brazil. E-mail: dlm@cin.ufpe.br.

David Macêdo was with Montreal Institute for Learning Algorithms (MILA), Université de Montréal (UdeM), Quebec, Canada.

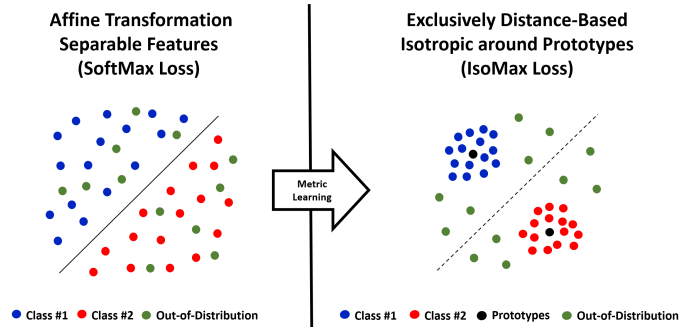


Fig. 1. Adapted from [9, Fig. 1]. SoftMax loss produces separable features. Metric learning on features extracted from SoftMax loss trained networks may convert from the situation on the left to the situation on the right. Exclusively distance-based (isotropic) losses tend to generate more discriminative features. Out-of-distribution examples are more discernible when in-distribution examples are concentrated around prototypes.

a sample comes from the in-distribution on which a neural network was trained. They also introduced benchmark datasets and metrics for this task. Additionally, Hendrycks and Gimpel established the baseline performance by proposing an OOD detection approach that uses the maximum predicted probability (MPS) as the score to detect OOD examples.

We argue that the unsatisfactory OOD detection performance of modern neural networks is mainly due to the drawbacks of the currently used loss rather than model limitations. The SoftMax loss¹ anisotropy does not incentivize the concentration of high-level representations in the feature space [4], [9], which makes OOD detection difficult [4]. Indeed, its affine transformation produces separable rather than discriminative features, which would facilitate OOD detection (Fig. 1). Additionally, SoftMax loss produces overconfident predictions [11], equivalent to low mean entropy posterior probability distributions. Such a fact is in frontal disagreement with the maximum entropy principle [12]–[14].

Rather than directly fixing the above mentioned critical SoftMax loss drawbacks, current OOD detection approaches improve OOD detection performance by adding novel techniques to circumvent its weakness. However, this strategy usually produces undesired side effects and add problematic requirements to the solution (Table I). For example, Out-of-Distribution detector for Neural networks (ODIN) [2] and the Mahalanobis distance-based method [3] use *input preprocessing*, which produces remarkably slow and energy-inefficient inferences [15]. Additionally, to tune hyperparameters, these solutions need unrealistic access to OOD samples or adversarial examples, which require a cumbersome process to generate.

¹We follow the “SoftMax loss” expression as defined in [10].

TABLE I
OUT-OF-DISTRIBUTION DETECTION: APPROACHES, TECHNIQUES, AND SIDE EFFECTS.

Techniques and Side Effects	SoftMax Loss [1] (current baseline)	ODIN [2]	Mahalanobis [3]	ACET [4]	IsoMax Loss (proposed baseline)
Inference Input Preprocessing: Multiple Forward Passes and Backpropagation, At Least Three Times Slower Inference. SLOW INFERENCE	Not Required (Fast)	Required (Slow)	Required (Slow)	Not Required (Fast)	Not Required (Fast)
Inference Input Preprocessing: At Least Three Times Higher Energy Consumption, At Least Three Times Higher Computational Cost. ENERGY-INEFFICIENT INFERENCE	Not Required (Efficient)	Required (Not Efficient)	Required (Not Efficient)	Not Required (Efficient)	Not Required (Efficient)
Adversarial Training: Previously Known Adversarial Hyperparameters. Slower and More Hyperparametrized Training. LIMITED SCALABILITY.	Not Required (Scalable)	Not Required (Scalable)	Not Required (Scalable)	Required (Not Scalable)	Not Required (Scalable)
Adversarial Validation: Previously Known Adversarial Hyperparameters. Adversarial Examples Generation. HYPERPARAMETERS VALIDATION.	Not Required (Turnkey)	Required (Not Turnkey)	Required (Not Turnkey)	Not Required (Turnkey)	Not Required (Turnkey)

IsoMax loss has no drawbacks compared with SoftMax loss while presenting considerably higher baseline OOD detection performance (please, see Table II). ODIN, the Mahalanobis method, and ACET present weaknesses from a practical use perspective. However, if these limitations are not a concern for a particular application, they may be adapted to use IsoMax loss to improve overall OOD detection performance.

In other situation, similar to the Mahalanobis distance-based approach, [5]–[8] require metric learning on features extracted from pretrained models. Another drawback usually present in OOD detection approaches is the *classification accuracy drop* [16], [17], which is a harmful side effect because classification is commonly the primary aim of the system [18]. Methods based on adversarial training, such as Adversarial Confidence Enhancing Training (ACET) [4], often increase training times [19] and present limited scalability when dealing with large-size images [20]. Furthermore, adversarial training may produce classification accuracy drop [21].

In some cases, OOD detection proposals require architecture modifications [22] or ensemble methods [23], [24]. Despite significantly improving the OOD detection performance, loss enhancement (regularization) techniques, such as outlier exposure [25], [26], background methods [27], and the energy-based training and score [28] require the addition of carefully chosen extra/outlier/background data. Moreover, they usually add hyperparameters to the solution.

Solutions based on uncertainty (or confidence) estimation (or calibration) [29]–[33] usually present additional complexity, slow and energy-inefficient inferences [15], and OOD detection performance worse than ODIN [17], [34].

In this paper, rather than circumvent SoftMax loss limitations, we follow a different strategy: we propose replacing it altogether with a novel loss that does not present the SoftMax loss mentioned drawbacks. Additionally, we used entropy for OOD detection. By doing so, we were able to improve the neural networks’ OOD detection baseline performance significantly. *Using this novel baseline OOD detection approach, previously mentioned or future techniques may improve the neural networks’ OOD detection performance even further.* Therefore, we propose IsoMax, a loss that is isotropic (exclusively distance-based) and produces high entropy posterior probability

distributions in agreement with the maximum entropy principle. We also propose using the entropy of the output probabilities as a score to perform OOD detection.

As we aim to increase the neural networks baseline OOD detection performance, we do not rely on collecting additional/outlier/background data and validating the appropriated hyperparameters to improve the OOD detection results [25]–[28]. As mentioned before, these (and other) current OOD techniques may be used in future works to improve our approach baseline OOD detection performance. Furthermore, with the sole aim to perform OOD detection, we emphasize that, unlike uncertainty/confidence estimation/calibration methods, our intention is not to produce calibrated probabilities. In the opposite direction, we plan to force the network to provide posterior probability distribution with the highest possible entropies (as stated by the maximum entropy principle), which correspond to low maximum probabilities.

Networks trained using IsoMax loss produce accurate predictions, as no classification accuracy drop is observed in comparison with networks trained with SoftMax loss. Additionally, the models trained using IsoMax loss provide *inferences that are fast and have energy and computational efficiency equivalent to models trained with SoftMax loss*, making our solution viable from an economical and environmental point of view [35]. Moreover, our approach is *hyperparameter-free*, which means it does not require validation using unrealistic access to OOD samples or the generation of adversarial examples. Furthermore, our solution is turnkey since it does not require additional/outlier data, feature extraction, metric learning, or hyperparameter tuning. No extra procedures other than typical network training are required.

We provide theoretical insights based on the maximum entropy principle to explain why our approach works. Experimental evidence confirms our theoretical assumptions

and shows that our straightforward baseline OOD detection solution significantly outperforms the SoftMax loss baseline performance and is even competitive with high performance OOD detection methods without requiring their supplementary techniques and associated side effects (Table I).

Indeed, despite being proposed as a baseline OOD detection solution that avoids current approaches drawbacks (e.g., classification accuracy drop, slow and energy-inefficient inferences, hyperparameter tuning, feature extraction, metric learning, and additional data), our approach provides high OOD detection performance. *Naturally, additional performance gains may be obtained in the future by adapting modern OOD methods to use IsoMax loss rather than SoftMax loss.*

In summary, the major contributions of this article are:

- 1) The theoretical intuitions that associates the unsatisfactory OOD detection performance of current neural networks with the SoftMax loss anisotropy and disagreement with maximum entropy principle.
- 2) The IsoMax loss, which is isotropic, in agreement with the maximum entropy principle, and works as a seamless SoftMax loss drop-in replacement. The IsoMax loss trained models present accurate predictions (no classification accuracy drop) and fast inferences that are energy- and computation-efficient. Besides, it is *hyperparameter-free* and does not require additional/outlier data. Under these severe restrictions, our solution provides *state-of-the-art* OOD detection performance.
- 3) The experimental demonstration that the entropy, which is a fast and energy-efficient computation, provides high OOD detection performance when the posterior probability distribution follows the maximum entropy principle, i.e., it presents high mean entropy. When using the entropy, rather than just one output, the information of all network outputs is considered.
- 4) Our approach improves neural networks baseline OOD detection performance. In applications where the requirements and side effects of current OOD techniques are not a concern, future works may combine them with our loss to achieve even higher OOD detection performance.

In Section II, we emphasize the technical aspects of modern OOD detection approaches. In Section III, we present our proposal for a novel baseline OOD detection method. We present the experiments, results, and discussions in Section IV. In Section V, we conclude and present future works.

II. BACKGROUND

ODIN was proposed in [2] by combining input preprocessing with *temperature calibration*. Despite significantly outperforming the baseline, input preprocessing introduced in ODIN considerably increases the inference time by requiring an initial forward pass, a backpropagation, and finally a second forward pass to perform an inference that can be used for OOD detection. Considering that backpropagation is typically slower than a forward pass, *input preprocessing makes ODIN inferences at least three times slower than normal*. Additionally, input preprocessing multiplies the inference power consumption and computational cost by at least three. Those are severe

limitations from an economic and environmental perspective [35]. Several subsequent OOD detection proposals incorporated input preprocessing and its drawbacks [2], [3], [17], [36].

Temperature calibration consists of changing the scale of the logits of a pretrained model. Both input preprocessing and temperature calibration *require hyperparameter tuning*. Consequently, ODIN requires unrealistic access to OOD samples to validate hyperparameters. Even if the supposed OOD samples are available during design-time, using these examples to tune hyperparameters makes the solution overfit to detect this particular type of out-distribution².

In real-world applications, the system will likely operate under unknown out-distributions, and the estimated OOD detection performance could degrade significantly. Therefore, using OOD samples to validate hyperparameters may produce over-optimistic OOD detection performance estimations [34].

Alternately, using in-distribution validation sets for both hyperparameter tuning and OOD detection evaluation produces overestimated performance, as test data is also used to perform validation. For example, in [17], to avoid overestimated results, the necessary in-distribution data for hyperparameter tuning should have been removed from the training set. Such a procedure would presumably decrease classification accuracy and, consequently, the OOD detection performance.

The Mahalanobis distance-based method³ [3] overcomes the need for access to OOD samples by validating hyperparameters using adversarial examples, producing more realistic OOD detection performance estimates. However, using adversarial examples has the disadvantage of adding a cumbersome procedure to the solution. Even worse, the generation of adversarial samples itself requires hyperparameters, such as the maximum perturbations. While adequate hyperparameters may be known for research datasets, they may be difficult to find for novel real-world data.

Moreover, as the Mahalanobis approach also requires input preprocessing, the previously mentioned drawbacks associated with this technique are still present in the Mahalanobis solution. *Feature ensemble* introduced in this approach also presents limitations. Indeed, *feature ensembles* require training of extra classification and regression models on features extracted from many network layers. For applications using real-world large-size images, these shallow models may present scalability problems, as they would be required to work in spaces of tens of thousands of dimensions. Finally, the Mahalanobis method is not turnkey, as it involves feature extraction and metric learning post-processing.

Hyperparameter tuning is also a drawback to methods based on adversarial training, such as ACET [4], as we need adequate adversarial perturbations. Additionally, adversarial training is known for increasing training time [19] and reducing classification accuracy [21]. Furthermore, solutions based on adversarial training may not scale to applications dealing with real-world large-sized images [20], which may also be the case of approaches with high computational cost inferences [37].

²In this paper, the expression “out-distribution” refers to any distribution that generates OOD samples.

³For the rest of this paper, the expression “the Mahalanobis distance-based method” is replaced by “the Mahalanobis method”.

III. ENTROPIC OUT-OF-DISTRIBUTION DETECTION

A. Isotropy Maximization Loss

1) *Isotropy*: To fix the SoftMax loss anisotropy caused by its affine transformation, we propose the IsoMax loss, which is isotropic in the sense that its logits depend exclusively on distances from high-level features to class prototypes. For more information regarding distance-based losses, please see Supplementary Material A. For more information regarding the SoftMax loss anisotropy, how it harms the OOD detection performance, and the advantages of circumventing this problem using an isotropic loss, please see Supplementary Material B.

We designed the IsoMax loss to work as a SoftMax loss drop-in replacement. Therefore, the swap of the SoftMax loss with the IsoMax loss requires changes in neither the model’s architecture nor training procedures or parameters.

Let $\mathbf{f}_\theta(\mathbf{x})$ represent the high-level feature (embedding) associated with \mathbf{x} , \mathbf{p}_ϕ^j represent the prototype associated with the class j , and $d(\cdot)$ represent a distance. To construct an isotropic loss, we need to avoid *direct* dependency on $\mathbf{f}_\theta(\mathbf{x})$ or \mathbf{p}_ϕ^j . Therefore, the loss has to be a function that *exclusively* depends on the embedding-prototype distances given by $d(\mathbf{f}_\theta(\mathbf{x}), \mathbf{p}_\phi^j)$. Therefore, we can write:

$$\mathcal{L}_I = f(d(\mathbf{f}_\theta(\mathbf{x}), \mathbf{p}_\phi^j)) \quad (1)$$

In the previous equation, $f(\cdot)$ represents a scalar function. The expression $d(\mathbf{f}_\theta(\mathbf{x}), \mathbf{p}_\phi^j)$ represents the isotropic layer, where its weights are given by the learnable prototypes \mathbf{p}_ϕ^j .

We decided to normalize the embedding-prototype distances using the SoftMax *function* to allow interpretation in terms of probabilities. Therefore, the embedding-prototype distances represent the logits of the SoftMax *function* and correspond to the output of the isotropic layer. We also decided to use the cross-entropy for efficient optimization. Hence, we can write the following equation:

$$\mathcal{L}_I(\hat{y}^{(k)}|\mathbf{x}) = -\log\left(\frac{\exp(-d(\mathbf{f}_\theta(\mathbf{x}), \mathbf{p}_\phi^k))}{\sum_j \exp(-d(\mathbf{f}_\theta(\mathbf{x}), \mathbf{p}_\phi^j))}\right) \quad (2)$$

In the above equation, $\hat{y}^{(k)}$ represents the label of the correct class, while the negative logarithm represents the cross-entropy. The negative terms before the distances are necessary to indicate the negative correlation between distances and probabilities. The expression between the outermost parentheses applied to the term $-d(\mathbf{f}_\theta(\mathbf{x}), \mathbf{p}_\phi^j)$ represents the SoftMax *function*. We justify the use of the *non-squared* euclidean distance for IsoMax loss in Supplementary Material C.

Unlike usual metric learning-based OOD detection approaches, rather than learning a metric from a preexisting feature space (metric learning on features extracted from a pretrained model), when using the IsoMax loss, we learn a feature space that is, from the start, consistent with the chosen metric. Indeed, the minimization of Equation (2) is achieved by making the expression inside the outer parentheses goes to one. This is only possible by reducing the distances between the high-level features (embeddings) and the associated class

prototypes, while simultaneously keeping high distances among class prototypes. Hence, the main aim of metric learning, which is to reduce intraclass distances while increasing interclass distances, is performed naturally during the neural network training, avoiding the need for feature extraction and metric learning postprocessing phases.

2) *Entropy Maximization*: Isotropy increases OOD detection performance. However, we need to circumvent the SoftMax loss propensity to produce significantly low entropy posterior probability distributions for further gains. To achieve high entropy probability distributions in agreement with the maximum entropy principle, we introduce the *entropic scale*, a constant scalar multiplicative factor applied to the logits *throughout training* that is, nevertheless, *removed before inference*. We call this procedure “the entropy maximization trick”.

Our experiments show that “the entropy maximization trick” forces the neural networks to produce outputs with significantly high entropy probability distributions (as recommended by the maximum entropy principle) rather than the usual low entropy (overconfident) posterior probability distributions.

The entropic scale is related to the *inverse of the temperature* of the SoftMax *function*⁴. However, training with a *predefined constant* entropic scale and then *removing it before inference* is completely different from temperature calibration. On the one hand, in ODIN and similar methods based on temperature calibration, the temperature of a *pretrained* model is validated *after training*, which nevertheless was performed with a temperature equal to one. This validation usually requires unrealistic access to OOD or adversarial examples, which additionally make them not turnkey. Also, over-optimistic performance estimation is commonly produced [34]. On the other hand, our approach requires neither hyperparameter validation nor access to OOD or adversarial data.

The principle of maximum entropy, formulated by E. T. Jaynes to unify the statistical mechanics and information theory entropy concepts [12], [13], states that when estimating probability distributions, we should choose the one that produces the maximum entropy consistent with the given constraints [14]. Following this principle, we avoid introducing additional assumptions or bias not presented in the data.

Hence, from a set of trial probability distributions that satisfactorily describe the prior knowledge available, the distribution that presents the maximal information entropy, which is the least informative option, represents the best possible choice. In other words, we must produce posterior probability distributions as underconfident as possible as long as they match the correct predictions.

The principle of maximum entropy has been studied as a *regularization factor* [38], [39]. In some cases, it has also been used as a direct optimization procedure without connection to cross-entropy minimization or backpropagation. For example, in [40]–[42], the maximization of the entropy subject to a constraint on the expected classification error was shown to be equivalent to solving an unconstrained Lagrangian.

The relation between the principle of maximum entropy and Bayesian methods has been studied in [43]. Despite

⁴We follow the “SoftMax *function*” expression as defined in [10].

being theoretically well-grounded [44]–[47], *direct* entropy maximization presents high computational complexity, as it is an NP-complete problem [44], [46]. Alternatively, modern neural networks are trained using computationally efficient cross-entropy. However, this procedure does not prioritize high entropy (low confident) posterior probability distributions. *Actually, the opposite is true.* Indeed, the minimization of cross-entropy has the undesired side effect of producing low entropy (overconfident) posterior probability distributions [11].

Unlike the previously mentioned works, we use the principle of maximum entropy neither to motivate the construction of regularization mechanisms, such as label smoothing or the confidence penalty [38], [39], nor to perform *direct* maximum entropy optimization [40]–[42]. The entropy is not even calculated during IsoMax loss training. In the opposite direction, we use the principle of maximum entropy as theoretical motivation for constructing high entropy (low confident) posterior probabilities, still relying on computationally efficient cross-entropy minimization. Since our approach does *not* directly maximize the entropy, we cannot state that IsoMax produces the maximum entropy posterior probability distribution. However, the entropies produced by IsoMax loss are high enough to improve the OOD detection performance significantly.

$$\begin{aligned} \mathcal{L}_{\text{SoftMax}} &= -\log \left(\frac{\exp(L_k)}{\sum_j \exp(L_j)} \right) \rightarrow 0 \\ \implies \mathcal{P}(y|\mathbf{x}) &\rightarrow 1 \implies \mathcal{H}_{\text{SoftMax}} \rightarrow 0 \end{aligned} \quad (3)$$

Equation (3) describes the behavior of the cross-entropy and entropy for the SoftMax loss. L_j represents the logits associated with class j , and L_k represents the logits associated with the correct class k . When minimizing the loss (term before the first implies symbol), high probabilities are generated (term between implies symbols). Consequently, significantly low entropy posterior probability distributions are produced (term after the second implies symbol).

Hence, the usual cross-entropy minimization tends to generate unrealistic overconfident (low entropy) probability distributions. Therefore, we have an opposition between cross-entropy minimization and the principle of maximum entropy.

$$\begin{aligned} \mathcal{L}_{\text{IsoMax}} &= -\log \left(\frac{\exp(-E_s \times D_k)}{\sum_j \exp(-E_s \times D_j)} \right) \rightarrow 0 \\ \not\Rightarrow \mathcal{P}(y|\mathbf{x}) &\rightarrow 1 \implies \mathcal{H}_{\text{IsoMax}} \rightarrow 0 \end{aligned} \quad (4)$$

The IsoMax loss conciliates these contradictory objectives (loss minimization and entropy maximization) by multiplying the logits by a constant positive scalar E_s , which is presented during training but removed before inference.

Equation (4) demonstrates how the entropic scale (presented at training time but removed at inference time) allows the production of high entropy posterior distributions despite using cross-entropy minimization. D_j represents the logits (distances) associated with class j , and D_k represents the logits (distances) associated with the correct class k . The E_s present during

training allows the term $-E_s \times D_k$ to become high enough (less negative compared to $-E_s \times D_j$) to produce low loss (term before the first implies symbol) *without* producing high probabilities for the correct classes, as they are calculated with the E_s removed (term between implies symbols). Thus, it is possible to build posterior probability distributions with high entropy (term after the second implies symbol) in agreement with the fundamental principle of maximum entropy despite using cross-entropy to minimize the loss.

We emphasize that, regardless of training with the entropic scale, if we do not remove it before performing inference, the IsoMax loss produces outputs with entropies as low as those produced by the SoftMax loss and, consequently, the OOD detection performance does not further increase. Therefore, returning to Equation (2), multiplying the embedding-prototype distances by E_s , and making $d(\cdot)$ equal to the *nonsquared* Euclidean distance, we can write the definitive IsoMax loss as:

$$\begin{aligned} \mathcal{L}_I(\hat{y}^{(k)}|\mathbf{x}) &= -\log \left(\frac{\exp(-E_s \|\mathbf{f}_\theta(\mathbf{x}) - \mathbf{p}_\phi^k\|)}{\sum_j \exp(-E_s \|\mathbf{f}_\theta(\mathbf{x}) - \mathbf{p}_\phi^j\|)} \right) \\ &= -\log \left(\frac{\exp(-E_s \sqrt{(\mathbf{f}_\theta(\mathbf{x}) - \mathbf{p}_\phi^k) \cdot (\mathbf{f}_\theta(\mathbf{x}) - \mathbf{p}_\phi^k)})}{\sum_j \exp(-E_s \sqrt{(\mathbf{f}_\theta(\mathbf{x}) - \mathbf{p}_\phi^j) \cdot (\mathbf{f}_\theta(\mathbf{x}) - \mathbf{p}_\phi^j)})} \right) \end{aligned} \quad (5)$$

We emphasize that removing the entropic scale after the training does not affect the ability of the solution to represent the prior knowledge available, as it does not change the predictions. Therefore, the expression for the probabilities with the entropic scale removed is preferable, as it increases the entropy of the posterior distributions in agreement with the principle of maximum entropy. Hence, inference probabilities for the IsoMax loss are defined as follows:

$$\begin{aligned} p_I(y^{(i)}|\mathbf{x}) &= \frac{\exp(-\|\mathbf{f}_\theta(\mathbf{x}) - \mathbf{p}_\phi^i\|)}{\sum_j \exp(-\|\mathbf{f}_\theta(\mathbf{x}) - \mathbf{p}_\phi^j\|)} \\ &= \frac{\exp(-\sqrt{(\mathbf{f}_\theta(\mathbf{x}) - \mathbf{p}_\phi^i) \cdot (\mathbf{f}_\theta(\mathbf{x}) - \mathbf{p}_\phi^i)})}{\sum_j \exp(-\sqrt{(\mathbf{f}_\theta(\mathbf{x}) - \mathbf{p}_\phi^j) \cdot (\mathbf{f}_\theta(\mathbf{x}) - \mathbf{p}_\phi^j)})} \end{aligned} \quad (6)$$

Please, notice that the entropic scale E_s was intentionally removed from the loss Equation 5 to build the inference Equation 6 to perform “the entropy maximization trick”.

3) *Initialization and Implementation Details:* We experimentally observed that using the Xavier [48] and Kaiming [49] initializations for prototypes makes the OOD detection performance oscillate. Sometimes it improves, sometimes it decreases. Hence, we decided to always initialize all prototypes to zero vector, as this is the most natural value for untrained embeddings. Weight decay is applied to prototypes, as they are regular trainable parameters.

To calculate losses based on cross-entropy, deep learning libraries usually combine the logarithm and probability calculations into a single computation. However, we experimentally

observed that sequentially computing these calculations as stand-alone operations improves IsoMax performance.

The class prototypes have the same dimension as the neural network last layer representations. Naturally, the number of prototypes is equal to the number of classes. Therefore, the IsoMax loss has fewer parameters than the SoftMax loss, as it has no bias to be learned.

Finally, we verified classification accuracy drop and low or oscillating OOD detection performance when trying to integrate E_s with cosine similarity [10], [50], [51] or the affine transformations used in SoftMax loss. In such cases, the above trick to initialize prototypes to zero vector cannot be performed. Therefore, we confirmed *nonsquared* Euclidean distance as the best option to build the IsoMax loss.

B. Entropic Score

We define our score to perform OOD detection, called the entropic score, as the output probabilities negative entropy:

$$\mathcal{ES} = - \sum_{i=1}^N p(y^{(i)}|\mathbf{x}) \log p(y^{(i)}|\mathbf{x}) \quad (7)$$

Using the negative entropy as a score to evaluate whether a particular sample is OOD, we consider the information provided by all available network outputs rather than just one. For instance, ODIN and ACET only use the maximum probability, while the Mahalanobis method only uses the distance to the nearest prototype. The entropy has been studied before for anomaly detection [52].

Regarding the use of entropy as an OOD score, one of the most relevant contribution of this paper is to experimentally show that it does not significantly overcome the maximum probability score when dealing with the usual low entropy (overconfident) neural networks posterior probability distributions. However, the entropic score significantly improves the OOD detection performance when used with the high entropy (underconfident) neural networks posterior probability distributions produced by the IsoMax loss in agreement with the principle of the maximum entropy. For more information regarding the use of the entropy as a score to perform OOD, please see Supplementary Material D.

C. Differentiation from the Scaled Cosine Approach

Another *hyperparameter-free* approach is presented in [16]. However, different from IsoMax loss, this solution presents *significant classification accuracy drop* (the authors even suggest using two models, one for classification and the other for OOD detection) and increases the number of parameters used in the original model and requires an additional layer.

Additionally, it is not an isotropic loss, as the cosine similarity is used rather than a distance. The factor used in the loss during training is not removed before the inference to produce the maximization of the entropy of the posterior probability distributions. Indeed, it is not based on the principle of maximum entropy and still makes overconfident predictions. It does not use an entropic score but rather the usual maximum probability score. Moreover, the authors explicitly say that

they do not have an explanation of why their solution works. Finally, our approach produces prototypes, which is not the case with the mentioned solution.

IV. EXPERIMENTAL ANALYSES

All datasets, models, training procedures, and evaluation metrics followed the baseline established in [1] and were subsequently used in major OOD detection papers [2]–[4]. We only compared approaches that did not present classification accuracy drop in the experiments presented in the work in which they were proposed.

Since it is a well-known fact that using outlier/background data improves OOD detection performance and we intend to propose an baseline OOD detection approach for neural networks, we do not rely on auxiliary/outlier/background data. Therefore, considering that loss enhancement (regularization) techniques may benefit both SoftMax and IsoMax losses, we decided to perform all experiments without outlier exposure [25], [26], background samples [27], or energy-based training and score [28].

We trained from scratch 100-layer DenseNet-BC [53] (growth rate $k=12$, 0.8M parameters) and 34-layer ResNets [54] on CIFAR10 [55], CIFAR100 [55] and SVHN [56] using SoftMax and IsoMax losses. We used SGD with the Nesterov moment equal to 0.9, 300 epochs with a batch size of 64, and an initial learning rate of 0.1 with a learning rate decay rate equal to ten applied in epochs 150, 200, and 250. We used dropout equal to zero. The weights decay was 0.0001. The *source code* is available⁵. We used resized images from the TinyImageNet [57]⁶ and the Large-scale Scene UNDERstanding (LSUN) [58]⁶ datasets as OOD data. Each set of OOD data presents ten thousand images.

Finally, we separately added these OOD data to the CIFAR10, CIFAR100, and SVHN validation sets to construct the respective OOD detection test sets. For example, the OOD detection test set for in-distribution CIFAR10 and out-distribution TinyImageNet is composed by combing the CIFAR validation set and the TinyImageNet OOD data. In some cases, CIFAR10 and SVHN work as out-distribution and the respective validation set is used to construct the OOD detection test set. We emphasize that our solution does not use validation sets for training or validation. Therefore, validation sets are used exclusively for building OOD detection test sets.

We evaluated the performance using three detection metrics. First, we calculated the true negative rate at the 95% true positive rate (TNR@TPR95) using the adequate threshold. In addition, we evaluated the area under the receiver operating characteristic curve (AUROC) and the detection accuracy (DTACC), which corresponds to the maximum classification probability over all possible thresholds δ :

$$1 - \min_{\delta} \{ P_{in} (o(\mathbf{x}) \leq \delta) P(\mathbf{x} \text{ is from } P_{in}) + P_{out} (o(\mathbf{x}) > \delta) P(\mathbf{x} \text{ is from } P_{out}) \}, \quad (8)$$

⁵<https://github.com/dlmacedo/entropic-out-of-distribution-detection>

⁶<https://github.com/facebookresearch/odin>

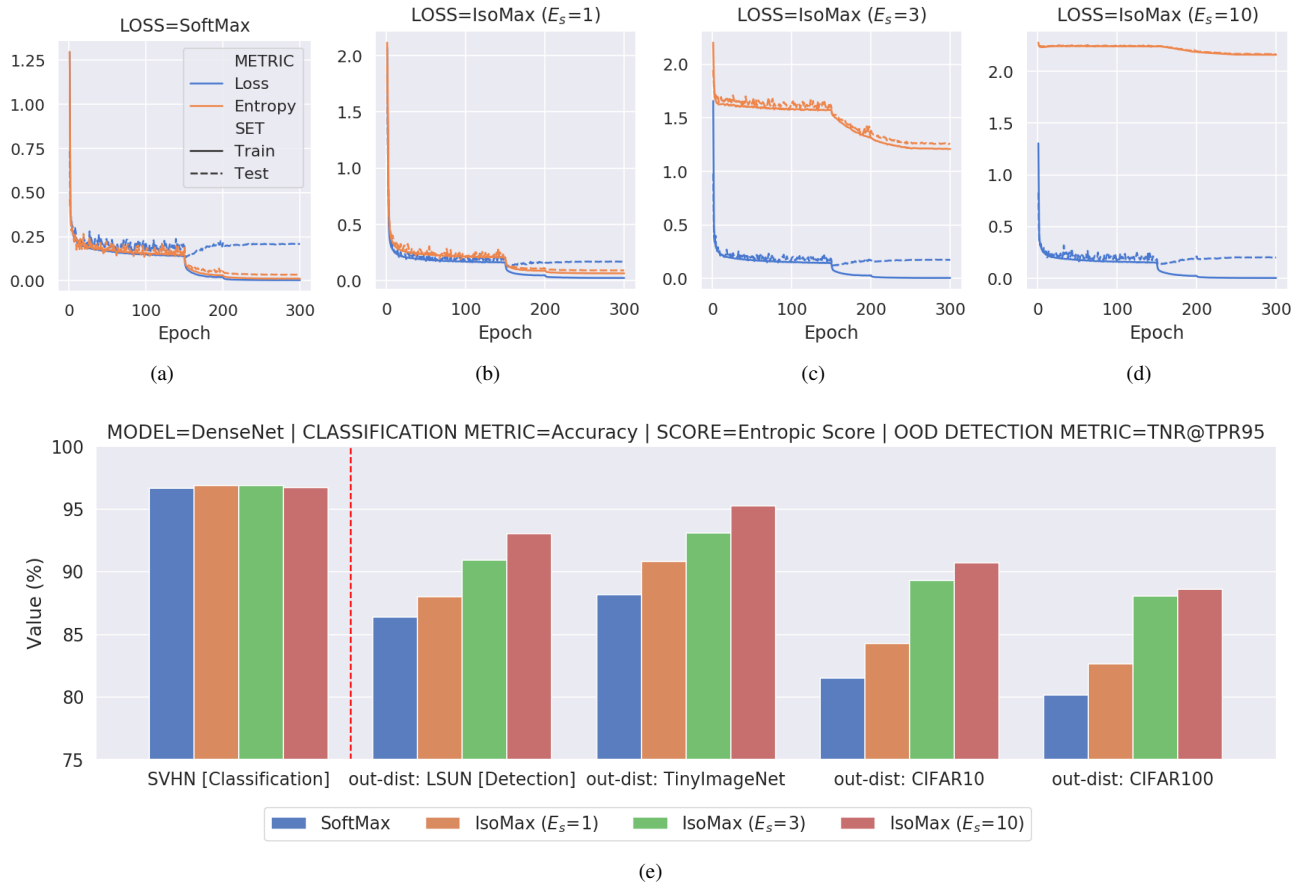


Fig. 2. IsoMax loss effects: (a) SoftMax loss simultaneously minimizes both the cross-entropy and the entropy of the posterior probabilities. (b) IsoMax loss produces low entropy posterior probabilities for low entropic scale ($E_s=1$). (c) IsoMax loss produces medium mean entropy for an intermediate entropic scale ($E_s=3$). (d) IsoMax loss minimizes the cross-entropy while producing high mean entropies for the high entropic scale ($E_s=10$). “The entropy maximization trick” is the fundamental mechanism that allows us to migrate from low entropy posterior probability distributions (a,b) to high entropy posterior probability distributions (d). Higher entropic scale values correlate to higher mean entropies as recommended by the principle of maximum entropy. Regardless of training with a high entropic scale, if we do not remove it for inference (“the entropy maximization trick”), the IsoMax loss always produces posterior probability distributions with entropies as low as those generated by the SoftMax loss. An entropic scale equal to ten is sufficient to virtually produce the maximum possible entropy posterior probability distribution, as the highest possible value of the entropy is $\log(N)$, where N is the number of classes. (e) The left side of the dashed vertical red line presents classification accuracies. The dashed vertical red line’s right side shows OOD detection performance using the entropic score and the TNR@TPR95 metric. Higher mean entropies produce increased OOD detection performance regardless of the out-distribution. We emphasize that OOD examples were never used during training and no validation was required to tune hyperparameters. Additionally, isotropy enables IsoMax loss to produce higher OOD performance than SoftMax loss, even for the unitary value of the entropic scale. Finally, IsoMax loss presents similar classification accuracy compared with SoftMax regardless of the entropic scale. The entropic score, which is the negative entropy of the network output probabilities, was used as the score.

where $o(\mathbf{x})$ is a given OOD detection score. It is assumed that both positive and negative samples have equal probability. AUROC and DTACC are threshold independent.

A. Entropic Scale, High Entropy, and OOD Detection

To experimentally show that higher entropic scales lead to higher entropy probability distributions and consequently improved OOD detection performance, we trained DenseNets on SVHN using the SoftMax loss and IsoMax loss with distinct entropic scale values. We used the entropic score and the TNR@TPR95 to evaluate OOD detection performance (Fig. 2).

As expected, Fig. 2a shows that the SoftMax loss generates posterior distributions with low entropy. Fig. 2b illustrates that the unitary entropic scale ($E_s=1$) does not increase the distribution mean entropy. In other words, isotropy alone is not enough to circumvent the cross-entropy propensity to produce low entropy probability distributions and the entropic scale is

indeed necessary. Nevertheless, the replacement of anisotropic logits based on affine transformation by isotropic logits is enough to produce initial OOD detection performance gains regardless of the out-distribution (Fig. 2e).

Fig. 2c shows that an intermediate entropic scale ($E_s=3$) provides medium entropy probability distributions with corresponding additional OOD detection performance gains for all out-distributions (Fig. 2e). Fig. 2d illustrates that a high entropic scale ($E_s=10$) produces even higher entropy probability distributions and the highest OOD detection performance regardless of the out-distribution considered (Fig. 2e).

Despite the entropy scale value used, the cross-entropy is minimized and the classification accuracies produced by SoftMax and IsoMax losses are similar. For a high entropic scale, the IsoMax loss minimizes the cross-entropy while producing high entropy posterior probability distributions as recommended by the principle of maximum entropy.

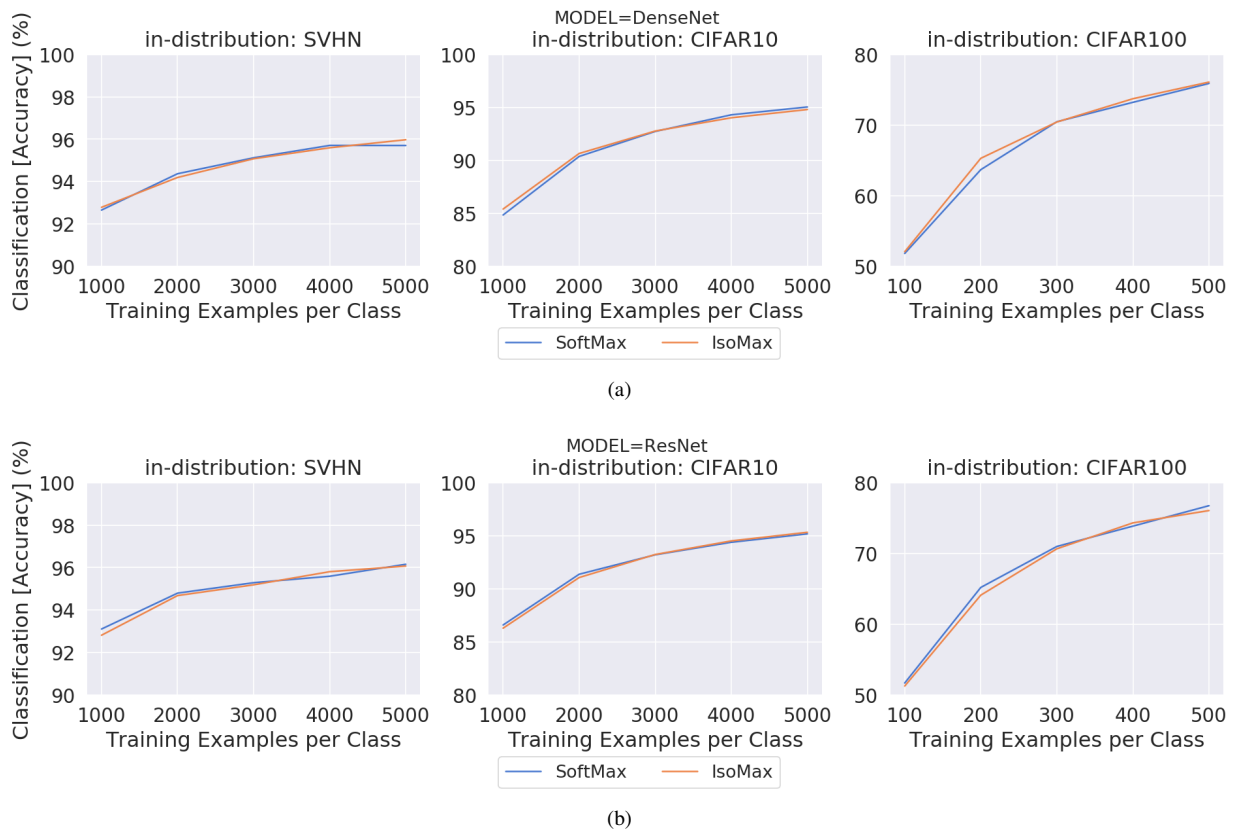


Fig. 3. IsoMax loss presents test accuracy similar to SoftMax loss (no classification accuracy drop) for different numbers of training examples per class on several datasets and models. Simultaneously, IsoMax usually produces much higher OOD detection performance (Table II).

TABLE II
CURRENT AND PROPOSED BASELINE OUT-OF-DISTRIBUTION DETECTION APPROACHES COMPARISON.
FAST AND ENERGY-EFFICIENT INFERENCE. TURNKEY APPROACHES. NO EXTRA/OUTLIER/BACKGROUND DATA USED.

Model	In-Data (training)	Out-Data (unseen)	Baseline Out-of-Distribution Detection Approaches Comparison. Fast and Energy-Efficient Inferences. Turnkey Approaches. No outlier data used.		
			TNR@TPR95 (%) [\uparrow] SoftMax+MPS [1] / IsoMax+ES (ours)	AUROC (%) [\uparrow] SoftMax+ES / IsoMax+ES (ours)	DTACC (%) [\uparrow]
DenseNet	CIFAR10	SVHN	32.2 / 33.2 / 77.0	86.6 / 86.9 / 96.6	79.9 / 79.9 / 91.6
		TinyImageNet	55.8 / 59.8 / 88.0	93.5 / 94.2 / 97.8	87.6 / 87.8 / 93.2
		LSUN	64.9 / 69.5 / 94.5	95.2 / 95.9 / 98.8	89.9 / 90.0 / 94.9
	CIFAR100	SVHN	20.6 / 24.9 / 23.4	80.1 / 81.9 / 88.6	73.9 / 74.3 / 83.7
		TinyImageNet	19.4 / 23.7 / 49.1	77.0 / 78.8 / 92.6	70.6 / 71.1 / 86.6
		LSUN	18.8 / 24.4 / 63.0	75.9 / 77.9 / 94.7	69.5 / 70.2 / 89.1
ResNet	CIFAR10	SVHN	81.5 / 83.7 / 94.1	96.5 / 96.9 / 98.5	91.9 / 92.1 / 95.0
		TinyImageNet	88.2 / 90.0 / 97.0	97.7 / 98.1 / 99.1	93.5 / 93.7 / 96.1
		LSUN	86.4 / 88.4 / 96.8	97.3 / 97.8 / 99.1	92.8 / 93.0 / 96.0
	CIFAR100	SVHN	43.1 / 44.5 / 83.6	91.7 / 92.0 / 97.1	86.5 / 86.5 / 91.9
		TinyImageNet	46.3 / 48.0 / 70.2	89.8 / 90.0 / 94.6	84.0 / 84.1 / 88.3
		LSUN	51.2 / 53.3 / 82.3	92.2 / 92.6 / 96.9	86.5 / 86.6 / 91.5
ResNet	CIFAR100	SVHN	15.9 / 18.0 / 20.2	71.3 / 72.7 / 85.3	66.1 / 66.3 / 79.7
		TinyImageNet	18.5 / 22.4 / 50.6	74.7 / 76.3 / 92.0	68.8 / 69.1 / 85.6
		LSUN	18.4 / 22.4 / 54.8	74.7 / 76.5 / 93.2	69.1 / 69.4 / 87.5
	SVHN	CIFAR10	67.3 / 67.7 / 92.3	89.8 / 89.7 / 98.0	87.0 / 86.9 / 94.1
		TinyImageNet	66.9 / 67.3 / 94.4	89.0 / 89.0 / 98.4	86.7 / 86.6 / 94.8
		LSUN	62.2 / 62.5 / 90.8	86.0 / 85.8 / 97.8	84.2 / 84.1 / 93.6

The compared baseline OOD detection approaches are turnkey (no outlier/background/extra data required, no additional procedures other than typical straightforward neural network training are required), produce no classification accuracy drop, and present fast and energy-efficient inferences. Neither adversarial training, input preprocessing, temperature calibration, feature ensemble, nor metric learning is used. Since there is no hyperparameter to tune, no access to OOD or adversarial examples is required. SoftMax+MPS means training with SoftMax loss and performing OOD detection using the maximum probability score, which is the approach defined in [1]. SoftMax+ES means training with SoftMax loss and performing OOD detection using the entropic score. IsoMax+ES means training with IsoMax loss and performing OOD detection using the entropic score. The OOD detection test sets are composed of images from both in-data and out-data (see Section IV for additional details). The best results are in bold. To the best of our knowledge, *IsoMax+ES presents the state-of-the-art under these severe restrictive assumptions.*

TABLE III
COMPARISON OF THE PROPOSED BASELINE OUT-OF-DISTRIBUTION DETECTION APPROACH WITH NO SEAMLESS SOLUTIONS.
UNFAIR COMPARISON OF APPROACHES WITH DIFFERENT REQUIREMENTS AND SIDE EFFECTS. NO EXTRA/OUTLIER/BACKGROUND DATA USED.

Model	In-Data (training)	Out-Data (unseen)	ODIN, ACET, and Mahalanobis present troublesome requirements. ODIN, ACET, and Mahalanobis produce undesired side effects.	
			AUROC (%) [↑] ODIN [2] / ACET [4] / IsoMax+ES (ours) / Mahalanobis [3]	DTACC (%) [↑]
DenseNet	CIFAR10	SVHN	92.8 / NA / 96.6 / 97.6	86.5 / NA / 91.6 / 92.6
		TinyImageNet	97.2 / NA / 97.8 / 98.8	92.1 / NA / 93.2 / 95.0
		LSUN	98.5 / NA / 98.8 / 99.2	94.3 / NA / 94.9 / 96.2
	CIFAR100	SVHN	88.2 / NA / 88.6 / 91.8	80.7 / NA / 83.7 / 84.6
		TinyImageNet	85.3 / NA / 92.6 / 97.0	77.2 / NA / 86.6 / 91.8
		LSUN	85.7 / NA / 94.7 / 97.9	77.3 / NA / 89.1 / 93.8
SVHN	CIFAR10	91.9 / NA / 98.5 / 98.8	86.6 / NA / 95.0 / 96.3	
	TinyImageNet	94.8 / NA / 99.1 / 99.8	90.2 / NA / 96.1 / 98.9	
	LSUN	94.1 / NA / 99.1 / 99.9	89.1 / NA / 96.0 / 99.2	
ResNet	CIFAR10	SVHN	86.5 / 98.1 / 97.1 / 95.5	77.8 / NA / 91.9 / 89.1
		TinyImageNet	93.9 / 85.9 / 94.6 / 99.0	86.0 / NA / 88.3 / 95.4
		LSUN	93.7 / 85.8 / 96.9 / 99.5	85.8 / NA / 91.5 / 97.2
	CIFAR100	SVHN	72.0 / 91.2 / 85.3 / 84.4	67.7 / NA / 79.7 / 76.5
		TinyImageNet	83.6 / 75.2 / 92.0 / 87.9	75.9 / NA / 85.6 / 84.6
		LSUN	81.9 / 69.8 / 93.2 / 82.3	74.6 / NA / 87.5 / 79.7
SVHN	CIFAR10	92.1 / 97.3 / 98.0 / 97.6	89.4 / NA / 94.1 / 94.6	
	TinyImageNet	92.9 / 97.7 / 98.4 / 99.3	90.1 / NA / 94.8 / 98.8	
	LSUN	90.7 / 99.7 / 97.8 / 99.9	88.2 / NA / 93.6 / 99.5	

ODIN uses input preprocessing, temperature calibration, and adversarial validation (hyperparameter tuning using adversarial examples). The Mahalanobis solution uses input preprocessing, adversarial validation, feature extraction, feature ensemble, and metric learning. Input preprocessing makes the inferences of ODIN and the Mahalanobis method at least three times slower and *at least three times less energy/computationally efficient than SoftMax or IsoMax inferences*. Feature ensembles may limit the Mahalanobis method scalability to deal with large-size images used in real-world applications. ACET uses adversarial training, which results in slower training, possibly reduced scalability for large-size images, and eventually, classification accuracy drop. The ODIN, the Mahalanobis approach, and ACET present hyperparameters that need to be validated for each combination of datasets and models presented in the table. Furthermore, considering that adversarial hyperparameters (e.g., the adversarial perturbation) used in ODIN/Mahalanobis/ACET were validated using the SVHN/CIFAR10/CIFAR100 validation sets and that these sets were reused as OOD detection test set, we conclude that the ODD detection performance reported by those papers, which we are reproducing in this table, may be overestimated. ODIN/Mahalanobis/ACET results were obtained using SoftMax loss rather than IsoMax loss as baseline. No outlier/extra/background data is used. IsoMax+ES means training with IsoMax loss and performing OOD detection using the entropic score. IsoMax+ES does not use these techniques and does not have such requirements, side effects, and hyperparameters to tune (as IsoMax+ES works as a baseline OOD detection approach, those techniques may be incorporated in future research). The OOD detection test sets are composed of images from both in-data and out-data (see Section IV for further details). The best results are in bold (2% tolerance).

TABLE IV
OUT-OF-DISTRIBUTION DETECTION: INFERENCE DELAYS / PRESUMED COMPUTATIONAL COST AND ENERGY CONSUMPTION RATES.

Model	In-Data (training)	Hardware (inference)	Out-of-Distribution Detection: Inference Delays / Presumed Computational Cost and Energy Consumption Rates.		
			SoftMax Loss [1] (current baseline)	IsoMax Loss (ours) (proposed baseline)	Input Preprocessing: ODIN [2], Mahalanobis [3], Generalized ODIN [17] (ms) [↓]
			MPS (ms) [↓] / ES (ms) [↓]	MPS (ms) [↓] / ES (ms) [↓]	
DenseNet	CIFAR10	CPU	18.1 / 19.4	18.0 / 19.2	242.4 (≈ 10x slower)
		GPU	11.6 / 13.0	11.6 / 11.5	39.2 (≈ 4x slower)
	CIFAR100	CPU	18.4 / 19.8	18.4 / 19.3	261.0 (≈ 10x slower)
		GPU	12.9 / 11.4	11.8 / 11.5	39.6 (≈ 4x slower)
	SVHN	CPU	18.1 / 18.6	18.3 / 18.6	241.5 (≈ 10x slower)
		GPU	11.6 / 11.9	11.7 / 11.6	39.6 (≈ 4x slower)
ResNet	CIFAR10	CPU	22.3 / 23.2	23.0 / 23.5	250.4 (≈ 10x slower)
		GPU	4.5 / 3.8	4.2 / 4.1	15.4 (≈ 4x slower)
	CIFAR100	CPU	23.3 / 23.1	23.3 / 23.8	252.6 (≈ 10x slower)
		GPU	4.3 / 3.9	4.3 / 4.2	14.8 (≈ 4x slower)
	SVHN	CPU	23.1 / 23.4	23.4 / 23.3	263.8 (≈ 10x slower)
		GPU	4.2 / 4.0	4.0 / 4.0	15.7 (≈ 4x slower)

MPS means maximum probability score. ES means entropic score. For SoftMax and IsoMax losses (baseline OOD detection approaches), the inference delays combine both classification and detection computation. For the methods based on input preprocessing, the inference delays represent only the input preprocessing phase. All values are in milliseconds. In addition to presenting similar classification accuracy (Fig. 3) and much better OOD detection performance (Table II), IsoMax loss trained networks produce inferences as fast as SoftMax trained networks. Moreover, the entropic score is as fast as the maximum probability score. Using CPU (Intel i7-4790K, 4.00GHz, x64, octa-core) for inference (the case more relevant from a cost point of view), methods based on input preprocessing are *about ten times slower* than the baseline approaches. Using GPU (Nvidia GTX 1080 Ti) for inference, our approach is *about four times faster* than the methods based on input preprocessing. The inference delay rates presumably reflect in similar the computational cost and energy consumption rates.

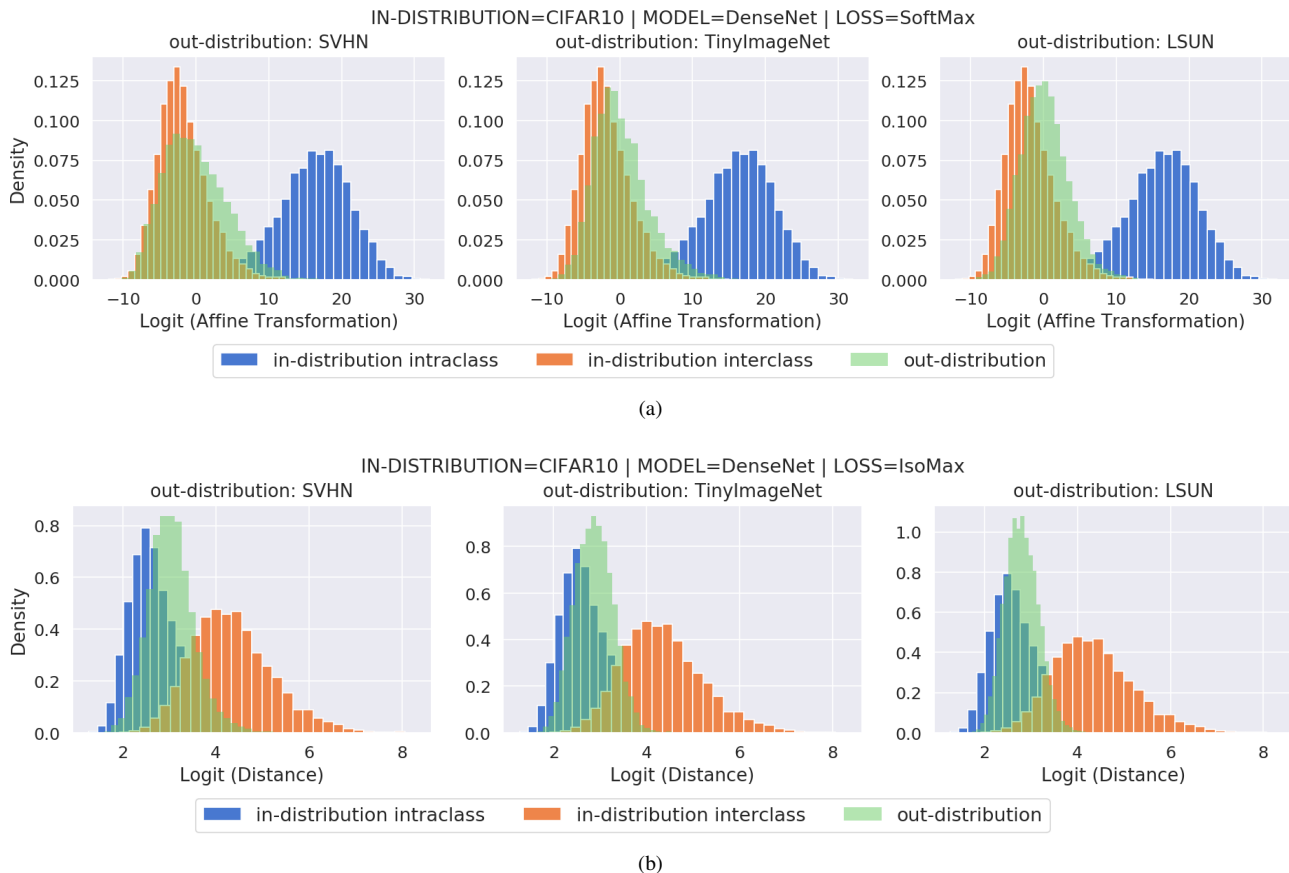


Fig. 4. Logits: (a) In SoftMax loss, out-distribution logits mimic in-distribution interclass logits. (b) In IsoMax loss, out-distribution logits mimic in-distribution intraclass logits, which facilitates OOD detection, as there are many more interclass logits than intraclass logits, and the entropic score takes into consideration the information provided by all network outputs rather than just one. Distances are calculated from class prototypes.

More importantly, higher entropy posterior probability distributions directly correlate with increased OOD detection performances despite the OOD data. Fig. 2d shows that an entropic scale $E_s=10$ is enough to produce probability distributions with essentially the maximum possible entropies. Additionally, we experimentally observed no further gains for entropic scales higher than ten. Therefore, we defined the entropic scale as a constant equal to ten for all subsequent experiments reported in this paper.

B. Classification Accuracy

Fig. 3 shows that the classification accuracy of models trained with the IsoMax loss is similar to the models trained with the SoftMax loss regardless of the dataset or architecture. This is also true for a varying number of training examples per class.

C. Out-of-Distribution Detection

1) *Fair Scenario*: In Table II, we observe that models trained with the SoftMax loss using the maximum probability as the score (SoftMax+MPS) almost always present the worst OOD detection performance results.

In the case of models trained with SoftMax loss, replacing the maximum probability score by the entropic score (SoftMax+ES) produces small OOD detection performance gains. However, the combination of models trained using IsoMax loss with the

entropic score (IsoMax+ES), which is the proposed solution, significantly improves, usually by several percentage points, the OOD detection performance across almost all datasets, models, out-distributions, and metrics. We emphasize that the entropic score only produces high OOD detection performance when the probability distributions present high entropy (IsoMax+ES). For low entropy probability distributions (SoftMax+ES), the performance increase is minimal. For a study showing that the IsoMax loss superiority in relation to SoftMax is robust for different number of training examples per class, see Supplementary Material E.

The IsoMax loss is well-positioned to replace SoftMax loss as a novel baseline OOD detection approach for neural networks OOD detection since the former does not present an accuracy drop in relation to the latter and simultaneously improves the OOD detection performance. Additional techniques (e.g., input preprocessing, adversarial training, and outlier exposure) may be added to further improve OOD detection performance gains.

2) *Unfair Scenario*: Table III presents a perspective about how our proposed baseline OOD detection approach compares with no seamless solutions. Hence, we need to analyze the mentioned table considering that it shows an *unfair* comparison of approaches that present different requirements and side effects. ODIN and the Mahalanobis solution use input preprocessing⁷.

⁷To allow OOD detection, each inference requires a first neural network forward pass, a backpropagation, and a second forward pass.

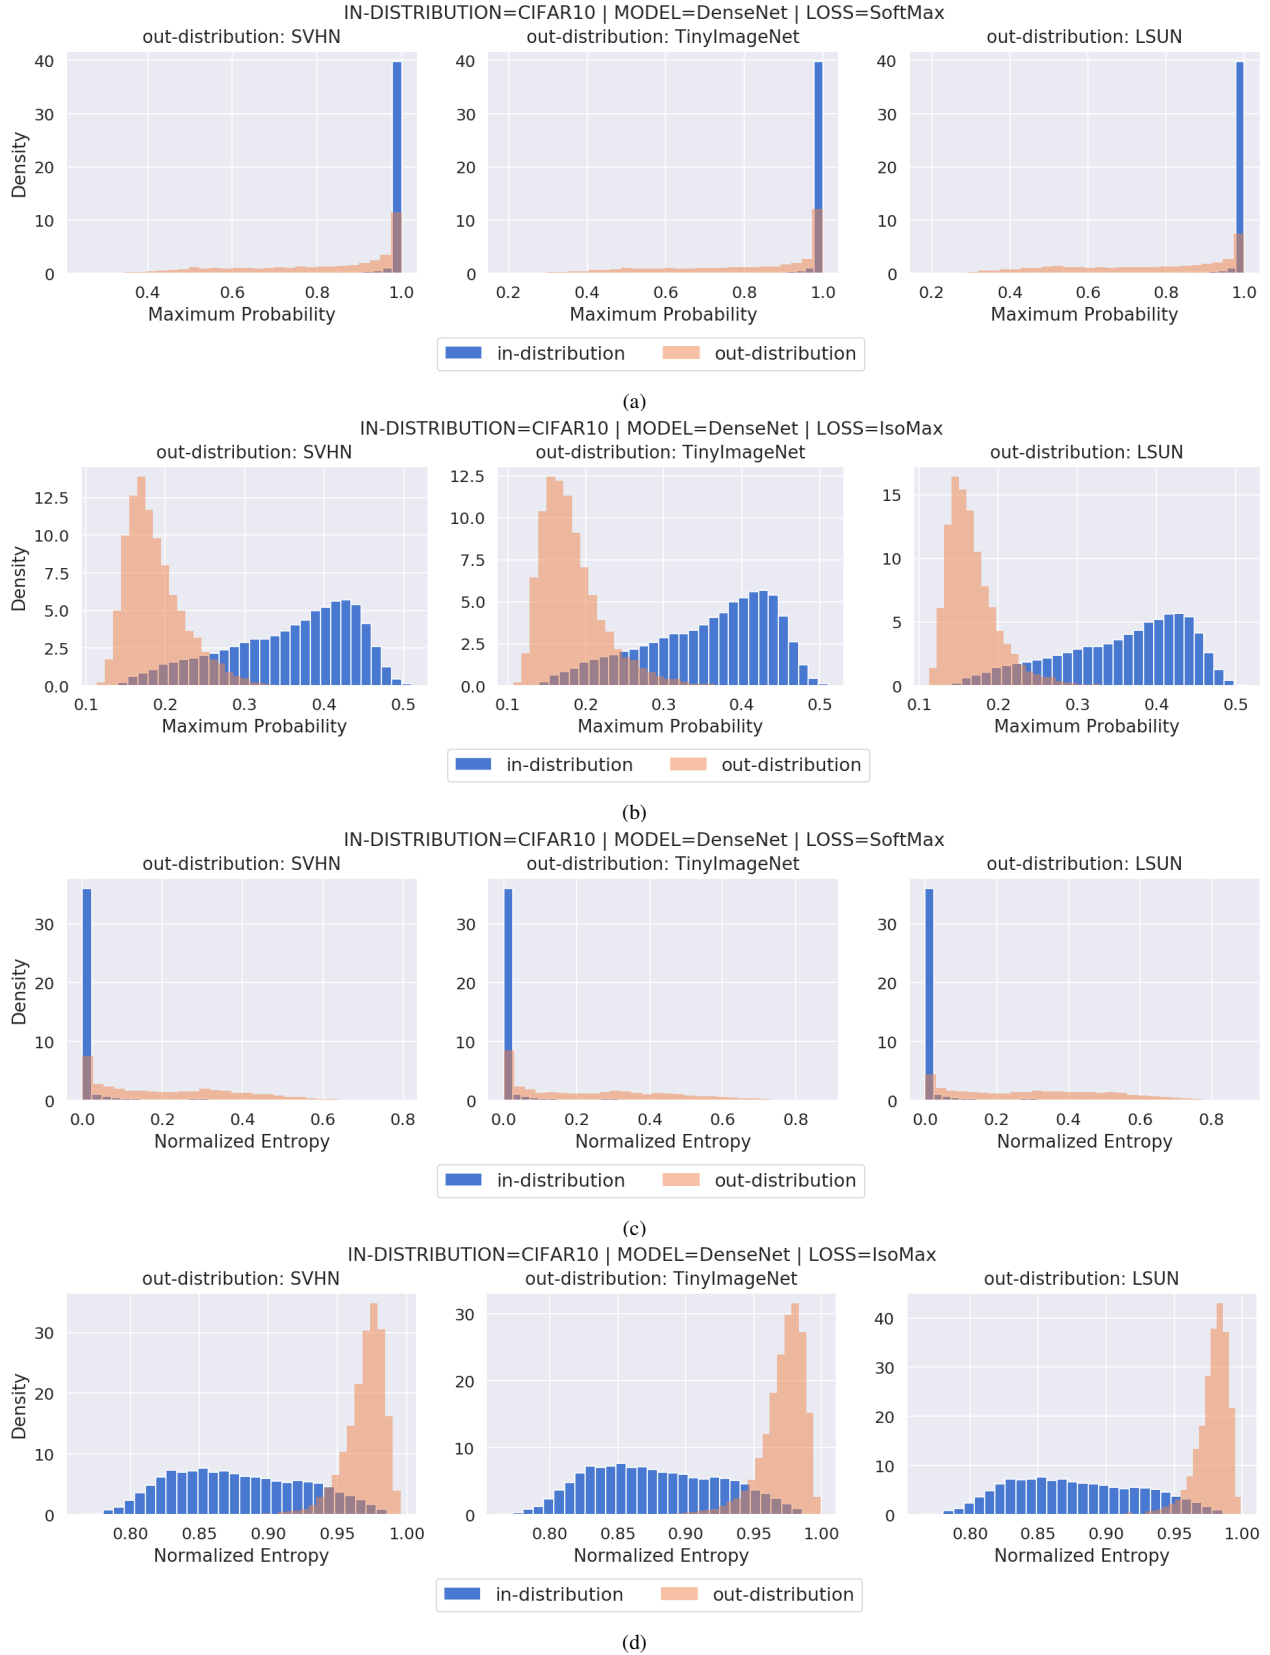


Fig. 5. Probabilities and entropies: (a) SoftMax loss produces high confident predictions for in-distribution samples. SoftMax loss usually provides high maximum probabilities even for OOD samples. (b) IsoMax loss produces less confident predictions for in-distribution samples than SoftMax loss. IsoMax loss commonly produces even lower maximum probability for OOD samples. (c) SoftMax loss provides low entropy (high confidence) for almost all in-distribution samples and even usually for OOD samples. (d) IsoMax loss produces high entropy for out-distributions. More precise separation between the in-distribution and out-distributions is obtained. *Following the principle of maximum entropy, rather than calibrated probabilities, we need to provide predictions as underconfident (high entropy) as possible as long as they fit the data appropriately, i.e., produce no classification accuracy drop.*

Consequently, they present solutions with much slower and less energy-efficient inferences than models trained with IsoMax loss, which are as fast and computation-efficient as the models trained with common SoftMax loss. Moreover, they also require validation using adversarial samples.

Additionally, ODIN requires temperature calibration, while the Mahalanobis approach uses feature ensemble and metric learning, which may be implicated in limited scalability for large-size images. ACET requires adversarial training, which may also prevent its use in large-size images. ODIN, the Mahalanobis approach, and ACET have hyperparameters tuned for each combination of in-data and models in the table. ODIN, the Mahalanobis method, and ACET used SoftMax loss rather than IsoMax loss. IsoMax+ES exhibits neither the mentioned unfortunate requirements nor undesired side effects.

Finally, we emphasize that the adversarial hyperparameters (e.g., the maximum adversarial perturbation) used in ODIN/Mahalanobis/ACET methods were validated in previous papers not related to OOD detection using the SVHN/CIFAR10/CIFAR100 validation sets. However, these validation sets were also used in the competing OOD methods papers as OOD detection test sets. Hence, the OOD detection performances reported in the compared methods papers used here for comparison may be overestimated.

Regardless of the previous considerations, Table III shows that IsoMax+ES considerably outperforms ODIN in all evaluated scenarios. Therefore, in addition to avoiding hyperparameter tuning and access to OOD or adversarial samples, the results show that removing the entropic scale is much more effective in increasing the OOD detection performance than performing temperature calibration.

Furthermore, IsoMax+ES usually outperforms ACET by a large margin. Moreover, in most cases, even operating under much more favorable conditions, the Mahalanobis method surpasses IsoMax+ES by less than 2%. In some scenarios, the latter overcomes the former despite avoiding hyperparameter validation, being seamless and producing much faster and more computation-efficient inferences, as no input preprocessing technique is required.

Table IV presents the inference delays for SoftMax loss, IsoMax loss, and competing methods using CPU and GPU. We observe that neural networks trained using IsoMax loss produce inferences equally fast as the ones produced by networks trained using SoftMax loss, regardless of using CPU or GPU for inference. Additionally, the entropic score is as fast as the usual maximum probability score. Moreover, methods based on input preprocessing were more than ten times slower on CPU and about four times slower on GPU. Finally, those rates presumably apply to the computational cost and energy consumption as well.

D. Logits, Probabilities, and Entropies

Fig. 4 shows that the in-distribution *interclass* logits are more distinguishable from out-distribution logits when using IsoMax loss, which explains its increased OOD detection performance compared with the SoftMax loss since there are far more *interclass* logits than *intra*class logits. Distances are calculated from class prototypes.

Fig. 5 shows that networks trained with SoftMax loss exhibit high maximum probabilities. Sometimes this is true even for OOD samples. For networks trained with IsoMax loss, OOD samples usually present lower maximum probabilities compared with in-distribution samples. Furthermore, it also shows that the networks trained with SoftMax loss are overconfident.

We reemphasize that this work aims to perform OOD detection. Unlike uncertainty/calibration estimation/calibration approaches, we do not claim or intend that the probabilities produced are calibrated. To agree with the principle of maximum entropy, rather than “plausible probabilities”, we need to produce the lowest possible probabilities that are, nevertheless, capable of providing the highest classification accuracy possible. We may even question the meaning of calibrated probabilities in an open set environment such as OOD tasks where we do not even know how often the system will deal with OOD examples.

Additionally, Fig. 5 also shows that the entropy works as a high-quality score to distinguish the in-distribution from the out-distribution in neural networks trained with IsoMax loss. For information regarding the training metrics, please see Supplementary Material F.

V. CONCLUSION

We proposed a baseline OOD detection approach based on the maximum entropy principle. The proposed IsoMax loss works as a SoftMax loss drop-in replacement that produces accurate predictions in addition to inferences that are fast and energy- and computation-efficient. OOD detection is performed using the rapid entropic score. Furthermore, it is also turnkey, as no additional procedures other than a straightforward neural network training is required, and no hyperparameters are tuned. Neither is required the collection of extra/outlier data.

The direct replacement of the SoftMax loss by the IsoMax loss significantly improves the baseline neural networks’ OOD detection performance. Hence, we conclude that the general low OOD detection performance of current deep networks is due to SoftMax loss drawbacks, i.e., anisotropy and overconfidence, rather than the models’ limitations.

Our baseline OOD detection approach produces high OOD detection performance without relying on extra techniques (e.g., input preprocessing, adversarial training, hyperparameters validation, feature ensemble, additional/outlier/background data, and others) that, unfortunately, present inconvenient requirements and undesired side effects. Nevertheless, when the cited requirements and side effects are not a concern for a particular real-world application, the mentioned (or novel) techniques may be combined with IsoMax loss to possibly achieve higher OOD detection performance. This combined solution may be particularly needed for more challenging large-size image datasets such as ImageNet.

Summarily, the three most original and relevant contributions of this paper are the following: First, the theoretical arguments that motivate neural network design with high entropy outputs. Second, “the entropy maximization trick” that allows it. Third, the experimental demonstration that the entropy of neural networks with high entropy posterior probability distributions represents a high-performance OOD detection score.

We intend to apply our baseline OOD detection approach to models using large-size images used in large-scale real-world applications in future works. As the principle of maximum entropy is a general concept, we also plan to adapt our approach to machine learning areas other than deep learning. Another promising approach could be using recent data augmentation techniques [59], [60] or strategies based on pretrained models [37]. Additionally, despite requiring auxiliary/outlier/background data, to further increase the OOD detection performance of our solution, we plan to incorporate loss enhancement (regularization) techniques such as outlier exposure [25], [26], background samples [27] and energy-based training and score techniques [28].

REFERENCES

- [1] D. Hendrycks and K. Gimpel, "A baseline for detecting misclassified and out-of-distribution examples in neural networks," *International Conference on Learning Representations*, 2017.
- [2] S. Liang, Y. Li, and R. Srikant, "Enhancing the reliability of out-of-distribution image detection in neural networks," *International Conference on Learning Representations*, 2018.
- [3] K. Lee, K. Lee, H. Lee, and J. Shin, "A simple unified framework for detecting out-of-distribution samples and adversarial attacks," *Neural Information Processing Systems*, 2018.
- [4] M. Hein, M. Andriushchenko, and J. Bitterwolf, "Why ReLU networks yield high-confidence predictions far away from the training data and how to mitigate the problem," *IEEE International Conference on Computer Vision and Pattern Recognition*, 2018.
- [5] W. J. Scheirer, A. Rocha, A. Sapkota, and T. E. Boult, "Towards open set recognition," *IEEE Transactions on Pattern Analysis and Machine Intelligence*, vol. 35, no. 7, pp. 1757–1772, 2013.
- [6] W. J. Scheirer, L. P. Jain, and T. E. Boult, "Probability models for open set recognition," *IEEE Transactions on Pattern Analysis and Machine Intelligence*, vol. 36, no. 11, pp. 2317–2324, 2014.
- [7] A. Bendale and T. Boult, "Towards open world recognition," *IEEE International Conference on Computer Vision and Pattern Recognition*, 2015.
- [8] E. Rudd, L. P. Jain, W. J. Scheirer, and T. Boult, "The extreme value machine," *IEEE Transactions on Pattern Analysis and Machine Intelligence*, vol. 40, no. 3, pp. 762–768, 2018.
- [9] Y. Wen, K. Zhang, Z. Li, and Y. Qiao, "A discriminative feature learning approach for deep face recognition," *European Conference on Computer Vision*, 2016.
- [10] W. Liu, Y. Wen, Z. Yu, and M. Yang, "Large-margin softmax loss for convolutional neural networks," *International Conference on Machine Learning*, 2016.
- [11] C. Guo, G. Pleiss, Y. Sun, and K. Q. Weinberger, "On calibration of modern neural networks," *International Conference on Machine Learning*, 2017.
- [12] E. T. Jaynes, "Information theory and statistical mechanics," *Physical Review*, vol. 106, pp. 620–630, 1957.
- [13] —, "Information theory and statistical mechanics. II," *Physical Review*, vol. 108, pp. 171–190, 1957.
- [14] T. M. Cover and J. A. Thomas, "Elements of information theory," *Wiley Series in Telecommunications and Signal Processing*, 2006.
- [15] N. C. Thompson, K. Greenewald, K. Lee, and G. F. Manso, "The computational limits of deep learning," *CoRR*, vol. abs/2007.05558, 2020.
- [16] E. Techapanurak and T. Okatani, "Hyperparameter-free out-of-distribution detection using softmax of scaled cosine similarity," *CoRR*, vol. abs/1905.10628, 2019.
- [17] Y.-C. Hsu, Y. Shen, H. Jin, and Z. Kira, "Generalized ODIN: Detecting out-of-distribution image without learning from out-of-distribution data," *IEEE International Conference on Computer Vision and Pattern Recognition*, 2020.
- [18] N. Carlini, A. Athalye, N. Papernot, W. Brendel, J. Rauber, D. Tsipras, I. J. Goodfellow, A. Madry, and A. Kurakin, "On evaluating adversarial robustness," *CoRR*, vol. abs/1902.06705, 2019.
- [19] E. Wong, L. Rice, and J. Z. Kolter, "Fast is better than free: Revisiting adversarial training," *International Conference on Learning Representations*, 2020.
- [20] A. Shafahi, M. Najibi, A. Ghiasi, Z. Xu, J. P. Dickerson, C. Studer, L. S. Davis, G. Taylor, and T. Goldstein, "Adversarial training for free!" *Neural Information Processing Systems*, 2019.
- [21] A. Raghunathan, S. M. Xie, F. Yang, J. C. Duchi, and P. Liang, "Adversarial training can hurt generalization," *CoRR*, vol. abs/1906.06032, 2019.
- [22] Q. Yu and K. Aizawa, "Unsupervised out-of-distribution detection by maximum classifier discrepancy," *International Conference on Computer Vision*, 2019.
- [23] A. Vyas, N. Jammalamadaka, X. Zhu, D. Das, B. Kaul, and T. L. Willke, "Out-of-distribution detection using an ensemble of self supervised leave-out classifiers," *European Conference on Computer Vision*, 2018.
- [24] B. Lakshminarayanan, A. Pritzel, and C. Blundell, "Simple and scalable predictive uncertainty estimation using deep ensembles," *Neural Information Processing Systems*, 2017.
- [25] D. Hendrycks, M. Mazeika, and T. Dietterich, "Deep anomaly detection with outlier exposure," *International Conference on Learning Representations*, 2019.
- [26] A.-A. Papadopoulos, M. R. Rajati, N. Shaikh, and J. Wang, "Outlier exposure with confidence control for out-of-distribution detection," *CoRR*, vol. abs/1906.03509, 2019.
- [27] A. R. Dhamija, M. Günther, and T. Boult, "Reducing network agnostophobia," *Neural Information Processing Systems*, 2018.
- [28] W. Liu, X. Wang, J. D. Owens, and Y. Li, "Energy-based out-of-distribution detection," *CoRR*, vol. abs/2010.03759, 2020.
- [29] A. Kendall and Y. Gal, "What uncertainties do we need in bayesian deep learning for computer vision?" *Neural Information Processing Systems*, 2017.
- [30] C. Leibig, V. Allken, M. S. Ayhan, P. Berens, and S. Wahl, "Leveraging uncertainty information from deep neural networks for disease detection," *Scientific Reports*, vol. 7, 2017.
- [31] A. Malinin and M. Gales, "Predictive uncertainty estimation via prior networks," *Neural Information Processing Systems*, 2018.
- [32] V. Kuleshov, N. Fenner, and S. Ermon, "Accurate uncertainties for deep learning using calibrated regression," *International Conference on Machine Learning*, 2018.
- [33] A. Subramanya, S. Srinivas, and R. V. Babu, "Confidence estimation in deep neural networks via density modelling," *CoRR*, vol. abs/1707.07013, 2017.
- [34] A. Shafaei, M. Schmidt, and J. J. Little, "A less biased evaluation of out-of-distribution sample detectors," *British Machine Vision Conference*, 2019.
- [35] R. Schwartz, J. Dodge, N. A. Smith, and O. Etzioni, "Green AI," *CoRR*, vol. abs/1907.10597, 2019.
- [36] T. DeVries and G. W. Taylor, "Learning confidence for out-of-distribution detection in neural networks," *CoRR*, vol. abs/1802.04865, 2018.
- [37] C. S. Sastry and S. Oore, "Detecting out-of-distribution examples with in-distribution examples and gram matrices," *CoRR*, vol. abs/1912.12510, 2019.
- [38] A. Dubej, O. Gupta, R. Raskar, and N. Naik, "Maximum-entropy fine grained classification," *Neural Information Processing Systems*, 2018.
- [39] G. Pereyra, G. Tucker, J. Chorowski, Łukasz Kaiser, and G. Hinton, "Regularizing neural networks by penalizing confident output distributions," *International Conference on Learning Representations*, 2017.
- [40] D. Miller, A. Rao, K. Rose, and A. Gersho, "A maximum entropy approach for optimal statistical classification," *IEEE Workshop on Neural Networks for Signal Processing*, 1995.
- [41] A. L. Berger, S. A. Della Pietra, and V. J. Della Pietra, "A maximum entropy approach to natural language processing," *Computational Linguistics*, vol. 22, no. 1, pp. 39–71, 1996.
- [42] J. Shawe-Taylor and D. Hardoon, "Pac-bayes analysis of maximum entropy classification," *International Conference on Artificial Intelligence and Statistics*, 2009.
- [43] E. T. Jaynes, *The Relation of Bayesian and Maximum Entropy Methods*. Dordrecht: Springer Netherlands, 1988, pp. 25–29.
- [44] J. Pearl, "Probabilistic reasoning in intelligent systems - networks of plausible inference," *Morgan Kaufmann*, 1989.
- [45] J. Williamson, "Objective bayesian nets," in *We Will Show Them! Essays in Honour of Dov Gabbay, Volume Two*. College Publications, 2005, pp. 713–730.
- [46] —, "Philosophies of probability," *Philosophy of Mathematics: Handbook of the Philosophy of Science*, 2009.
- [47] —, "In defence of objective bayesianism," *Oxford University Press*, vol. 23, no. 2, pp. 255–258, 2013.
- [48] X. Glorot and Y. Bengio, "Understanding the difficulty of training deep feedforward neural networks," *International Conference on Artificial Intelligence and Statistics*, 2010.

- [49] K. He, X. Zhang, S. Ren, and J. Sun, "Delving deep into rectifiers: Surpassing human-level performance on imagenet classification," *International Conference on Computer Vision*, 2016.
- [50] F. Wang, J. Cheng, W. Liu, and H. Liu, "Additive margin softmax for face verification," *IEEE Signal Processing Letters*, vol. 25, no. 7, pp. 926–930, 2018.
- [51] J. Deng, J. Guo, N. Xue, and S. Zafeiriou, "ArcFace: Additive angular margin loss for deep face recognition," *IEEE International Conference on Computer Vision and Pattern Recognition*, 2019.
- [52] V. Chandola, A. Banerjee, and V. Kumar, "Anomaly detection: A survey," *ACM Comput. Surv.*, vol. 41, no. 3, pp. 15:1–15:58, 2009.
- [53] G. Huang, Z. Liu, L. v. d. Maaten, and K. Q. Weinberger, "Densely connected convolutional networks," *IEEE International Conference on Computer Vision and Pattern Recognition*, 2017.
- [54] K. He, X. Zhang, S. Ren, and J. Sun, "Identity mappings in deep residual networks," *European Conference on Computer Vision*, 2016.
- [55] A. Krizhevsky, "Learning multiple layers of features from tiny images," *Science Department, University of Toronto*, 2009.
- [56] Y. Netzer and T. Wang, "Reading digits in natural images with unsupervised feature learning," *Neural Information Processing Systems*, 2011.
- [57] J. Deng, W. Dong, R. Socher, L. Li, K. Li, and F. Li, "ImageNet: A large-scale hierarchical image database," *IEEE International Conference on Computer Vision and Pattern Recognition*, 2009.
- [58] F. Yu, Y. Zhang, S. Song, A. Seff, and J. Xiao, "LSUN: construction of a large-scale image dataset using deep learning with humans in the loop," *CoRR*, vol. abs/1506.03365, 2015.
- [59] S. Thulasidasan, G. Chennupati, J. A. Bilmes, T. Bhattacharya, and S. Michalak, "On mixup training: Improved calibration and predictive uncertainty for deep neural networks," *Neural Information Processing Systems*, 2019.
- [60] S. Yun, D. Han, S. J. Oh, S. Chun, J. Choe, and Y. Yoo, "Cutmix: Regularization strategy to train strong classifiers with localizable features," *International Conference on Computer Vision*, 2019.
- [61] Y. Sun, Y. Chen, X. Wang, and X. Tang, "Deep learning face representation by joint identification-verification," *Neural Information Processing Systems*, 2014.
- [62] F. Schroff, D. Kalenichenko, and J. Philbin, "FaceNet: A unified embedding for face recognition and clustering," *IEEE International Conference on Computer Vision and Pattern Recognition*, 2015.
- [63] J. Snell, K. Swersky, and R. S. Zemel, "Prototypical networks for few-shot learning," *Neural Information Processing Systems*, 2017.
- [64] T. Mensink, J. J. Verbeek, F. Perronnin, and G. Csurka, "Distance-based image classification: Generalizing to new classes at near-zero cost," *IEEE Transactions on Pattern Analysis and Machine Intelligence*, vol. 35, no. 11, pp. 2624–2637, 2013.
- [65] K. Musgrave, S. J. Belongie, and S. Lim, "A metric learning reality check," *CoRR*, vol. abs/2003.08505, 2020.
- [66] C. E. Shannon, "A mathematical theory of communication," *Bell System Technical Journal*, vol. 27, no. 3, pp. 379–423, 1948.



Tsang Ing Ren received the B.Sc. degree in electronic engineering from the Universidade Federal de Pernambuco, Recife, Brazil, and the Ph.D. degree in physics from the University of Antwerp, Antwerp, Belgium. He is currently an associate professor with the Center for Informatics, Universidade Federal de Pernambuco. His research interests include Machine Learning, Image Processing, Computational Photography, Computer Vision, and Deep Learning.



Cleber Zanchettin received his Ph.D. degree in computer science from the Universidade Federal de Pernambuco, Recife, Brazil, in 2008. He is currently a professor and a technical reviewer with the Centro de Informática, Universidade Federal de Pernambuco. He has authored over 60 papers in international refereed journals and conferences in pattern recognition, artificial neural networks (ANNs), and intelligent systems. His current research interests include hybrid neural systems and applications of ANNs.



Adriano L. I. Oliveira obtained his B.Sc. degree in electrical engineering and M.Sc. and Ph.D. degrees in computer science from the Universidade Federal de Pernambuco, Brazil, in 1993, 1997 and 2004, respectively. In 2011, he joined the Center for Informatics at the Universidade Federal de Pernambuco as an assistant professor. He was a visiting professor at École de technologie supérieure, Université du Québec, Montreal, Canada, from 2018 to 2019. He was an assistant professor at the Universidade Federal Rural de Pernambuco from 2009 to 2011 and at the

Pernambuco State University from 2002 to 2009. He has published over 110 articles in scientific journals and conferences and one book. He is a senior member of the IEEE. His current research interests include neural networks, machine learning, pattern recognition, data mining, and applications of these techniques to time series analysis and forecasting, information systems, software engineering, and biomedicine.



David Macêdo received his M.Sc. Computer Science degree and B.Sc. Electronic Engineer degree *summa cum laude* from the Universidade Federal de Pernambuco (UFPE), Brazil. He was a visiting researcher at the Montreal Institute for Learning Algorithms (MILA), Université de Montréal (UdeM), Canada. He co-created and is currently a collaborator professor of the Deep Learning course of the Computer Science Master and Doctorate Programs at the Center for Informatics (CIn), Universidade Federal de Pernambuco (UFPE), Brazil. He is a professor at Faculdade

Nova Roma, Brazil. He has authored approximately twenty deep learning papers published in international peer-reviewed journals and conferences and is a reviewer of IEEE journals. He is pursuing a Ph.D. degree in computer science at UFPE. His research interests include Deep Learning, Computer Vision, Natural Language Processing, Speech Processing, and Trustworthy Artificial Intelligence.



Teresa Ludermir received her Ph.D. degree in artificial neural networks from the Imperial College London, London, U.K., in 1990. She was a lecturer with Kings College London, London, from 1991 to 1992. She joined the Centro de Informática, Universidade Federal de Pernambuco, Recife, Brazil, in 1992, where she is currently a professor and the Head of the Computational Intelligence Group. She has authored over 300 articles in scientific journals and conferences and three books on neural networks. Her current research interests include weightless

neural networks, hybrid neural systems, and applications of neural networks. Ludermir organized two of the Brazilian Symposia on Neural Networks.

Supplementary Material

APPENDIX A DISTANCE-BASED LOSSES

Recently, neural network distance-based losses have been proposed in the context of face recognition. For example, the contrastive [61] and triplet [62] losses use high-level feature (embeddings) *pairwise* distances. In both cases, the SoftMax *function*⁸ is not present, and the *squared* Euclidean distance is used. One of the main drawbacks is the need for using *Siamese neural networks*, which adds complexity to the solution and expands memory requirements during training [9]. Additionally, the *triplet sampling* and *pairwise training*, which implicate the recombination of the training samples with dramatic data expansion, slow convergence and produce instability [9]. Finally, no prototypes are learned during training. The challenge to train networks using *purely* distance-based losses while avoiding *triplet sampling* and *pairwise training* was discussed in [9], which proposed a *squared* Euclidean distance-based *regularization* method.

The center loss [9] has two parameters α and λ . We call a loss isotropic when its dependency on the high-level features (embeddings) is performed *exclusively* through distances, which are usually calculated to the class prototypes. In this sense, the center loss is *not* isotropic, as it presents affine transformation in its SoftMax classification term. Therefore, the center loss inherits the previously mentioned drawbacks of the SoftMax loss affine transformation.

In [63], the authors proposed a solution based on *squared* Euclidean distance to address few shot learning. However, this approach does not work as a SoftMax loss drop-in replacement, as it does not simultaneously learn high-level features (embeddings) *and* *prototypes* using *exclusively* stochastic gradient descent (SGD) and *end-to-end* backpropagation. Indeed, despite learning embeddings using regular SGD and backpropagation, *additional offline procedures are required to calculate the class prototypes* in the mentioned approach.

APPENDIX B SOFTMAX LOSS ANISOTROPY

Let \mathbf{x} represent the input applied to a neural network and $\mathbf{f}_\theta(\mathbf{x})$ represent the high-level feature vector produced by it. For this work, the underlying structure of the network does not matter. Considering k to be the correct class for a particular training example \mathbf{x} , we can write the SoftMax loss associated with this specific training sample as:

$$\mathcal{L}_S(\hat{y}^{(k)}|\mathbf{x}) = -\log \left(\frac{\exp(\mathbf{w}_k^\top \mathbf{f}_\theta(\mathbf{x}) + b_k)}{\sum_j \exp(\mathbf{w}_j^\top \mathbf{f}_\theta(\mathbf{x}) + b_j)} \right) \quad (9)$$

In Equation (9), \mathbf{w}_j and b_j represent the weights and biases associated with class j , respectively. The sum has N terms, where N is the number of classes. From a geometric perspective, the term $\mathbf{w}_j^\top \mathbf{f}_\theta(\mathbf{x}) + b_j$ represents a hyperplane in

the high-level feature space. It divides the feature space into two subspaces that we call the positive and negative subspaces. The deeper inside the positive subspace the feature vector $\mathbf{f}_\theta(\mathbf{x})$ of a particular example is located, the more likely the example is believed to belong to the considered class.

Therefore, training neural networks using SoftMax loss does not incentivize agglomeration of representations of examples associated with a particular class into a limited region of the hyperspace, as it produces *separable features* rather than *discriminative features* [9, Fig. 1]. The immediate consequence is the propensity of neural networks trained with SoftMax loss to make high confidence predictions on examples that stay in regions far away from the training examples, which explains their unsatisfactory OOD detection performance [4]. Indeed, the SoftMax loss is based on affine transformations, which are essentially internal products. Consequently, the last layer representations of such networks tend to align in the direction of the weight vector, producing locally preferential directions in space and subsequently anisotropy.

The SoftMax loss anisotropy is usually corrected by using metric learning on neural network pretrained features [3], [5]–[8], [64]. For example, the high OOD detection performance of the Mahalanobis approach [3] indicates that deploying locally isotropic spaces around class prototypes improves the OOD detection performance. In such solutions, a mapping from the extracted features to a novel embedding space is constructed, and class prototypes are produced. The distance may be predefined (e.g., Euclidean distance) or learned (e.g., Mahalanobis distance).

However, approaches based on feature extraction and metric learning present drawbacks [65]. First, they are not turnkey, as additional procedures are required after neural network training. Additionally, they usually present hyperparameters to tune, typically requiring unrealistic access to design-time OOD or adversarial samples. *Therefore, a possible option to build a seamless approach to the OOD detection is to design an isotropic (exclusively distance-based) loss that works as a SoftMax loss drop-in replacement.*

APPENDIX C NONSQUARED EUCLIDEAN DISTANCE

We need to choose a distance that allows IsoMax to work as a SoftMax drop-in replacement. Hence, the loss needs to learn *both* high-level features *and* *prototypes* using *exclusively* SGD and *end-to-end* backpropagation, as *no additional offline procedures are allowed*. We also require the training using IsoMax loss to be *as consistent and stable as the typical SoftMax loss neural network training*.

The covariance matrix makes it hard to use the Mahalanobis distance to train a neural network directly. Therefore, we decide to use *Euclidean* distance. We have reasons to prefer the *nonsquared* Euclidean distance rather than the *squared* Euclidean distance. First, the *nonsquared* Euclidean distance is a real metric that obeys the Cauchy–Schwarz inequality while the *nonsquared* Euclidean distance is not. Using a metric that follows the Cauchy–Schwarz inequality is essential because of our previous geometric considerations. Additionally, using

⁸We follow the “SoftMax *function*” expression as defined in [10].

the *squared* Euclidean distance is actually equivalent to using a linear model with a particular parameterization [63], [64], which we prefer to avoid to increase the representative power of the proposed loss.

Moreover, we experimentally observed that training neural networks using *exclusively* SGD and *end-to-end* backpropagation is more stable and consistent when using *nonsquared* Euclidean distance rather than *squared* Euclidean distance. Indeed, *squared* Euclidean distance-based logits are harder to *seamlessly* train than *nonsquared* Euclidean distance-based logits because numeric calculus instabilities are much more likely to occur when performing calculations and derivations with values of the order of $\mathcal{O}(e^{-d^2})$ than $\mathcal{O}(e^{-d})$. Finally, even in the cases in which we were eventually able to *seamlessly* train neural networks using the *squared* Euclidean distance, we observed lower OOD detection performance than using the *nonsquared* Euclidean distance-based alternative. Therefore, we choose the *nonsquared* Euclidean distance.

APPENDIX D ENTROPIC SCORE DISCUSSION

Out-of-distribution detection approaches typically define a score to be used after inference to evaluate whether an example should be considered OOD. In a seminal work, [66] demonstrated that the entropy presents the optimum measure of the randomness of a source of symbols. More broadly, we currently understand entropy as a measure of the uncertainty we have about a random variable. Considering that the uncertainty in classifying a specific sample should be an optimum metric to evaluate whether a particular example is OOD.

During IsoMax training, the embedding-prototype distances are affected. On the one hand, the distances from embeddings to the correct class prototype are reduced to increase classification accuracy. On the other hand, the distances from embeddings to the wrong class prototypes are increased. Consequently, based on the Equation (6), the probabilities of in-distribution examples increase. Therefore, it is reasonable to expect that samples with lower entropy more likely belong to the in-distribution.

From a practical perspective, using this predefined mathematical expression as score avoids the need to train an additional regression model to detect OOD samples that is otherwise required, for example, in the Mahalanobis approach.

Even more important, since no regression model needs to be trained, there is no need for unrealistic access to OOD or adversarial samples for hyperparameter validation. Since the entropic score is a predefined mathematical expression rather than a trainable model, it is available as soon as the neural network training finishes, avoiding additional training of extra models in a postprocessing phase.

APPENDIX E ROBUSTNESS STUDY

Fig. 6 presents the OOD detection performance of SoftMax and IsoMax losses in many models (DenseNet and ResNet), and datasets (SVHN, CIFAR10, and CIFAR100) for a range of training samples per class. For each in-distribution, the AUROC and TNR@TPR95 results were averaged over all possible

combinations of OOD detection test set. The entropic score was used in all cases. It shows that IsoMax loss consistently and notably overcomes the OOD detection performance of SoftMax loss for virtually all combinations of datasets, training examples per class, metrics, and models.

APPENDIX F TRAINING METRICS

Fig. 7 shows that training metrics are remarkably similar for SoftMax and IsoMax losses. Regardless of the dataset and model used, the loss produced are similar. The same is true for the validation accuracy along the deep neural network training.

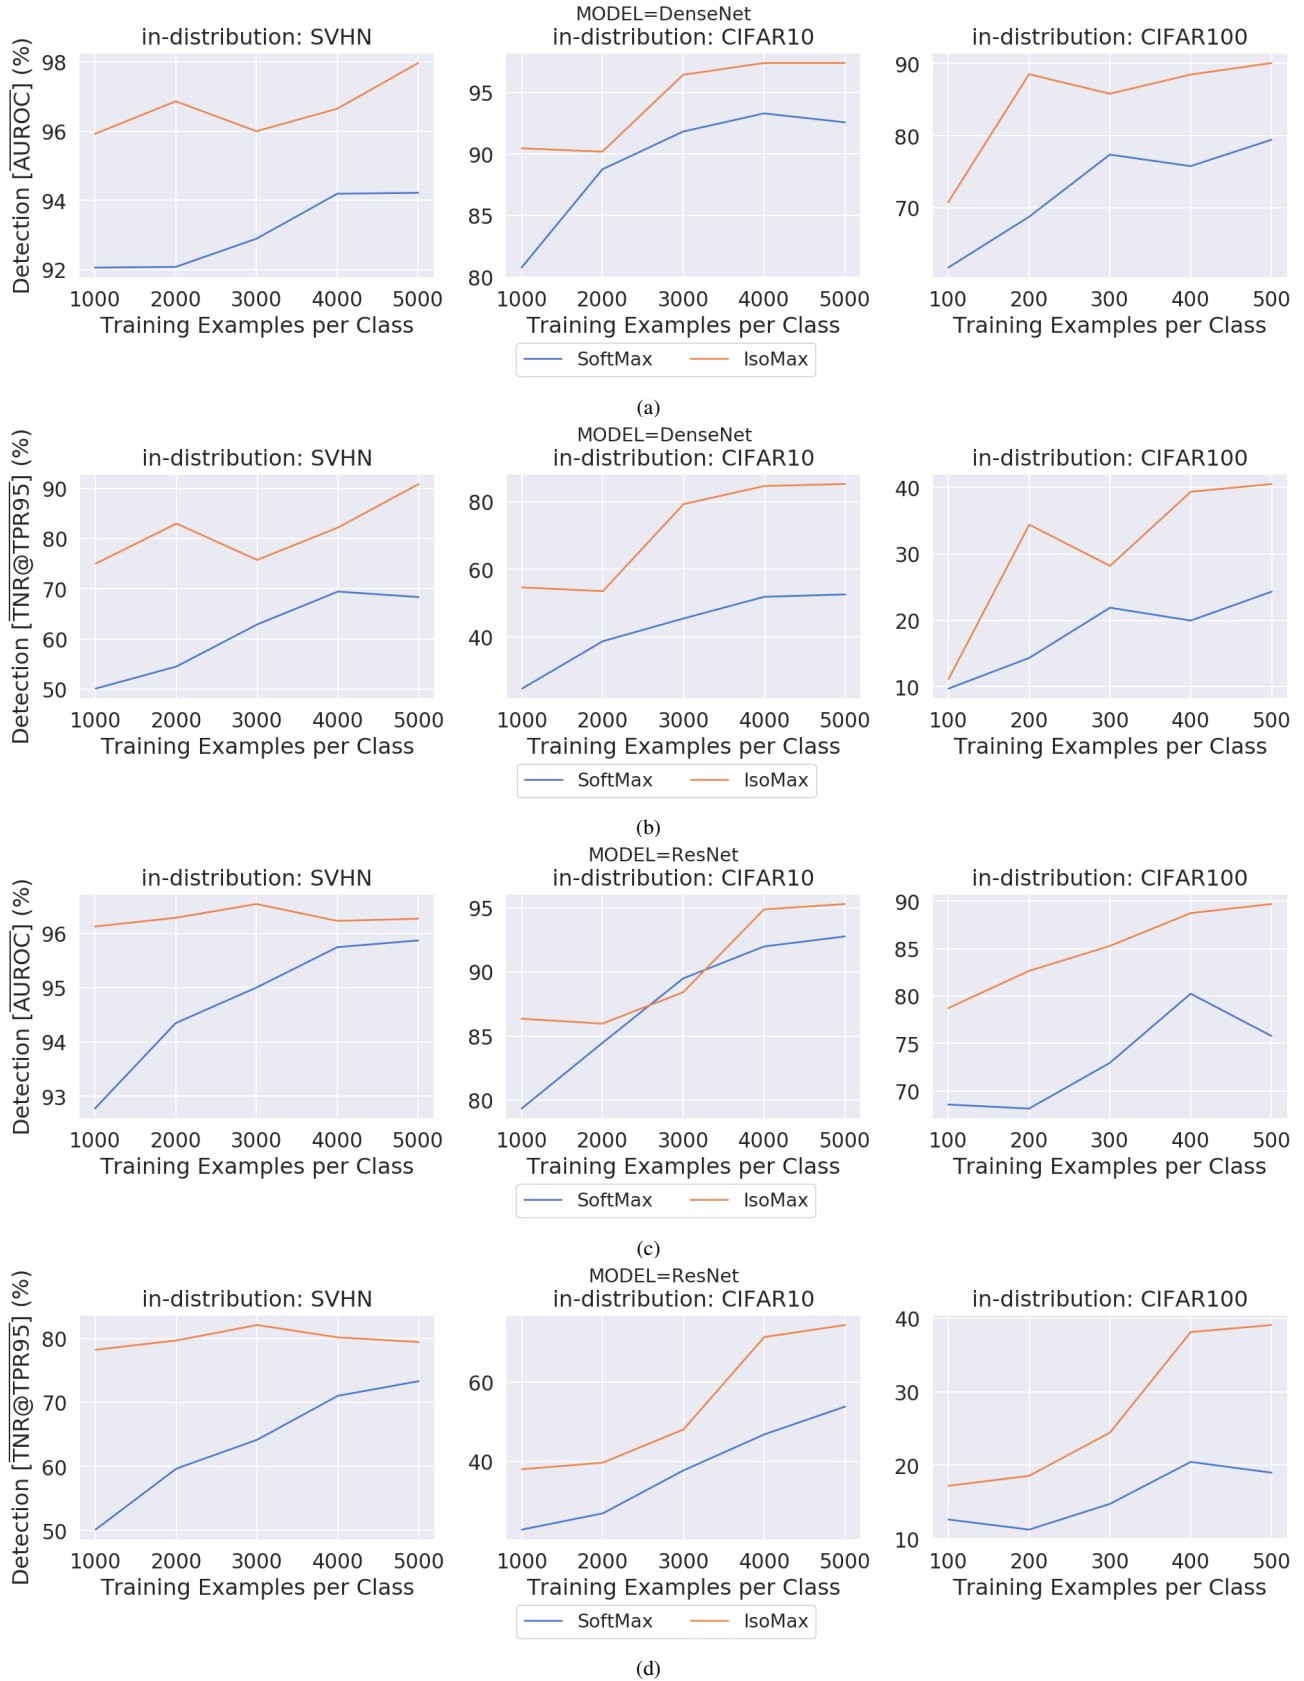


Fig. 6. Robustness study: IsoMax loss consistently presents higher OOD detection performance than does SoftMax loss for different numbers of training examples per class on several datasets, models, and metrics. The entropic score was used for both SoftMax and IsoMax losses. For each in-distribution, we calculated the mean AUROC and TNR@TPR95 considering all possible OOD detection test sets for extra details).

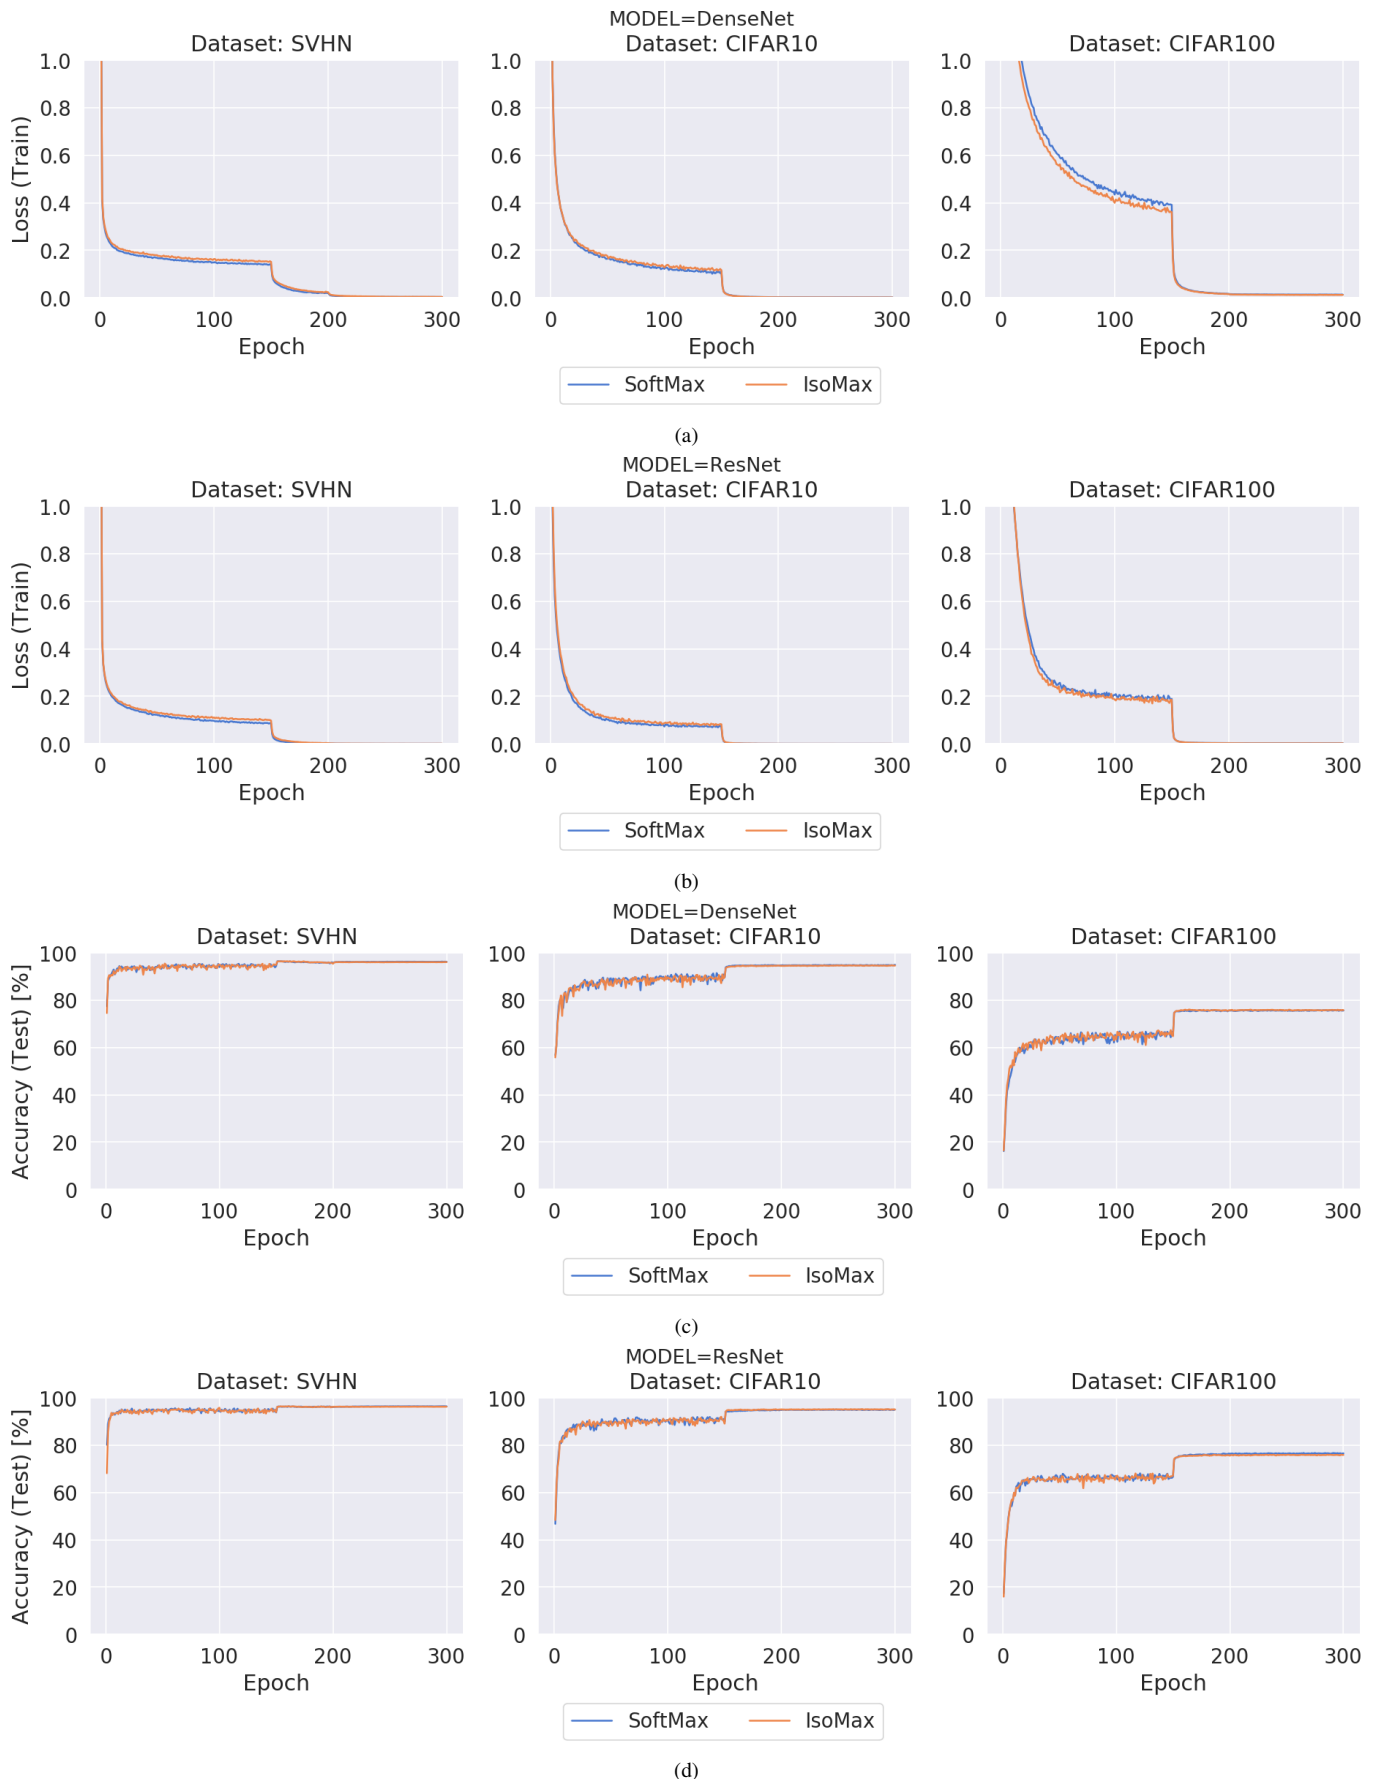


Fig. 7. Training metrics: (a,b) Training loss values and (c,d) test accuracies for a range of models, datasets, and losses. SoftMax loss and IsoMax loss present remarkably similar metrics throughout training, which confirms that IsoMax loss training is consistent and stable.