GENREC: A FLEXIBLE DATA GENERATOR FOR RECOMMENDATIONS

A PREPRINT

Erica Coppolillo*

University of Calabria ICAR-CNR Via Pietro Bucci, 87036 Arcavacata CS erica.coppolillo@unical.it

Ettore Ritacco

Department of Computer Science University of Udine Via Palladio, 8, 33100 Udine UD ettore.ritacco@uniud.it

Simone Mungari

University of Calabria
ICAR-CNR
Revelis SRL
Via Pietro Bucci, 87036 Arcavacata CS
simone.mungari@unical.it

Giuseppe Manco

ICAR-CNR Via Pietro Bucci 8/9c, 87036 Arcavacata CS giuseppe.manco@icar.cnr.it

July 24, 2024

ABSTRACT

The scarcity of realistic datasets poses a significant challenge in benchmarking recommender systems and social network analysis methods and techniques. A common and effective solution is to generate synthetic data that simulates realistic interactions. However, although various methods have been proposed, the existing literature still lacks generators that are fully adaptable and allow easy manipulation of the underlying data distributions and structural properties. To address this issue, the present work introduces GENREC, a novel framework for generating synthetic user-item interactions that exhibit realistic and well-known properties observed in recommendation scenarios. The framework is based on a stochastic generative process based on latent factor modeling. Here, the latent factors can be exploited to yield long-tailed preference distributions, and at the same time they characterize subpopulations of users and topic-based item clusters. Notably, the proposed framework is highly flexible and offers a wide range of hyper-parameters for customizing the generation of user-item interactions. The code used to perform the experiments is publicly available: https://anonymous.4open.science/r/GenRec-DED3.

1 Introduction

Ensuring clean and reliable interaction data is a major concern across various research fields, such as recommendation and personalization (Heinrich et al., 2019; Shalom et al., 2015), social network analysis (Reda and Zellou, 2023; Al-Hajjar et al., 2015), and data mining in broad sense (Jain et al., 2020). As algorithms become more powerful and sophisticated, the demand for reliable benchmarking studies to evaluate and compare their capabilities across various perspectives and scenarios is growing. However, the availability of benchmark open-source datasets is limited because large industrial companies generally do not release their vast amounts of proprietary data to the public. As a result, the need for dependable datasets is more urgent and valuable than ever.

One way to address the scarcity of real data is performing crowd-sourcing (Lee and Hosanagar, 2014, 2019; Matt et al., 2013; Zhu et al., 2018a). However, recruiting real users is generally expensive and time-consuming. A more practical and comprehensive solution consists of generating data synthetically. In this regard, some methods try to replicate the

^{*}E. Coppolillo and S. Mungari equally contributed to the paper.

characteristics of real-world data by learning their distribution (Luong Vuong et al., 2023; Arjovsky et al., 2017), by performing augmentation (Vo and Soh, 2018) or compression (Wu et al., 2023). These methods learn directly from the ground truth, thus providing a reliable replication of real-world data. Nevertheless, such approaches are limited to the specific scenarios used for training, thus narrowing their flexibility. On the other hand, probabilistic frameworks that generate synthetic data from scratch are probably the most common (Erdős et al., 1960; Barabási and Albert, 1999; Leskovec et al., 2010). Among others, the Gaussian, Bernoullian and Dirichlet distributions are typically used for replicating real-world characteristics, specifically regarding user-item interactions (Wang et al., 2020; Zhang et al., 2021; Tso and Schmidt-Thieme, 2006; Chaney et al., 2018).

We argue that none of the aforementioned methods provide full customization of the generation process, which as a consequence results rather limited to specific scenarios. We overcome this limitation by presenting GENREC, a flexible and generalizable framework which allows to (i) generating synthetic data from scratch, without the need of referring to pre-existing dataset; (ii) adapting the sub-populations of users and items, within their underlying distribution properties; and (iii) regulating the users interest over each topic, i.e., the probability that a user will interact with items belonging to a given category.

The rest of the paper is structured as follows. Section 2 reports an overview of the state-of-the-art synthetic generation procedures. In Section 3, we formally define our methodology and discuss its novelty with respect to the current approaches in the literature. We present the some experiments in Section 4, where we show the adequacy of the proposed framework in generating realistic synthesized data. Finally, Section 5 concludes the paper.

2 Related Work

Given the scarcity of high-quality real-world datasets for recommender systems, there has been considerable effort in the literature to generate synthetic data. In this broad context, we specifically concentrate on producing realistic user-item interactions. This task poses several challenges, including the necessity to replicate the topological characteristics of real-world scenarios (Erdős et al., 1960; Barabási and Albert, 1999; Leskovec et al., 2010; Luong Vuong et al., 2023). The present literature covers a wide range of different approaches, which we outline below.

Data Augmentation and Condensation. Data augmentation consists of expanding an existing dataset while preserving its structural properties. This valuable task has been extensively studied in the literature. Vo and Soh (2018) propose a framework based on Variational Autoencoder (VAE) for generating novel items that users will probably interact with. Belletti et al. (2019) propose an expanding approach based on an adaption of Kronecker Graphs. More recently, Large Language Models have been exploited in this regard (Mysore et al., 2023).

In an opposite perspective, condensation refers to the task of compressing the original data while still maintaining their properties. Wu et al. (2023) propose a novel framework for condensing the original dataset while addressing the long-tail problem with a reasonable choice of false negative items. Jin et al. (2021) propose a strategy aiming at compacting a graph preserving its features for classification tasks. The process is performed by a gradient matching loss optimization and a strategy to condense node features and structural information simultaneously.

Semi-Synthetic Generation. Differently from data augmentation methods, these approaches involve models learning directly from a ground-truth dataset to generate a fully synthetic one. For instance, Bobadilla and Gutierrez (2024) introduce a Wasserstein-GAN architecture (Arjovsky et al., 2017) for this purpose. The resulting synthetic dataset exhibits similar patterns and distributions of users, items, and ratings compared to the real dataset used in the experimental evaluation.

A specific sub-field of this research area focuses on generating synthetic data to protect sensitive real-world information. These methods are typically applied in fields such as finance and healthcare, and in general in any context where data privacy is crucial (Liu et al., 2022; Lilienthal et al., 2023). For instance, in (Slokom et al., 2020), the framework alters a subset of real data values to produce a new semi-synthetic dataset. Similarly, in (Smith et al., 2017), the model starts by generating a dense user-item matrix using a probabilistic matrix factorization approach based on Gaussian distributions, further masking some user preferences.

Probabilistic Models. The generation of synthetic data is often performed by adopting probabilistic approaches. Different kinds of distributions have been explored for user-item content sampling, such as the typical Gaussian (Wang et al., 2020), the Bernoullian (Zhang et al., 2021), the Dirichlet and Chi-square distributions (Tso and Schmidt-Thieme, 2006). Among the others, Hu et al. (2016) propose a Bayesian Generative Framework and modeling procedure based on Gibbs Sampling for binary count data with side information.

Simulation-based. Driven by the objective of integrating generation and recommendation, other methods aim at simulating realistic interactions for inactive users (Wang et al., 2019; Zhao et al., 2021; Wang, 2021). In Ribeiro et al. (2023), the intent is to generate a binary preference matrix with five different topics spanning from the Far Left to the Far Right of the political spectrum. Their main limitation is the lack of a study of the generated user and item distributions. Chaney et al. (2018) extend the model proposed by Schmit and Riquelme (2017) for allowing multiple interactions for the same user. The histories are generated by sampling from a (noisy) utility matrix which represents the actual preferences of users.

Table 1 reports the portion of methods presented in this section that generate synthetic datasets from scratch, thus presenting similarities with our proposal. The table summarizes the differences with our methodology.

Model	No training	Realistic	Source Code	Flexibile		
	_			Distributions	Interactions	Topics
GENREC (ours)	✓	✓	1	✓	✓	√
Tso and Schmidt-Thieme (2006)	✓	X	X	X	X	✓
Smith et al. (2017)	✓	✓	X	X	✓	X
Chaney et al. (2018)	X	X	X	X	X	X
Zhang et al. (2021)	✓	X	X	X	✓	✓
Ribeiro et al. (2023)	✓	✓	✓	X	X	✓

Table 1: Comparison between the proposed framework and the state-of-the-art models which generate synthetic data from scratch. The column "No training" indicates whether the method allows to generating interactions without a training phase; "Realistic" refers to the conformity of the generated data to the typical properties of real-world scenarios; "Source Code" denotes the availability of the code for the experiments; finally, the column "Flexible" refers to the adaptability of the approach in terms of (i) following a specific distribution, (ii) modifying the properties of the synthetic user-item interactions, and (iii) introducing a given number of topics, further regulating the users interest accordingly.

3 Data Generation

In the following, we outline the foundational models that inspired our generation procedure, highlighting their limitations and explaining how our framework overcomes them.

3.1 Preliminaries

In our opinion, the most promising approaches for the data generation task are the ones proposed by Chaney et al. (2018) and Smith et al. (2017), which we describe in the following.

Both the methods model the initial preferences as a (noisy) product of latent user preference and item attributes. However, we believe that Smith et al. (2017) oversimplify the generation process, by sampling both users and items latent features from a Normal Distribution. Conversely, Chaney et al. (2018) propose a more sophisticated approach, defining users latent features as $\rho \in \mathbb{R}^{|U| \times K}$, and items attributes as $\alpha \in \mathbb{R}^{|I| \times K}$, with K being the latent space dimensionality. In more detail, $\rho_u \sim Dirichlet(\mu^\rho)$ for each $u \in U$, and $\alpha_i \sim Dirichlet(\mu^\alpha)$ for each $i \in I$, where $\mu^\rho \sim Dirichlet(1) \cdot 10$ and $\mu^\alpha \sim Dirichlet(100) \cdot 0.1$. The latent representations are further used to generate the true utility matrix $V^{|U| \times |I|}$, representing the actual utility of a user interacting with an item. Specifically, $V_{u,i} \sim Beta'(\rho_u \alpha_i^T)$, where Beta' is an atypical parameterization of the beta distribution having mean $\mu = \rho_u \alpha_i^T$ and fixed variance $\sigma = 10^{-5}$. However, in real-world scenarios, actual utilities are unknown. The (known) utility matrix T is hence obtained by blurring V via a noisy factor $\omega \sim Beta'(\mu_\omega)$, with $\mu_\omega = 0.98$. Finally, preferences populating $\mathcal D$ are generated through a combination between T and a non-parametric function $f(rank_u^{\mathfrak R}(i))$, which ranks each item $i \in I$, for each user $u \in U$, according to a recommender system $\mathfrak R$.

Differently from Chaney et al. (2018), Smith et al. (2017) introduce some flexibility into the dataset construction, by defining a *budget* B_u for each user u, as

$$B_u \sim \text{round}(\text{exponential}(\beta)) + c_b$$
 (1)

where c_b is a positive hyperparameter set as the desired number of ratings for any user. This factor allows to achieve a realistic distribution over user adoptions. More specifically, for a given user, the authors devise a normalized distribution over items by combining an item-popularity vector \mathbf{p} , with the underlying preference distribution obtained from the

(factored) preference vector $\hat{\mathbf{R}}_{u}$:

$$p_i \sim PowerLaw(\alpha) + c$$
 (2)

$$\mathbf{D}_{u} = \frac{\mathbf{p} \odot (\hat{\mathbf{R}}_{u} + \min_{i}(\hat{\mathbf{R}}_{ui}))}{||\mathbf{p} \odot (\hat{\mathbf{R}}_{u} + \min_{i}(\hat{\mathbf{R}}_{ui}))||_{1}}$$
(3)

Here, c is a positive parameter which avoids the probability of an item being rated to be 0, and \mathbf{D}_u represents the item distribution for u. From this distribution, B_u items are finally sampled without replacement. Notably, Equation 3 captures, within the synthetic data generation process, the well-known phenomenon of *popularity bias* (Zhu et al., 2018b; Channamsetty and Ekstrand, 2017; Liu et al., 2019), i.e., the phenomenon where a few items are extremely popular, while most items receive interactions from only a small number of users.

3.2 GENREC

In our opinion, the aforesaid approaches present several limitations, as well as interesting starting points that we aimed to extend. First, Chaney et al. (2018) impose μ^{ρ} (and μ^{α}) to be equal for all $u \in U$, thus constraining the exploration of the latent space to a confined sampling region. In other words, μ^{ρ} being equal across all users entails sampling their preferences from the same multinomial distribution, thereby reducing their variety. A similar consideration can be made for μ^{α} regarding the items choice. To overcome this limitation, we perform a distinct sampling for each user and item by applying $\mu^{\rho_u} \sim Dirichlet(\mathbf{1}) \cdot 10$, $\forall u \in U$, and $\mu^{\alpha_i} \sim Dirichlet(\mathbf{100}) \cdot 0.1$, $\forall i \in I$, respectively.

Our second extension lies in separating the items into c categories and users into p populations, i.e., partitioning $I = \{I_1, I_2, ..., I_c\}$ and $U = \{U_1, U_2, ..., U_p\}$, with $c \le K$. Assume a target items category $i \in [1, c]$ to be preferred by the j-th population, $j \in [1, p]$. We allow users in U_j to prefer items belonging to I_i by disabling the item latent features corresponding to the other categories $k \in [1, c]$, $k \ne i$, i.e., by setting them to a value $\epsilon \sim 0$. Similarly, we may disable the users latent features corresponding to the other sub-populations $l \in [1, p]$, $l \ne j$.

Given that the probability of a user u interacting with an item i is determined by the dot product of their respective latent factors, disabling some of them ensures that users from a particular sub-population predominantly interact with specific categories of items.

Example. Assume K=4, c=2 and p=3, implying $I=\{I_1,I_2\}$, and $U=\{U_1,U_2,U_3\}$. We want to increase the likelihood of users in U_1 to choose items from I_1 , of users in U_3 to pick from I_2 and impose users in U_2 to have equal probability of picking from both sets. We here assume that the first (resp. last) $\frac{K}{2}$ items latent features refer to the first (resp. second) category. Then, the generation starts with the latent feature $\alpha_i \sim Dirichlet(\mu_1^{\alpha_i}, \mu_2^{\alpha_i}, \epsilon, \epsilon)$, for $i \in I_1$ (where $(\mu_1^{\alpha_i}, \mu_2^{\alpha_i}) \sim Dirichlet(\mathbf{100}) \cdot 0.1$ and $\epsilon \sim 0$) and $\alpha_i \sim Dirichlet(\epsilon, \epsilon, \mu_1^{\alpha_i}, \mu_2^{\alpha_i})$ for $i \in I_2$ (with $(\mu_1^{\alpha_i}, \mu_2^{\alpha_i}) \sim Dirichlet(\mathbf{100}) \cdot 0.1$). Similarly, $\rho_u \sim Dirichlet(\mu_1^{\rho_u}, \mu_2^{\rho_u}, \epsilon, \epsilon)$ for $u \in U_1$, with $(\mu_1^{\rho_u}, \mu_2^{\rho_u}) \sim Dirichlet(\mathbf{1}) \cdot 10$, and by contrast $\rho_u \sim Dirichlet(\epsilon, \epsilon, \mu_1^{\rho_u}, \mu_2^{\rho_u})$ for $u \in U_3$, with again $(\mu_1^{\rho_u}, \mu_2^{\rho_u}) \sim Dirichlet(\mathbf{1}) \cdot 10$. Finally, $\rho_u \sim Dirichlet(\mu_1^{\rho_u}, \mu_2^{\rho_u}, \mu_3^{\rho_u}, \mu_4^{\rho_u})$ for $u \in U_2$, with $(\mu_1^{\rho_u}, \mu_2^{\rho_u}, \mu_3^{\rho_u}, \mu_4^{\rho_u}) \sim Dirichlet(\mathbf{1}) \cdot 10$. In other words, we set the first (resp. last) $\frac{K}{2}$ latent features of items in I_1 (resp. in I_2) to a value $\epsilon \sim 0$. Regarding the users, we similarly set the first (resp. last) $\frac{K}{2}$ features of users in U_1 (resp. in U_2) to ϵ , while leaving all the features of users in U_2 equal 1.

Further, we observed that, in the procedure proposed by Chaney et al. (2018), the data generation relies on a non-parametric function $f(rank_u^{\mathfrak{R}}(i))$, where \mathfrak{R} is a recommender system to be trained. We indeed aim at producing organic interactions, disentangled by any additional component which could be difficult to manipulate. For this reason, we populate \mathcal{D} by performing a sampling directly from T:

$$\hat{d}_{u,i} \sim Bernoulli(t_{u,i}),$$
 (4)

where $t_{u,i}$ corresponds to the (known) utility of item i with respect to user u.

However, we notice that interactions sampled via Equation 4 do not follow a power-law distribution. It is well-documented in the literature that user-item interactions typically follow a power-law pattern (Newman, 2003, 2005; Clauset et al., 2009a). This is indeed captured by the generation procedure by Smith et al. (2017), which samples the items popularity from a power-law distribution. We argue, however, that power-law distributions in empirical data may present several variations, such as Power-Law with exponential cut-off, Stretched Exponential and Log-Normal (Clauset et al., 2009b).

Inspired by this consideration, we generalize our approach by modeling the underlying user-item distributions as a plag-and-play component, and resort to the following equations:

$$pop_i \sim Long Tail(\lambda)$$
 (5)

$$\hat{d}_{u,i} \sim Bernoulli(t_{u,i}^{\delta(1-pdf(pop_i))}), \tag{6}$$

where LongTail can be any long-tail distribution and pdf(x) represents the empirical density function relative to x. Here, u is a user, pop_i is a popularity score associated to item i^2 , $t_{u,i}$ corresponds to the (known) utility of u with respect to i, and δ is a control parameter that balances the items popularity over the distribution. The results of hyper-tuning this parameter are discussed in Section 4. Finally, $\hat{d}_{u,i}$ indicates whether u interacted with item i.

In this way, we impose the item popularity to be long-tailed distributed (Equation 5), further sampling the interaction history $\hat{\mathcal{D}}_u$ of each user u as a Bernoullian process (Equation 6). However, this sampling procedure is biased towards interaction lists that are normally distributed, due to the underlying bernoullian process. To ensure the long-tail property, we adopt a similar approach as (Smith et al., 2017): we define the set $\mathcal{D}_u \subseteq \hat{\mathcal{D}}_u$ as a uniform sample from $\hat{\mathcal{D}}_u$ with size n_u . The process is defined as follows:

$$n_u \sim Long Tail(\beta)$$
 (7)

$$n_u = n_u + \tau \tag{8}$$

$$\mathcal{D}_u = \{i_j | i_j \sim Uniform(\hat{\mathcal{D}}_u), j = 1, \dots, n_u\},$$
(9)

where τ is an hyper-parameter that controls the minimum length of user history (Equation 8).

The whole generation procedure is summarized in Algorithm 1.

Algorithm 1 GENREC Generation Process

```
1: Input: U, I, T, \tau, \lambda, \beta, \delta
  2: Output: \mathcal{D}
 3: \mathcal{P} \leftarrow \{pop_i | pop_i \sim LongTail(\lambda), \forall i \in I\}
  4: \mathcal{N} \leftarrow \{n_u + \tau | n_u \sim LongTail(\beta), \forall u \in U\}
  5: \mathcal{D} = \{\emptyset\}
  6: for u \in U do
                \hat{\mathcal{D}}_u = \{\emptyset\}
  7:
                 \begin{array}{c} \mathbf{while} \ |\hat{\mathcal{D}}_u| < \mathcal{N}_u \ \mathbf{do} \\ \mathbf{for} \ i \in I \ \mathbf{do} \end{array} 
  8:
  9:
                               if Bernoulli(t_{u,i}^{\delta(1-\operatorname{pdf}(\mathcal{P}_i))}) then
10:
                               \hat{\mathcal{D}}_u \leftarrow \hat{\mathcal{D}}_u \cup \{i\} end if
11:
12:
                        end for
13:
                 end while
14:
                 \mathcal{D}_u \leftarrow \{i_j | i_j \sim \textit{Uniform}(\hat{\mathcal{D}}_u), j = 1, \dots, \mathcal{N}_u\}
15:
16: end for
```

4 Experiments

We conduct an extensive evaluation of GENREC, in order to test its flexibility under several perspectives, as reported in the following. First, we show that the proposed approach allows for categorizing users into sub-populations and items into topics of interest, further regulating the underlying interactions distribution. Next, we perform a sensitivity analysis by varying the popularity factor (δ) and the chosen distribution shape (LongTail), showing their impact over the generated data. Finally, we demonstrate that our approach can be extended to produce realistic samples based on real-world dataset, straightening the usability of our synthetic framework.

To conduct the experiments, we fix p=c=2. This means we generate a synthetic dataset with two sub-populations of users and two topics of interest for the items. For simplicity, given n as the size of the generated sample, we assume the first $\frac{n}{2}$ users belong to the first population (U_1) and the second $\frac{n}{2}$ users to the second one (U_2) . The same partition applies to the items with respect to the topics $(I_1 \text{ and } I_2)$. We further impose that users in U_1 most probably interact with the items in I_1 , and vice-versa.

Tuning Interactions. We recall from Section 3 that our procedure allows us to adjust the user-item interactions by means of the ϵ parameter, i.e., by disabling the latent features corresponding to the sub-populations and topics for

²Being $LongTail(\lambda)$ a continuous function, pop_i is not the popularity of item i (i.e., the number of users who interacted with it), but should be interpreted as a probability score, e.g., the average number of users who would interact with i in different experimental trials.

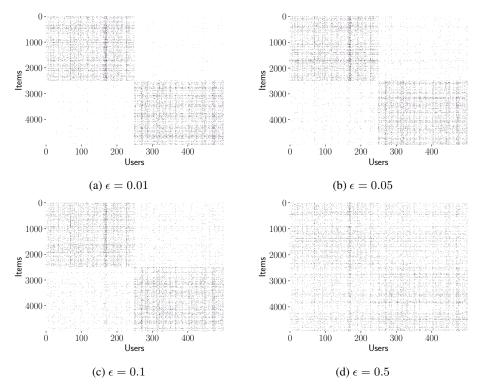


Figure 1: Visualization of the user-item interaction matrix by varying the ϵ parameter. The X-axis reports the users, while the Y-axis represents the items. A dot in the position (u, i) indicates the the user u interacted with item i.

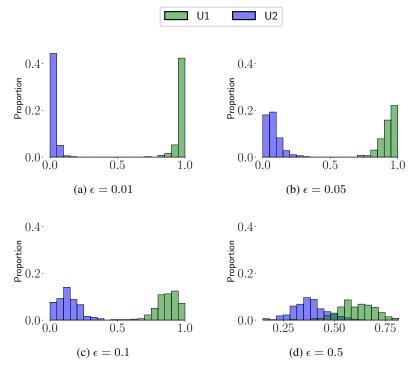


Figure 2: Distributions of users who interact with items belonging to a given topic of interest. The X-axis represents the percentage of items in I_1 within the users history. The Y-axis shows the proportion of users having that percentage.

which we want to generate fewer interactions. Refer to Example 3.2 for more details. Figure 1 visualizes the user-item interaction matrix as we increase the ϵ value. When ϵ is close to 0 (Figure 1a), the interaction matrix is essentially bipartite, since users in U_1 (resp. U_2) always interacted with items in I_1 (resp. I_2). As ϵ increases, the matrix becomes more scattered, eventually becoming completely homogeneous in Figure 1d.

As a complementary experiment, we arbitrarily selected one item set as a reference, I_1 , and calculated the percentage of items in I_1 appearing in each user's history. Figure 2 shows how the user distributions change as ϵ varies. In Figure 2a, they are highly clustered, indicating that items in I_1 are always chosen by users belonging to U_1 , and never by the ones in U_2 . As ϵ increases, the distributions gradually converge, eventually overlapping in Figure 2d. **Tweaking**

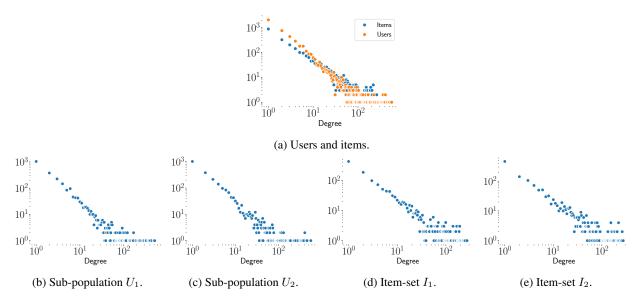


Figure 3: Degree distributions of users and items, either aggregated or considered as sub-groups. The X-axis represents the degree, while the Y-axis reports the frequency.

Distributions. We now validate the flexibility of GENREC by demonstrating how easily the frequency distributions can be adapted. For these experiments, the dataset is generated to follow a Power-law distribution. Figure 3a illustrates the degree distribution for both users and items, showing that both adhere to the desired properties set during the generation process. Importantly, this compliance is observed not only in the aggregated dataset but also within each sub-population of users $(U_1 \text{ and } U_2)$ and items $(I_1 \text{ and } I_2)$, as depicted in Figures 3b to 3e. Next, we show the adaptability of our

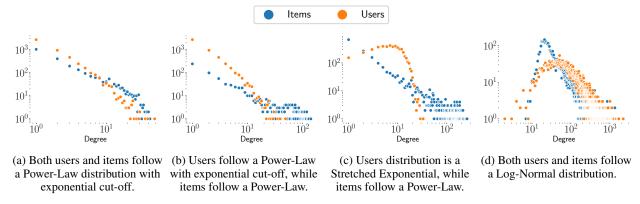


Figure 4: Degree distributions following different shapes, imposed by the generation procedure. X-axis represents the degree, while Y-axis reports the frequency.

procedure in generating data following specific distributions, such as Power-Law, Power-Law with exponential cut-off, and Stretched Exponential, indicated by Clauset et al. (2009a) as representative of real-world scenarios. Figure 4 reports the degree distributions obtained by imposing different combinations of the aforesaid shapes. Notably, we can fix the same distribution for both users and items (Figures 4a and 4d), or differentiate them (Figure 4b and 4c), thus ensuring

total control over the generation procedure. Finally, we perform a sensitivity analysis of the popularity coefficient δ , to

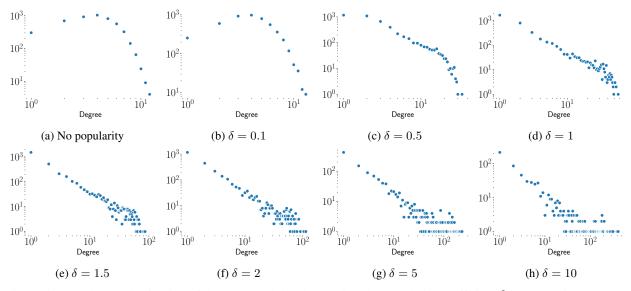


Figure 5: Item-degree distribution of the generated data by varying the popularity coefficient δ . The X-axis represents the degree, while the Y-axis depicts the frequency.

assess its impact over the data degree distribution. In this experiment, the sample is Power-law distributed. Figure 5 depicts the results. We can see that, as δ increases, i.e., as more importance is given to the item popularity, the degree distribution converges to the chosen shape (Figure 5d). Vice-versa, if the popularity factor is totally ignored (Figure 5a), the distribution approaches a Normal shape. Notably, this is due to the Bernoullian sampling process intrinsic into the procedure (line 9 of Algorithm 1), which governs the dataset creation.

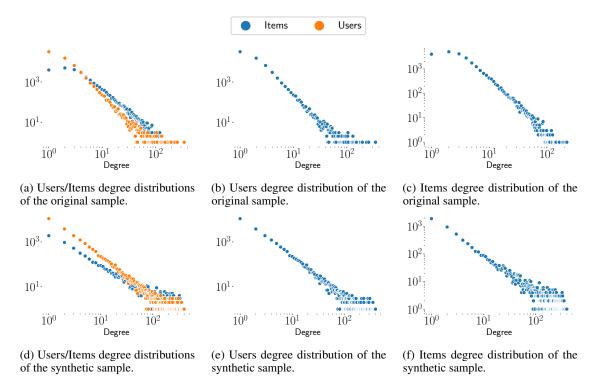


Figure 6: Users/Items degree distributions of the original dataset (top row) and of the synthetic sample generated by GENREC (bottom row). The X-axis represents the degree, while the Y-axis shows the frequency.

Generating Realistic Data. As a final experiment, we tested if our procedure is able to generate realistic samples, relying on a pre-existing dataset. As a reference benchmark, we selected a dataset based on Amazon Music (Yuehuan et al., 2021). To reproduce the original distribution, we used a Power-law shape both for users and items, i.e., Equations 5 and 7, setting the parameters as: $\beta=1.91, \lambda=1.99$ and $\delta=1.0$. The results are shown in Figure 6. The top row reports the real distributions, while the bottom row depicts the synthetic ones. We can see that the generated sample reflects the structural properties of the original dataset, despite not being identical. This demonstrates that our procedure can be further exploited to generate realistic samples, based on a reference dataset.

5 Conclusions and Future Work

Motivated by the scarcity of realistic datasets in the context of recommendations, in this paper, we present GENREC, a flexible and customizing framework for generating user-item interactions. In the experimental section, we showed that our procedure allows to (i) separating users and items into an arbitrary number of populations and topics, respectively; (ii) regulating the probability that a certain group interacts with a given topic; (iii) tweaking the underlying distribution, modeling it as a plug-and-play component; and (iv) freely tuning the structural parameters, e.g., minimum number of interactions per user, impact of popularity over the items distributions.

Despite the high flexibility of our method, there is still margin for improvements. Currently, our main limitation consists in a grid-search estimation of the parameters, needed to replicate a specific real distribution. As a future pointer, we aim at integrating an automatic parameters estimation within our framework, to reach convergence more efficiently.

Acknowledgements

This work has been partially funded by MUR on D.M. 351/2022, PNRR Ricerca, CUP H23C22000440007 and CUP H23C22000550005. It is also supported by project SERICS (PE00000014) under the MUR National Recovery and Resilience Plan funded by the European Union – NextGenerationEU.

References

- Dua'a Al-Hajjar, Nouf Jaafar, Manal Al-Jadaan, and Reem Alnutaifi. Framework for social media big data quality analysis. In *New Trends in Database and Information Systems II*. Springer International Publishing, 2015. ISBN 978-3-319-10518-5.
- Martín Arjovsky, Soumith Chintala, and Léon Bottou. Wasserstein generative adversarial networks. In *Proceedings of the 34th International Conference on Machine Learning, ICML 2017, Sydney, NSW, Australia, 6-11 August 2017*. PMLR, 2017. URL http://proceedings.mlr.press/v70/arjovsky17a.html.
- Albert-László Barabási and Réka Albert. Emergence of scaling in random networks. science, 1999.
- Francois Belletti, Karthik Lakshmanan, Walid Krichene, Yi-Fan Chen, and John R. Anderson. Scalable realistic recommendation datasets through fractal expansions. *ArXiv*, abs/1901.08910, 2019. URL https://api.semanticscholar.org/CorpusID:59292000.
- Jesus Bobadilla and Abraham Gutierrez. Wasserstein gan-based architecture to generate collaborative filtering synthetic datasets. *Applied Intelligence*, 2024. doi:10.1007/s10489-024-05313-4.
- Allison J. B. Chaney, Brandon M. Stewart, and Barbara E. Engelhardt. How algorithmic confounding in recommendation systems increases homogeneity and decreases utility. In *Proceedings of the 12th ACM Conference on Recommender Systems*, 2018. doi:10.1145/3240323.3240370.
- Sushma Channamsetty and Michael D. Ekstrand. Recommender response to diversity and popularity bias in user profiles. In *International Florida Artificial Intelligence Research Society Conference*, FLAIRS '17, 2017.
- Aaron Clauset, Cosma Rohilla Shalizi, and M. E. J. Newman. Power-law distributions in empirical data. *SIAM Review*, 2009a. doi:10.1137/070710111. URL https://doi.org/10.1137%2F070710111.
- Aaron Clauset, Cosma Rohilla Shalizi, and Mark E. J. Newman. Power-law distributions in empirical data. *SIAM Rev.*, 2009b. doi:10.1137/070710111.
- Paul Erdős, Alfréd Rényi, et al. On the evolution of random graphs. *Publ. math. inst. hung. acad. sci*, pages 17–60, 1960.
- Bernd Heinrich, Marcus Hopf, Daniel Lohninger, Alexander Schiller, and Michael Szubartowicz. Data quality in recommender systems: the impact of completeness of item content data on prediction accuracy of recommender systems. *Electronic Markets*, 2019. URL https://api.semanticscholar.org/CorpusID:203179968.

- Changwei Hu, Piyush Rai, and Lawrence Carin. Non-negative matrix factorization for discrete data with hierarchical side-information. In *International Conference on Artificial Intelligence and Statistics*, 2016. URL https://api.semanticscholar.org/CorpusID:5408791.
- Abhinav Jain, Hima Patel, Lokesh Nagalapatti, Nitin Gupta, Sameep Mehta, Shanmukha Guttula, Shashank Mujumdar, Shazia Afzal, Ruhi Sharma Mittal, and Vitobha Munigala. Overview and importance of data quality for machine learning tasks. In *Proceedings of the 26th ACM SIGKDD International Conference on Knowledge Discovery & Data Mining*, KDD '20, New York, NY, USA, 2020. Association for Computing Machinery. doi:10.1145/3394486.3406477.
- Wei Jin, Lingxiao Zhao, Shichang Zhang, Yozen Liu, Jiliang Tang, and Neil Shah. Graph condensation for graph neural networks. *ArXiv*, abs/2110.07580, 2021. URL https://api.semanticscholar.org/CorpusID:238857085.
- Dokyun Lee and Kartik Hosanagar. Impact of recommender systems on sales volume and diversity. In *Procs. Association for Information Systems ICIS*, 2014.
- Dokyun Lee and Kartik Hosanagar. How do recommender systems affect sales diversity? A cross-category investigation via randomized field experiment. *Inf. Syst. Res.*, 2019.
- Jure Leskovec, Deepayan Chakrabarti, Jon Kleinberg, Christos Faloutsos, and Zoubin Ghahramani. Kronecker graphs: An approach to modeling networks. *J. Mach. Learn. Res.*, 2010. ISSN 1532-4435.
- Derek Lilienthal, Paul Mello, Magdalini Eirinaki, and Stas Tiomkin. Multi-resolution diffusion for privacy-sensitive recommender systems. *CoRR*, abs/2311.03488, 2023. doi:10.48550/ARXIV.2311.03488.
- Fan Liu, Zhiyong Cheng, Huilin Chen, Yinwei Wei, Liqiang Nie, and Mohan S. Kankanhalli. Privacy-preserving synthetic data generation for recommendation systems. In SIGIR '22: The 45th International ACM SIGIR Conference on Research and Development in Information Retrieval, Madrid, Spain, July 11 15, 2022, 2022. doi:10.1145/3477495.3532044.
- Yudan Liu, Kaikai Ge, Xu Zhang, and Leyu Lin. Real-time attention based look-alike model for recommender system. In *ACM SIGKDD International Conference on Knowledge Discovery & Data Mining*, KDD '19, 2019.
- Nguyen Luong Vuong, Nam Vo, and Jason Jung. Dagzang: a synthetic data generator for cross-domain recommendation services. *PeerJ Computer Science*, 2023. doi:10.7717/peerj-cs.1360.
- Christian Matt, Thomas Hess, and Christian Weiß. The differences between recommender technologies in their impact on sales diversity. In *Procs. Association for Information Systems ICIS*, 2013.
- Sheshera Mysore, Andrew Mccallum, and Hamed Zamani. Large language model augmented narrative driven recommendations. In *Proceedings of the 17th ACM Conference on Recommender Systems*, 2023. doi:10.1145/3604915.3608829.
- M. E. J. Newman. The structure and function of complex networks. *SIAM Review*, 2003. doi:10.1137/s003614450342480. URL https://doi.org/10.1137%2Fs003614450342480.
- MEJ Newman. Power laws, pareto distributions and zipf's law. *Contemporary Physics*, 2005. doi:10.1080/00107510500052444. URL https://doi.org/10.1080%2F00107510500052444.
- Oumaima Reda and Ahmed Zellou. Assessing the quality of social media data: a systematic literature review. Bulletin of Electrical Engineering and Informatics, 2023. URL https://api.semanticscholar.org/CorpusID: 255019071.
- Manoel Horta Ribeiro, Veniamin Veselovsky, and Robert West. The amplification paradox in recommender systems. In *Proceedings of the Seventeenth International AAAI Conference on Web and Social Media, ICWSM 2023, June 5-8, 2023, Limassol, Cyprus*, 2023. doi:10.1609/ICWSM.V17I1.22223.
- Sven Schmit and Carlos Riquelme. Human interaction with recommendation systems: On bias and exploration. *ArXiv*, 2017. URL https://api.semanticscholar.org/CorpusID:1161719.
- Oren Sar Shalom, Shlomo Berkovsky, Royi Ronen, Elad Ziklik, and Amihood Amir. Data quality matters in recommender systems. *Proceedings of the 9th ACM Conference on Recommender Systems*, 2015. URL https://api.semanticscholar.org/CorpusID:6066355.
- Manel Slokom, Martha A. Larson, and Alan Hanjalic. Partially synthetic data for recommender systems: Prediction performance and preference hiding. *CoRR*, abs/2008.03797, 2020. URL https://arxiv.org/abs/2008.03797.
- Matthew Smith, Laurent Charlin, and Joelle Pineau. A sparse probabilistic model of user preference data. In *Advances in Artificial Intelligence 30th Canadian Conference on Artificial Intelligence, Canadian AI 2017, Edmonton, AB, Canada, May 16-19, 2017, Proceedings*, 2017. doi:10.1007/978-3-319-57351-9_36.
- Karen H. L. Tso and Lars Schmidt-Thieme. Evaluation of attribute-aware recommender system algorithms on data with varying characteristics. In *Advances in Knowledge Discovery and Data Mining, 10th Pacific-Asia Conference, PAKDD 2006, Singapore, April 9-12, 2006, Proceedings, 2006.* doi:10.1007/11731139_97.

- Karen H. L. Tso and Lars Schmidt-Thieme. Evaluation of attribute-aware recommender system algorithms on data with varying characteristics. In *Advances in Knowledge Discovery and Data Mining*. Springer Berlin Heidelberg, 2006. ISBN 978-3-540-33207-7.
- Thanh Vinh Vo and Harold Soh. Generation meets recommendation: proposing novel items for groups of users. In *Proceedings of the 12th ACM Conference on Recommender Systems*, 2018. doi:10.1145/3240323.3240357.
- Qinyong Wang, Hongzhi Yin, Hao Wang, Quoc Viet Hung Nguyen, Zi Huang, and Lizhen Cui. Enhancing collaborative filtering with generative augmentation. In *Proceedings of the 25th ACM SIGKDD International Conference on Knowledge Discovery & Data Mining*, 2019. doi:10.1145/3292500.3330873.
- Wenlin Wang. Learning to recommend from sparse data via generative user feedback. In AAAI Conference on Artificial Intelligence, 2021. URL https://api.semanticscholar.org/CorpusID:235306143.
- Xiao Wang, Ruijia Wang, Chuan Shi, Guojie Song, and Qingyong Li. Multi-component graph convolutional collaborative filtering. In *EAAI 2020 of Thirty-Fifth Conference on Artificial Intelligence AAAI*, 2020. doi:10.1609/AAAI.V34I04.6094.
- Jiahao Wu, Wenqi Fan, Shengcai Liu, Qijiong Liu, Rui He, Qing Li, and Ke Tang. Dataset condensation for recommendation, 2023.
- He Yuehuan, Sayeh Bayat Olek, and Shimona Narang. Technical report, MIE 1624 Course Project. Kaggle., 2021. URL https://kaggle.com/competitions/mie1624winter2021.
- Qi Zhang, Longbing Cao, Chongyang Shi, and Liang Hu. Tripartite collaborative filtering with observability and selection for debiasing rating estimation on missing-not-at-random data. In *EAAI 2021 of Thirty-Fifth Conference on Artificial Intelligence AAAI*, 2021. doi:10.1609/AAAI.V35I5.16597.
- Xiangyu Zhao, Long Xia, Lixin Zou, Hui Liu, Dawei Yin, and Jiliang Tang. Usersim: User simulation via supervised generative adversarial network. In *Proceedings of the Web Conference 2021*. Association for Computing Machinery, 2021. doi:10.1145/3442381.3450125.
- Dong Hong Zhu, Yawei Wang, and Ya Ping Chang. The influence of online cross-recommendation on consumers' instant cross-buying intention: The moderating role of decision-making difficulty. *Internet Res.*, 2018a.
- Ziwei Zhu, Xia Hu, and James Caverlee. Fairness-aware tensor-based recommendation. In ACM International Conference on Information and Knowledge Management, CIKM '18, 2018b.