


```
Environment: ox1 = new Object(); ... oxN = new Object(); oy1 = newObject(); ... oyM = new Object();
```

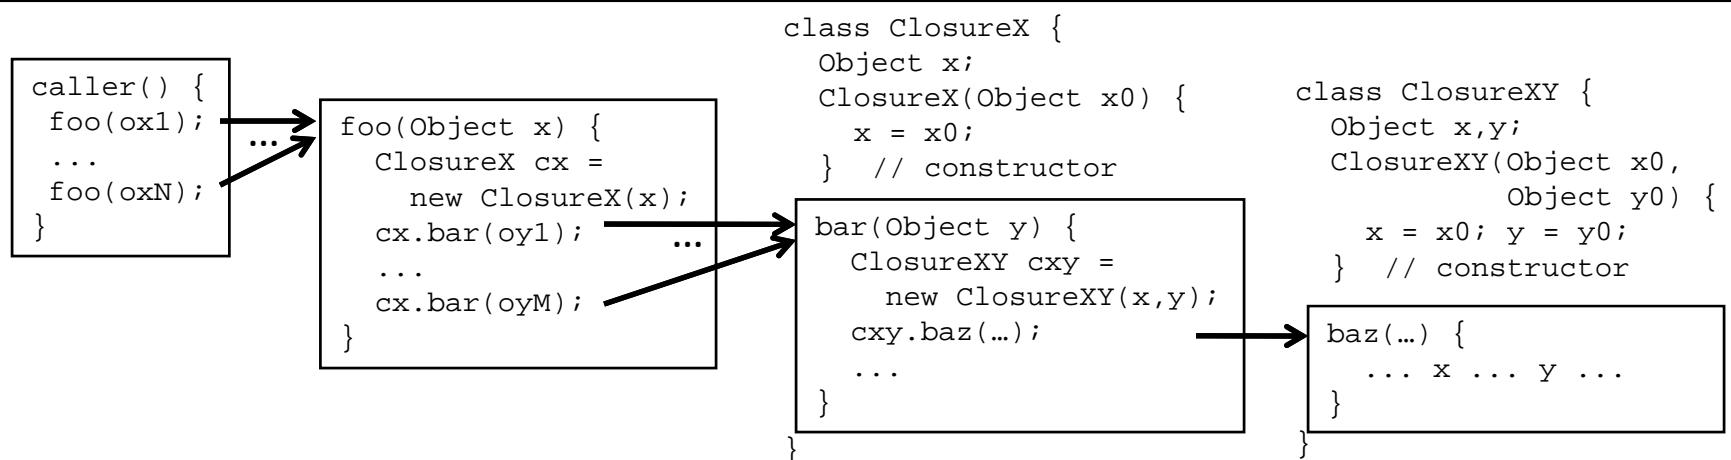

local variable
points-to info

```

caller@1: foo_x -> [ox1]
...
caller@N: foo_x -> [oxN]

```

```

foo@1: bar_y -> [oy1]
...
foo@M: bar_y -> [oyM]

```

$O(N+M)$
environments

heap object
points-to info

```

caller@1:
    foo::ClosureX.x -> [ox1]
    ...
caller@N:
    foo::ClosureX.x -> [oxN]

```

```

foo@1:
    bar::ClosureXY.x -> [ox1, ..., oxN]
    bar::ClosureXY.y -> [oy1]
    ...
foo@M:
    bar::ClosureXY.x -> [ox1, ..., oxN]
    bar::ClosureXY.y -> [oyM]

```