

Hybrid Conditional Gradient - Smoothing Algorithms with Applications to Sparse and Low Rank Regularization

A. Argyriou, M. Signoretto, J. Suykens

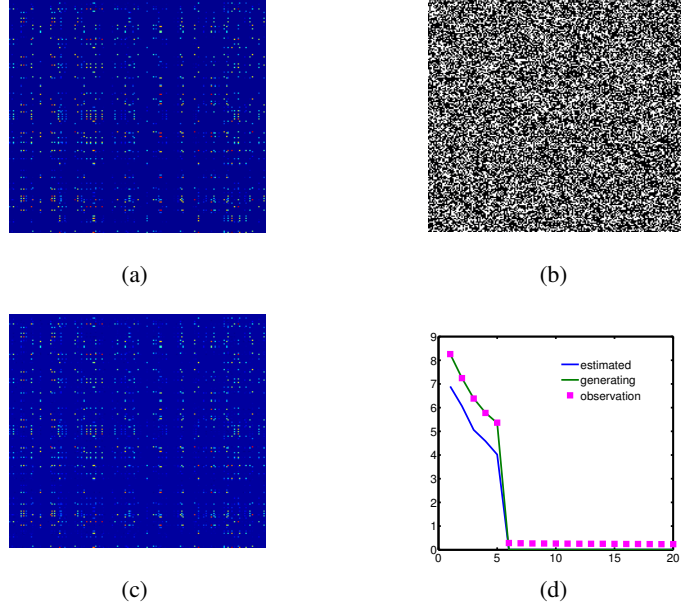


Figure 1: An illustration of the synthetic problem for $N = 200$. The generating matrix, simultaneously sparse and low-rank (1a), a mask with the observed entries, in white; 40% of the total number of entries are observed (1b), the matrix estimated by HCGS (1c), the leading singular values for the generating/observation/estimated matrix (1d).

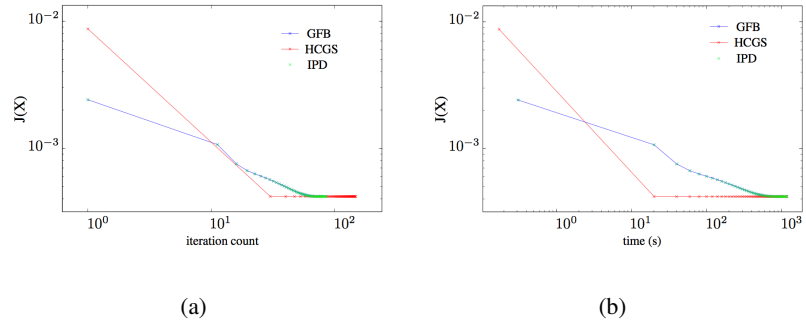


Figure 2: Comparison of objective values for $N = 400$, (2a) as a function of the iteration count, and (2b) as a function of time.

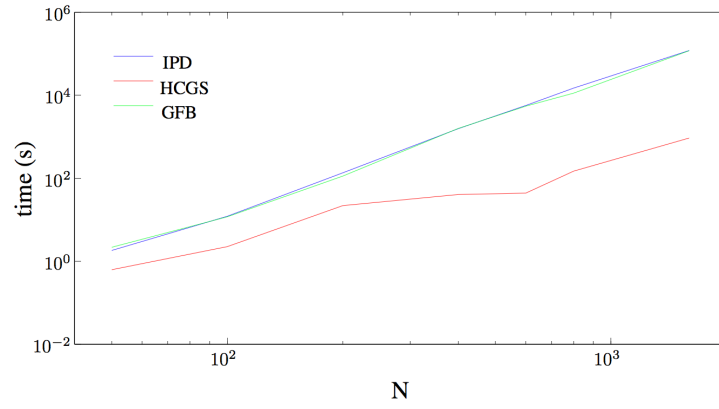


Figure 3: Required time for convergence as a function of N (40% observed entries), for the sparse - low rank experiment.

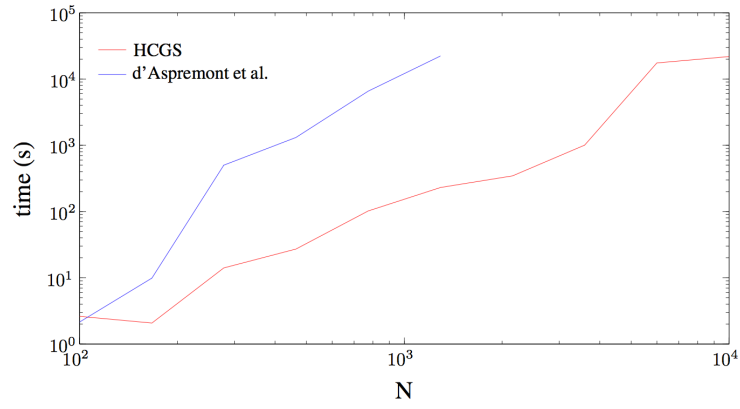


Figure 4: Computational time (in seconds) versus matrix size for the sparse PCA experiment.