


Global & local context can be built via summation, averaging, concatenation, hadamard product, etc.

Column Name  
Character Encoder  
CT-E

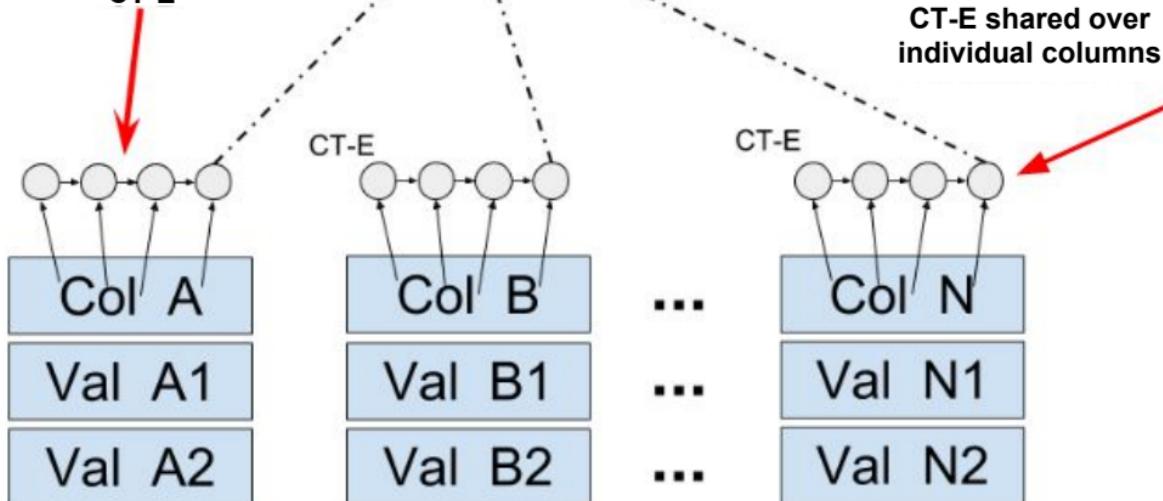

Individual (shared) column encoders' processing can be fully parallelized