

Efficient Construction of Broadcast Graphs

A. Averbuch ^{*} R. Hollander Shabtai [†] Y. Roditty [‡]

Abstract

A broadcast graph is a connected graph, $G = (V, E)$, $|V| = n$, in which each vertex can complete broadcasting of one message within at most $t = \lceil \log n \rceil$ time units. A minimum broadcast graph on n vertices is a broadcast graph with the minimum number of edges over all broadcast graphs on n vertices. The cardinality of the edge set of such a graph is denoted by $B(n)$. In this paper we construct a new broadcast graph with $B(n) \leq (k+1)N - (t - \frac{k}{2} + 2)2^k + t - k + 2$, for $n = N = (2^k - 1)2^{t+1-k}$ and $B(n) \leq (k+1-p)n - (t - \frac{k}{2} + p + 2)2^k + t - k - (p-2)2^p$, for $2^t < n < (2^k - 1)2^{t+1-k}$, where $t \geq 7$, $2 \leq k \leq \lfloor t/2 \rfloor - 1$ for even n and $2 \leq k \leq \lceil t/2 \rceil - 1$ for odd n , $d = N - n$, $x = \lfloor \frac{d}{2^{t+1-k}} \rfloor$ and $p = \lfloor \log_2(x+1) \rfloor$ if $x > 0$ and $p = 0$ if $x = 0$.

The new bound is an improvement upon the bounds appeared in [2],[7] and [9] and the recent bound presented by Harutyunyan and Liestman ([13]) for odd values of n .

Keywords: Broadcasting, minimum broadcast graph.

1 Introduction

Broadcasting is an information distribution problem in a connected graph, in which one vertex, called the *originator*, has to distribute a message to

^{*}School of Computer Sciences, Tel Aviv University, Tel Aviv 69978, Israel

[†]School of Computer Sciences, Tel Aviv University, Tel Aviv 69978, Israel and Afeka College of Engineering, Tel-Aviv 69460, Israel

[‡]School of Computer Sciences, Tel Aviv University, Tel Aviv 69978, Israel and School of Computer Sciences, The Academic College of Tel-Aviv-Yaffo, Tel-Aviv 61161, Israel. email: jr@post.tau.ac.il

all other vertices by placing a series of calls among the communication lines of the graph. Once informed, the informed vertices aid the originator in distributing the message. This is assumed to take place in discrete time units. The broadcasting has to be completed within a minimal number of time units subjected to the following constraints:

1. Each call involves only one informed vertex and one of its uninformed neighbors.
2. Each call requires one time unit.
3. A vertex can participate in at most one call at each time unit.
4. At each time unit many calls can be performed in parallel.

Formally, any network can be modeled as a simple connected graph $G = (V, E)$, $|V| = n$, where V is the set of vertices and E is the set of edges (the communication lines). For a given originator vertex, u , the *broadcast time* of u , $b(u)$, is defined as the minimum number of time units needed to complete broadcasting from u . Note that for any vertex $u \in V$, $b(u) \geq \lceil \log n \rceil$ (to the sequel the base of logs is always 2), since at each time unit the number of informed vertices can at most double. The broadcast time $b(G)$ of the graph G is defined as $\max\{b(u) | u \in G\}$ and G is called a broadcast graph if $b(G) = \lceil \log n \rceil$.

The *broadcast number* $B(n)$ is the minimum number of edges in any broadcast graph on n vertices. A *minimum broadcast graph (mbg)* is a broadcast graph on n vertices with $B(n)$ edges. Currently, the exact values of $B(n)$ are known only for $n = 2^p$, $n = 2^p - 2$, $n = 127$, and for several values of $n \leq 63$, as detailed below. Farley et al. [6] determined the values of $B(n)$ for $n \leq 15$ and showed that hypercubes are *mbgs* such that $B(2^p) = p2^{p-1}$ for any $p \geq 2$. Mitchell and Hedetniemi [16] determined the value of $B(17)$, while Bermond, Hell, Liestman and Peters [1] determined the values of $B(n)$ for $n = 18, 19, 30, 31$. Khachatryan and Haroutunian [14] and independently Dinnen, Fellows and Faber [3] proved that $B(2^p - 2) = (p - 1)(2^{p-1} - 1)$ for all $p \geq 2$.

Since *mbg's* seem to be difficult to find, many authors have devised meth-

ods to construct broadcast graphs. The number of edges in any broadcast graph on n vertices gives an upper bound on $B(n)$. Several papers have shown methods to construct broadcast graphs by forming the compound of two known broadcast graphs (see [2], [4], [9] and [14]). These methods have proven effective for graphs on $n_1 n_2$ vertices from two known broadcast graphs on n_1 and n_2 vertices. Thus, compounding produces good upper bound on $B(n)$ for many values of n . In particular, a very tight upper bound was obtained for $n = 2^p - 2^k$ by compounding mbg's on 2^{k-1} and $2^{p-k+1} - 2$ vertices: $B(2^p - 2^k) \leq \frac{2^p - 2^k}{2} (p - \frac{k+1}{2})$ (see [2],[14]).

Broadcast graphs on other sizes can sometimes be formed by adding or deleting vertices from known broadcast graphs(see [1] for example). An efficient vertex addition method is suggested in [12]. The authors in [9] presented a method based on compounding and then merging several vertices into one that allows the construction of the best broadcast graphs for almost all values of n , including many prime numbers. In particular, a very tight upper bound on $B(n)$ is $B(2^p - 2^k + 1) \leq 2^{p-1} (p - \frac{k}{2})$ (again by compounding mbg's on 2^k and 2^{p-k} vertices and then merging 2^k vertices into one).

Farley ([5]) proposed the recursive method to construct minimal broadcast graphs and proved the general upper bound

$$B(n) \leq \frac{n \lceil \log n \rceil}{2}, \quad 2^{p-1} < n \leq 2^p. \quad (1)$$

Other general upper bounds on $B(n)$ are obtained from a direct construction using binomial trees (see [8],[9],[14]) for some values of n .

Direct construction of broadcast graphs is a difficult problem. The best upper bound from a direct construction for any n is

$$B(n) \leq n(p - k + 1) - 2^{p-k} - \frac{1}{2}(p - k)(3p + k - 3) + 2k, \quad (2)$$

where $n = 2^p - 2^k - r$, $0 \leq k \leq p - 2$ and $0 \leq r \leq 2^k - 1$ (see [9]). While this bound is tight for $p - k$ is small for $k < p/2$ it is not as good as the bound from [5], in (1).

The best general upper bound on $B(n)$ for even n , namely,

$$B(n) \leq \frac{n \lceil \log n \rceil}{2} \quad (3)$$

obtained from the modified Knödel graph (see [2],[7]). This bound, is better than the one in (1) for all even $n \neq 2^p$.

In [11], Harutyunyan and Xu presented an upper bound on $B(n)$ for odd n . They proved that for integers n, p , where $n > 65$ is odd, $p \geq 7$ and $n \neq 2^p + 1$, $B(n) \leq \frac{(n+1)\lfloor \log n \rfloor}{2} + 2\lceil \frac{n-1}{10} \rceil - \lfloor \frac{\lfloor \log n \rfloor + 2}{4} \rfloor$.

However, recently Harutyunyan and Liestman presented in [13] a new upper bound for odd, positive integers, namely,

Theorem 1.1. *Let n be an even integer such that $\lceil \log n \rceil > 2$ is prime, $m = \lceil \log n \rceil \neq 2^j - 1$ for any integer j , m divides n , and for any integer $d \neq m - 1$ which is a divisor of $m - 1$, $2^d \not\equiv 1 \pmod{m}$. Then,*

$$B(n+1) \leq \frac{n\lceil \log n \rceil}{2} + \frac{n}{\lceil \log n \rceil} + \lceil \log n \rceil - 2. \quad (4)$$

In this paper we present a new upper bound for $B(n)$, improving the bounds in (1),(2),(3) and (4). Our main result is,

Theorem 1.2. *Let t, k, n be positive integers. Then, for a given $t \geq 7$ and $2 \leq k \leq \lfloor t/2 \rfloor - 1$,*

1. *If $n = N = (2^k - 1)2^{t+1-k}$,*

$$B(n) \leq (k+1)N - (t - \frac{k}{2} + 2)2^k + t - k + 2. \quad (5.a)$$

2. *If $2^t < n < (2^k - 1)2^{t+1-k}$,*

$$B(n) \leq (k+1-p)n - (t - \frac{k}{2} + p + 2)2^k + t - k - (p-2)2^p, \quad (5.b)$$

$$\text{where } d = N - n, x = \lfloor \frac{d}{2^{t+1-k}} \rfloor \text{ and } p = \begin{cases} \lfloor \log_2(x+1) \rfloor & \text{if } x > 0 \\ 0 & \text{otherwise.} \end{cases}$$

2 Proof of Theorem 1.2

In this section we prove theorem 1.2. First we construct a minimal broadcast graph and then demonstrate the broadcast scheme.

2.1 Construction of the minimal broadcast graph

We start by defining the binomial tree.

Definition 2.1. A binomial tree of order t , denoted by B^t , is defined recursively as follows:

A binomial tree of order 0 is the trivial tree (a single vertex).

A binomial tree of order t has vertex which is a root vertex whose children are roots of binomial trees of orders $t - 1, t - 2, \dots, 2, 1, 0$ (in this order).

Observation: The Binomial tree B^t has 2^t vertices and height t . Because of its unique structure, a binomial tree of order t can be constructed trivially from two trees of order $t - 1$ by attaching one of them as the right-most child of the root of the other one [see Figure.1].

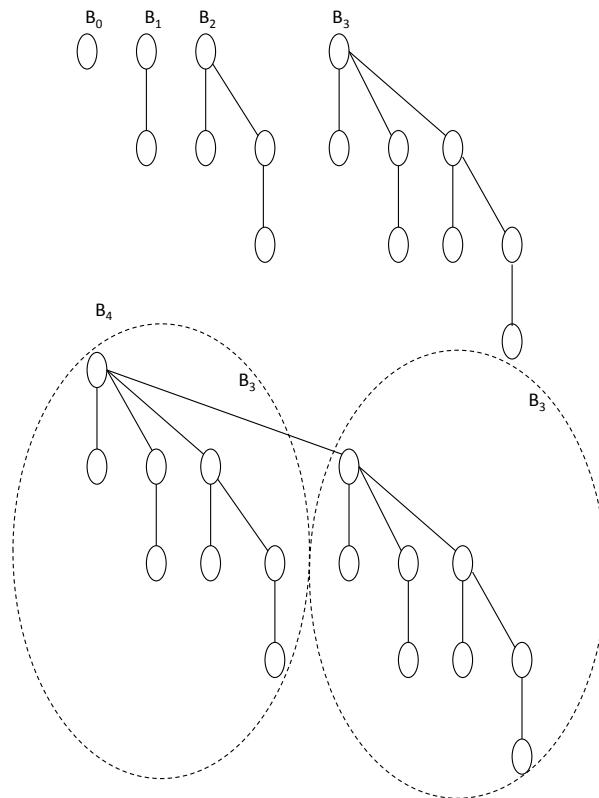


Figure 1: The Binomial trees B^0, B^1, B^2, B^3 and B^4 .

Lemma 2.1. *Let B^n be the binomial tree of order n . Let u be the root of B^n . Then, $b(u) = n$.*

The proof is straightforward and is omitted.

Now we define a hypercube graph.

Definition 2.2. *A hypercube graph of dimension n , denoted by Q^n , is defined recursively as follows:*

A hypercube graph of dimension 0 is a single vertex.

A hypercube graph of dimension n is constructed of two hypercubes, each of dimension $n - 1$, Q_1^{n-1} and Q_2^{n-1} and there is a perfect matching connecting the vertices of Q_1^{n-1} with those of Q_2^{n-1} .

Notice: A hypercube graph is a n -regular graph with 2^n vertices and thus has $n2^{n-1}$ edges.

Observation: Because of its unique structure, a hypercube graph of dimension n can be constructed trivially from n hypercube graphs of orders $n - 1, n - 2, \dots, 2, 1, 0, 0$, denoted by $Q^{n-1}, Q^{n-2}, \dots, Q^0, Q^{01}$, respectively.

Q^0 and Q^{01} form a hypercube of dimension 1,

Q^0, Q^{01} and Q^1 form a hypercube of dimension 2,

etc...

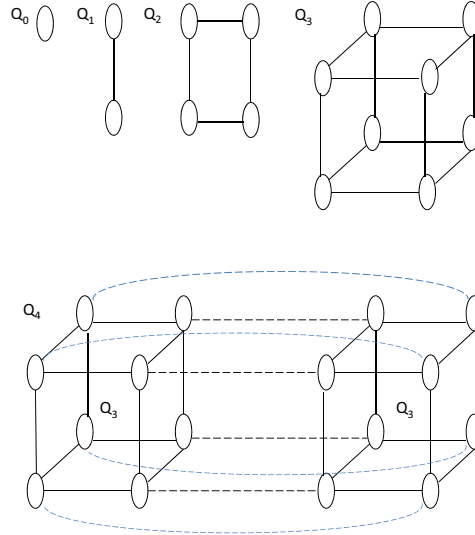


Figure 2: The hypercubes Q^0, Q^1, Q^2, Q^3 and Q^4 .

The following lemma is of great importance to our proof.

Lemma 2.2. *Let Q^n be the n -dimensional hypercube. Then, for each vertex $u \in V(Q^n)$, $b(u) = n$.*

The proof is easy and follows by induction on n and is omitted.

Proof of theorem 1.2:

First we demonstrate the construction of a broadcasting graph G giving the upper bound of $B(N)$ declared in (5.a), for $N = (2^k - 1)2^{t+1-k}$ (case 1). The broadcasting graph $G = (V, E)$, $|V| = n$, with $2^t < n < N$ shall be constructed later (case 2). The broadcasting scheme in that graphs shall demonstrate in the next section.

Case 1: For a given integer $t \geq 7$ and k , $2 \leq k \leq \lfloor t/2 \rfloor - 1$, we construct a minimal broadcast graph $G = (V, E)$ with $|V| = N = (2^k - 1)2^{t+1-k}$.

The broadcast graph G is constructed of $2^k - 1$ binomial trees denoted $B_i, 1 \leq i \leq 2^k - 1$. Each $B_i, 1 \leq i \leq 2^k - 1$, is a B^{t+1-k} tree. Let $R = \{r_1, \dots, r_{2^k-1}\}$ be the set of the roots of the binomial trees $B_1, B_2, \dots, B_{2^k-1}$, respectively. For each $i, 1 \leq i \leq 2^k - 1$, r_i is of degree $t + 1 - k$.

Thus, $|V(G)| = N = (2^k - 1)2^{t+1-k}$.

It is easily observed that $\lceil \log N \rceil = t + 1$.

Denote by $V_1 = \{r_1, \dots, r_{k-1}\}$ the set of the roots of the trees B_1, \dots, B_{k-1} , respectively and by $V_2 = \{r_{k+1}, \dots, r_{2^k-1}\}$ the set of the roots of the trees $B_{k+1}, \dots, B_{2^k-1}$, respectively. Thus, $V_1 \cup \{r_k\} \cup V_2 = R$ with $|R| = 2^k - 1$.

We are ready now to construct the set $E(G)$ and to calculate its cardinality. First, we have the edges of the binomial trees. Let $w \in B_1$ be the farthest leaf from the root r_1 . We connect the vertices of $R \cup \{w\}$ in a way that they form a hypercube of dimension k , denoted by Q^k . Let $Q^{k-1}, Q^{k-2}, \dots, Q^0, Q^{01}$, be the hypercube graphs that form Q^k such that $w \in Q^{01}$ (in fact, $w = Q^{01}$) and for each $0 \leq i \leq k - 1$, $r_{i+1} \in Q^i$. Let Q_1^{k-1} and Q_2^{k-1} be the two hypercube graphs of dimension $k - 1$ that form Q^k such that $Q_1^{k-1} = Q^{k-1}$ and $Q_2^{k-1} = Q^{k-2}, \dots, Q^0, Q^{01}$ form Q_2^{k-1} . Now, we connect each vertex $v, v \in V \setminus (R \cup \{w\})$, in which its root, $r, r \in Q_1^{k-1}$, to each of the vertices in $V_1 \cup \{r\}$. For the vertices $v, v \in V \setminus (R \cup \{w\})$, in which their root $r, r \in Q_2^{k-1}$, we do the following: if $r \in Q^i, 0 \leq i \leq k - 2$, we connect v to its root r , to each vertex in $V_1 \setminus \{r_{i+1}\}$ and to r_k .

Summary: The *mbg* graph G constructed is a hypercube Q^k of dimension k , and 2^k vertices (the set $R \cup \{w\}$), where each of the vertices in R is a root of a binomial tree on 2^{t+1-k} vertices. Furthermore, each of the vertices of the binomial trees which are not on $R \cup \{w\}$ is adjacent to its root and to each of the vertices in $V_1 \cup \{r_k\}$, except to r_j , if that vertex belongs to Q^{j-1} , for $1 \leq j \leq k$.

Now, we are ready to calculate the cardinality of $|E(G)|$.

First, the number of edges in the binomial trees is

$$|\cup_{i=1}^{2^k-1} E(B_i)| = \sum_{i=1}^{2^k-1} |E(B_i)| = (2^k - 1)(2^{t+1-k} - 1). \quad (6)$$

The number of edges in the hypercube induced on $R \cup \{w\}$ is

$$|E(Q^k)| = k2^{k-1}. \quad (7)$$

The number of edges that connect each non root vertex in G to its root is

$$(2^k - 1)[2^{t+1-k} - 1 - (t + 1 - k)] - 1. \quad (8)$$

The number of edges that connect the non root vertices in $Q_2^{k-1} \setminus \{w\}$ to r_k is

$$(2^{k-1} - 1)(2^{t+1-k} - 1) - 1. \quad (9)$$

The number of edges that connect each vertex of V_1 to all vertices of Q_1^{k-1} which are not roots (do not belong to R) is

$$(k - 1)2^{k-1}(2^{t+1-k} - 1). \quad (10)$$

And finally, the number of edges that connect the vertices of V_1 to all the vertices in $Q_2^{k-1} \setminus \{w\}$ is

$$(k - 2)(2^{k-1} - 1)[(2^{t+1-k} - 1) - 1]. \quad (11)$$

Thus, summing the values in (6) up to (11) and recalling that $N = (2^k - 1)2^{t+1-k}$ we obtain

$$|E(G)| = (k + 1)N - (t + 2 - \frac{k}{2})2^k + t + 2 - k. \quad (12)$$

Case 2: We construct now a *mbg* $G' = (V', E')$, $|V'| = n$, where $2^t < n < (2^k - 1)2^{t+1-k}$. We start by constructing a *mbg*, $G = (V, E)$, with $|V| = N = (2^k - 1)2^{t+1-k}$ as described in Case 1. Then, we obtain G' from G by deleting vertices and edges from G , in a way described below.

Define $d = N - n$, $x = \lfloor \frac{d}{2^{t+1-k}} \rfloor$, $y = d - x2^{t+1-k}$ and

$$p = \begin{cases} \lfloor \log_2(x + 1) \rfloor & \text{if } x > 0 \\ 0 & \text{otherwise.} \end{cases}$$

Note that $0 \leq x < 2^{k-1}$, $0 \leq y < 2^{t+1-k}$ and $1 \leq p < k$.

In order to construct G' we delete vertices from G as needed according to the value of d . Since $d = 2^{t+1-k}x + y$, the deletion process is done as follows:

1. If $x = 0$, $d = y$, we delete y vertices from some binomial tree in a way that we start deleting from the leaves and each vertex is deleted after all its descendants in the binomial tree are already deleted.
2. If $x > 0$, $d = 2^{t+1-k}x + y$, we delete $2^p - 1$ complete binomial trees and additional $2^{t+1-k}[x - (2^p - 1)] + y$ non root vertices and then add $2^p - 1$ edges. This is done in the following way:
 - (a) Delete all the vertices that are in the binomial trees in which their roots form Q^0, Q^1, \dots, Q^{p-1} . Here, we delete $2^p - 1$ binomial trees, where p of these trees are rooted by vertices from V_1 . Note that the hypercubes Q^0, Q^1, \dots, Q^{p-1} are deleted from Q_2^{k-1} .
 - (b) Delete $2^{t+1-k}(x - (2^p - 1)) + y$ non root vertices from the trees in which their roots are in $Q_2^{k-1} \setminus (\cup_{i=0}^{p-1} Q^i)$. Note that since $p = \lfloor \log_2(x + 1) \rfloor$, the number of vertices that we delete here is less than $2^{t+1-k} \cdot 2^p$.
 - (c) For each vertex $b \in Q_1^{k-1} \cap R$, in which we have deleted its neighbor in Q_2^{k-1} , we connect b to some vertex that remained in Q^{k-2} . Those edges that we add here replace the edges that connected b to some other root in Q_2^{k-1} that we have deleted in (a). This addition of edges is crucial in order to keep each vertex in the hypercube Q_1^{k-1} matched to another vertex in Q_2^{k-1} .

After the deletion process is ended we obtain in G' the following sets: R' is the set of the binomial trees roots. Then, $R' = V_1' \cup \{r_k\} \cup V_2'$, $|R'| = 2^k - 1 - (2^p - 1) = 2^k - 2^p$, where $V_1' = \{r_1 \dots r_{k-1-p}\}$, $|V_1'| = k - 1 - p$, $V_2' = R' \setminus (V_1' \cup \{r_k\})$ and $|V_2'| = 2^k - 1 - k - (2^p - 1 - p) = 2^k - 2^p + p - k$.

Now we calculate the number of edges that are deleted from G in order to obtain the graph G' .

First, we count the edges that are adjacent to each non-root vertex in the $2^p - 1$ complete binomial trees that were deleted from G . The degree of each vertex v in $V \setminus R$ is $k + j + 1$, where j is the distance of v to the farthest

leaf in its subtree. Indeed, j edges connect v to its direct siblings, k edges connect v to vertices in R and one edge connects v to its direct ancestor. Since we delete a vertex after all its siblings are already deleted, the number of edges deleted each time we delete a vertex in $V \setminus R$ is $k + 1$. Therefore, the number of such edges that are deleted is

$$(k + 1)(2^{t+1-k} - 1)(2^p - 1). \quad (13)$$

Since the degree of each vertex in Q^k is k , the number of edges that we delete from Q^k is $k(2^p - 1)$. By adding the $2^p - 1$ edges, we actually omit from Q^k , as described,

$$(k - 1)(2^p - 1) \quad (14)$$

edges.

Note that if $x \neq 0$, the tree B_1 rooted in r_1 ($r_1 = Q^0$) is deleted from G . Since $w \in B_1$, w is deleted from G . The calculation in (14) includes the k edges that connect w to Q^k .

Now, we count the number of edges that connected the p roots that were deleted from V_1 to all the non root vertices that remained in G' . This number is

$$[n - (2^k - 2^p)]p. \quad (15)$$

Finally, we count $k + 1$ edges for each of the $2^{t+1-k}(x - (2^p - 1)) + y$ non-root vertices that we delete from Q_2^{k-1} , which is:

$$(k + 1)[2^{t+1-k}(x - (2^p - 1)) + y]. \quad (16)$$

Summing (13)-(16), the total number of edges that we delete from G in order to construct G' is

$$np + (k + 1)d - p2^k + (p - 2)2^p + 2. \quad (17)$$

Now, by subtracting (17) from (12), recalling that $d = N - n$, we obtain that the number of edges in G' :

$$|E(G')| = (k + 1 - p)n - (t - \frac{k}{2} + p + 2)2^k + t - k - (p - 2)2^p. \quad (18)$$

This complete the proof of the construction of *mbg* graph for $2^t < n \leq N$.

Observation: One can easily observe that if $n = N$ and thus, $x = p = 0$, we obtain $E(G') = (k + 1)n - (t - \frac{k}{2} + 2)2^k + t - k + 2$ as in (12).

Remark: For odd n we can have $k \leq \lceil \frac{t}{2} \rceil - 1$.

2.2 Broadcasting Scheme

Let u be an originator. We demonstrate a broadcasting scheme in the constructed graphs of cases 1 and 2.

Case 1 : $|V| = n = (2^k - 1)2^{t+1-k}$.

Case 1.1 : Let $u \in R \cup \{w\}$.

The broadcasting scheme in that case is as follows: Since the vertices of $R \cup \{w\}$ form a hypercube of 2^k vertices, at most k time units are needed to complete broadcasting in $R \cup \{w\}$ (see lemma 2.2).

Case 1.2 : $u \in Q_1^{k-1} \setminus R$.

At time unit $t = 1$, u transmits to its root, which needs another $k - 1$ time units to accomplish broadcasting to all members of Q_1^{k-1} . At time unit i , $2 \leq i \leq k$, u transmits to r_{k-i+1} that needs another $k - i$ time units to accomplish broadcasting in Q^{k-i} . Broadcasting in Q^{k-i} completes after time unit k and therefore broadcasting in Q_2^{k-1} completes at time unit k (see lemma 2.2). Therefore, broadcasting in Q^k completes within k time units.

Case 1.3 : $u \in Q_2^{k-1} \setminus (R \cup \{w\})$.

At the first time unit u transmits the message to r_k , which needs another $k - 1$ time units to accomplish broadcasting to all members of Q_1^{k-1} . Suppose $u \in Q^j$, $0 \leq j \leq k - 2$. Then, at time unit i , $2 \leq i \leq k, i \neq j$, u transmits the message to r_{k-i+1} that needs another $k - i$ time units to accomplish broadcasting in Q^{k-i} and thus, broadcasting in Q^{k-i} completes after time unit k . At time unit j , u transmits the message to its root that needs another j time units to accomplish broadcasting in Q^j . Therefore, broadcasting in

Q_2^{k-1} completes at time unit k and broadcasting in Q^k complete within k time units (see lemma 2.2).

Now, in all three cases, after the first k time units, each root in R needs at most additional $t + 1 - k$ time units to complete broadcasting in its binomial tree (see lemma 2.1). Thus, broadcasting in G completes within at most $k + t + 1 - k = t + 1$ time units, which is $b(u) \leq t + 1, \forall u \in V(G)$.

Case 2 : $2^t < n < (2^k - 1)2^{t+1-k}$.

In this section we recall the definitions of d, x and p defined in case 2 in the previous section: $d = N - n$, $x = \lfloor d/2^{t+1-k} \rfloor$, $p = \lfloor \log_2(x + 1) \rfloor$, where $0 \leq x < 2^{k-1}$ and $0 \leq p < k - 1$.

Case 2.1 : $u \in R'$.

At the first time unit u transmits the message to the other half of Q^k . Meaning, if $u \in Q_2^{k-1}$ then u transmits the message to its neighbor in Q_1^{k-1} , or, $u \in Q_1^{k-1}$, and it transmits the message to its neighbor in Q_2^{k-1} . That is possible, since each vertex in Q_1^{k-1} is connected to one of the vertices in Q_2^{k-1} . Thus, after the first time unit $k - 1$ more time units are needed to accomplish broadcasting in Q_1^{k-1} and Q_2^{k-1} . Therefore, broadcasting in R' is completing within at most k time units.

Case 2.2 : $u \in Q_1^{k-1} \setminus R'$.

At time unit $t = 1$, u transmits to its root, that needs another $k - 1$ time units to accomplish broadcasting to all members of Q_1^{k-1} . At time unit i , $2 \leq i \leq k - p$, u transmits to r_{k-i+1} that needs another $k - i$ time units to accomplish broadcasting in Q^{k-i} . Broadcasting in Q^{k-i} completes after time unit k and therefore broadcasting in Q_2^{k-1} completes at time unit k (see lemma 2.2). Thus, broadcasting in Q^k completes within k time units.

Case 2.3 : $u \in Q_2^{k-1} \setminus (R' \cup \{w\})$.

At the first time unit u transmits the message to r_k , which needs another $k - 1$ time units to accomplish broadcasting to all members of Q_1^{k-1} . Furthermore,

$u \in Q^j, p \leq j \leq k-2$. Then, at time unit $i, 2 \leq i \leq k-p, i \neq j$, u transmits the message to r_{k-i+1} that needs another $k-i$ time units to accomplish broadcasting in Q^{k-i} . Thus, broadcasting in Q^{k-i} completes after time unit k . At time unit j , u transmits the message to its root that needs another j time units to accomplish broadcasting in Q^j . Therefore, broadcasting in Q_2^{k-1} completes at time unit k and broadcasting in Q^k complete within k time units (see lemma 2.2).

Now, in all three cases, each root in R' needs at most $t+1-k$ additional time units to complete broadcasting in its binomial tree (see lemma 2.1). Thus, broadcasting in G' completes within at most $k+t+1-k = t+1$ time units

Hence, $b(u) \leq t+1, \forall u \in V(G')$.

This completes the proof of theorem 1.2, in both cases.

2.2.1 Example: Minimal broadcast network construction

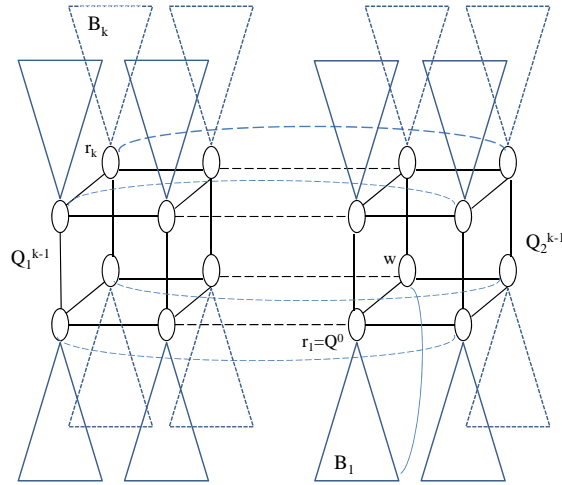


Figure 3: This figure demonstrates the *mbg* construction for $k = 4$. The graph is constructed of $2^k - 1$ binomial trees of dimension $t+1-k$. The set of binomial trees roots is R . The vertex w is a leaf in B_1 . The vertices in $R \cup \{w\}$ form a hypercube Q^k of dimension k . The two hypercubes of dimension $k-1$ that form Q^k are Q_1^{k-1} and Q_2^{k-1} . Each vertex v , $v \in V \setminus (R \cup \{w\})$, in which its root, r , $r \in Q_1^{k-1}$, is connected to $k-1$ roots in Q_2^{k-1} (the set V_1) and to $\{r\}$. Each vertex in $V \setminus (R \cup \{w\})$, in which its root r , $r \in Q_2^{k-1}$ and $r \in Q^i$, $0 \leq i \leq k-2$, is connected to its root r , to each vertex in $V_1 \setminus \{r_{i+1}\}$ and to r_k .

t	k	maximal n	our result	[9] result	t	k	maximal n	our result	[9] result
7	2	192	551	557	15	2	49152	147407	147421
8	2	384	1124	1131	15	3	57344	229266	229307
8	3	448	1731	1751	15	4	61440	306973	307094
9	2	768	2273	2281	15	5	63488	380476	380778
9	3	896	3516	3539	15	6	64512	450699	451375
10	2	1536	4574	4583	16	2	98304	294860	294875
10	3	1792	7093	7119	16	3	114688	458635	458679
10	4	1920	9448	9524	16	4	122880	614158	614288
11	2	3072	9179	9189	16	5	126976	761373	761698
11	3	3584	14254	14283	16	6	129024	902220	902949
11	4	3840	19033	19118	16	7	130048	1038539	1040073
12	2	6144	18392	18403	17	2	196608	589769	589785
12	3	7168	28583	28615	17	3	229376	917380	917427
12	4	7680	38218	38312	17	4	245760	1228543	1228682
12	5	7936	47257	47490	17	5	253952	1523198	1523546
13	2	12288	36821	36833	17	6	258048	1805325	1806107
13	3	14336	57248	57283	17	7	260096	2078796	2080445
13	4	15360	76603	76706	18	2	393216	1179590	1179607
13	5	15872	94842	95098	18	3	458752	1834877	1834927
14	2	24576	73682	73695	18	4	491520	2457328	2457476
14	3	28672	114585	114623	18	5	507904	3046879	3047250
14	4	30720	153388	153500	18	6	516096	3611598	3612433
14	5	31744	190043	190322	18	7	520192	4159437	4161201
14	6	32256	224970	225593	18	8	522240	4696076	4699666

Table 1: In this table we show the number of edges for maximal values of $n = N = (2^k - 1)2^{t+1-k}$ for $7 \leq t \leq 18$ and $2 \leq k \leq \lfloor t/2 \rfloor - 1$. We compare our results with the results of [9].

$n/ E(G') $	$k = 2$	$k = 3$	$k = 4$	$k = 5$	$k = 6$	[13] result	[9] result
16385	49109	49044	48909	48628	48043	115871	
16386	49112	49047	48912	48631	48046		
16387	49115	49050	48915	48634	48049	115808	
...
24575	73679	73614	73479	73198	72613	173670	
24576	73682	73617	73482	73201	72616		
24577		98205	98080	97821	97284	173684	
24578		98209	98084	97825	97288		
24579		98213	98088	97829	97292	173698	
...
28671		114581	114456	114197	113660	202615	
28672		114585	114460	114201	113664		
28673			143153	142912	142413	202629	
28674			143158	142917	142418		
...
30719			153383	153142	152643	217087	
30720			153388	153147	152648		
30721				183905	183440	217101	
30722				183911	183446		
30723				183917	183452	217116	
...
31743				190037	189572	224324	
31744				190043	189578		
31745					221393	224338	222016
31746					221400		222023
31747					221407	224352	222030
...
32255					224963	227942	225586

Table 2: In this table we show our result of $|E(G')|$ for $t = 14$, $2 \leq k \leq 6$ and $16385 \leq n \leq 32255$. We compare our results with the results of [13] and [9].

References

- [1] J. C. Bermond, P. Hell, A.L. Liestman, J. G. Peters. "Sparse broadcast graphs". *Discrete Applied Math.* 36(1992), 97-130.
- [2] J. C. Bermond, P. Fraigniaud, J. Peters. "Antepenultimate broadcasting". *Networks*, 26(1995), 125-137.
- [3] M.J. Dinneen, M. R. Fellows, V. Faber. "Algebraic constructions of efficient broadcast networks". *Applied Algebra, Algebraic Algorithms and Error Correcting Codes 9, Lecture Notes in Computer Science*, vol 539, Springer Berlin(1991), 152-158.
- [4] M. J. Dinneen, J. A. Ventura, M. C. Wilson, G. Zakeri. "Compound construction of broadcast networks". *Discrete Math.* 93(1999), 205-232.
- [5] A. M. Farley. "Minimum broadcast networks". *Networks* 9(1979), 313-332.
- [6] A. Farley, S. Hedetniemi, S. Mitchell, A. Proskurowski. Minimum broadcast graphs. *Discrete Math.* 25(1979), 189-193.
- [7] G. Fertin and A. Raspaud. "A survey on Knödel Graphs". *Discrete Applied Math.* 137(2004), 173-195.
- [8] M. Grigni and D. Peleg. "Tight bounds on minimum broadcast networks". *SIAM J. on Discrete Math.* 4(1991), 207-222.
- [9] H. A. Harutyunyan, A. L. Leistman. "More broadcast graphs". *Discrete Applied Math.* 98(1999), 81-102.
- [10] H. A. Harutyunyan: Minimum multiple message broadcast graphs. *Networks* 47(4)(2006), 218-224.
- [11] Hovhannes Harutyunyan, Xiangyang Xu. New Construction of Broadcast Graphs. *11th International Conference Information Visualization (IV '07)(2007)*, 751-756.

- [12] H. A. Harutyunyan. "An efficient vertex addition method in broadcast networks". *Internet Math.* vol. 5, No. 3(2008), 211-225.
- [13] H. A. Harutyunyan, A. L. Leistman. "Upper bounds on the broadcast function using minimum dominating sets". *Discrete Math.* 312(2012), 2992-2996.
- [14] L. H. Khachatryan and H. S. Haroutunian. "Constuction of new classes of minimal broadcast networks". in Proc. *3rd International Colloquium on Coding Theory*, Armenia(1990), 69-77.
- [15] W. Knödel. "New gossips and telephones". *Discrete Math.* 13(1975), 95.
- [16] S. Mitchell and S. Hedetniemi. "A census of minimum broadcast graphs". *J. Combin. Inform. Systems Sci.* 5(1980), 141-151.