

The Price of Differential Privacy for Low-Rank Factorization

Jalaj Upadhyay *
 Department of Computer Science
 Whiting School of Engineering
 Johns Hopkins University
 jalaj@jhu.edu

Abstract

Computing a *low-rank factorization* of an $m \times n$ matrix \mathbf{A} is a fundamental component in many applications, such as clustering, data mining, recommendation system, etc. It requires outputting three matrices: an orthonormal $m \times k$ matrix \mathbf{U} , an orthonormal $n \times k$ matrix \mathbf{V} , and a $k \times k$ positive semidefinite diagonal matrix $\mathbf{\Sigma}$, where $\mathbf{U}\mathbf{\Sigma}\mathbf{V}^T$ approximates the matrix \mathbf{A} in the Frobenius norm in the sense that

$$\|\mathbf{A} - \mathbf{U}\mathbf{\Sigma}\mathbf{V}^T\|_F \leq (1 + \alpha)\|\mathbf{A} - [\mathbf{A}]_k\|_F + \gamma$$

with constant probability. Here $[\mathbf{A}]_k$ is the best rank- k approximation of \mathbf{A} .

In this paper, we study what price one has to pay to release *differentially private low-rank factorization* of a matrix. We consider various settings that are close to the real world applications of low-rank factorization: (i) the manner in which matrices are updated (row by row or in an arbitrary manner), (ii) whether matrices are distributed or not, and (iii) how the output is produced (once at the end of all updates, also known as *one-shot algorithms* or continually). Even though these settings are well studied without privacy, surprisingly, there are no private algorithm for these settings (except when a matrix is updated row by row). We present the first set of differentially private algorithms for all these settings.

Our algorithms when private matrix is updated in an arbitrary manner promise differential privacy with respect to two stronger privacy guarantees than previously studied, use space and time *comparable* to the non-private algorithm, and achieve *optimal accuracy*. To complement our positive results, we also prove that the space required by our algorithms is optimal up to logarithmic factors. When data matrices are distributed over multiple servers, we give a non-interactive differentially private algorithm with communication cost independent of dimension. In concise, we give algorithms that incur optimal cost. We also perform experiments to verify that all our algorithms perform well in practice and outperform the best known algorithms until now for large range of parameters. We give experimental results for total approximation error and additive error for varying dimensions, α and k .

There are few key take aways from this paper: (i) maintaining a differentially private sketches of row space and column space of a matrix already give a sub-optimal accuracy, but this can be significantly improved by careful inexpensive post-processing, and (ii) even though we can only use linear sketches when matrices are updated arbitrarily, the structural properties of linear sketches can be carefully exploited to get tight bound on the error. While most of the focus has been on careful analysis, the power of post-processing has been largely ignored in the literature of differentially private low rank factorization.

Keywords Low-rank approximation, differential privacy, local differential privacy

*Work was done when the author was at Pennsylvania State University. Research supported by NSF award IIS-1447700.

1 Introduction

Low-rank factorization (LRF) of matrices is a fundamental component used in many applications, such as chemometrics [Ste08, WAH⁺97], clustering [CEM⁺15, DFK⁺04, McS01], data mining [AFK⁺01], recommendation systems [DKR02], information retrieval [PTRV98a, STC04], learning distributions [AM05, KSV05], system-control [Mar11], and web search [AFKM01, Kle99]. In these applications, given an $m \times n$ matrix \mathbf{A} , a common approach is to first compute three matrices: a diagonal positive semidefinite matrix $\tilde{\Sigma}_k \in \mathbb{R}^{k \times k}$ and two matrices with orthonormal columns, $\tilde{\mathbf{U}}_k \in \mathbb{R}^{m \times k}$ and $\tilde{\mathbf{V}}_k \in \mathbb{R}^{n \times k}$. The requirement then is that the product $\mathbf{B} := \tilde{\mathbf{U}}_k \tilde{\Sigma}_k \tilde{\mathbf{V}}_k^T$ is as close to \mathbf{A} as possible. More formally,

Problem 1. $(\alpha, \beta, \gamma, k)$ -LRF. Given parameters $0 < \alpha, \beta \leq 1$ and γ , an $m \times n$ matrix \mathbf{A} and the target rank k , compute a rank- k matrix factorization $\tilde{\mathbf{U}}_k, \tilde{\Sigma}_k$, and $\tilde{\mathbf{V}}_k$ such that with probability at least $1 - \beta$

$$\|\mathbf{A} - \tilde{\mathbf{U}}_k \tilde{\Sigma}_k \tilde{\mathbf{V}}_k^T\|_F \leq (1 + \alpha)\Delta_k + \gamma,$$

where $\|\cdot\|_F$ denotes the Frobenius norm, $\Delta_k := \|\mathbf{A} - [\mathbf{A}]_k\|_F$ with $[\mathbf{A}]_k$ being the best rank- k approximation of \mathbf{A} . We refer to the parameter γ as the additive error and the parameter α as the multiplicative error.

Unfortunately, most of the applications listed above either does not use any privacy mechanism or use ad hoc privacy mechanism. This has led to serious privacy leaks as exemplified by denonymization of Netflix datasets [NS08]. To assuage such attacks, McSherry and Mironov [MM09] suggested that one should use a robust privacy guarantee, such as (ϵ, δ) -differential privacy, defined by Dwork *et al.* [DMNS06]:

Definition 1. A randomized algorithm \mathfrak{M} gives (ϵ, δ) -differential privacy, if for all neighboring datasets \mathbf{A} and \mathbf{A}' , and all subsets S in the range of \mathfrak{M} , $\Pr[\mathfrak{M}(\mathbf{A}) \in S] \leq \exp(\epsilon)\Pr[\mathfrak{M}(\mathbf{A}') \in S] + \delta$, where the probability is over the coin tosses of \mathfrak{M} .

All currently known differentially private algorithms [BDMN05, CSS12, DTTZ14, HP14, HR12, JXZ15, KT13, Upa14a] output a low-rank matrix if a single entity stores a static matrix. One can then factorized the output in $O(mn^2)$ time and $O(mn)$ space. However, practical matrices used in above applications are often large, distributed over many servers, and are dynamically updated [Mah11, Mar08]. Therefore, for any practical deployment [App16, EPK14], one would like to simultaneously maintain strong privacy guarantee and minimize space requirements, communication between servers and computational time, in order to reduce bandwidth, latency, synchronization issues and resource overhead.

We initialize the study of space, time, and communication cost efficient differentially private algorithm for solving **Problem 1** under various settings: (i) the manner in which matrices are updated (row by row or in arbitrary manner), (ii) whether matrices are distributed (local model of privacy) or not (central model of privacy), and (iii) how the output is produced (once at the end of all updates, also known as *one-shot algorithms* or continually). Without privacy, there are many algorithms for solving **Problem 1** under all these settings [BCL05, BWZ16, CMM17, CW13, CW17, DV06, GSS17, MZ11, MM13, NDT09, Sar06].

Surprisingly, there are no private algorithm for these settings (except in central model when matrices are received row by row [DTTZ14]). For example, known algorithms either use multiple pass over the data matrix [HP14, HR12, HR13, KT13] or cannot handle arbitrary updates [DTTZ14]. Similarly, known algorithms that continually release output are for *monotonic functions* [DNPR10], thereby excluding **Problem 1**. Private algorithms like [DTTZ14, HR12] that can be extended to distributed setting use multiple rounds of interaction, large communication cost, and/or result in trivial error bounds. Moreover, known private algorithms are inefficient compared to non-private algorithms: $O(mnk)$ time and $O(mn)$ space compared to time linear in the sparsity of the matrix and $O((m+n)k/\alpha)$ space [BWZ16, CW13]. In fact, for rank- k matrices, Musco and Woodruff [MW17] state that **Problem 1** is equivalent to the well studied *matrix completion* problem for which one can have $\tilde{O}(n \cdot \text{poly}(k))$ time non private algorithm [JNS13]. Under same assumptions, private algorithm takes $O(mnk)$ time [HR12]. This motivates the central thesis of this paper: can we have non-trivial private algorithms under all these settings, and if yes, do we have to pay for privacy?

Our Results	Updates	Output Produced	Privacy	Additive Error	Local?
Theorem 47	Turnstile	At the end	$\mathbf{A} - \mathbf{A}' = \mathbf{u}\mathbf{v}^\top$	$\tilde{O}\left(\left(\sqrt{mk\alpha^{-1}} + \sqrt{kn}\right)\epsilon^{-1}\right)$	×
Theorem 48	Turnstile	At the end	$\ \mathbf{A} - \mathbf{A}'\ _F = 1$	$\tilde{O}\left(\left(\sqrt{mk\alpha^{-2}} + \sqrt{kn}\right)\epsilon^{-1}\right)$	×
Theorem 50	Turnstile	Continually	$\mathbf{A} - \mathbf{A}' = \mathbf{u}\mathbf{v}^\top$	$\tilde{O}\left(\left(\sqrt{mk\alpha^{-1}} + \sqrt{kn}\right)\epsilon^{-1}\log T\right)$	×
Theorem 51	Turnstile	Continually	$\ \mathbf{A} - \mathbf{A}'\ _F = 1$	$\tilde{O}\left(\left(\sqrt{mk\alpha^{-1}} + \sqrt{kn}\right)\epsilon^{-1}\log T\right)$	×
Theorem 49	Row by row	At the end	$\ \mathbf{A} - \mathbf{A}'\ _F = 1$	$\tilde{O}\left((\alpha\epsilon)^{-1}\sqrt{nk}\right)$	×
Theorem 57	Row by row	At the end	$\ \mathbf{A} - \mathbf{A}'\ _F = 1$	$\tilde{O}\left(k\alpha^{-2}\epsilon^{-1}\sqrt{m}\right)$	✓

Table 1: Our Results for $(\epsilon, \Theta(n^{-c}))$ -Differentially Private Algorithms When $k > 1/\alpha, c \geq 2$, stream length T .

Our Results. We give a unified approach and first set of algorithms for solving [Problem 1](#) in all the settings mentioned above while showing that *one does not have to pay the price of privacy* (more than what is required in terms of additive error and space, see [Section 1.1.2](#)). Our algorithms are also practical as shown by our empirical evaluations (see [Appendix J](#)). On a high level, we show the following:

1. When a private matrix is streamed, we propose differentially private algorithms with respect to two stronger privacy guarantees than previously studied. Our algorithms are space and time efficient and also achieve *optimal accuracy*. We complement our positive results with a matching lower bound on the space required ([Theorem 3](#)). [Section 1.1](#) covers this in more details.
2. When a private matrix is distributed over multiple servers, we give a non-interactive differentially private algorithm with communication cost independent of dimension. [Section 3](#) covers this in more details.

Our results relies crucially on *careful analysis* and our algorithms heavily exploit advance yet inexpensive *post-processing*. The power of careful analysis was shown by Dwork *et al.* [[DTTZ14](#)] who improved an earlier result of Blum *et al.* [[BDMN05](#)]. However, only two known private algorithms for [Problem 1](#) use any form of post-processing: Hardt and Roth [[HR12](#)] uses simple pruning of entries of a matrix formed in the intermediate step, while Dwork *et al.* [[DTTZ14](#)] uses best rank- k approximation of the privatized matrix. These post-processing either make the algorithm suited only for static matrices or are expensive.

In what follows, we give more details of our result when matrices are streamed and compare it with previous works. All our results are summarized in [Table 1](#). Unless specified, for the ease of presentation, we assume that $k \geq 1/\alpha, \delta = \Theta(n^{-c})$ for $c \geq 2$, and $\tilde{O}(\cdot)$ hides a poly $\log n$ factor for the rest of this section.

1.1 Differentially Private Low-Rank Factorization When Matrices are Streamed

All currently known differentially private algorithms to solve [Problem 1](#) assume that a single central server holds the entire private matrix which is not updated over a period of time (see [Figure 1](#)). However, practical matrices are constantly updated. In this section, we consider when a private matrix is updated arbitrarily, known as the *turnstile update model* to capture many practical scenarios (see the survey [[Mut05](#)] for further motivations). Formally, in a turnstile update model, a matrix $\mathbf{A} \in \mathbb{R}^{m \times n}$ is initialized to an all zero-matrix and is updated by a sequence of triples $\{i, j, \Delta\}$, where $1 \leq i \leq m, 1 \leq j \leq n$, and $\Delta \in \mathbb{R}$.

Each update results in a change in the (i, j) -th entry of \mathbf{A} as follows: $\mathbf{A}_{i,j} \leftarrow \mathbf{A}_{i,j} + \Delta$. An algorithm is *differentially private under turnstile update model* if, for all possible matrices updated in the turnstile update model and runs of the algorithm, the output of the server



Figure 1: The central model (left) and the turnstile model (right).

is (ε, δ) -differentially private. In the non-private setting, Boutsidis *et al.* [BWZ16] gave a space-optimal algorithm for low-rank factorization in the turnstile update model. Unfortunately, a straightforward application of known privacy techniques to make their algorithm differentially private incurs a large additive error (see Appendix K for details). This raises the following natural question:

Question 1. Can we solve Problem 1 with good accuracy while preserving differential privacy and receiving the matrix in the turnstile update model?

We answer this question positively. To better comprehend the privacy aspect of our results presented in this section, we first need to define our notion of neighboring datasets (streaming matrices in our context).

We consider two stronger privacy guarantees than previously studied: Priv_1 and Priv_2 (see Section 1.1.1 for comparison and Section 1.1.3 for discussion). In Priv_1 , we call two matrices \mathbf{A} and \mathbf{A}' neighboring if $\mathbf{A} - \mathbf{A}' = \mathbf{u}\mathbf{v}^\top$ for some unit vectors \mathbf{u} and \mathbf{v} . In Priv_2 , we consider two matrices \mathbf{A} and \mathbf{A}' neighboring if $\|\mathbf{A} - \mathbf{A}'\|_F \leq 1$. We say two data streams are neighboring if they are formed by neighboring matrices. For these two definitions, we show the following:

Theorem 2. (*Theorem 47 and Theorem 48, informal*). *Let \mathbf{A} be an $m \times n$ matrix (with $\text{nn}(\mathbf{A})$ non-zero entries and $m \leq n$) streamed in a turnstile update model. Then*

1. *There is an (ε, δ) -differentially private algorithm under Priv_1 that uses $\tilde{O}((m+n)k\alpha^{-1})$ space and outputs a rank- k factorization $\tilde{\mathbf{U}}_k, \tilde{\Sigma}_k, \tilde{\mathbf{V}}_k$ in time $\tilde{O}(\text{nn}(\mathbf{A}) + m^2k\alpha^{-1} + nk^2\alpha^{-2})$ such that,*

$$\|\mathbf{A} - \tilde{\mathbf{U}}_k \tilde{\Sigma}_k \tilde{\mathbf{V}}_k^\top\|_F \leq (1 + \alpha)\Delta_k + \tilde{O}((\sqrt{mk\alpha^{-1}} + \sqrt{kn})/\varepsilon).$$

2. *There is an (ε, δ) -differentially private algorithm under Priv_2 that uses $\tilde{O}((m\alpha^{-1} + n)k\alpha^{-1})$ space, and outputs a rank- k factorization $\tilde{\mathbf{U}}_k, \tilde{\Sigma}_k, \tilde{\mathbf{V}}_k$ in $\tilde{O}(\text{nn}(\mathbf{A}) + (m\alpha^{-2} + n)k^2\alpha^{-2})$ time such that*

$$\|\mathbf{A} - \tilde{\mathbf{U}}_k \tilde{\Sigma}_k \tilde{\mathbf{V}}_k^\top\|_F \leq (1 + \alpha)\Delta_k + \tilde{O}((\sqrt{mk\alpha^{-2}} + \sqrt{kn})/\varepsilon).$$

1.1.1 Comparison With Previous Works

All the previous private algorithms compute a low rank approximation of either the matrix \mathbf{A} or its covariance $\mathbf{A}^\top \mathbf{A}$. One can compute a factorization from their output at the expense of an extra $O(mn^2)$ time and $O(mn)$ space (Dwork *et al.* [DTTZ14] requires an extra $O(n^3)$ time and $O(n^2)$ space to output an LRF of $\mathbf{A}^\top \mathbf{A}$). Some works like [CSS12, KT13, HR12, HP14] compute LRF under the spectral norm instead of Frobenius norm. We state the previously studied problems and their differences with Problem 1 in Appendix ???. To summarize the discussion in Appendix ??, only Hardt and Roth [HR12] and Upadhyay [Upa14a] study a problem closest to ours (the differences being that they do not consider turnstile updates and output a low rank approximation). Therefore, we compare Theorem 2 only with these two results.

We do not make any assumptions on the input matrix. This allows us to cover matrices of all form in an unified manner. We cover this in more detail in Section 1.1.3. In what follows, we compare the additive error, space and time required, and privacy guarantees in more detail. Table 2 enumerates these comparisons. Both Hardt and Roth [HR12] and Upadhyay [Upa14a] incur a multiplicative error of $\sqrt{1 + k/p}$, where p is an oversampling parameter (typically, $p = \Theta(k)$), and $m \leq n$. Therefore, for a reasonable comparison, we consider Theorem 2 when $\alpha = \Theta(1)$ and $m \leq n$.

Our additive error is smaller than Upadhyay [Upa14a] by a factor of $\tilde{O}(k^{3/2})$. To make a reasonable comparison with Hardt and Roth [HR12], we consider their result without coherence assumption: which roughly says that no single row of the matrix is significantly correlated with any of the right singular vectors of the matrix. Then combining Theorem 4.2 and 4.7 in Hardt and Roth [HR12] results in an additive error

	Privacy Notion	Additive Error	Space Required	Streaming
Theorem 47	$\mathbf{A} - \mathbf{A}' = \mathbf{u}\mathbf{v}^\top$	$\tilde{O}\left(\left(\sqrt{km}\alpha^{-1} + \sqrt{kn}\right)\varepsilon^{-1}\right)$	$\tilde{O}((m+n)k\alpha^{-1})$	Turnstile
Theorem 48	$\ \mathbf{A} - \mathbf{A}'\ _F = 1$	$\tilde{O}\left(\left(\sqrt{km}\alpha^{-2} + \sqrt{kn}\right)\varepsilon^{-1}\right)$	$\tilde{O}((m+n)k\alpha^{-2})$	Turnstile
Hardt-Roth [HR12]	$\mathbf{A} - \mathbf{A}' = \mathbf{e}_s\mathbf{v}^\top$	$\tilde{O}\left(\left(\sqrt{km} + kc\sqrt{n}\right)\varepsilon^{-1}\right)$	$O(mn)$	\times
Upadhyay [Upa14a]	$\mathbf{A} - \mathbf{A}' = \mathbf{e}_s\mathbf{v}^\top$	$\tilde{O}\left(\left(k^2\sqrt{n} + m\right)\varepsilon^{-1}\right)$	$\tilde{O}((m+n)k\alpha^{-1})$	Row-wise
Lower Bounds	All of the above	$\Omega\left(\sqrt{km} + \sqrt{kn}\right)$ [HR12]	$\Omega((m+n)k\alpha^{-1})$ (Thm. 52)	Turnstile

Table 2: Comparison of Private k -Rank Approximation ($\|\mathbf{u}\|_2, \|\mathbf{v}\|_2 = 1$, \mathbf{e}_s is a standard basis, $k \leq 1/\alpha$).

$\tilde{O}((\sqrt{km} + ck\sqrt{n})\varepsilon^{-1})$, where c is the maximum entry in their projection matrix. In other words, we improve the result of Hardt and Roth [HR12] by an $\tilde{O}(c\sqrt{k})$ factor.

Our algorithms are more efficient than previous algorithms in terms of space and time even though earlier algorithms output a rank- k matrix and cannot handle updates in the turnstile model. Upadhyay [Upa14a] takes more time than Hardt and Roth [HR12]. The algorithm of Hardt and Roth [HR12] uses $O(mn)$ space since it is a private version of Halko *et al.* [HMT11] and has to store the entire matrix: both the stages of Halko *et al.* [HMT11] require the matrix explicitly. One of the motivations mentioned in Hardt and Roth [HR12] is sparse private incoherent matrices (see the discussion in Hardt and Roth [HR12, Sec 1.1]), but their algorithm uses this only to reduce the additive error and not the running time. On the other hand, our algorithms use sublinear space. In fact, when $m \cdot \text{poly}(k, 1/\alpha) \leq \text{nn}(\mathbf{A})$, our algorithm under Priv_2 runs in time linear in $\text{nn}(\mathbf{A})$ and almost matches the running time of most efficient non-private algorithm in the turnstile model [CW13, BWZ16], which run in time $O(\text{nn}(\mathbf{A}) + nk^2\alpha^{-2} + k^3\alpha^{-5})$.

Previous works consider two matrices neighboring either if they differ in one entry [HP14, HR13, JXZ15] (i.e., $\mathbf{A} - \mathbf{A}' = \mathbf{e}_i\mathbf{e}_j^\top$) or when they differ in one row by a unit norm [DTTZ14, HR12, Upa14a] (i.e., $\mathbf{A} - \mathbf{A}' = \mathbf{e}_i\mathbf{v}^\top$ for some unit vector \mathbf{v}), depending on whether a user's data is an entry of the matrix or a row of the matrix. Both these privacy guarantees are special case of Priv_1 by setting either \mathbf{u} (in the case of [DTTZ14, HR12]) or both \mathbf{v} and \mathbf{u} (in the case of [HR13, HP14]) as a standard basis vector.

1.1.2 Optimality of Our Results

Tightness of Additive Error. Hardt and Roth [HR12] showed a lower bound of $\Omega(\sqrt{kn} + \sqrt{km})$ on additive error by showing a reduction to the linear reconstruction attack [DN03]. In other words, any algorithm that outputs a low rank matrix with additive error $o(\sqrt{kn} + \sqrt{km})$ cannot be differentially private! This lower bound holds even when the private algorithm can access the private matrix any number of times. Our results show that one can match the lower bound for constant α , a setting considered in Hardt and Roth [HR12], up to a small logarithmic factor, while allowing access to the private matrix only in the turnstile model.

Space Lower Bound and Optimality of the Algorithm Under Priv_1 . Our algorithm under Priv_1 uses the same space as non-private algorithm up to a logarithmic factor, which is known to be optimal for $\gamma = 0$ [CW09]. However, we incur a non-zero additive error, γ , which is inevitable [HR12], and it is not clear if we can achieve better space algorithm when $\gamma \neq 0$. This raises the following question:

Question 2. What is the space complexity for computing $(\alpha, \beta, \gamma, k)$ -LRF when $\gamma \neq 0$?

We complement our positive results by showing a lower bound on the space complexity of computing low-rank approximation with non-trivial additive error. The result holds for any randomized algorithm; therefore, also hold for differentially private algorithm. This we believe makes our result of independent interest.

Theorem 3. (*Theorem 52, informal*). *The space required by any randomized algorithm to solve $(\alpha, 1/6, O(m+n), k)$ -LRF in the turnstile update model is $\Omega((n+m)k\alpha^{-1})$.*

As mentioned above, any differentially private incurs an additive error $\Omega(\sqrt{km} + \sqrt{kn})$ [HR12]. Moreover, earlier literature in differentially private low-rank approximation (i.e., Hardt and Roth [HR12]) set $\alpha = \sqrt{2} - 1$. **Theorem 3** thus answers Question 3 for all $k \geq 3$ for the parameters studied in the literature, and prove the space optimality of our algorithm. Our proof uses a reduction from the two-party communication complexity of AIND problem. In the AIND problem, Alice is given $\mathbf{x} \in \{0, 1\}^N$ and Bob is given an index i together with $\mathbf{x}_{i+1}, \dots, \mathbf{x}_N$. The goal of Bob is to output \mathbf{x}_i . We use the input of Alice and Bob to construct an instance of low-rank approximation and show that any algorithm for LRF in the turnstile update model for this instance yields a single round communication protocol for AIND.

1.1.3 Some Discussion on Privacy Guarantees, Assumptions, and Relaxation

The two privacy guarantees considered in this paper have natural reasons to be considered. Priv_1 generalizes the earlier privacy guarantees and captures the setting where any two matrices differ in only one spectrum. Since Priv_1 is defined in terms of the spectrum of matrices, Priv_1 captures one of the natural privacy requirements in all the applications of LRF. Priv_2 is more stronger than Priv_1 . To motivate the definition of Priv_2 , consider a graph, $\mathcal{G} := (\mathcal{V}, \mathcal{E})$ that stores career information of people in a set \mathcal{P} since their graduation. The vertex set \mathcal{V} is the set of all companies. An edge $e = (u, v) \in \mathcal{E}$ has weight $\sum_{p \in \mathcal{P}} (t_{p,e}/t_p)$, where $t_{p,e}$ is the time for which the person p held a job at v after leaving his/her job at u , and t_p is the total time lapsed since his/her graduation. Graphs like \mathcal{G} are useful because the weight on every edge $e = (u, v)$ depends on the number of people who changed their job status from u to v (and the time they spent at v). Therefore, data analysts might want to mine such graphs for various statistics. In the past, graph statistics have been extensively studied in the literature of differential privacy for static graph under *edge-level privacy* (see, for e.g., [DTTZ14, HR12, HP14, Upa13, Upa14a]): the presence or absence of a person corresponds to a change in a single edge. On the other hand, in graphs like \mathcal{G} , presence or absence of a person would be reflected on many edges. If we use earlier results on edge-level privacy to such graphs, it would lead to either a large additive error or a loss in privacy parameters ϵ, δ . Priv_2 is an attempt to understand whether we can achieve any non-trivial guarantee on the additive error without depreciating the privacy parameters.

Our choice to *not make any assumptions* such as symmetry, incoherence, or a bound on the Frobenius norm of the input matrix, as made in previous works [DTTZ14, HR12, HP14, KT13], allows us to give results as general as possible and cover many practical scenarios not covered by previous works. For example, this allows us to have a unified algorithmic approach for all the settings mentioned earlier in the introduction (see Corollaries 4 and 6). Moreover, by not making any assumption on the Frobenius norm or coherence of the matrix, we are able to cover many general cases not covered by previous results. For example, adjacency matrices corresponding to graph \mathcal{G} can have arbitrary large Frobenius norm. Such graphs can be distributed over all the companies and updated every time a person changes his job, and the effect is (possibly) reflected on many edges. On the other hand, one would like to protect private information about an individual in \mathcal{G} or data packets in communication network.

There are practical learning application such as word2vec where private data is used to build a relationship graph on objects (such as words-to-words, queries-to-urls, etc) also share all these properties. Other applications like recommendation systems, clustering, and network analysis, have their input datasets store dynamically changing private information in the form of $m \times n$ matrices. For example, communication networks that stores the routing information passing through various nodes of the network and online video streaming websites that stores users' streaming history, both store private information in the form of matrix which is updated in a turnstile manner and has arbitrary large Frobenius norm. These data are useful for their respective businesses since they can be used for various analyses [DFK⁺04, LKLS13, New06].

On the other hand, in some practical applications, matrices are more structured. One such special case is when the rows of private matrix \mathbf{A} have bounded norm and one would like to approximate $\mathbf{A}^\top \mathbf{A}$. This problem was studied by Dwork *et al.* [DTTZ14] (see Appendix ?? for their formal problem statement). We

Initialization. Set $\rho_1 = \sqrt{(1+\alpha)\ln(1/\delta)}/\varepsilon$ and $\rho_2 = \sqrt{(1+\alpha)}\rho_1$. Set $\eta = \max\{k, \alpha^{-1}\}$, $t = O(\eta\alpha^{-1}\log(k/\delta))$, $v = O(\eta\alpha^{-2}\log(k/\delta))$ and $\sigma_{\min} = 16\log(1/\delta)\sqrt{t(1+\alpha)(1-\alpha)^{-1}\ln(1/\delta)}/\varepsilon$. Sample $\Omega \sim \mathcal{N}(0, 1/t)^{m \times t}$, and $\Phi \in \mathbb{R}^{(m+n) \times m}$, $\Psi \in \mathbb{R}^{t \times m}$ such that $\Phi^T \sim \mathcal{D}_R$, $\Psi \sim \mathcal{D}_R$ satisfies [Lemma 14](#). Sample $\mathbf{S} \in \mathbb{R}^{v \times m}$, $\mathbf{T} \in \mathbb{R}^{v \times (m+n)}$ such that $\mathbf{S} \sim \mathcal{D}_A$, $\mathbf{T}^T \sim \mathcal{D}_A$ satisfies [Lemma 15](#). Define $\hat{\Phi} = \Phi\Omega$. Sample $\mathbf{N}_1 \sim \mathcal{N}(0, \rho_1^2)^{t \times (m+n)}$ and $\mathbf{N}_2 \sim \mathcal{N}(0, \rho_2^2)^{v \times v}$. Keep $\mathbf{N}_1, \mathbf{N}_2, \hat{\Phi}$ private.

Computing the factorization. On input a matrix $\mathbf{A} \in \mathbb{R}^{m \times n}$,

1. Set $\hat{\mathbf{A}} = (\mathbf{A} \quad \sigma_{\min}\mathbb{I}_m)$ by padding a scaled identity matrix $\sigma_{\min}\mathbb{I}_m$ to the columns of \mathbf{A} , where \mathbb{I}_m denotes an $m \times m$ identity matrix. Compute $\mathbf{Y}_c = \hat{\mathbf{A}}\hat{\Phi}$, $\mathbf{Y}_r = \Psi\hat{\mathbf{A}} + \mathbf{N}_1$, and $\mathbf{Z} = \mathbf{S}\hat{\mathbf{A}}\mathbf{T}^T + \mathbf{N}_2$.
2. Compute a matrix $\mathbf{U} \in \mathbb{R}^{m \times t}$ whose columns are orthonormal basis for the column space of \mathbf{Y}_c and matrix $\mathbf{V} \in \mathbb{R}^{t \times n}$ whose rows are the orthonormal basis for the row space of \mathbf{Y}_r .
3. Compute a SVD of $\mathbf{S}\mathbf{U} := \tilde{\mathbf{U}}_s \tilde{\Sigma}_s \tilde{\mathbf{V}}_s^T \in \mathbb{R}^{v \times t}$ and a SVD of $\mathbf{V}\mathbf{T}^T := \tilde{\mathbf{U}}_t \tilde{\Sigma}_t \tilde{\mathbf{V}}_t^T \in \mathbb{R}^{t \times v}$.
4. Compute a SVD of $\tilde{\mathbf{V}}_s \tilde{\Sigma}_s^\dagger [\tilde{\mathbf{U}}_s^T \mathbf{Z} \tilde{\mathbf{V}}_t]_k \tilde{\Sigma}_t^\dagger \tilde{\mathbf{U}}_t^T$. Let it be $\mathbf{U}'\Sigma'\mathbf{V}'^T$.
5. Output the matrix $\tilde{\mathbf{U}} = \mathbf{U}\mathbf{U}'$ comprising of left singular vectors, diagonal matrix $\tilde{\Sigma} = \Sigma'$, and the matrix $\tilde{\mathbf{V}} = \mathbf{V}^T\mathbf{V}'$ with right-singular vectors.

Figure 2: Space Optimal (ε, δ) -Differentially Private LRF Under Priv_1 (PRIVATE-SPACE-OPTIMAL-LRF)

consider the matrices are updated by inserting one row at a time: all the updates at time $\tau \leq T$ are of the form $\{i_\tau, \mathbf{A}^{(\tau)}\}$, where $1 \leq i_\tau \leq m$, $\mathbf{A}^{(\tau)} \in \mathbb{R}^n$, and $i_\tau \neq i_{\tau'}$ for all $\tau \neq \tau'$. We get the following corollary by using $\mathbf{A}^T\mathbf{A}$ as the input matrix (see [Appendix F](#) for the formal description of the algorithm):

Corollary 4. (*Theorem 49, informal*). *Let \mathbf{A} be an $m \times n$ matrix updated by inserting one row at a time such that every row has a bounded norm 1 and $m > n$. Then there is an (ε, δ) -differentially private algorithm under Priv_2 that uses $\tilde{O}(nk\alpha^{-2})$ space, and outputs a rank- k matrix \mathbf{B} such that with probability at least $9/10$, $\|\mathbf{A}^T\mathbf{A} - \mathbf{B}\|_F \leq (1+\alpha)\|\mathbf{A}^T\mathbf{A} - [\mathbf{A}^T\mathbf{A}]_k\|_F + \tilde{O}\left(\sqrt{nk}/(\alpha\varepsilon)\right)$.*

We do not violate the lower bound of Dwork *et al.* [\[DTTZ14\]](#) because their lower bound is valid when $\alpha = 0$, which is not possible for low space algorithms due to [Theorem 3](#). Dwork *et al.* [\[DTTZ14\]](#) bypassed their lower bounds under a stronger assumption known as *singular value separation*: the difference between k -th singular value and all k' -th singular values for $k' > k$ is at least $\omega(\sqrt{n})$. In other words, our result shows that we do not need singular value separation while using significantly less space— $\tilde{O}(nk/\alpha^2)$ as compared to $O(n^2)$ —if we are ready to pay for a small multiplicative error (this also happens for both the problems studied by Blocki *et al.* [\[BBDS12\]](#) though the authors do not mention it explicitly). There are scenarios where our algorithm perform better, such as when $\|\mathbf{A}^T\mathbf{A} - [\mathbf{A}^T\mathbf{A}]_k\|_F = O(\sqrt{kn})$ with small singular value separation. For example, a class of rank- ck matrices (for $c \geq 2$) with singular values $\sigma_1, \dots, \sigma_{ck}$, such that $\sigma_k^2 = \sigma_{k'}^2 + O(\sqrt{n/k})$ for $k \leq k' \leq ck$, does not satisfy singular value separation. Moreover, $\|\mathbf{A}^T\mathbf{A} - [\mathbf{A}^T\mathbf{A}]_k\|_F = O(\sqrt{kn})$ and $\|\mathbf{A}^T\mathbf{A}\|_F = O(\sqrt{m})$. In this case, we have $\|\mathbf{A}^T\mathbf{A} - \mathbf{B}\|_F \leq O((\alpha\varepsilon)^{-1}\sqrt{kn})$. On the other hand, Dwork *et al.* [\[DTTZ14\]](#) guarantees $\|\mathbf{A}^T\mathbf{A} - \mathbf{B}\|_F \leq O(\varepsilon^{-1}k\sqrt{n})$. That is, we improve on Dwork *et al.* [\[DTTZ14\]](#) when $\alpha = \Theta(1)$ for a large class of matrices. Some examples include the matrices considered in the literature of matrix completion (see [\[MW17\]](#) for details).

2 A Meta Low Space Differentially Private Algorithm Under Priv_1

Our aim in this section is to present a unified algorithmic approach in the form of meta algorithm (see, [Figure 2](#)) for all the settings mentioned in the introduction. This restricts a lot in terms of algorithmic design especially when privacy is the main focus. For example, since one of our goals is private algorithms under

turnstile update model, we are restricted to only use linear sketches due to the result of Li *et al.* [LNW14].

Even though we are restricted by what approach we can take, we show that advance yet inexpensive post-processing combined with careful analysis can lead to a unified algorithmic approach for outputting LRF with significantly small error in all the settings mentioned earlier in the introduction. In particular, we make three key observations: (i) there is a way to maintain differentially private sketches of \mathbf{A} (henceforth, we call such sketches *noisy sketches*) that give sub-optimal additive error, (ii) one can apply post-processing to these noisy sketches to obtain optimal additive error, and (iii) even though we can only use linear sketches when matrices are updated arbitrarily, we can judiciously exploit the properties of these sketches in our analysis to get tight bounds on the additive error for all the settings considered in this paper.

To illustrate point (i) and why we need post-processing, consider the following vanilla algorithm, which is reminiscent of Dwork *et al.* [DTTZ14], for approximating the right singular vector: compute $\mathbf{B} = \Phi \mathbf{A} + \mathbf{N}_1$, where Φ satisfies [MM13, Theorem 1] and $\mathbf{N}_1 \sim \mathcal{N}(0, \rho_1^2)^{\tilde{O}(n^2) \times n}$ for ρ_1 as defined in Figure 2. The output is $[\mathbf{B}]_k$, the best rank k approximation of \mathbf{B} . This already gives a good approximation. Let $m \gg n^2$ and let $[\tilde{\mathbf{U}}]_k [\tilde{\Sigma}]_k [\tilde{\mathbf{V}}]_k^T$ be the singular value decomposition of $[\mathbf{B}]_k$. Then by [MM13, Theorem 1],

$$\begin{aligned} \|\mathbf{A} - \mathbf{A}[\tilde{\mathbf{V}}]_k [\tilde{\mathbf{V}}]_k^T\|_F &\leq \|(\mathbf{A} + \Phi^\dagger \mathbf{N}_1) - (\mathbf{A} + \Phi^\dagger \mathbf{N}_1)[\tilde{\mathbf{V}}]_k [\tilde{\mathbf{V}}]_k^T\|_F + \|\Phi^\dagger \mathbf{N}_1 + \Phi^\dagger \mathbf{N}_1 [\tilde{\mathbf{V}}]_k [\tilde{\mathbf{V}}]_k^T\|_F \\ &\leq (1 - \alpha)^{-1} \|\mathbf{B}(\mathbb{I} - [\tilde{\mathbf{V}}]_k [\tilde{\mathbf{V}}]_k^T)\|_F + O(\|\Phi^\dagger \mathbf{N}_1 + \Phi^\dagger \mathbf{N}_1 [\tilde{\mathbf{V}}]_k [\tilde{\mathbf{V}}]_k^T\|_F) \\ &= (1 - \alpha)^{-1} \|\mathbf{B} - [\mathbf{B}]_k\|_F + O(\|\Phi^\dagger \mathbf{N}_1 + \Phi^\dagger \mathbf{N}_1 [\tilde{\mathbf{V}}]_k [\tilde{\mathbf{V}}]_k^T\|_F) \\ &\leq (1 - \alpha) \|\mathbf{B}(\mathbb{I} - [\mathbf{V}]_k [\mathbf{V}]_k^T)\|_F + O(\|\Phi^\dagger \mathbf{N}_1 + \Phi^\dagger \mathbf{N}_1 [\tilde{\mathbf{V}}]_k [\tilde{\mathbf{V}}]_k^T\|_F) \\ &\leq (1 + \alpha) (1 - \alpha)^{-1} \Delta_k + O(\|\Phi^\dagger \mathbf{N}_1\|_F + \|\Phi^\dagger \mathbf{N}_1 [\tilde{\mathbf{V}}]_k [\tilde{\mathbf{V}}]_k^T\|_F). \end{aligned}$$

The term in $O(\cdot)$ can be bounded using the projection property of Φ to get a sub-optimal additive error. The question is whether we can further improve it to get optimal additive error. We show that with careful algorithmic design and analysis as pointed out in point (ii) above, we can indeed achieve optimal additive error. That is, we can extract top- k singular components of the input matrix \mathbf{A} from sketches that are appropriately perturbed to preserve differential privacy. The underlying idea is as follows: suppose we know the singular value decomposition of $[\mathbf{A}]_k := [\mathbf{U}]_k [\Sigma]_k [\mathbf{V}]_k^T$, where $[\mathbf{A}]_k$ is a best rank- k approximation to \mathbf{A} [EY36]. Then for finding a matrix \mathbf{B} such that $\mathbf{B} \approx \mathbf{A}$, it suffices to compute $\tilde{\mathbf{U}}$ that approximates $[\mathbf{U}]_k$, $\tilde{\Sigma}$ that approximates $[\Sigma]_k$, and $\tilde{\mathbf{V}}$ that approximates $[\mathbf{V}]_k$, and set $\mathbf{B} := \tilde{\mathbf{U}} \tilde{\Sigma} \tilde{\mathbf{V}}^T$. However, this oversimplified overview does not guarantee privacy. The question next is which privacy preserving technique one should use to ensure small additive error (and if possible, optimal additive error).

The two traditional methods to preserve privacy—input perturbation and output perturbation—do not provide both privacy and small additive error. For example, if we use output perturbation to compute the sketches $\mathbf{Y}_c = \mathbf{A}\Phi + \mathbf{N}$ and $\mathbf{Y}_r = \Psi\mathbf{A} + \mathbf{N}'$ for appropriate sketching matrices Φ and Ψ and noise matrices \mathbf{N} and \mathbf{N}' , then we get an additive error term that can be arbitrarily large (more specifically, depends on the Frobenius norm of \mathbf{A} and has the form $\|\mathbf{N}\mathcal{L}_\mathbf{A}\mathbf{N}'\|_F$ for some linear function $\mathcal{L}_\mathbf{A}$ of \mathbf{A}). On the other hand, input perturbation of the linear sketches $\mathbf{Y}_r = \Psi\mathbf{A}$ and $\mathbf{Y}_c = \mathbf{A}\Phi$ followed by a multiplication by Gaussian matrices Ω_1 and Ω_2 as in [BBDS12, Upa14a, Upa14b] can leak private data due to a subtle reason. Every row of $\Omega_1 \mathbf{Y}_c$ (and columns of $\mathbf{Y}_r \Omega_2$) has a multivariate Gaussian distribution if the determinant of $\mathbf{Y}_c^T \mathbf{Y}_c$ ($\mathbf{Y}_r \mathbf{Y}_r^T$, respectively) is non zero. If $m < n$, one can prove that computing $\mathbf{Y}_c \Omega_1$ preserves privacy, but, since, \mathbf{Y}_r is not a full-column rank matrix, the multivariate Gaussian distribution is not defined. The trick to consider the subspace orthogonal to the kernel space of \mathbf{Y}_r [BBDS12] does not work because span of $\Psi\mathbf{A}$ and $\Psi\mathbf{A}'$ may not coincide for neighboring matrices \mathbf{A} and \mathbf{A}' . If the span do not coincide, then one can easily differentiate the two cases with high probability, violating differential privacy. In fact, until this work, it was not even clear whether using input perturbation yields low rank approximation (see the comment after Theorem IV.2 and discussion in Section V in Blocki *et al.* [BBDS12]).

All of this presents a pessimistic picture. However, we show that we incur optimal additive error and preserve privacy if we use input perturbation with a careful choice of parameter to one of the sketches (depending on whether $m \leq n$ or not) and output perturbation to the other two sketches. The intuitive reason why this incurs small additive error is the fact that only one of the sketches, \mathbf{Y}_r or \mathbf{Y}_c , undergoes output perturbation, so there is no term like $\|\mathbf{N}\mathcal{L}_A\mathbf{N}'\|_F$ as above. While helpful to the intuition, this does not directly yield optimal additive error. This is because, even if we do not get an additive error term with large value like $\|\mathbf{N}\mathcal{L}_A\mathbf{N}'\|_F$, if not analyzed precisely, one can either get a non-analytic expression for the error terms or one that is difficult to analyze. To get analytic expressions for all the error terms that are also easier to analyze, we introduce two carefully chosen optimization problems (see [equation \(3\)](#) below). We carefully tune our analysis so that the intermediate terms satisfy certain properties (see the proof sketch below for exact requirements). This allows us to show that \mathbf{Y}_c and \mathbf{Y}_r (or equivalently, their orthonormal bases \mathbf{U} and \mathbf{V}), as formed in [Figure 2](#), approximates the span of $[\mathbf{U}]_k$ and $[\mathbf{V}]_k$ up to a small additive error.

Once we have extracted a “good enough” \mathbf{U} and \mathbf{V} , our problem reduces to computing $\operatorname{argmin}_{\operatorname{rk}(\mathbf{X}) \leq k} \|\mathbf{A} - \mathbf{UXV}\|_F$. This would require storing the whole matrix \mathbf{A} , something that we wish to avoid. To avoid storing the whole \mathbf{A} , we use the fact that \mathbf{S} and \mathbf{T} are sampled from a distribution of random matrices with a property that, for all appropriate \mathbf{X} , $\|\mathbf{A} - \mathbf{UXV}\|_F \approx \|\mathbf{S}(\mathbf{A} - \mathbf{UXV})\mathbf{T}^\top\|_F$. In other words, without privacy, $\operatorname{argmin}_{\operatorname{rk}(\mathbf{X}) \leq k} \|\mathbf{S}(\mathbf{A} - \mathbf{UXV})\mathbf{T}^\top\|_F$ can be used to get a “good” approximation of $[\Sigma]_k$.

The exact method to perform and analyze the approximation of $[\Sigma]_k$ is slightly more involved because we only have access to the noisy version of \mathbf{SAT} . We show that careful post processing allows one to output an approximation to Σ_k under a rotation and a small additive error. Finally, we arrive at the following result stated for the case when $m \leq n$. The result when $m > n$ can be derived by just swapping m and n in the theorem below.

Theorem 5. *Let $m, n, k \in \mathbb{N}$ and $\alpha, \varepsilon, \delta$ be the input parameters (with $m \leq n$). Let $\kappa = (1 + \alpha)/(1 - \alpha)$, $\eta = \max\{k, \alpha^{-1}\}$, and $\sigma_{\min} = 16 \log(1/\delta) \sqrt{tk \ln(1/\delta)}/\varepsilon$. Given an $m \times n$ matrix \mathbf{A} , PRIVATE-SPACE-OPTIMAL-LRF, described in [Figure 2](#), outputs a factorization $\tilde{\mathbf{U}}, \tilde{\Sigma}, \tilde{\mathbf{V}}$ such that*

1. PRIVATE-SPACE-OPTIMAL-LRF is $(3\varepsilon, 3\delta)$ differentially private under Priv_1 .
2. With probability $9/10$ over the random coins of PRIVATE-SPACE-OPTIMAL-LRF,

$$\|(\mathbf{A} \ \mathbf{0}) - \tilde{\mathbf{U}}\tilde{\Sigma}\tilde{\mathbf{V}}^\top\|_F \leq (1 + \alpha)\Delta_k + O(\sigma_{\min}\sqrt{m} + \varepsilon^{-1}\sqrt{kn \ln(1/\delta)}), \text{ where } \mathbf{M}_k = \tilde{\mathbf{U}}\tilde{\Sigma}\tilde{\mathbf{V}}^\top.$$

3. The space used by PRIVATE-SPACE-OPTIMAL-LRF is $O((m + n)\eta\alpha^{-1} \log(k/\delta))$.
4. The total computational time is $O(\operatorname{nn}(\mathbf{A}) \log(1/\delta) + (m^2 + n\eta)\eta\alpha^{-2} \log^2(k/\delta) + \eta^3\alpha^{-5} \log^3(k/\delta))$.

Here $(\mathbf{A} \ \mathbf{0})$ is the matrix formed by appending an all zero $m \times m$ matrix to the columns of \mathbf{A} .

Proof Sketch. The proof of [Theorem 5](#) is presented in [Appendix D.1](#). Here, we give a brief sketch of [part 2](#) (for $m \leq n$) to illustrate the key points that helps us in the discussion of other results in this paper. Let $\hat{\mathbf{A}}$ be as defined in [Figure 2](#). [Part 2](#) follows from the following chain of inequalities and bounding $\|\hat{\mathbf{A}}\Phi\mathcal{L}_A\mathbf{N}_1\|_F$:

$$\begin{aligned} \|\mathbf{M}_k - (\mathbf{A} \ \mathbf{0})\|_F &\leq \|\mathbf{M}_k - \hat{\mathbf{A}}\|_F + O(\sigma_{\min}\sqrt{m}) \\ &\leq (1 + \alpha)\|\hat{\mathbf{A}} - [\hat{\mathbf{A}}]_k\|_F + \|\hat{\mathbf{A}}\Phi\mathcal{L}_A\mathbf{N}_1\|_F + O(\sigma_{\min}\sqrt{m}) \\ &\leq (1 + \alpha)\|\mathbf{A} - [\mathbf{A}]_k\|_F + \|\hat{\mathbf{A}}\Phi\mathcal{L}_A\mathbf{N}_1\|_F + O(\sigma_{\min}\sqrt{m}), \end{aligned} \quad (1)$$

where the matrix \mathcal{L}_A satisfies the following properties: (a) $\|\hat{\mathbf{A}}\Phi\mathcal{L}_A\Psi\hat{\mathbf{A}} - \hat{\mathbf{A}}\|_F \leq (1 + \alpha)\|\hat{\mathbf{A}} - [\hat{\mathbf{A}}]_k\|_F$, (b) \mathcal{L}_A has rank at most k , and (c) $\Psi\mathbf{A}\Phi\mathcal{L}_A$ is a rank- k projection matrix. We use subadditivity of norm to prove the first inequality and Weyl’s perturbation theorem ([Theorem 25](#)) to prove the third inequality.

Proving the second inequality is the technically involved part. For this, we need to find a candidate \mathcal{L}_A . Let suppose we have such a candidate \mathcal{L}_A with all the three properties. Then we can show that

$$\begin{aligned} \min_{\text{rk}(\mathbf{X}) \leq k} \|\mathbf{UXV} - \mathbf{B}\|_F &\leq \|\widehat{\mathbf{A}}\Phi\mathcal{L}_A\Psi\widehat{\mathbf{A}} - \widehat{\mathbf{A}}\|_F + \|\widehat{\mathbf{A}}\Phi\mathcal{L}_A\mathbf{N}_1\|_F + \|\mathbf{S}^\dagger\mathbf{N}_1(\mathbf{T}^\dagger)^\top\|_F \\ &\leq (1 + \alpha)\|\widehat{\mathbf{A}} - [\widehat{\mathbf{A}}]_k\|_F + \|\widehat{\mathbf{A}}\Phi\mathcal{L}_A\mathbf{N}_1\|_F + \|\mathbf{S}^\dagger\mathbf{N}_2(\mathbf{T}^\dagger)^\dagger\|_F, \end{aligned} \quad (2)$$

where $\mathbf{B} = \mathbf{A} + \mathbf{S}^\dagger\mathbf{N}_1(\mathbf{T}^\dagger)^\top$. The first inequality follows from the subadditivity of Frobenius norm, the fact that \mathbf{U} and \mathbf{V} are orthonormal bases of \mathbf{Y}_c and \mathbf{Y}_r , and property (b) to exploit that minimum on the left hand side is over rank- k matrices. We then use the approximation guarantee of property (a) to get the second inequality. Using [Lemma 28](#) and the fact that \mathbf{S} and \mathbf{T} satisfies [Lemma 15](#), we can lower bound the left hand side of [equation \(2\)](#) up to an additive term as follows:

$$\|(\mathbf{A} \ \mathbf{0}) - \widetilde{\mathbf{U}}\widetilde{\Sigma}\widetilde{\mathbf{V}}^\top\|_F - \|\mathbf{S}^\dagger\mathbf{N}_2(\mathbf{T}^\dagger)^\dagger\|_F \leq (1 + \alpha)^3 \min_{\text{rk}(\mathbf{X}) \leq k} \|\mathbf{UXV} - \mathbf{B}\|_F,$$

where $\widetilde{\mathbf{U}}$, $\widetilde{\Sigma}$, and $\widetilde{\mathbf{V}}$ are as in [Figure 2](#). We upper bound the right hand side of [equation \(2\)](#) by using Markov's inequality combined with the fact that both \mathbf{S} and \mathbf{T} satisfy [Lemma 15](#) and \mathcal{L}_A satisfies property (c). Scaling the value of α by a constant gives [part 2](#). So all that remains is to find a candidate matrix \mathcal{L}_A . To get such an \mathcal{L}_A , we construct and solve the following two closely related optimization problems:

$$\text{Prob}_1 : \min_{\mathbf{X}} \|\Psi(\widehat{\mathbf{A}}\Phi([\widehat{\mathbf{A}}]_k\Phi)^\dagger\mathbf{X} - \widehat{\mathbf{A}})\|_F \quad \text{and} \quad \text{Prob}_2 : \min_{\mathbf{X}} \|\widehat{\mathbf{A}}\Phi([\widehat{\mathbf{A}}]_k\Phi)^\dagger\mathbf{X} - \widehat{\mathbf{A}}\|_F. \quad (3)$$

We prove that a solution to Prob_1 gives us a candidate \mathcal{L}_A . This completes the proof. \square

Adapting to Continual Release Model. Until now, we gave algorithms that produce the output only at the end of the stream. There is a related model called (ε, δ) -differential privacy under T -continual release [[DNPR10](#)]. In this model, the server receives a stream of length T and produces an output after every update, such that every output is (ε, δ) -differentially private. Our meta algorithm can be easily modified to work in this model while incurring an extra $\log T$ factor. We utilize the fact that we only store noisy linear sketches of the private matrix during the updates and low-rank factorization is computed through post-processing on only the noisy sketches. So, we can use the generic transformation [[CSS12](#), [DNPR10](#)] to maintain the sketch form of the updates. A factorization for any range of time can be then done by aggregating all the sketches for the specified range using range queries. This gives the *first instance* of algorithm that provides differentially private continual release of LRF. We show the following.

Corollary 6. (*Theorem 51, informal*) *Let \mathbf{A} be an $m \times n$ private matrix with $m \leq n$ streamed over T time epochs. Then there is an (ε, δ) -differentially private algorithm under Priv_1 that outputs a rank- k factorization under the continual release for T time epochs such that $\gamma = \widetilde{O}(\varepsilon^{-1}(\sqrt{mk\alpha^{-1}} + \sqrt{kn}) \log T)$ with probability $9/10$.*

From Priv_1 to Priv_2 . If we try to use the idea described above to prove differential privacy under Priv_2 , we end up with an additive error that depends linearly on $\min\{m, n\}$. This is because we need to perturb the input matrix by a noise proportional to $\min\{\sqrt{km}, \sqrt{kn}\}$ to preserve differential privacy under Priv_2 . We show that by maintaining noisy sketches $\mathbf{Y} = \mathbf{A}\Phi + \mathbf{N}_1$ and $\mathbf{Z} = \mathbf{S}\mathbf{A} + \mathbf{N}_2$ for appropriately chosen noise matrices \mathbf{N}_1 and \mathbf{N}_2 and sketching matrices Φ and \mathbf{S} , followed by some post processing, we can have an optimal error differentially private algorithm under Priv_2 . Here, we require \mathbf{S} to satisfy the same property as in the case of Priv_1 . However, the lack of symmetry between \mathbf{S} and Φ requires us to decouple the effects of noise matrices to get a tight bound on the additive error.

3 Local Differentially Private Algorithm

Till now, we have considered a single server that receives the private matrix in a streamed manner. We next consider a stronger variant of differential privacy known as *local differential privacy* (LDP) [DJW13, DMNS06, EGS03, War65]. In the *local* model, each individual applies a differentially private algorithm locally to their data and shares only the output of the algorithm—called a report—with a server that aggregates users’ reports. A multi-player protocol is (ϵ, δ) -LDP if for all possible inputs and runs of the protocol, the transcript of player i ’s interactions with the server is (ϵ, δ) -LDP.

One can study two variants of local differential privacy depending on whether the server and the users interact more than once or not (see Figure 3). In the interactive variant, the server sends several messages, each to a subset of users. In the noninteractive variant, the server sends a single message to all the users at the start of the protocol and sends no message after that. Smith, Thakurta, and Upadhyay [STU17] argued that noninteractive locally private algorithms are ideal for implementation.

The natural extension of Problem 1 in the local model is when the matrix is distributed among the users such that every user has one

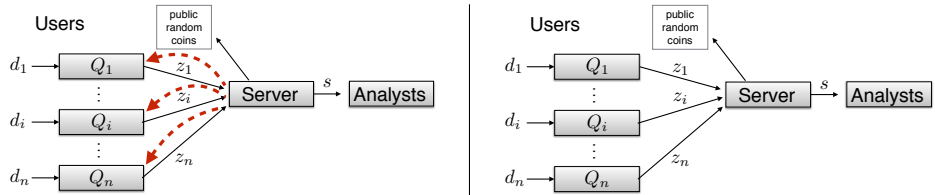


Figure 3: LDP with (left) and without (right) interaction.

row of the matrix and users are responsible for the privacy of their row vector. Unfortunately, known private algorithms (including the results presented till now) do not yield non trivial additive error in the local model. For example, if we convert Theorem 2 to the local model, we end up with an additive error $\tilde{O}(\sqrt{kmn})$. This is worse than the trivial bound of $O(\sqrt{mn})$, for example, when $\mathbf{A} \in \{0, 1\}^{m \times n}$, a trivial output of all zero matrix incurs an error at most $O(\sqrt{mn})$. In fact, existing lower bounds in the local model suggests that one is likely to incur an error which is $O(\sqrt{m})$ factor worse than in the central model, where m is the number of users. However, owing to the result of Dwork *et al.* [DTTZ14], we can hope to achieve non-trivial result for differentially private principal component analysis (see, Definition 10) leading us to ask

Question 3. Is there a locally private algorithm for low rank principal component analysis?

This problem has been studied without privacy under the *row-partition model* [BCL05, LBK14, LBR08, BWZ16, GSS17, PMVdG⁺13, QOSG02, TD99]). Even though there is a rich literature on local differentially private algorithms [AHP09, BS15, DJW13, EPK14, EGS03, HKR12, KLN⁺11, MS06, War65], the known approaches to convert existing (private or distributed non-private) algorithms to locally private algorithms either leads to a large additive error or require interaction. We exploit the fact that our meta algorithm only stores differentially private sketches of the input matrix to give a noninteractive algorithm for low-rank principal component analysis (PCA) under local differential privacy.

Theorem 7. (*Theorem 57, informal*). *Let \mathbf{A} be an $m \times n$ matrix (where $m > n$) such that every user holds one row of \mathbf{A} . Then there is a noninteractive (ϵ, δ) -LDP under Priv_2 that outputs a rank- k orthonormal matrix \mathbf{U} such that $\|\mathbf{A} - \mathbf{U}\mathbf{U}^\top \mathbf{A}\|_F \leq (1 + \alpha)\Delta_k + O(k\alpha^{-2}\epsilon^{-1}\sqrt{m} \log(k/\delta)\sqrt{\log(1/\delta)})$ with probability at least $9/10$. Moreover, every user sends $\tilde{O}(k^2\alpha^{-4} \log^2(k/\delta))$ bits of communication.*

The above theorem gives the first instance of non-interactive algorithm that computes low-rank principal component analysis in the model of local differential privacy. The best known lower bound on additive error for differentially private PCA is by Dwork *et al.* [DTTZ14] in the central model in the static data setting. Their lower bound on the additive error is $\tilde{\Omega}(k\sqrt{n})$ for squared Frobenius norm and has no multiplicative error. An interesting question from our result is to investigate how close or far we are from optimal error.

Roadmap to Appendices. All our proofs and algorithms are in appendices. We prove [Theorem 5](#) in [Appendix D](#), and, also provide and analyze a space efficient algorithm under Priv_2 . [Appendix E](#) covers the differentially private LRF in the turnstile update model under both Priv_1 and Priv_2 answering Question 1. We extend these algorithms to continual release model in [Appendix G](#). [Appendix H](#) gives the space lower bound when $\gamma \neq 0$ answering Question 2 and discussed in [Section 1.1.2](#). [Appendix I](#) gives noninteractive local differentially private LRF algorithm under Priv_2 answering Question 3 and discussed in [Section 3](#). [Appendix J](#) gives the empirical evaluation of our results.

Acknowledgement. The author wishes to thank Adam Smith for many useful discussions. Even though he declined to be coauthor in this paper, this paper would have not existed without his insightful inputs.

Contents

1	Introduction	1
1.1	Differentially Private Low-Rank Factorization When Matrices are Streamed	2
1.1.1	Comparison With Previous Works	3
1.1.2	Optimality of Our Results	4
1.1.3	Some Discussion on Privacy Guarantees, Assumptions, and Relaxation	5
2	A Meta Low Space Differentially Private Algorithm Under Priv_1	6
3	Local Differentially Private Algorithm	10
A	Related Work	15
B	Notations and Preliminaries	15
B.1	Definitons	16
B.2	Linear Algebra	17
B.3	Gaussian Distribution	18
C	Basic Results Used in This Paper	18
C.1	Random Projections.	18
C.2	Differential privacy	19
C.2.1	Robustness of Differential Privacy	19
C.2.2	Composition	20
C.3	Properties of Gaussian distribution.	20
C.4	Properties of pseudo-inverse of a matrix.	21
C.5	Linear Algebraic Results Used in This Paper	21
D	Low Space Differentially private Low-rank Factorization	23
D.1	Low Space Differentially Private Low-rank Factorization Under Priv_1	24
D.1.1	Correctness Proof of PRIVATE-SPACE-OPTIMAL-LRF	24
D.1.2	Privacy Proof of PRIVATE-SPACE-OPTIMAL-LRF	28
D.2	Low Space Differentially private Low-rank Factorization Under Priv_2	30
D.2.1	Privacy Proof of PRIVATE-FROBENIUS-LRF	32
D.2.2	Correctness Proof of PRIVATE-FROBENIUS-LRF	32
E	Differentially private LRF Under General Turnstile Model	34
E.1	Space Optimal Differentially private Low-rank Factorization Under Priv_1	34
E.2	Differentially private Low-rank Factorization Under Priv_2 in Turnstile Update Model	36
F	Case Study: Normalized Row Matrices	37
G	Case Study 2: Low-rank factorization Under Continual Release Model	38
G.1	Differentially Private Continual Release Low Rank Factorization Under Priv_2	38
G.2	Differentially Private Continual Release Low Rank Factorization Under Priv_1	40
H	Space Lower Bound for Low-rank Factorization When $\gamma \neq 0$	40
I	Noninteractive Local Differentially Private PCA	44

J	Empirical Evaluation of Our Algorithms	47
J.1	Empirical Evaluation of PRIVATE-OPTIMAL-SPACE-LRF	47
J.1.1	Empirical Evaluation of Additive Error for various dimension	49
J.1.2	Empirical Evaluation of Additive Error for various values of α	50
J.1.3	Empirical Evaluation of Additive Error for various values of k	50
J.2	Empirical Evaluation of PRIVATE-LOCAL-LRF	51
J.2.1	Empirical Evaluation of Additive Error for Various Dimension	51
J.2.2	Empirical Evaluation of Additive Error for various values of α	52
J.2.3	Empirical Evaluation of Additive Error for various values of k	53
J.3	Empirical Evaluation of OPTIMAL-SPACE-LRF	54
K	Analysis of Boutsidis <i>et al.</i> Under Noisy Storage	54
L	Source Codes for Our Experiments	58
L.1	Source Code for OPTIMAL-SPACE-LRF	58
L.2	Source Code for Comparing Private Algorithms	59
L.3	Source Code for Analyzing Additive Error for OPTIMAL-SPACE-PRIVATE-LRF	62
L.4	Source Code for PRIVATE-LOCAL-LRF	64
L.5	Source Code for Analyzing Additive Error for PRIVATE-LOCAL-LRF	66
	References	69

List of Figures

1	The central model (left) and the turnstile model (right).	2
2	Space Optimal (ε, δ) -Differentially Private LRF Under Priv_1 (PRIVATE-SPACE-OPTIMAL-LRF)	6
3	LDP with (left) and without (right) interaction.	10
4	Differentially private LRF Under Priv_2	31
5	Differentially private LRF Under Priv_1 in Turnstile Update Model	35
6	Differentially private LRF Under Priv_2 in Turnstile Update Model	36
7	Differentially private Covariance Approximation Under Priv_2 in Row-wise Update Model	38
8	Differentially private Low-rank Factorization Under Continual Release	39
9	Non-interactive Local Differentially private LRF Under Priv_1	45

List of Tables

1	Our Results for $(\varepsilon, \Theta(n^{-c}))$ -Differentially Private Algorithms When $k > 1/\alpha, c \geq 2$, stream length T	2
2	Comparison of Private k -Rank Approximation ($\ \mathbf{u}\ _2, \ \mathbf{v}\ _2 = 1, \mathbf{e}_s$ is a standard basis, $k \leq 1/\alpha$).	4
3	Empirical Comparison Between PRIVATE-OPTIMAL-SPACE-LRF and Hardt and Roth [HR12].	48
4	Empirical Comparison of Additive Error of PRIVATE-OPTIMAL-SPACE-LRF and Hardt and Roth [HR12].	49
5	Empirical Comparison of Additive Error of PRIVATE-OPTIMAL-SPACE-LRF for various values of α with Hardt and Roth [HR12].	51
6	Empirical Comparison of Additive Error of PRIVATE-OPTIMAL-SPACE-LRF and Hardt and Roth [HR12] for various values of k	52
7	Empirical Evaluation of PRIVATE-LOCAL-LRF.	53
8	Empirical Evaluation of Additive Error of PRIVATE-LOCAL-LRF for varying values of dimensions.	54
9	Empirical Evaluation of Additive Error of PRIVATE-LOCAL-LRF for various values of α	55
10	Empirical Evaluation of Additive Error of PRIVATE-LOCAL-LRF for various values of k	56
11	Empirical Evaluation of OPTIMAL-SPACE-LRF.	57

A Related Work

Low-rank approximation (LRA), where the goal is to output a matrix \mathbf{B} such that $\|\mathbf{A} - \mathbf{B}\|_F$ is close to the optimal LRA, of large data-matrices has received a lot of attention in the recent past in the private as well as the non-private setting. In what follows, we give a brief exposition of works most relevant to this work.

In the non-private setting, previous works have either used random projection or random sampling (at a cost of a small additive error) to give low-rank approximation [AM07, CW09, DKM06a, DM05, DRVW06, FKV04, KN14, PTRV98b, RV07, Sar06]. Subsequent works [CMM17, CW13, CW17, DV06, MZ11, MM13, NDT09, Sar06] achieved a run-time that depends linearly on the input sparsity of the matrix. In a series of works, Clarkson and Woodruff [CW09, CW13] showed space lower bounds and almost matching space algorithms. Recently, Boutsidis *et al.* [BWZ16] gave the first space-optimal algorithm for low-rank approximation under turnstile update mode, but they do not optimize for run-time. A optimal space algorithm was recently proposed by Yurtsever *et al.* [YUTC17]. Distributed PCA algorithms in the row partition model and arbitrary partition model has been long studied [BCL05, LBKW14, LBRB08, BWZ16, GSS17, PMVdG⁺13, QOSG02, TD99].

In the private setting, low-rank approximation LRA has been studied under a privacy guarantee called differential privacy. Differential privacy was introduced by Dwork *et al.* [DMNS06]. Since then, many algorithms for preserving differential privacy have been proposed in the literature [DR14]. All these mechanisms have a common theme: they perturb the output before responding to queries. Recently, Blocki *et al.* [BBDS12] and Upadhyay [Upa13] took a complementary approach. They perturb the input reversibly and then perform a random projection of the perturbed matrix.

Blum *et al.* [BDMN05] first studied the problem of differentially private LRA in the Frobenius norm. This was improved by Hardt and Roth [HR12] under the low coherence assumption. Upadhyay [Upa14a] later made it a single-pass. Differentially private LRA has been studied in the spectral norm as well by many works [CSS12, KT13, HR13, HP14]. Kapralov and Talwar [KT13] and Chaudhary *et al.* [CSS12] studied the spectral LRA of a matrix by giving a matching upper and lower bounds for privately computing the top k eigenvectors of a matrix with pure differential privacy (i.e., $\delta = 0$). In subsequent works Hardt and Roth [HR13] and Hardt and Price [HP14] improved the approximation guarantee with respect to the spectral norm by using *robust private subspace iteration* algorithm. Recently, Dwork *et al.* [DTTZ14] gave a tighter analysis of Blum *et al.* [BDMN05] to give an optimal approximation to the right singular space, i.e., they gave a LRA for the covariance matrix. Dwork *et al.* [DNPR10] first considered streaming algorithms with privacy under the model of *pan-privacy*, where the internal state is known to the adversary. They gave private analogues of known sampling based streaming algorithms to answer various counting tasks. This was followed by results on online private learning [DTTZ14, JKT12, TS13].

B Notations and Preliminaries

We give a brief exposition of notations and linear algebra to the level required to understand this paper. We refer the readers to standard textbook on this topic for more details [Bha13]. We let \mathbb{N} to denote the set of natural numbers and \mathbb{R} to denote the set of real numbers. For a real number $x \in \mathbb{R}$, we denote by $|x|$ the absolute value of x . We use boldface lowercase letters to denote vectors, for example, \mathbf{x} , and $\mathbf{x}_1, \dots, \mathbf{x}_n$ to denote the entries of \mathbf{x} , and bold-face capital letters to denote matrices, for example, \mathbf{A} . For two vectors \mathbf{x} and \mathbf{y} , we denote by $\langle \mathbf{x}, \mathbf{y} \rangle = \sum_i \mathbf{x}_i \mathbf{y}_i$ the inner product of \mathbf{x} and \mathbf{y} . We let $\mathbf{e}_1, \dots, \mathbf{e}_n$ denote the standard basis vectors in \mathbb{R}^n , i.e., \mathbf{e}_i has entries 0 everywhere except for the position i where the entry is 1. We denote by $(\mathbf{A} \ \mathbf{b})$ the matrix formed by appending the matrix \mathbf{A} with the vector \mathbf{b} . We use the notation \mathbb{I}_n to denote the identity matrix of order n and $\mathbf{0}^{m \times n}$ the all-zero $m \times n$ matrix. Where it is clear from the context, we drop the subscript.

For a $m \times n$ matrix \mathbf{A} , we denote by \mathbf{A}_{ij} the (i, j) -th entry of \mathbf{A} . We denote by $\text{vec}(\mathbf{A})$ the vector of length mn formed by the entries of the matrix \mathbf{A} , i.e., for an $m \times n$ matrix \mathbf{A} , the $((i-1)n + j)$ -th entry of $\text{vec}(\mathbf{A})$ is \mathbf{A}_{ij} , where $1 \leq i \leq m, 1 \leq j \leq n$. The *transpose* of a matrix \mathbf{A} is a matrix \mathbf{B} such that $\mathbf{B}_{ij} = \mathbf{A}_{ji}$. We use the notation \mathbf{A}^\top to denote the transpose of a matrix \mathbf{A} . For a matrix \mathbf{A} , we denote the best k -rank approximation of \mathbf{A} by $[\mathbf{A}]_k$ and its Frobenius norm by $\|\mathbf{A}\|_F$. For a matrix \mathbf{A} , we use the symbol $r(\mathbf{A})$ to denote its *rank* and $\det(\mathbf{A})$ to denote its *determinant*. A matrix \mathbf{A} is a *non-singular matrix* if $\det(\mathbf{A}) \neq 0$.

B.1 Definitons

Definition 8. (*Differentially Private Low Rank Factorizataion in the General Turnstile Update Model*). Let the private matrix $\mathbf{A} \in \mathbb{R}^{m \times n}$ initially be all zeroes. At every time epoch, the curator receives an update in the form of the tuple $\{i, j, \Delta\}$, where $1 \leq i \leq m, 1 \leq j \leq n$, and $\Delta \in \mathbb{R}$ —each update results in a change in the (i, j) -th entry of the matrix \mathbf{A} as follows: $\mathbf{A}_{i,j} \leftarrow \mathbf{A}_{i,j} + \Delta$. Given parameters $0 < \alpha, \beta < 1$ and γ , and the target rank k , the curator is required to output a differentially-private rank- k matrix factorization $\tilde{\mathbf{U}}_k, \tilde{\Sigma}_k$, and $\tilde{\mathbf{V}}_k$ of \mathbf{A} at the end of the stream, such that, with probability at least $1 - \beta$,

$$\|\mathbf{A} - \tilde{\mathbf{U}}_k \tilde{\Sigma}_k \tilde{\mathbf{V}}_k^\top\|_F \leq (1 + \alpha)\Delta_k + \gamma,$$

where $\Delta_k := \|\mathbf{A} - [\mathbf{A}]_k\|_F$ with $[\mathbf{A}]_k$ being the best rank- k approximation of \mathbf{A} .

Definition 9. (*Differentially Private Low Rank Factorizataion in the Continual Release Model*). Let the private matrix $\mathbf{A} \in \mathbb{R}^{m \times n}$ initially be all zeroes. At every time epoch t , the curator receives an update in the form of the tuple $\{i, j, \Delta\}$, where $1 \leq i \leq m, 1 \leq j \leq n$, and $\Delta \in \mathbb{R}$ —each update results in a change in the (i, j) -th entry of the matrix \mathbf{A} as follows: $\mathbf{A}_{i,j}^{(t)} \leftarrow \mathbf{A}_{i,j}^{(t-1)} + \Delta$. Given parameters $0 < \alpha, \beta < 1$ and γ , and the target rank k , the curator is required to output a differentially-private rank- k matrix factorization $\tilde{\mathbf{U}}_k^{(t)}, \tilde{\Sigma}_k^{(t)}$, and $\tilde{\mathbf{V}}_k^{(t)}$ of \mathbf{A} at every time epoch, such that, with probability at least $1 - \beta$,

$$\|\mathbf{A}^{(t)} - \tilde{\mathbf{U}}_k^{(t)} \tilde{\Sigma}_k^{(t)} (\tilde{\mathbf{V}}_k^{(t)})^\top\|_F \leq (1 + \alpha)\Delta_k^{(t)} + \gamma,$$

where $\Delta_k^{(t)} := \|\mathbf{A}^{(t)} - [\mathbf{A}^{(t)}]_k\|_F$ with $[\mathbf{A}^{(t)}]_k$ being the best rank- k approximation of $\mathbf{A}^{(t)}$.

Definition 10. (*Local Differentially Private Principal Component Analysis Problem*). Given an $m \times n$ matrix \mathbf{A} distributed among m users where each user holds a row of the matrix \mathbf{A} , a rank parameter k , and an accuracy parameter $0 < \alpha < 1$, design a local differentially private algorithm which, upon termination, outputs an orthonormal matrix \mathbf{U} such that

$$\|\mathbf{A} - \mathbf{U}\mathbf{U}^\top \mathbf{A}\|_F \leq (1 + \alpha)\|\mathbf{A} - [\mathbf{A}]_k\|_F + \gamma$$

with probability at least $1 - \beta$, and the communication cost of the algorithm is as small as possible. Furthermore, the algorithm should satisfies (ϵ, δ) -LDP.

In this paper, we use various concepts and results from the theory of random projections, more specifically the Johnson-Lindenstrauss transform and its variants.

Definition 11. Let $\alpha, \delta > 0$. A distribution \mathcal{D} over $t \times n$ random matrices satisfies (α, β) -Johnson Lindenstrauss property (JLP) if, for any unit vector $\mathbf{x} \in \mathbb{R}^n$, we have

$$\Pr_{\Phi \sim \mathcal{D}}[\|\Phi \mathbf{x}\|_2^2 \in (1 \pm \alpha)] \geq 1 - \beta.$$

Definition 12. A distribution \mathcal{D}_R of $t \times m$ matrices satisfies (α, δ) -subspace embedding for generalized regression if it has the following property: for any matrices $\mathbf{P} \in \mathbb{R}^{m \times n}$ and $\mathbf{Q} \in \mathbb{R}^{m \times n'}$ such that $r(\mathbf{P}) \leq r$, with probability $1 - \delta$ over $\Phi \sim \mathcal{D}_R$, if

$$\tilde{\mathbf{X}} = \underset{\mathbf{X}}{\operatorname{argmin}} \|\Phi(\mathbf{P}\mathbf{X} - \mathbf{Q})\|_F \quad \text{and} \quad \hat{\mathbf{X}} = \underset{\mathbf{X} \in \mathbb{R}^{n \times n'}}{\operatorname{argmin}} \|\mathbf{P}\mathbf{X} - \mathbf{Q}\|_F,$$

then $\|\widetilde{\mathbf{P}\mathbf{X}} - \mathbf{Q}\|_F \leq (1 + \alpha)\|\widehat{\mathbf{P}\mathbf{X}} - \mathbf{Q}\|_F$.

Definition 13. A distribution \mathcal{D}_A over $v \times m$ matrices satisfies (α, δ) -affine subspace embedding if it has the following property: for any matrices $\mathbf{D} \in \mathbb{R}^{m \times n}$ and $\mathbf{E} \in \mathbb{R}^{m \times n'}$ such that $r(\mathbf{D}) \leq r$, with probability $1 - \delta$ over $\mathbf{S} \sim \mathcal{D}_A$, simultaneously for all $\mathbf{X} \in \mathbb{R}^{n \times n'}$, $\|\mathbf{S}(\mathbf{D}\mathbf{X} - \mathbf{E})\|_F^2 = (1 \pm \alpha)\|\mathbf{D}\mathbf{X} - \mathbf{E}\|_F^2$.

We use the symbol \mathcal{D}_R to denote a distribution that satisfies (α, δ) -subspace embedding for generalized regression and \mathcal{D}_A to denote a distribution that satisfies (α, δ) -affine subspace embedding.

B.2 Linear Algebra

A matrix is called a *diagonal matrix* if the non-zero entries are all along the principal diagonal. An $m \times m$ matrix \mathbf{A} is a *unitary matrix* if $\mathbf{A}^\top \mathbf{A} = \mathbf{A}\mathbf{A}^\top = \mathbb{I}_m$. Additionally, if the entries of the matrix \mathbf{A} are real, then such a matrix is called an *orthogonal matrix*. For an $m \times m$ matrix \mathbf{A} , the *trace* of \mathbf{A} is the sum of its diagonal elements. We use the symbol $\text{Tr}(\mathbf{A})$ to denote the trace of matrix \mathbf{A} . We use the symbol $\det(\mathbf{A})$ to denote the determinant of matrix \mathbf{A} .

Let \mathbf{A} be an $m \times m$ matrix. Its *singular values* are the eigenvalues of the matrix $\sqrt{\mathbf{A}^\top \mathbf{A}}$. The eigenvalues of the matrix $\sqrt{\mathbf{A}^\top \mathbf{A}}$ are real because $\mathbf{A}^\top \mathbf{A}$ is a symmetric matrix and has a well-defined *spectral decomposition*¹ [Bha13].

The *singular-value decomposition* (SVD) of an $m \times n$ rank- r matrix \mathbf{A} is a decomposition of \mathbf{A} as a product of three matrices, $\mathbf{A} = \mathbf{U}\mathbf{\Sigma}\mathbf{V}^\top$ such that $\mathbf{U} \in \mathbb{R}^{m \times r}$ and $\mathbf{V} \in \mathbb{R}^{n \times r}$ have orthonormal columns and $\mathbf{\Sigma} \in \mathbb{R}^{r \times r}$ is a diagonal matrix with singular values of \mathbf{A} on its diagonal. One can equivalently write it in the following form:

$$\mathbf{A} = \sum_{i=1}^{r(\mathbf{A})} \sigma_i \mathbf{u}_i \mathbf{v}_i^\top,$$

where \mathbf{u}_i is the i -th column of \mathbf{U} , \mathbf{v}_i is the i -th column of \mathbf{V} , and σ_i is the i -th diagonal entry of $\mathbf{\Sigma}$.

One can derive a lot of things from the singular value decomposition of a matrix. For example,

1. The *Moore-Penrose pseudo-inverse* of a matrix $\mathbf{A} = \mathbf{U}\mathbf{\Sigma}\mathbf{V}^\top$ is denoted by \mathbf{A}^\dagger and has a SVD $\mathbf{A}^\dagger = \mathbf{V}\mathbf{\Sigma}^\dagger\mathbf{U}^\top$, where $\mathbf{\Sigma}^\dagger$ consists of inverses of only non-zero singular values of \mathbf{A} . In other words,

$$\mathbf{A}^\dagger = \sum_{i=1}^{r(\mathbf{A})} \frac{1}{\sigma_i} \mathbf{u}_i \mathbf{v}_i^\top,$$

where $r(\mathbf{A})$ is the number of non-zero singular values of \mathbf{A} .

2. Let $\sigma_1 \geq \dots \geq \sigma_k \geq \dots \geq \sigma_{r(\mathbf{A})}$ be the singular values of \mathbf{A} . Then

$$[\mathbf{A}]_k = \sum_{i=1}^k \sigma_i \mathbf{u}_i \mathbf{v}_i^\top,$$

3. The trace of a matrix \mathbf{A} can be represented in form of the singular values of \mathbf{A} as follows: $\text{Tr}(\mathbf{A}) = \sum_i \sigma_i$. Similarly, the determinant of a matrix \mathbf{A} is $\det(\mathbf{A}) = \prod_i \sigma_i$. Moreover, the Frobenius norm of \mathbf{A} is $\sum_i \sigma_i^2$.

¹A spectral decomposition of a symmetric matrix \mathbf{A} is the representation of a matrix in form of its eigenvalues and eigenvectors: $\sum_i \lambda_i \mathbf{v}_i \mathbf{v}_i^\top$, where λ_i are the eigenvalues of \mathbf{A} and \mathbf{v}_i is the eigenvector corresponding to λ_i .

We use few unitary matrices, which we define next. Let N be a power of 2. A Walsh-Hadamard matrix of order N is an $N \times N$ matrix formed recursively as follows:

$$\mathbf{W}_N = \frac{1}{\sqrt{2}} \begin{pmatrix} \mathbf{W}_{N/2} & \mathbf{W}_{N/2} \\ \mathbf{W}_{N/2} & -\mathbf{W}_{N/2} \end{pmatrix} \quad \mathbf{W}_1 := (1).$$

A Walsh-Hadamard matrix is a unitary matrix. We often drop the subscript wherever it is clear from the context. A *randomized Walsh-Hadamard matrix* is a matrix product of a Walsh-Hadamard matrix and a random diagonal matrix with entries ± 1 picked according to the following probability distribution:

$$\Pr[X = 1] = \Pr[X = -1] = 1/2.$$

A *discrete Fourier matrix* of order n is an $n \times n$ matrix such that the (i, j) -th entry is $\omega^{(i-1)(j-1)}$, where ω is the n -th root of unity, i.e., $\omega = e^{-2\pi i/n}$.

B.3 Gaussian Distribution

Given a random variable x , we denote by $\mathcal{N}(\mu, \rho^2)$ the fact that x has a normal Gaussian distribution with mean μ and variance ρ^2 . The Gaussian distribution is invariant under affine transformation, i.e., if $X \sim \mathcal{N}(\mu_x, \sigma_x)$ and $Y \sim \mathcal{N}(\mu_y, \sigma_y)$, then $Z = aX + bY$ has the distribution $Z \sim \mathcal{N}(a\mu_x + b\mu_y, a\sigma_x^2 + b\sigma_y^2)$. This is also called the *rotational invariance* of Gaussian distribution. By simple computation, one can verify that the tail of a standard Gaussian variable decays exponentially. More specifically, for a random variable $X \sim \mathcal{N}(0, 1)$, we have $\Pr[|X| > t] \leq 2e^{-t^2/2}$.

Our proof uses an analysis of multivariate Gaussian distribution. The multivariate Gaussian distribution is a generalization of univariate Gaussian distribution. Let μ be an N -dimensional vector. An N -dimensional multivariate random variable, $\mathbf{x} \sim \mathcal{N}(\mu, \mathbf{\Lambda})$, where $\mathbf{\Lambda} = \mathbb{E}[(\mathbf{x} - \mu)(\mathbf{x} - \mu)^\top]$ is the $N \times N$ covariance matrix, has the probability density function given by $\text{PDF}_{\mathbf{x}}(\mathbf{x}) := \frac{e^{-\mathbf{x}^\top \mathbf{\Lambda}^{-1} \mathbf{x} / 2}}{\sqrt{(2\pi)^r(\Sigma) \det(\mathbf{\Lambda})}}$. If $\mathbf{\Lambda}$ has a non-trivial kernel space, then the multivariate distribution is undefined. However, in this paper, all our covariance matrices have only trivial kernel. Multivariate Gaussian distributions is invariant under affine transformation, i.e., if $\mathbf{y} = \mathbf{A}\mathbf{x} + \mathbf{b}$, where $\mathbf{A} \in \mathbb{R}^{M \times N}$ is a rank- M matrix and $\mathbf{b} \in \mathbb{R}^M$, then $\mathbf{y} \sim \mathcal{N}(\mathbf{A}\mu + \mathbf{b}, \mathbf{A}\mathbf{\Lambda}\mathbf{A}^\top)$.

C Basic Results Used in This Paper

Our proofs uses various concepts and known results about random projections, pseudo-inverse of matrices and gaussian distribution. In this section, we cover them up to the level of exposition required to understand this paper. We refer to the excellent book by Bhatia [Bha13] for more exposition on pseudo-inverses, and Woodruff [Woo14].

C.1 Random Projections.

Random projection has been used in computer science for a really long time. Some partial application includes metric and graph embeddings [Bou85, LLR95], computational speedups [Sar06, Vem05], machine learning [BBV06, Sch00], nearest-neighbor search [IM98, Nir06], and compressed sensing [BDDW08].

In this paper, we use random projections that satisfy [Definition 12](#) and [Definition 13](#). An example distribution \mathcal{D}_R with $t = O(\alpha^{-2} \log(1/\delta))$ is the distribution of random matrices whose entries are sampled i.i.d. from $\mathcal{N}(0, 1/t)$. Recently, Clarkson and Woodruff [CW12] proposed other distribution of random matrices that satisfies (α, δ) -subspace embedding for generalized regression and (α, δ) -affine subspace embedding. They showed the following:

Lemma 14. ([CW12, Lem 41, Lem 46]) *There is a distribution \mathcal{D}_R over $\mathbb{R}^{t \times m}$ such that satisfies*

- (i) *if $t = O(\alpha^{-2} \log^2 m)$, then for $\Phi \sim \mathcal{D}_R$ and any $m \times n$ matrix \mathbf{Q} , $\|\Phi \mathbf{Q}\|_F^2 = (1 \pm \alpha) \|\mathbf{Q}\|_F^2$, and*
- (ii) *if $t = O(r/\alpha \log(r/\delta))$, then \mathcal{D}_R satisfies (α, δ) -subspace embedding for generalized regression for \mathbf{P} and \mathbf{Q} .*

Further, for any matrix $\mathbf{L} \in \mathbb{R}^{m \times n}$, $\Phi \mathbf{L}$ can be computed in $O(\text{nn}(\mathbf{L}) + tn \log t)$ time. Here \mathbf{P} , \mathbf{Q} , and r are as in Definition 12.

Lemma 15. [CW12, Thm 39, Thm 42]) *There exists a distribution \mathcal{D}_A over $\mathbb{R}^{v \times m}$ such that*

- (i) *if $v = \Theta(\alpha^{-2})$, then for $\mathbf{S} \sim \mathcal{D}_A$ and any $m \times d$ matrix \mathbf{D} , $\|\mathbf{S} \mathbf{D}\|_F^2 = (1 \pm \alpha) \|\mathbf{D}\|_F^2$.*
- (ii) *if $v = O(p/\alpha^2 \log(p/\delta))$, then \mathcal{D}_A satisfies (α, δ) -affine embedding for \mathbf{D} and \mathbf{E} .*

Further, for any matrix $\mathbf{L} \in \mathbb{R}^{m \times n}$, $\mathbf{S} \mathbf{L}$ can be computed in $O(\text{nn}(\mathbf{L}) + nv \log v)$ time. Here \mathbf{E} , \mathbf{D} , and p are as in Definition 13.

In the theorems above, Φ and \mathbf{S} are oblivious to the matrices \mathbf{P} , \mathbf{Q} , \mathbf{D} , and \mathbf{E} . That is, we design the distribution \mathcal{D}_A over linear maps such that for any fixed matrices \mathbf{D} , \mathbf{E} , if we chose $\mathbf{S} \sim \mathcal{D}_A$, then \mathbf{S} is an (α, β) -affine embedding for \mathbf{D} , \mathbf{E} . Similarly, we design the distribution \mathcal{D}_R over linear maps such that for any fixed matrices \mathbf{P} , \mathbf{Q} , if we chose $\Phi \sim \mathcal{D}_R$, then Φ is an (α, β) embedding for \mathbf{P} , \mathbf{Q} .

C.2 Differential privacy

Differential privacy is a very robust guarantee of privacy which makes confidential data available widely for accurate analysis while still preserving the privacy of individual data. Achieving these two requirements at the same time seems paradoxical. On one hand, we do not wish to leak information about an individual. On the other hand, we want to answer the query on the entire database as accurately as possible. This makes designing differentially private mechanisms challenging.

C.2.1 Robustness of Differential Privacy

One of the key features of differential privacy is that it is preserved under arbitrary post-processing, i.e., an analyst, without additional information about the private database, cannot compute a function that makes an output less differentially private. In other words,

Lemma 16. (Dwork *et al.* [DKM⁺06b]). *Let $\mathfrak{M}(\mathbf{D})$ be an (α, β) -differential private mechanism for a database \mathbf{D} , and let h be any function, then any mechanism $\mathfrak{M}' := h(\mathfrak{M}(\mathbf{D}))$ is also (α, β) -differentially private for the same set of tasks.*

Proof. Let \mathfrak{M} be a differentially private mechanism. Let $\text{range}(\mathfrak{M})$ denote the range of \mathfrak{M} . Let R be the range of the function $h(\cdot)$. Without loss of generality, we assume that $h(\cdot) : \text{range}(\mathfrak{M}) \rightarrow R$ is a deterministic function. This is because any randomized function can be decomposed into a convex combination of deterministic function, and a convex combination of differentially private mechanisms is differentially private. Fix any pair of neighbouring data-sets \mathbf{DB} and $\widetilde{\mathbf{DB}}$ and an event $S \subseteq R$. Let $T = \{y \in \text{range}(\mathfrak{M}) : f(y) \in S\}$. Then

$$\begin{aligned} \Pr[f(\mathfrak{M}(\mathbf{DB})) \in S] &= \Pr[\mathfrak{M}(\mathbf{DB}) \in T] \\ &\leq \exp(\alpha) \Pr[\mathfrak{M}(\widetilde{\mathbf{DB}}) \in T] + \beta \\ &= \exp(\alpha) \Pr[f(\mathfrak{M}(\widetilde{\mathbf{DB}})) \in S] + \beta. \end{aligned}$$

□

C.2.2 Composition

Before we begin, we discuss what does it mean by the term “composition” of differentially private mechanism. The composition that we consider covers the following two cases:

1. Repeated use of differentially private mechanism on the same database.
2. Repeated use of differentially private mechanism on different database that might contain information relating to a particular individual.

The first case covers the case when we wish to use the same mechanism multiple times while the second case covers the case of cumulative loss of privacy of a single individual whose data might be spread across many databases.

It is easy to see that the composition of pure differentially private mechanisms yields another pure differentially private mechanism, i.e., composition of an $(\alpha_1, 0)$ -differentially private and an $(\alpha_2, 0)$ -differentially private mechanism results in an $(\alpha_1 + \alpha_2, 0)$ -differentially private mechanism. In other words, the privacy guarantee depreciates linearly with the number of compositions. In the case of approximate differential privacy, we can improve on the degradation of α parameter at the cost of slight depreciation of the β factor. We use this strengthening in our proofs. In our proofs of differential privacy, we prove that each row of the published matrix preserves (α_0, β_0) -differential privacy for some appropriate α_0, β_0 , and then invoke a composition theorem by Dwork, Rothblum, and Vadhan [DRV10] to prove that the published matrix preserves (α, β) -differential privacy. The following theorem is the composition theorem that we use.

Theorem 17. (Dwork *et al.* [DRV10]). *Let $\alpha_0, \beta_0 \in (0, 1)$, and $\beta' > 0$. If $\mathfrak{M}_1, \dots, \mathfrak{M}_\ell$ are each (α, β) -differential private mechanism, then the mechanism $\mathfrak{M}(\mathbf{D}) := (\mathfrak{M}_1(\mathbf{D}), \dots, \mathfrak{M}_\ell(\mathbf{D}))$ releasing the concatenation of each algorithm is $(\alpha', \ell\beta + 0 + \beta')$ -differentially private for $\alpha' < \sqrt{2\ell \ln(1/\beta')} \alpha_0 + 2\ell \alpha_0^2$.*

A proof of this theorem could be found in [DR14, Chapter 3].

Gaussian Mechanism. The Gaussian variant of the Laplace mechanism was proven to preserve differential privacy by Dwork *et al.* [DKM⁺06b] in a follow-up work. Let $f(\cdot)$ be a function from a class of Δ -sensitive functions. The Gaussian mechanism is

$$\mathfrak{M}(\mathbf{D}, f(\cdot), \alpha) := f(\mathbf{D}) + (X_1, \dots, X_k), \text{ where } X_i \sim \mathcal{N}\left(0, \frac{\Delta^2}{\epsilon^2} \log(1.25/\delta)\right).$$

Dwork *et al.* [DKM⁺06b] proved the following.

Theorem 18. (Gaussian mechanism [DKM⁺06b]). *Let $\mathbf{x}, \mathbf{y} \in \mathbb{R}^n$ be any two vectors such that $\|\mathbf{x} - \mathbf{y}\|_2 \leq c$. Let $\rho = c\epsilon^{-1} \sqrt{\log(1/\delta)}$ and $\mathbf{g} \sim \mathcal{N}(0, \rho^2)^n$ be a vector with each entries sampled i.i.d. Then for any $\mathbf{s} \subset \mathbb{R}^n$, $\Pr[\mathbf{x} + \mathbf{g} \in \mathbf{s}] \leq e^\epsilon \Pr[\mathbf{y} + \mathbf{g} \in \mathbf{s}] + \delta$.*

C.3 Properties of Gaussian distribution.

We need the following property of a random Gaussian matrices.

Fact 19. ([JL84, Sar06]) *Let $\mathbf{P} \in \mathbb{R}^{m \times n}$ be a matrix of rank r and $\mathbf{Q} \in \mathbb{R}^{m \times n'}$ be an $m \times n'$ matrix. Let \mathcal{D} be a distribution of matrices over $\mathbb{R}^{t \times n}$ with entries sampled i.i.d. from $\mathcal{N}(0, 1/t)$. Then there exists a $t = O(r/\alpha \log(r/\beta))$ such that \mathcal{D} is an (α, β) -subspace embedding for generalized regression.*

Lemma 20. *Let $\mathbf{N} \sim \mathcal{N}(0, \rho^2)^{m \times n}$ Gaussian matrix. Then with probability 99/100, $\|\mathbf{N}\|_F = O(\rho\sqrt{mn})$.*

Proof. The lemma follows from the following computation.

$$\mathbb{E}[\|\mathbf{C}\Phi\|_F^2] = \mathbb{E}\left[\sum_{i,j} (\tilde{\mathbf{N}}_1)_{ij}^2\right] = \sum_{i,j} \mathbb{E}[(\tilde{\mathbf{N}}_1)_{ij}^2] = mn\rho^2.$$

The result follows using Markov's inequality. □

C.4 Properties of pseudo-inverse of a matrix.

We need the following results about product of pseudo-inverse in the proof of [Lemma 26](#) and [Lemma ??](#).

Fact 21. *If \mathbf{A} has a left-inverse, then $\mathbf{A}^\dagger = (\mathbf{A}^\top \mathbf{A})^{-1} \mathbf{A}^\top$ and if \mathbf{A} has right-inverse, then $\mathbf{A}^\dagger = \mathbf{A}^\top (\mathbf{A} \mathbf{A}^\top)^{-1}$.*

Theorem 22. *Let \mathbf{A} and \mathbf{B} be conforming matrices and either,*

1. \mathbf{A} has orthonormal columns (i.e., $\mathbf{A}^\top \mathbf{A}$ is an identity matrix) or,
2. \mathbf{B} has orthonormal rows (i.e., $\mathbf{B} \mathbf{B}^\top$ is an identity matrix),
3. \mathbf{A} has all columns linearly independent (full column rank) and \mathbf{B} has all rows linearly independent (full row rank) or,
4. $\mathbf{B} = \mathbf{A}^\top$ (i.e., \mathbf{B} is the conjugate transpose of \mathbf{A}),

then $(\mathbf{A}\mathbf{B})^\dagger = \mathbf{B}^\dagger \mathbf{A}^\dagger$.

We use the following variant of Pythagorean theorem in the proof of [Lemma 28](#).

Theorem 23. (Pythagorean theorem). *Let \mathbf{A} and \mathbf{B} be two matrices such that $\mathbf{A}^\top \mathbf{B}$ is a zero matrix. Then for any $\mathbf{C} = \mathbf{A} + \mathbf{B}$, we have $\|\mathbf{C}\|_F^2 = \|\mathbf{A}\|_F^2 + \|\mathbf{B}\|_F^2$.*

C.5 Linear Algebraic Results Used in This Paper

We also need the following results for the privacy proof.

Theorem 24. (Lidskii Theorem [[Bha13](#)]). *Let \mathbf{A}, \mathbf{B} be $n \times n$ Hermitian matrices. Then for any choice of indices $1 \leq i_1 \leq \dots \leq i_k \leq n$,*

$$\sum_{j=1}^k \lambda_{i_j}(\mathbf{A} + \mathbf{B}) \leq \sum_{j=1}^k \lambda_{i_j}(\mathbf{A}) + \sum_{j=1}^k \lambda_{i_j}(\mathbf{B}),$$

where $\{\lambda_i(\mathbf{A})\}_{i=1}^n$ are the eigen-values of \mathbf{A} in decreasing order.

Theorem 25. (Weyl's Perturbation Theorem [[Bha13](#)]). *For any $m \times n$ matrices \mathbf{P}, \mathbf{Q} , we have $|\sigma_i(\mathbf{P} + \mathbf{Q}) - \sigma_i(\mathbf{P})| \leq \|\mathbf{Q}\|_2$, where $\sigma_i(\cdot)$ denotes the i -th singular value and $\|\mathbf{Q}\|_2$ is the spectral norm of the matrix \mathbf{Q} .*

We use the notation $\text{Rad}(p)$ to denote a distribution with support ± 1 such that $+1$ is sampled with probability p and -1 is sampled with probability $1 - p$. An $n \times n$ Walsh-Hadamard matrix \mathbf{H}_n is constructed recursively as follows:

$$\mathbf{H}_n = \begin{pmatrix} \mathbf{H}_{n/2} & \mathbf{H}_{n/2} \\ \mathbf{H}_{n/2} & -\mathbf{H}_{n/2} \end{pmatrix} \text{ and } \mathbf{H}_1 := 1.$$

A randomized Walsh-Hadamard matrix \mathbf{W}_n is formed by multiplying \mathbf{H}_n with a diagonal matrix whose diagonal entries are picked i.i.d. from $\text{Rad}(1/2)$. We drop the subscript n where it is clear from the context. A subsampled randomized Hadamard matrix is constructed by multiplying $\mathbf{\Pi}_{1..r}$ from the left to a randomized Hadamard matrix, where $\mathbf{\Pi}_{1..r}$ is the matrix formed by the first r rows of a random permutation matrix.

Lemma 26. *Let \mathbf{S} be a $v \times m$ subsampled randomized Hadamard matrix, where $v \leq m$ and $\mathbf{N} \in \mathbb{R}^{v \times n}$. Then we have,*

$$\|\mathbf{S}^\dagger \mathbf{N}_2\|_F = \|\mathbf{N}_2\|_F.$$

Proof. One way to look at the action of \mathbf{S} when it is a subsampled Hadamard transform is that it is a product of matrices \mathbf{W} and $\mathbf{\Pi}_{1..r}$, where $\mathbf{\Pi}_{1..r}$ is the matrix formed by the first r rows of a random permutation matrix and \mathbf{W} is a randomized Walsh-Hadamard matrix formed by multiplying a Walsh-Hadamard matrix with a diagonal matrix whose non-zero entries are picked i.i.d. from $\text{Rad}(1/2)$.

Since $\mathbf{W}\mathbf{D}$ has orthonormal rows, $\mathbf{S}^\dagger = (\mathbf{\Pi}_{1..v}\mathbf{W}\mathbf{D})^\dagger = (\mathbf{W}\mathbf{D})^\top(\mathbf{\Pi}_{1..v})^\dagger$. This implies

$$\begin{aligned}\|\mathbf{S}^\dagger\mathbf{N}\|_F &= \|(\mathbf{\Pi}_{1..v}\mathbf{W}\mathbf{D})^\dagger\mathbf{N}\|_F = \|(\mathbf{W}\mathbf{D})^\top\mathbf{\Pi}_{1..v}^\dagger\mathbf{N}\|_F \\ &= \|\mathbf{\Pi}_{1..v}^\dagger\mathbf{N}\|_F.\end{aligned}$$

Using the fact that $\mathbf{\Pi}_{1..v}$ is a full row rank matrix and $\widehat{\mathbf{\Pi}}_{1..v}\widehat{\mathbf{\Pi}}_{1..v}^\top$ is an identity matrix, we have $\widehat{\mathbf{\Pi}}_{1..v}^\dagger = \widehat{\mathbf{\Pi}}_{1..v}^\top(\widehat{\mathbf{\Pi}}_{1..v}\widehat{\mathbf{\Pi}}_{1..v}^\top)^{-1} = \widehat{\mathbf{\Pi}}_{1..v}^\top$. The result follows. \square

We reprove the following theorem of Boutsidis *et al.* [BWZ16]. Our proof allows us a tighter control on the intermediate results which helps us to get a tighter bound on the additive error.

Theorem 27. *Let \mathcal{D}_R be an (α, δ) -subspace embedding for generalized regression (Definition 12). Then with probability $1 - 2\delta$ over $\mathbf{\Phi}^\top \sim \mathcal{D}_R$ and $\mathbf{\Psi} \sim \mathcal{D}_R$, for any arbitrary $m \times n$ matrix \mathbf{A} ,*

$$\min_{X, r(X) \leq k} \|\mathbf{A}\mathbf{\Phi}\mathbf{X}\mathbf{\Psi}\mathbf{A} - \mathbf{A}\|_F \leq (1 + \alpha)^2 \|\mathbf{A} - [\mathbf{A}]_k\|_F. \quad (4)$$

Our proof uses two optimization problems and uses the solution to those optimization problem in a clever way. We feel that our proof is simpler. It also has explicit solutions to the two optimization problems, which makes it easy to extend to the case of private low-rank factorization and get a tight bound.

Proof. Let $[\mathbf{A}]_k = \mathbf{U}_k \mathbf{\Sigma}_k \mathbf{V}_k^\top$. We will use Lemma 14 to prove the theorem. Set $\mathbf{\Phi} = \mathbf{\Phi}^\top$, $\mathbf{P} = [\mathbf{A}]_k^\top$, $\mathbf{Q} = \mathbf{A}^\top$. Then for $\widetilde{\mathbf{X}} = \arg\min_{\mathbf{X}} \|\mathbf{\Phi}^\top([\mathbf{A}]_k^\top \mathbf{X} - \mathbf{A}^\top)\|_F$, we have with probability $1 - \delta$ over $\mathbf{\Phi}^\top \sim \mathcal{D}_R$,

$$\begin{aligned}\|[\mathbf{A}]_k^\top \widetilde{\mathbf{X}} - \mathbf{A}^\top\|_F &\leq (1 + \alpha) \min_{\mathbf{X}} \|[\mathbf{A}]_k^\top \mathbf{X} - \mathbf{A}^\top\|_F \\ &\leq (1 + \alpha) \|[\mathbf{A}]_k^\top - \mathbf{A}^\top\|_F\end{aligned}$$

where the last inequality follows by setting $\mathbf{X} = \mathbf{U}_k \mathbf{U}_k^\top$. Here $\widetilde{\mathbf{X}} = (\mathbf{\Phi}^\top[\mathbf{A}]_k^\top)^\dagger(\mathbf{A}\mathbf{\Phi})^\top$. Since Frobenius norm is preserved under transpose, we have by substituting the value of $\widetilde{\mathbf{X}}$,

$$\|\mathbf{A}\mathbf{\Phi}([\mathbf{A}]_k\mathbf{\Phi})^\dagger[\mathbf{A}]_k - \mathbf{A}\|_F \leq (1 + \alpha) \|\mathbf{A} - [\mathbf{A}]_k\|_F. \quad (5)$$

We now use Lemma 14 on the following regression problem:

$$\min_{\mathbf{X}} \|\mathbf{W}\mathbf{X} - \mathbf{A}\|_F, \quad \text{where } \mathbf{W} = \mathbf{A}\mathbf{\Phi}([\mathbf{A}]_k\mathbf{\Phi})^\dagger.$$

Let $\widehat{\mathbf{X}} = \arg\min_{\mathbf{X}} \|\mathbf{\Psi}(\mathbf{W}\mathbf{X} - \mathbf{A})\|_F$. Since $[\mathbf{A}]_k$ has rank k , Lemma 14 and equation (5) gives with probability $1 - \delta$ over $\mathbf{\Psi} \sim \mathcal{D}_R$

$$\begin{aligned}\|\mathbf{W}\widehat{\mathbf{X}} - \mathbf{A}\|_F &= \|\mathbf{A}\mathbf{\Phi}([\mathbf{A}]_k\mathbf{\Phi})^\dagger\widehat{\mathbf{X}} - \mathbf{A}\|_F \\ &\leq (1 + \alpha) \min_{\mathbf{X}} \|(\mathbf{A}\mathbf{\Phi})([\mathbf{A}]_k\mathbf{\Phi})^\dagger\mathbf{X} - \mathbf{A}\|_F \\ &\leq (1 + \alpha) \|\mathbf{A}\mathbf{\Phi}([\mathbf{A}]_k\mathbf{\Phi})^\dagger[\mathbf{A}]_k - \mathbf{A}\|_F \\ &\leq (1 + \alpha)^2 \|\mathbf{A} - [\mathbf{A}]_k\|_F.\end{aligned}$$

Substituting the value of $\widehat{\mathbf{X}} = (\mathbf{\Psi}\mathbf{W})^\dagger\mathbf{\Psi}\mathbf{A}$, with probability $1 - 2\delta$ over $\mathbf{\Phi}^\top$, $\mathbf{\Psi} \sim \mathcal{D}_R$, we have

$$\|\mathbf{A}\mathbf{\Phi}([\mathbf{A}]_k\mathbf{\Phi})^\dagger(\mathbf{\Psi}\mathbf{A}\mathbf{\Phi}([\mathbf{A}]_k\mathbf{\Phi})^\dagger)^\dagger\mathbf{\Psi}\mathbf{A} - \mathbf{A}\|_F \leq (1 + \alpha)^2 \|\mathbf{A} - [\mathbf{A}]_k\|_F. \quad (6)$$

Since $([\mathbf{A}]_k\mathbf{\Phi})^\dagger(\mathbf{\Psi}\mathbf{A}\mathbf{\Phi}([\mathbf{A}]_k\mathbf{\Phi})^\dagger)^\dagger$ has rank at most k , this completes the proof because $([\mathbf{A}]_k\mathbf{\Phi})^\dagger\mathbf{\Psi}$ is a rank- k matrix. \square

We prove the following key lemma, which can be seen as a generalization of one of the previous results of Clarkson and Woodruff [CW09]. This lemma would be required in proving all our results.

Lemma 28. *Let \mathbf{R} be a matrix with orthonormal rows and \mathbf{C} have orthonormal columns. Then*

$$\min_{X, r(X)=k} \|\mathbf{C}\mathbf{X}\mathbf{R} - \mathbf{F}\|_F = \|\mathbf{C}[\mathbf{C}^\top\mathbf{F}\mathbf{R}^\top]_k\mathbf{R} - \mathbf{F}\|_F.$$

Proof. For any matrix \mathbf{Y} of appropriate dimension, we have $\langle \mathbf{F} - \mathbf{C}\mathbf{C}^\top\mathbf{F}, \mathbf{C}\mathbf{C}^\top\mathbf{F} - \mathbf{C}\mathbf{Y}\mathbf{R} \rangle = 0$. This is because $\mathbf{F} - \mathbf{C}\mathbf{C}^\top\mathbf{F} = (\mathbb{I} - \mathbf{C}\mathbf{C}^\top)\mathbf{F}$ lies in space orthogonal to $\mathbf{C}(\mathbf{C}^\top\mathbf{F} - \mathbf{Y}\mathbf{R})$. By [Theorem 23](#),

$$\begin{aligned} \|\mathbf{F} - \mathbf{C}\mathbf{Y}\mathbf{R}\|_F^2 &= \|\mathbf{F} - \mathbf{C}\mathbf{C}^\top\mathbf{F}\|_F^2 + \|\mathbf{C}\mathbf{C}^\top\mathbf{F} - \mathbf{C}\mathbf{Y}\mathbf{R}\|_F^2 \\ &= \|\mathbf{F} - \mathbf{C}\mathbf{C}^\top\mathbf{F}\|_F^2 + \|\mathbf{C}^\top\mathbf{F} - \mathbf{Y}\mathbf{R}\|_F^2, \end{aligned} \quad (7)$$

where the second equality follows from the properties of unitary matrices.

Again, for any matrix \mathbf{Y} of appropriate dimensions, we have $\langle \mathbf{C}^\top\mathbf{F}\mathbf{R}^\top\mathbf{R} - \mathbf{Y}\mathbf{R}, \mathbf{C}^\top\mathbf{F} - \mathbf{C}^\top\mathbf{F}\mathbf{R}^\top\mathbf{R} \rangle = 0$. This is because $\mathbf{C}^\top\mathbf{F}\mathbf{R}^\top\mathbf{R} - \mathbf{Y}\mathbf{R} = (\mathbf{C}^\top\mathbf{F}\mathbf{R}^\top - \mathbf{Y})\mathbf{R}$ lies in the space spanned by \mathbf{R} , and $\mathbf{C}^\top\mathbf{F} - \mathbf{C}^\top\mathbf{F}\mathbf{R}^\top\mathbf{R} = \mathbf{C}^\top\mathbf{F}(\mathbb{I} - \mathbf{R}^\top\mathbf{R})$ lies in the orthogonal space. By [Theorem 23](#), we have

$$\|\mathbf{C}^\top\mathbf{F} - \mathbf{Y}\mathbf{R}\|_F^2 = \|\mathbf{C}^\top\mathbf{F} - \mathbf{C}^\top\mathbf{F}\mathbf{R}^\top\mathbf{R}\|_F^2 + \|\mathbf{C}^\top\mathbf{F}\mathbf{R}^\top\mathbf{R} - \mathbf{Y}\mathbf{R}\|_F^2 \quad (8)$$

Since $\|\mathbf{C}^\top\mathbf{F} - \mathbf{C}^\top\mathbf{F}\mathbf{R}^\top\mathbf{R}\|_F^2$ is independent of \mathbf{Y} , we just bound the term $\|\mathbf{C}^\top\mathbf{F}\mathbf{R}^\top\mathbf{R} - \mathbf{Y}\mathbf{R}\|_F^2$. Substituting $\mathbf{Y} = [\mathbf{C}\mathbf{F}\mathbf{R}]_k$ and using the fact that multiplying \mathbf{R} from the right does not change the Frobenius norm and $[\mathbf{C}^\top\mathbf{F}\mathbf{R}^\top]_k$ is the best k -rank approximation to the matrix $\mathbf{C}^\top\mathbf{F}\mathbf{R}^\top$, for all rank- k matrices \mathbf{Z} , we have

$$\|\mathbf{C}^\top\mathbf{F}\mathbf{R}^\top\mathbf{R} - [\mathbf{C}^\top\mathbf{F}\mathbf{R}^\top]_k\mathbf{R}\|_F^2 \leq \|\mathbf{C}^\top\mathbf{F}\mathbf{R}^\top\mathbf{R} - \mathbf{Z}\mathbf{R}\|_F^2. \quad (9)$$

Combining [equation \(9\)](#) with [equation \(8\)](#) and [Theorem 23](#), we have

$$\|\mathbf{C}^\top\mathbf{F} - [\mathbf{C}\mathbf{F}\mathbf{R}]_k\mathbf{R}\|_F^2 \leq \|\mathbf{C}^\top\mathbf{F} - \mathbf{C}^\top\mathbf{F}\mathbf{R}^\top\mathbf{R}\|_F^2 + \|\mathbf{C}^\top\mathbf{F}\mathbf{R}^\top\mathbf{R} - \mathbf{Z}\mathbf{R}\|_F^2 = \|\mathbf{C}^\top\mathbf{F} - \mathbf{Z}\mathbf{R}\|_F^2. \quad (10)$$

Combining [equation \(10\)](#) with [equation \(7\)](#), the fact that \mathbf{C} has orthonormal columns, and [Theorem 23](#), we have

$$\begin{aligned} \|\mathbf{F} - \mathbf{C}[\mathbf{C}\mathbf{F}\mathbf{R}]_k\mathbf{R}\|_F^2 &\leq \|\mathbf{F} - \mathbf{C}\mathbf{C}^\top\mathbf{F}\|_F^2 + \|\mathbf{C}^\top\mathbf{F} - \mathbf{Z}\mathbf{R}\|_F^2 \\ &= \|\mathbf{F} - \mathbf{C}\mathbf{C}^\top\mathbf{F}\|_F^2 + \|\mathbf{C}\mathbf{C}^\top\mathbf{F} - \mathbf{C}\mathbf{Z}\mathbf{R}\|_F^2 \\ &= \|\mathbf{F} - \mathbf{C}\mathbf{Z}\mathbf{R}\|_F^2. \end{aligned}$$

This completes the proof of [Lemma 28](#). □

D Low Space Differentially private Low-rank Factorization

In this section, we give our basic low space algorithms for various granularity of privacy. These algorithms serve as a meta algorithm on which we built algorithms in various model of computations, like streaming model under turnstile update, continual release model, and local model. In [Appendix D.1](#), we analyze the algorithm presented earlier in [Section 1.1](#). In [Appendix D.2](#), we give our low space differentially private algorithm under Priv_2 , a stronger privacy guarantee.

D.1 Low Space Differentially Private Low-rank Factorization Under Priv_1

In this section, we analyze the algorithm presented earlier in [Section 1.1](#). For the ease of the readers, we first restate [Theorem 5](#) here.

Restatement of Theorem 5. Let $m, n, k \in \mathbb{N}$ and $\alpha, \varepsilon, \delta$ be the input parameters. Let $s = \max\{m, n\}$, $u = \min\{m, n\}$, $\kappa = (1 + \alpha)/(1 - \alpha)$, $\eta = \max\{k, \alpha^{-1}\}$, and $\sigma_{\min} = 16 \log(1/\delta) \sqrt{t\kappa \ln(1/\delta)}/\varepsilon$. Given an $m \times n$ matrix \mathbf{A} , PRIVATE-SPACE-OPTIMAL-LRF, described in [Figure 2](#), outputs a k -rank factorization $\tilde{\mathbf{U}}, \tilde{\mathbf{\Sigma}}$, and $\tilde{\mathbf{V}}$, such that

1. PRIVATE-SPACE-OPTIMAL-LRF is $(3\varepsilon, 3\delta)$ differentially private under Priv_1 .
2. Let $\mathbf{M}_k = \tilde{\mathbf{U}}\tilde{\mathbf{\Sigma}}\tilde{\mathbf{V}}^\top$. Then with probability $9/10$ over the random coins of PRIVATE-SPACE-OPTIMAL-LRF,

$$\|(\mathbf{A} \ \mathbf{0}) - \mathbf{M}_k\|_F \leq (1 + \alpha)\|\mathbf{A} - [\mathbf{A}]_k\|_F + O(\sigma_{\min}\sqrt{u} + \varepsilon^{-1}\sqrt{ks \ln(1/\delta)}),$$

3. The space used by PRIVATE-SPACE-OPTIMAL-LRF is $O((m + n)\eta\alpha^{-1} \log(k/\delta))$.
4. The total computational time is $O\left(\text{nn}(\mathbf{A}) \log(1/\delta) + \frac{(u^2 + s\eta)\eta \log^2(k/\delta)}{\alpha^2} + \frac{\eta^3 \log^3(k/\delta)}{\alpha^5}\right)$.

First note that if we do not aim for run time efficiency, then we can simply use Gaussian random matrices instead of sampling $\Phi, \Psi \sim \mathcal{D}_R$ and $\mathbf{S}, \mathbf{T} \sim \mathcal{D}_A$ as per [Lemma 14](#) and [Lemma 15](#). This would simplify the privacy proof as we will see later. Secondly, the probability of success can be amplified to get a high probability bound by standard techniques. We leave these details as they are standard arguments.

Proof of Theorem 5. Part 3 follows immediately by setting the values of t and v . Part 4 of [Theorem 5](#) requires some computation. More precisely, we have the following.

1. Computing \mathbf{Y}_c requires $O(\text{nn}(\mathbf{A}) \log(1/\delta) + m(m+n)t)$ time and computing \mathbf{Y}_r requires $O(\text{nn}(\mathbf{A}) \log(1/\delta) + (m + n)t^2)$ time.
2. Computing \mathbf{U} and \mathbf{V} requires $O(nt^2 + mt^2) = O((m + n)\eta^2\alpha^{-2} \log^2(k/\delta))$ time.
3. Computing a SVD of matrices $\mathbf{S}\mathbf{U}$ and $\mathbf{T}\mathbf{V}^\top$ requires $vt^2 + tv^2 = O(k^3\alpha^{-5} \log^2(k/\delta))$.
4. Computing \mathbf{Z} requires $O(\text{nn}(\mathbf{A}) \log(1/\delta) + \eta^2/\alpha^2 \log^2(k/\delta) + n\eta^2\alpha^{-2} \log^2(k/\delta))$ Computation of $[\tilde{\mathbf{U}}_s^\top \mathbf{Z} \tilde{\mathbf{V}}]_k$ requires $O(\text{nn}(\mathbf{A}) \log(1/\delta) + tv^2 = O(\text{nn}(\mathbf{A}) \log(1/\delta) + k^3\alpha^{-5} \log^3(k/\delta))$ time.
5. Computation of the last SVD requires $O((m + n)\eta^2\alpha^{-2} \log^2(k/\delta))$ time.

Combining all these terms, we have our claim on the running time.

D.1.1 Correctness Proof of PRIVATE-SPACE-OPTIMAL-LRF

We now prove the correctness guarantee of PRIVATE-SPACE-OPTIMAL-LRF. In what follows, we analyze the case when $m \leq n$. The case when $n \leq m$ follows analogously due to the symmetry of PRIVATE-SPACE-OPTIMAL-LRF. First note that appending \mathbf{A} with an all zero matrix $\mathbf{0}^{m \times m}$ has no effect on its k -rank approximation, i.e., we can analyze the approximation guarantee for $\hat{\mathbf{A}} := (\mathbf{A} \ \mathbf{0})$ instead of \mathbf{A} . Let \mathbf{M}_k be as defined in [Theorem 5](#). We break our proof in three main steps.

- (i) Lower bound $\|\mathbf{M}_k - \hat{\mathbf{A}}\|_F$ by $\|\mathbf{M}_k - (\mathbf{A} \ \mathbf{0})\|_F$ up to an additive term ([Lemma 29](#)).
- (ii) Relate $\|\mathbf{M}_k - \hat{\mathbf{A}}\|_F$ and $\|\hat{\mathbf{A}} - [\hat{\mathbf{A}}]_k\|_F$ ([Lemma 30](#)).

(iii) Upper bound $\|\widehat{\mathbf{A}} - [\widehat{\mathbf{A}}]_k\|_F$ by a term linear in $\|\mathbf{A} - [\mathbf{A}]_k\|_F$ up to an additive term (Lemma 32).

Part 2 of Theorem 5 follows by combining these three items together.

Performing step (i). We start by proving a bound on $\|\mathbf{M}_k - \widehat{\mathbf{A}}\|_F$ by $\|\mathbf{M}_k - \mathbf{A}\|_F$ and a small additive term. The following lemma provides such a bound.

Lemma 29. *Let \mathbf{A} be an $m \times n$ input matrix, and let $\widehat{\mathbf{A}} = (\mathbf{A} \ \sigma_{\min} \mathbb{I}_m)$ for σ_{\min} defined in Theorem 5. Denote by $\mathbf{M}_k := \widetilde{\mathbf{U}} \widetilde{\Sigma} \widetilde{\mathbf{V}}^\top$ the output of PRIVATE-OPTIMAL-SPACE-LRF. Then*

$$\|\mathbf{M}_k - (\mathbf{A} \ \mathbf{0})\|_F \leq \|\mathbf{M}_k - \widehat{\mathbf{A}}\|_F + \sigma_{\min} \sqrt{m}.$$

Proof. The lemma is immediate from the following observation: $\|\mathbf{M}_k - (\mathbf{A} \ \mathbf{0})\|_F - \sigma_{\min} \|\mathbb{I}_m\|_F \leq \|\mathbf{M}_k - (\mathbf{A} \ \mathbf{0}) - (\mathbf{0} \ \sigma_{\min} \mathbb{I})\|_F = \|\mathbf{M}_k - \widehat{\mathbf{A}}\|_F$, where the first inequality follows from the sub-additivity of the Frobenius norm. \square

Performing step (ii). This is the most involved part of the proof and uses multiple lemmas as follows.

Lemma 30. *Let $\widehat{\mathbf{A}} = (\mathbf{A} \ \sigma_{\min} \mathbb{I})$ and denote by $\mathbf{M}_k := \widetilde{\mathbf{U}} \widetilde{\Sigma} \widetilde{\mathbf{V}}^\top$. Let $\widehat{\Phi} = t^{-1} \Omega \Phi$. Then with probability $1 - O(\delta)$ over the random coins of the algorithm PRIVATE-SPACE-OPTIMAL-LRF,*

$$\|\mathbf{M}_k - \widehat{\mathbf{A}}\|_F \leq (1 + \alpha) \|\widehat{\mathbf{A}} - [\widehat{\mathbf{A}}]_k\|_F + 2 \|\mathbf{S}^\dagger \mathbf{N}(\mathbf{T}^\top)^\dagger\|_F + \|\widehat{\mathbf{A}} \widehat{\Phi} ([\widehat{\mathbf{A}}]_k \widehat{\Phi})^\dagger (\Psi \widehat{\mathbf{A}} \widehat{\Phi} ([\widehat{\mathbf{A}}]_k \widehat{\Phi})^\dagger)^\dagger \mathbf{N}_1\|_F.$$

Proof. Let $\mathbf{B} = \widehat{\mathbf{A}} + \mathbf{S}^\dagger \mathbf{N}(\mathbf{T}^\top)^\top$ and $\widehat{\Phi} = \Omega \Phi$. We first use the relation between $\min_{\mathbf{X}, r(\mathbf{X}) \leq k} \|\widehat{\mathbf{A}} \widehat{\Phi} \mathbf{X} \Psi \widehat{\mathbf{A}} - \widehat{\mathbf{A}}\|$ and $(1 + \alpha) \|\widehat{\mathbf{A}} - [\widehat{\mathbf{A}}]_k\|_F$ from the proof of Theorem 27. Using Lemma 14 and Fact 19, if we set $\mathbf{A} = \widehat{\mathbf{A}}$ in equation (6), then with probability $1 - 3\delta$ over $\widehat{\Phi}^\top, \Psi \sim \mathcal{D}_R$, $\|\widehat{\mathbf{A}} \widehat{\Phi} ([\widehat{\mathbf{A}}]_k \widehat{\Phi})^\dagger (\Psi \widehat{\mathbf{A}} \widehat{\Phi} ([\widehat{\mathbf{A}}]_k \widehat{\Phi})^\dagger)^\dagger \Psi \widehat{\mathbf{A}} - \widehat{\mathbf{A}}\|_F \leq (1 + \alpha)^2 \|\widehat{\mathbf{A}} - [\widehat{\mathbf{A}}]_k\|_F$. Now define a rank- k matrix $\mathbf{P}_k := ([\widehat{\mathbf{A}}]_k \widehat{\Phi})^\dagger (\Psi \widehat{\mathbf{A}} \widehat{\Phi} ([\widehat{\mathbf{A}}]_k \widehat{\Phi})^\dagger)^\dagger$. Let us consider the following optimization problem:

$$\min_{\substack{\mathbf{X} \\ r(\mathbf{X}) \leq k}} \|\mathbf{Y}_c \mathbf{X} \mathbf{Y}_r - \mathbf{B}\|_F.$$

Since \mathbf{P}_k is a rank- k matrix, using the subadditivity of the Frobenius norm, we have

$$\begin{aligned} \min_{\substack{\mathbf{X} \\ r(\mathbf{X}) \leq k}} \|\mathbf{Y}_c \mathbf{X} \mathbf{Y}_r - \mathbf{B}\|_F &\leq \|\mathbf{Y}_c \mathbf{P}_k \mathbf{Y}_r - \mathbf{B}\|_F \\ &= \|\mathbf{Y}_c \mathbf{P}_k \mathbf{Y}_r - (\widehat{\mathbf{A}} + \mathbf{S}^\dagger \mathbf{N}(\mathbf{T}^\top)^\top)\|_F \\ &\leq \|\mathbf{Y}_c \mathbf{P}_k \mathbf{Y}_r - \widehat{\mathbf{A}}\|_F + \|\mathbf{S}^\dagger \mathbf{N}(\mathbf{T}^\top)^\top\|_F \\ &= \|\widehat{\mathbf{A}} \widehat{\Phi} \mathbf{P}_k (\Psi \widehat{\mathbf{A}} + \mathbf{N}_1) - \widehat{\mathbf{A}}\|_F + \|\mathbf{S}^\dagger \mathbf{N}(\mathbf{T}^\top)^\top\|_F \\ &\leq \|\widehat{\mathbf{A}} \widehat{\Phi} \mathbf{P}_k \Psi \widehat{\mathbf{A}} - \widehat{\mathbf{A}}\|_F + \|\mathbf{S}^\dagger \mathbf{N}_2(\mathbf{T}^\top)^\top\|_F + \|\widehat{\mathbf{A}} \widehat{\Phi} \mathbf{P}_k \mathbf{N}_1\|_F \\ &\leq (1 + \alpha)^2 \|\widehat{\mathbf{A}} - [\widehat{\mathbf{A}}]_k\|_F + \|\mathbf{S}^\dagger \mathbf{N}_2(\mathbf{T}^\top)^\top\|_F + \|\widehat{\mathbf{A}} \widehat{\Phi} \mathbf{P}_k \mathbf{N}_1\|_F \end{aligned} \quad (11)$$

Let $\mathbf{S}_2 = \widehat{\mathbf{A}} \widehat{\Phi} \mathbf{P}_k \mathbf{N}_1$. By definition, \mathbf{V} is a matrix whose rows are an orthonormal basis for the row space of \mathbf{Y}_r and \mathbf{U} is a matrix whose columns are an orthonormal basis for the column space of \mathbf{Y}_c . Therefore,

$$\min_{\substack{\mathbf{Y} \\ r(\mathbf{Y}) \leq k}} \|\mathbf{U} \mathbf{Y} \mathbf{V} - \mathbf{B}\|_F \leq \min_{\substack{\mathbf{X} \\ r(\mathbf{X}) \leq k}} \|\mathbf{Y}_c \mathbf{X} \mathbf{V} - \mathbf{B}\|_F \leq \min_{\substack{\mathbf{X} \\ r(\mathbf{X}) \leq k}} \|\mathbf{Y}_c \mathbf{X} \mathbf{Y}_r - \mathbf{B}\|_F. \quad (12)$$

Combining equation (11) and equation (12), we have

$$\min_{\substack{\mathbf{Y} \\ r(\mathbf{Y}) \leq k}} \|\mathbf{U} \mathbf{Y} \mathbf{V} - \mathbf{B}\|_F \leq (1 + \alpha)^2 \|\widehat{\mathbf{A}} - [\widehat{\mathbf{A}}]_k\|_F + \|\mathbf{S}^\dagger \mathbf{N}_2(\mathbf{T}^\top)^\top\|_F + \|\mathbf{S}_2\|_F. \quad (13)$$

Claim 31. Let $\mathbf{U}, \mathbf{V}, \mathbf{B}, \mathbf{A}, \mathbf{S}, \mathbf{T}$ and \mathbf{N}_2 be as above. Let \mathcal{D}_A be a distribution that satisfies (α, δ) -affine embedding. Let $\tilde{\mathbf{X}} = \operatorname{argmin}_{\mathbf{X}, r(\mathbf{X})=k} \|\mathbf{S}(\mathbf{U}\mathbf{X} - \mathbf{B})\|_F$. Then with probability $1 - O(\delta)$ over $\mathbf{S}, \mathbf{T}^\top \sim \mathcal{D}_A$,

$$\|(\mathbf{U}\tilde{\mathbf{X}}\mathbf{V} - \mathbf{B})\|_F \leq (1 + \alpha)^4 \|\hat{\mathbf{A}} - [\hat{\mathbf{A}}]_k\|_F + 4\|\mathbf{S}^\dagger \mathbf{N}_2(\mathbf{T}^\dagger)^\top\|_F + 4\|\mathbf{S}_2\|_F.$$

Proof. Set $p = t$, $\mathbf{D} = \mathbf{U}$ and $\mathbf{E} = \mathbf{B}$ in the statement of [Lemma 15](#). Let us restrict our attention to matrices \mathbf{X} with rank at most k and denote by

$$\hat{\mathbf{X}} = \operatorname{argmin}_{\mathbf{X}, r(\mathbf{X}) \leq k} \|\mathbf{U}\mathbf{X}\mathbf{V} - \mathbf{B}\|_F \quad \text{and} \quad \tilde{\mathbf{X}} = \operatorname{argmin}_{\mathbf{X}, r(\mathbf{X}) \leq k} \|\mathbf{S}(\mathbf{U}\mathbf{X}\mathbf{V} - \mathbf{B})\mathbf{T}^\top\|_F.$$

Then we have with probability $1 - 3\delta$ over $\mathbf{S} \sim \mathcal{D}_A$,

$$\min_{\substack{\mathbf{X} \\ r(\mathbf{X})=k}} \|\mathbf{U}\mathbf{X}\mathbf{V} - \mathbf{B}\|_F = \|\mathbf{U}\hat{\mathbf{X}}\mathbf{V} - \mathbf{B}\|_F \geq (1 + \alpha)^{-1/2} \|\mathbf{S}(\mathbf{U}\hat{\mathbf{X}}\mathbf{V} - \mathbf{B})\|_F. \quad (14)$$

Substituting $\mathbf{D} = \mathbf{V}^\top$, $\mathbf{X} = (\mathbf{S}\mathbf{U}\hat{\mathbf{X}})^\top$ and $\mathbf{E} = (\mathbf{S}\mathbf{B})^\top$ in the statement of [Lemma 15](#), with probability $1 - 4\delta$,

$$\begin{aligned} (1 + \alpha)^{-1/2} \|\mathbf{S}(\mathbf{U}\hat{\mathbf{X}}\mathbf{V} - \mathbf{B})\|_F &= (1 + \alpha)^{-1/2} \|\mathbf{V}^\top(\mathbf{S}\mathbf{U}\hat{\mathbf{X}})^\top - (\mathbf{S}\mathbf{B})^\top\|_F \\ &\geq (1 + \alpha)^{-1} \|\mathbf{T}(\mathbf{V}^\top(\mathbf{S}\mathbf{U}\hat{\mathbf{X}})^\top - (\mathbf{S}\mathbf{B})^\top)\|_F \\ &= (1 + \alpha)^{-1} \|\mathbf{S}(\mathbf{U}\hat{\mathbf{X}}\mathbf{V} - \mathbf{B})\mathbf{T}^\top\|_F \\ &\geq (1 + \alpha)^{-1} \min_{\substack{\mathbf{X} \\ r(\mathbf{X}) \leq k}} \|\mathbf{S}(\mathbf{U}\mathbf{X}\mathbf{V} - \mathbf{B})\mathbf{T}^\top\|_F \\ &= (1 + \alpha)^{-1} \|\mathbf{S}(\mathbf{U}\tilde{\mathbf{X}}\mathbf{V} - \mathbf{B})\mathbf{T}^\top\|_F \\ &\geq (1 + \alpha)^{-2} \|(\mathbf{U}\tilde{\mathbf{X}}\mathbf{V} - \mathbf{B})\|_F. \end{aligned} \quad (15)$$

Combining [equation \(15\)](#) with [equation \(13\)](#), with probability $1 - O(\delta)$ over the random coins of PRIVATE-OPTIMAL-SPACE-LRF,

$$\|(\mathbf{U}\tilde{\mathbf{X}}\mathbf{V} - \mathbf{B})\|_F \leq (1 + \alpha)^4 \|\hat{\mathbf{A}} - [\hat{\mathbf{A}}]_k\|_F + 4(\|\mathbf{S}^\dagger \mathbf{N}_2(\mathbf{T}^\dagger)^\top\|_F + \|\mathbf{S}_2\|_F) \quad (16)$$

as $\alpha \in (0, 1)$. This completes the proof of [Claim 31](#). \square

To finalize the proof, we need to compute

$$\tilde{\mathbf{X}} = \operatorname{argmin}_{\substack{\mathbf{X} \\ r(\mathbf{X}) \leq k}} \|\mathbf{S}(\mathbf{U}\mathbf{X}\mathbf{V} - \mathbf{B})\mathbf{T}^\top\|_F.$$

We use [Lemma 28](#) to compute $\tilde{\mathbf{X}}$. Recall $\mathbf{S}\mathbf{U} = \mathbf{U}_s \boldsymbol{\Sigma}_s \mathbf{V}_s^\top$ and $\mathbf{T}\mathbf{V}^\top = \mathbf{U}_t \boldsymbol{\Sigma}_t \mathbf{V}_t^\top$. Using [Lemma 28](#) with $\mathbf{C} = \tilde{\mathbf{U}}_s$, $\mathbf{R} = \tilde{\mathbf{V}}_t^\top$ and $\mathbf{F} = \mathbf{Z} = \mathbf{S}\hat{\mathbf{A}}\mathbf{T}^\top + \mathbf{N}_2$, we get

$$[\tilde{\mathbf{U}}_s^\top \mathbf{S}\mathbf{B}\mathbf{T}^\top \tilde{\mathbf{V}}_t]_k = \operatorname{argmin}_{\substack{\mathbf{X} \\ r(\mathbf{X}) \leq k}} \|\tilde{\mathbf{U}}_s \mathbf{X} \tilde{\mathbf{V}}_t^\top - \mathbf{S}\mathbf{B}\mathbf{T}^\top\|_F$$

This implies that $\operatorname{argmin}_{\mathbf{X}, r(\mathbf{X}) \leq k} \|\mathbf{S}(\mathbf{U}\mathbf{X}\mathbf{V} - \mathbf{B})\mathbf{T}^\top\|_F$ has closed form

$$\tilde{\mathbf{X}} = \tilde{\mathbf{V}}_s \tilde{\boldsymbol{\Sigma}}_s^\dagger [\tilde{\mathbf{U}}_s^\top \mathbf{Z} \tilde{\mathbf{V}}_t]_k \tilde{\boldsymbol{\Sigma}}_t^\dagger \tilde{\mathbf{U}}_t^\top \quad (17)$$

Recall, $\tilde{\mathbf{X}} = \tilde{\mathbf{V}}_s \tilde{\Sigma}_s^\dagger [\tilde{\mathbf{U}}_s^\top \mathbf{Z} \tilde{\mathbf{V}}_t]_k \tilde{\Sigma}_t^\dagger \tilde{\mathbf{U}}_t^\top = \mathbf{U}' \Sigma' \mathbf{V}'^\top$. Substituting [equation \(17\)](#) in [equation \(16\)](#) and the fact that $\mathbf{B} = \hat{\mathbf{A}} + \mathbf{S}^\dagger \mathbf{N}_2 (\mathbf{T}^\top)^\dagger$, we have

$$\begin{aligned} \|\mathbf{U} \mathbf{U}' \Sigma' (\mathbf{V}'^\top \mathbf{V}')^\top - \hat{\mathbf{A}}\|_F - \|\mathbf{S}^\dagger \mathbf{N}_2 (\mathbf{T}^\top)^\dagger\|_F &\leq \|\mathbf{U} \mathbf{U}' \Sigma' (\mathbf{V}'^\top \mathbf{V}')^\top - \mathbf{B}\|_F \\ &\leq (1 + \alpha)^6 \|\hat{\mathbf{A}} - [\hat{\mathbf{A}}]_k\|_F + O(\|\mathbf{S}^\dagger \mathbf{N}_2 (\mathbf{T}^\top)^\dagger\|_F + \|\mathbf{S}_2\|_F). \end{aligned}$$

This in particular implies that

$$\|\mathbf{U} \mathbf{U}' \Sigma' (\mathbf{V}'^\top \mathbf{V}')^\top - \hat{\mathbf{A}}\|_F \leq (1 + \alpha)^6 \|\hat{\mathbf{A}} - [\hat{\mathbf{A}}]_k\|_F + O(\|\mathbf{S}^\dagger \mathbf{N}_2 (\mathbf{T}^\top)^\dagger\|_F + \|\mathbf{S}_2\|_F).$$

Scaling the value of α by a constant completes the proof of [Lemma 30](#). \square

Performing step (iii). In order to complete the proof, we compute an upper bound on $\|\hat{\mathbf{A}} - [\hat{\mathbf{A}}]_k\|_F$. For this, we need the Weyl's perturbation theorem ([Theorem 25](#)).

Lemma 32. *Let d be the maximum of the rank of \mathbf{A} and $\hat{\mathbf{A}}$. Let $\sigma_1, \dots, \sigma_d$ be the singular values of \mathbf{A} and $\sigma'_1, \dots, \sigma'_d$ be the singular values of $\hat{\mathbf{A}}$. Then $|\sigma_i - \sigma'_i| \leq \sigma$ for all $1 \leq i \leq d$.*

Proof. The lemma follows from the basic application of [Theorem 25](#). We can write $\hat{\mathbf{A}} = \begin{pmatrix} \mathbf{A} & \mathbf{0} \\ \mathbf{0} & \sigma_{\min} \mathbb{I}_m \end{pmatrix}$. The lemma follows since, by construction, all the singular values of $\begin{pmatrix} \mathbf{0} & \sigma_{\min} \mathbb{I}_m \end{pmatrix}$ are σ_{\min} . \square

To compute the additive error, we need to bound $\|\mathbf{S}^\dagger \mathbf{N}_2 (\mathbf{T}^\top)^\dagger\|_F$ and $\|\mathbf{S}_2\|_F$. This is done by the following two lemmas.

Claim 33. *Let \mathcal{D}_R be a distribution that satisfies (α, δ) -subspace embedding for generalized regression. Let \mathbf{S}_2 be as defined above. Then with probability 99/100 over $\hat{\Phi} \sim \mathcal{D}_R$, $\|\mathbf{S}_2\|_F = \rho_1 \sqrt{kn(1 + \alpha)}$.*

Proof. Let $\mathbf{G} = \Psi \mathbf{A} \Phi ([\hat{\mathbf{A}}]_k \hat{\Phi})^\dagger$. \mathbf{G} is an $m \times k$ matrix. When $\alpha \leq 1$, \mathbf{G} has rank k . This implies that there exist a $t \times k$ matrix $\hat{\mathbf{U}}$ with orthonormal columns such that $\mathbf{G} \mathbf{G}^\dagger = \hat{\mathbf{U}} \hat{\mathbf{U}}^\top$. Therefore, $\Psi \mathbf{S}_2 = \mathbf{G} \mathbf{G}^\dagger \mathbf{N}_2 = \hat{\mathbf{U}} \hat{\mathbf{U}}^\top \mathbf{N}_1$. From the second claim of [Lemma 14](#) and the choice of the parameter t , $\|\mathbf{S}_2\|_F^2 \leq (1 + \alpha) \|\hat{\mathbf{U}} \hat{\mathbf{U}}^\top \mathbf{N}_1\|_F^2$. Since every entries of \mathbf{N}_1 are picked i.i.d. and $\hat{\mathbf{U}} \hat{\mathbf{U}}^\top$ is an orthonormal projection onto a k -dimensional subspace, we have $\|\mathbf{S}_2\|_F = O(\rho_1 \sqrt{kn(1 + \alpha)})$. \square

The following claim follows from [Lemma 26](#).

Claim 34. *Let $\mathbf{S}, \mathbf{T} \sim \mathcal{D}_A$. Then for any matrix \mathbf{N}_2 of appropriate dimension, $\|\mathbf{S}^\dagger \mathbf{N}_2 (\mathbf{T}^\top)^\dagger\|_F = \|\mathbf{N}_2\|_F$.*

Proof. Let $\mathbf{C} = \mathbf{S}^\dagger \mathbf{N}_2 (\mathbf{T}^\top)^\dagger$. Then $\mathbf{S} \mathbf{C} \mathbf{T}^\top = \mathbf{S} \mathbf{S}^\dagger \mathbf{N}_2 (\mathbf{T} \mathbf{T}^\top)^\dagger$. Now $\mathbf{S} \mathbf{S}^\dagger$ (similarly, $\mathbf{T} \mathbf{T}^\top$) is a projection onto a random subspace of dimension k . Since every entries of \mathbf{N}_2 is picked i.i.d. from $\mathcal{N}(0, \rho^2)$, $\mathbf{S} \mathbf{C} \mathbf{T}^\top = \tilde{\mathbf{N}}_2$, where $\tilde{\mathbf{N}}_2$ is an $v \times v$ matrix with every entries picked i.i.d. from $\mathcal{N}(0, \rho_2^2)$. Using [Lemma 20](#), this implies that

$$\mathbb{E}[\|\mathbf{S} \mathbf{C} \mathbf{T}^\top\|_F^2] = \mathbb{E}[\|\tilde{\mathbf{N}}_2\|_F^2] = \sum_{i,j} \mathbb{E}[(\tilde{\mathbf{N}}_2)_{ij}^2] = v^2 \rho_2^2.$$

The result follows using Markov's inequality and the fact that $\|\mathbf{S} \mathbf{C} \mathbf{T}^\top\|_F^2 = (1 + \alpha)^2 \|\mathbf{C}\|_F^2$ and $\alpha \leq 1$. \square

The above claim implies that $\|\mathbf{N}_2\|_F = O(\rho_2 v)$ with probability 99/100.

Since $\|\hat{\mathbf{A}} - [\hat{\mathbf{A}}]_k\|_F^2 \leq \sum_{i>k} \sigma_i'^2$ and $\|\mathbf{A} - \mathbf{A}_k\|_F^2 \leq \sum_{i>k} \sigma_i^2$, combining [Lemma 29](#), [Lemma 30](#), [Claim 33](#), [Claim 34](#), [Lemma 32](#), and [Lemma 20](#), we have the final utility bound.

Lemma 35. *Let ρ_1, ρ_2 , and σ_{\min} be as defined in [Theorem 5](#). With probability 99/100 over the coins of the algorithm PRIVATE-OPTIMAL-SPACE-LRF, the output of PRIVATE-OPTIMAL-SPACE-LRF satisfies*

$$\|(\mathbf{A} \ \mathbf{0}) - \mathbf{M}_k\|_F \leq (1 + \alpha) \|\mathbf{A} - [\mathbf{A}]_k\|_F + O(\sigma_{\min} \sqrt{m} + \rho_1 \sqrt{kn(1 + \alpha)} + \rho_2 v).$$

Now observe that $v = O((\eta/\alpha^2) \log(k/\delta)) \ll \min\{m, n\}$ and $1 + \alpha \leq 2$. If former is not the case, then there is no reason to do a random projection. Therefore, the term $\rho_2 v$ is subsumed by the rest of the term. The result follows by setting the values of ρ_1 and σ_{\min} . \square

D.1.2 Privacy Proof of PRIVATE-SPACE-OPTIMAL-LRF

Our privacy result can be restated as the following lemma.

Lemma 36. *If σ_{\min}, ρ_1 and ρ_2 be as in [Theorem 5](#), then the algorithm presented in [Figure 2](#), ALGORITHM 2, is $(3\varepsilon, 3\delta)$ -differentially private.*

We prove the lemma when $m \leq n$. The case for $m \geq n$ is analogous after inverting the roles of $\widehat{\Phi}$ and Ψ . Let \mathbf{A} and \mathbf{A}' be two neighboring matrices, i.e., $\mathbf{E} = \mathbf{A} - \mathbf{A}' = \mathbf{u}\mathbf{v}^\top$. Then $\widehat{\mathbf{A}}$ and $\widehat{\mathbf{A}'}$, constructed by OPTIMAL-SPACE-PRIVATE-LRF, has the following property: $\widehat{\mathbf{A}'} = \widehat{\mathbf{A}} + (\mathbf{E} \ \mathbf{0})$.

Claim 37. *If $\rho_1 = \frac{\sqrt{(1+\alpha)\ln(1/\delta)}}{\varepsilon}$ and $\rho_2 = \frac{(1+\alpha)\sqrt{\ln(1/\delta)}}{\varepsilon}$, then publishing \mathbf{Y}_r and \mathbf{Z} preserves $(2\varepsilon, 2\delta)$ -differential privacy.*

Proof. We use the second claims of [Lemma 14](#) and [Lemma 15](#), i.e., $\|\mathbf{S}\mathbf{D}\|_F^2 = (1 \pm \alpha)\|\mathbf{D}\|_F^2$ and $\|\Psi\mathbf{D}\|_F^2 = (1 \pm \alpha)\|\mathbf{D}\|_F^2$ for all \mathbf{D} , where $\mathbf{S} \sim \mathcal{D}_A$ and $\Psi \sim \mathcal{D}_R$. Let \mathbf{A} and \mathbf{A}' be two neighboring matrices such that $\mathbf{E} = \mathbf{A} - \mathbf{A}' = \mathbf{u}\mathbf{v}^\top$. Then $\|\mathbf{S}(\mathbf{E} \ \mathbf{0})\mathbf{T}^\top\|_F^2 \leq (1 + \alpha)\|(\mathbf{E} \ \mathbf{0})\mathbf{T}^\top\|_F^2 \leq (1 + \alpha)^2$. Publishing \mathbf{Z} preserves (ε, δ) -differential privacy follows from considering the vector form of the matrix $\mathbf{S}\widehat{\mathbf{A}}\mathbf{T}^\top$ and \mathbf{N}_2 and applying [Theorem 18](#). Similarly, we use [Theorem 18](#) and the fact that, for any matrix \mathbf{C} of appropriate dimension, $\|\Psi\mathbf{C}\|_F^2 \leq (1 + \alpha)\|\mathbf{C}\|_F^2$, to prove that publishing $\Psi\widehat{\mathbf{A}} + \mathbf{N}_1$ preserves differential privacy. \square

We next prove that \mathbf{Y}_c is (ε, δ) -differentially private. This would complete the proof of [Lemma 36](#) by combining [Lemma 16](#) and [Theorem 17](#) with the above claim. Let $\mathbf{A} - \mathbf{A}' = \mathbf{E} = \mathbf{u}\mathbf{v}^\top$ and let $\widehat{\mathbf{v}} = (\mathbf{v} \ \mathbf{0}^m)$. Then $\widehat{\mathbf{A}} - \widehat{\mathbf{A}'} = \mathbf{u}\widehat{\mathbf{v}}^\top$. Since Φ^\top is sampled from \mathcal{D}_R , we have $\|\Phi^\top\mathbf{W}\|_F^2 = (1 + \alpha)\|\mathbf{W}\|_F^2$ for any matrix \mathbf{W} with probability $1 - \delta$ (second claim of [Lemma 14](#)). Therefore, $\mathbf{u}\mathbf{v}^\top\Phi = (1 + \alpha)^{1/2}\mathbf{u}\widetilde{\mathbf{v}}^\top = \widetilde{\mathbf{u}}\widetilde{\mathbf{v}}^\top$ for some unit vectors $\mathbf{u}, \widetilde{\mathbf{v}}$ and $\widetilde{\mathbf{u}} = (1 + \alpha)^{1/2}\mathbf{u}$. We now show that $\widehat{\mathbf{A}}\Phi\Omega_1$ preserves privacy. We prove that each row of the published matrix preserves $(\varepsilon_0, \delta_0)$ -differential privacy for some appropriate ε_0, δ_0 , and then invoke [Theorem 17](#) to prove that the published matrix preserves (ε, δ) -differential privacy.

It may seem that the privacy of \mathbf{Y}_c follows from the result of Blocki *et al.* [[BBDS12](#)], but this is not the case because of the following reasons.

1. The definition of neighboring matrices considered in this paper is different from that of Blocki *et al.* [[BBDS12](#)]. To recall, Blocki *et al.* [[BBDS12](#)] considered two matrices neighboring if they differ in at most one row by a unit norm. In our case, we consider two matrices are neighboring if they have the form $\mathbf{u}\mathbf{v}^\top$ for unit vectors \mathbf{u}, \mathbf{v} .
2. We multiply the Gaussian matrix to a random projection of $\widehat{\mathbf{A}}$ and not to \mathbf{A} as in the case of Blocki *et al.* [[BBDS12](#)], i.e., to $\widehat{\mathbf{A}}\Phi$ and not to $\widehat{\mathbf{A}}$.

If we do not care about the run time efficiency of the algorithm, then we can set $\widehat{\Phi} := \Omega$ instead of $\widehat{\Phi} := \Omega\Phi$. In this case, we would not need to deal with the second issue mentioned above.

We first give a brief overview of how to deal with these issues here. The first issue is resolved by analyzing $(\widehat{\mathbf{A}} - \widehat{\mathbf{A}'})\Phi$. We observe that this expression can be represented in the form of $\widetilde{\mathbf{u}}\widetilde{\mathbf{v}}^\top$, where $\widetilde{\mathbf{u}} = (1 + \alpha)^{1/2}\mathbf{u}$ for some $\|\mathbf{u}\|_2 = 1, \|\widetilde{\mathbf{v}}\|_2 = 1$. The second issue can be resolved by observing that Φ satisfies (α, δ) -JLP because of the choice of t . Since the rank of $\widehat{\mathbf{A}}$ and $\widehat{\mathbf{A}}\Phi$ are the same, the singular values of $\widehat{\mathbf{A}}\Phi$ are within a multiplicative factor of $(1 \pm \alpha)^{1/2}$ of the singular values of Φ with probability $1 - \delta$ due to Sarlos [[Sar06](#)]. Therefore, we scale the singular values of $\widehat{\mathbf{A}}$ appropriately.

We now return to the proof. Denote by $\widehat{\mathbf{A}} = (\mathbf{A} \ \sigma_{\min} \mathbb{I}_m)$ and by $\widehat{\mathbf{A}}' = (\mathbf{A}' \ \sigma_{\min} \mathbb{I}_m)$, where $\mathbf{A} - \mathbf{A}' = \mathbf{u}\mathbf{v}^\top$. Then $\widehat{\mathbf{A}}' - \widehat{\mathbf{A}} = (\mathbf{u}\mathbf{v}^\top \ \mathbf{0})$. Let $\mathbf{U}_C \Sigma_C \mathbf{V}_C^\top$ be the SVD of $\mathbf{C} = \widehat{\mathbf{A}} \Phi$ and $\widetilde{\mathbf{U}}_C \widetilde{\Sigma}_C \widetilde{\mathbf{V}}_C^\top$ be the SVD of $\widetilde{\mathbf{C}} = \widehat{\mathbf{A}}' \Phi$. From above discussion, we know that if $\mathbf{A} - \mathbf{A}' = \mathbf{u}\mathbf{v}^\top$, then $\mathbf{C} - \widetilde{\mathbf{C}} = (1 + \alpha)^{1/2} \widetilde{\mathbf{u}} \widetilde{\mathbf{v}}^\top$ for some unit vectors $\widetilde{\mathbf{u}}$ and $\widetilde{\mathbf{v}}$. For notational brevity, in what follows we write \mathbf{u} for $\widetilde{\mathbf{u}}$ and \mathbf{v} for $\widetilde{\mathbf{v}}$.

Note that both \mathbf{C} and $\widetilde{\mathbf{C}}$ are full rank matrices because of the construction; therefore $\mathbf{C}\mathbf{C}^\top$ (respectively, $\widetilde{\mathbf{C}}\widetilde{\mathbf{C}}^\top$) is a full dimensional $m \times m$ matrix. This implies that the affine transformation of the multi-variate Gaussian is well-defined (both the covariance $(\mathbf{C}\mathbf{C}^\top)^{-1}$ has full rank and $\det(\mathbf{C}\mathbf{C}^\top)$ is non-zero). That is, the PDF of the distributions of the rows, corresponding to \mathbf{C} and $\widetilde{\mathbf{C}}$, is just a linear transformation of $\mathcal{N}(\mathbf{0}, \mathbb{I}_{m \times m})$. Let $\mathbf{y} \sim \mathcal{N}(\mathbf{0}, \mathbb{I})^t$.

$$\begin{aligned} \text{PDF}_{\mathbf{C}\mathbf{Y}}(\mathbf{x}) &= \frac{1}{\sqrt{(2\pi)^t \det(\mathbf{C}\mathbf{C}^\top)}} e^{(-\frac{1}{2}\mathbf{x}(\mathbf{C}\mathbf{C}^\top)^{-1}\mathbf{x}^\top)} \\ \text{PDF}_{\widetilde{\mathbf{C}}\mathbf{Y}}(\mathbf{x}) &= \frac{1}{\sqrt{(2\pi)^t \det(\widetilde{\mathbf{C}}\widetilde{\mathbf{C}}^\top)}} e^{(-\frac{1}{2}\mathbf{x}(\widetilde{\mathbf{C}}\widetilde{\mathbf{C}}^\top)^{-1}\mathbf{x}^\top)} \end{aligned}$$

Let $\varepsilon_0 = \frac{\varepsilon}{\sqrt{4t \ln(1/\delta) \log(1/\delta)}}$ and $\delta_0 = \delta/2t$, We prove that every row of the published matrix is $(\varepsilon_0, \delta_0)$ differentially private. Let \mathbf{x} be sampled either from $\mathcal{N}(\mathbf{0}, \mathbf{C}\mathbf{C}^\top)$ or $\mathcal{N}(\mathbf{0}, \widetilde{\mathbf{C}}\widetilde{\mathbf{C}}^\top)$. It is straightforward to see that the combination of [Claim 38](#) and [Claim 39](#) below proves differential privacy for a row of published matrix. The lemma then follows by an application of [Theorem 17](#) and our choice of ε_0 and δ_0 .

Claim 38. *Let \mathbf{C} and ε_0 be as defined above. Then*

$$e^{-\varepsilon_0} \leq \sqrt{\frac{\det(\mathbf{C}\mathbf{C}^\top)}{\det(\widetilde{\mathbf{C}}\widetilde{\mathbf{C}}^\top)}} \leq e^{\varepsilon_0}.$$

Claim 39. *Let \mathbf{C} , ε_0 , and δ_0 be as defined earlier. Let $\mathbf{y} \sim \mathcal{N}(\mathbf{0}, \mathbb{I})^m$. If \mathbf{x} is sampled either from $\mathbf{C}\mathbf{y}$ or $\widetilde{\mathbf{C}}\mathbf{y}$, then we have*

$$\Pr \left[\left| \mathbf{x}^\top (\mathbf{C}\mathbf{C}^\top)^{-1} \mathbf{x} - \mathbf{x}^\top (\widetilde{\mathbf{C}}\widetilde{\mathbf{C}}^\top)^{-1} \mathbf{x} \right| \leq \varepsilon_0 \right] \geq 1 - \delta_0.$$

Proof of Claim 38. The claim follows simply as in [\[BBDS12\]](#) after a slight modification. More concretely, we have $\det(\mathbf{C}\mathbf{C}^\top) = \prod_i \sigma_i^2$, where $\sigma_1 \geq \dots \geq \sigma_m \geq \sigma_{\min}(\mathbf{C})$ are the singular values of \mathbf{C} . Let $\widetilde{\sigma}_1 \geq \dots \geq \widetilde{\sigma}_m \geq \sigma_{\min}(\widetilde{\mathbf{C}})$ be its singular value for $\widetilde{\mathbf{C}}$. The matrix \mathbf{E} has only one singular value $\sqrt{1 + \alpha}$. This is because $\mathbf{E}\mathbf{E}^\top = (1 + \alpha)\mathbf{v}\mathbf{v}^\top$. To finish the proof of this claim, we use [Theorem 24](#).

Since the singular values of $\mathbf{C} - \widetilde{\mathbf{C}}$ and $\widetilde{\mathbf{C}} - \mathbf{C}$ are the same, Lidskii's theorem ([Theorem 24](#)) gives $\sum_i (\sigma_i - \widetilde{\sigma}_i) \leq \sqrt{1 + \alpha}$. Therefore, with probability $1 - \delta$,

$$\begin{aligned} \sqrt{\prod_{i: \widetilde{\sigma}_i \geq \sigma_i} \frac{\widetilde{\sigma}_i^2}{\sigma_i^2}} &= \prod_{i: \widetilde{\sigma}_i \geq \sigma_i} \left(1 + \frac{\widetilde{\sigma}_i - \sigma_i}{\sigma_i} \right) \\ &\leq \exp \left(\frac{\varepsilon}{32\sqrt{(1 + \alpha)t \log(2/\delta) \log(t/\delta)}} \sum_i (\widetilde{\sigma}_i - \sigma_i) \right) \\ &\leq e^{\varepsilon_0/2}. \end{aligned}$$

The first inequality holds because $\Phi \sim \mathcal{D}_R$ satisfies (α, δ) -JLP due to the choice of t (second claim of [Lemma 14](#)). Since \mathbf{C} and \mathbf{A} have same rank, this implies that all the singular values of \mathbf{C} are within a $(1 \pm \alpha)^{1/2}$ multiplicative factor of $\widehat{\mathbf{A}}$ due to a result by Sarlos [\[Sar06\]](#). In other words, $\sigma_i \geq \sigma_{\min}(\mathbf{C}) \geq (1 - \alpha)^{1/2} \sigma_{\min}$. The case for all $i \in [m]$ when $\widetilde{\sigma}_i \leq \sigma_i$ follows similarly as the singular values of \mathbf{E} and $-\mathbf{E}$ are the same. This completes the proof of [Claim 38](#). \square

Proof of Claim 39. Without any loss of generality, we can assume $\mathbf{x} = \mathbf{C}\mathbf{y}$. The case for $\mathbf{x} = \tilde{\mathbf{C}}\mathbf{y}$ is analogous. Let $\mathbf{C} - \tilde{\mathbf{C}} = \mathbf{v}\mathbf{u}^\top$. Note that $\mathbb{E}[(\boldsymbol{\Omega})_{i,j}] = 0$ for all $1 \leq i, j \leq m$ and $\text{COV}((\boldsymbol{\Omega})_{i,j}) = 1$ if and only if $i = j$; and 0 otherwise. First note that the following

$$\begin{aligned} \mathbf{x}^\top(\mathbf{C}\mathbf{C}^\top)^{-1}\mathbf{x} - \mathbf{x}^\top(\tilde{\mathbf{C}}\tilde{\mathbf{C}}^\top)^{-1}\mathbf{x} &= \mathbf{x}^\top(\mathbf{C}\mathbf{C}^\top)^{-1}(\tilde{\mathbf{C}}\tilde{\mathbf{C}}^\top)(\tilde{\mathbf{C}}\tilde{\mathbf{C}}^\top)^{-1}\mathbf{x} - \mathbf{x}^\top(\tilde{\mathbf{C}}\tilde{\mathbf{C}}^\top)^{-1}\mathbf{x} \\ &= \mathbf{x}^\top \left[(\mathbf{C}\mathbf{C}^\top)^{-1}(\mathbf{C}\mathbf{u}\mathbf{v}^\top + \mathbf{v}\mathbf{u}^\top\tilde{\mathbf{C}}^\top)(\tilde{\mathbf{C}}\tilde{\mathbf{C}}^\top)^{-1} \right] \mathbf{x}. \end{aligned}$$

Using the singular value decomposition of $\mathbf{C} = \mathbf{U}_\mathbf{C}\boldsymbol{\Sigma}_\mathbf{C}\mathbf{V}_\mathbf{C}^\top$ and $\tilde{\mathbf{C}} = \tilde{\mathbf{U}}_\mathbf{C}\tilde{\boldsymbol{\Sigma}}_\mathbf{C}\tilde{\mathbf{V}}_\mathbf{C}^\top$, we have

$$\left(\mathbf{x}^\top(\mathbf{U}_\mathbf{C}\boldsymbol{\Sigma}_\mathbf{C}^{-1}\mathbf{V}_\mathbf{C}^\top)\mathbf{u} \right) \left(\mathbf{v}^\top(\tilde{\mathbf{U}}_\mathbf{C}\tilde{\boldsymbol{\Sigma}}_\mathbf{C}^{-2}\tilde{\mathbf{U}}_\mathbf{C}^\top)\mathbf{x} \right) + \left(\mathbf{x}^\top(\mathbf{U}_\mathbf{C}\boldsymbol{\Sigma}_\mathbf{C}^{-2}\mathbf{U}_\mathbf{C}^\top)\mathbf{v} \right) \left(\mathbf{u}^\top(\tilde{\mathbf{V}}_\mathbf{C}\tilde{\boldsymbol{\Sigma}}_\mathbf{C}^{-1}\tilde{\mathbf{U}}_\mathbf{C}^\top)\mathbf{x} \right)$$

Since $\mathbf{x} \sim \mathbf{C}\mathbf{y}$, where $\mathbf{y} \sim \mathcal{N}(0, 1)^m$, we can write the above expression as $\tau_1\tau_2 + \tau_3\tau_4$, where

$$\begin{aligned} \tau_1 &= \left(\mathbf{y}^\top \mathbf{C}^\top(\mathbf{U}_\mathbf{C}\boldsymbol{\Sigma}_\mathbf{C}^{-1}\mathbf{V}_\mathbf{C}^\top)\mathbf{u} \right) & \tau_2 &= \left(\mathbf{v}^\top(\tilde{\mathbf{U}}_\mathbf{C}\tilde{\boldsymbol{\Sigma}}_\mathbf{C}^{-2}\tilde{\mathbf{U}}_\mathbf{C}^\top)\mathbf{C}\mathbf{y} \right) \\ \tau_3 &= \left(\mathbf{y}^\top \mathbf{C}^\top(\mathbf{U}_\mathbf{C}\boldsymbol{\Sigma}_\mathbf{C}^{-2}\mathbf{U}_\mathbf{C}^\top)\mathbf{v} \right) & \tau_4 &= \left(\mathbf{u}^\top(\tilde{\mathbf{V}}_\mathbf{C}\tilde{\boldsymbol{\Sigma}}_\mathbf{C}^{-1}\tilde{\mathbf{U}}_\mathbf{C}^\top)\mathbf{C}\mathbf{y} \right). \end{aligned}$$

Now since $\|\tilde{\boldsymbol{\Sigma}}_\mathbf{C}\|_2, \|\boldsymbol{\Sigma}_\mathbf{C}\|_2 \geq \sigma_{\min}(\mathbf{C})$, plugging in the SVD of \mathbf{C} and $\mathbf{C} - \tilde{\mathbf{C}} = \mathbf{v}\mathbf{u}^\top$, and that every term τ_i in the above expression is a linear combination of a Gaussian, i.e., each term is distributed as per $\mathcal{N}(0, \|\tau_i\|^2)$, we have the following:

$$\begin{aligned} \|\tau_1\|_2 &= \|(\mathbf{V}_\mathbf{C}\boldsymbol{\Sigma}_\mathbf{C}\mathbf{U}_\mathbf{C}^\top)(\mathbf{U}_\mathbf{C}\boldsymbol{\Sigma}_\mathbf{C}^{-1}\mathbf{V}_\mathbf{C}^\top)\mathbf{u}\|_2 \leq \|\mathbf{u}\|_2 \leq \sqrt{1+\alpha}, \\ \|\tau_2\|_2 &= \|\mathbf{v}^\top(\tilde{\mathbf{U}}_\mathbf{C}\tilde{\boldsymbol{\Sigma}}_\mathbf{C}^{-2}\tilde{\mathbf{U}}_\mathbf{C}^\top)(\tilde{\mathbf{U}}_\mathbf{C}\tilde{\boldsymbol{\Sigma}}_\mathbf{C}\tilde{\mathbf{V}}_\mathbf{C}^\top - \mathbf{v}\mathbf{u}^\top)\|_2 \\ &\leq \|\mathbf{v}^\top(\tilde{\mathbf{U}}_\mathbf{C}\tilde{\boldsymbol{\Sigma}}_\mathbf{C}^{-2}\tilde{\mathbf{U}}_\mathbf{C}^\top)\tilde{\mathbf{U}}_\mathbf{C}\tilde{\boldsymbol{\Sigma}}_\mathbf{C}\tilde{\mathbf{U}}_\mathbf{C}^\top\|_2 + \|\mathbf{v}^\top(\tilde{\mathbf{U}}_\mathbf{C}\tilde{\boldsymbol{\Sigma}}_\mathbf{C}^{-2}\tilde{\mathbf{U}}_\mathbf{C}^\top)\mathbf{v}\mathbf{u}^\top\|_2 \leq \frac{1}{\sigma_{\min}(\mathbf{C})} + \frac{\sqrt{1+\alpha}}{\sigma_{\min}^2(\mathbf{C})}, \\ \|\tau_3\|_2 &= \|(\mathbf{V}_\mathbf{C}\boldsymbol{\Sigma}_\mathbf{C}\mathbf{U}_\mathbf{C}^\top)(\mathbf{U}_\mathbf{C}\boldsymbol{\Sigma}_\mathbf{C}^{-2}\mathbf{U}_\mathbf{C}^\top)\mathbf{v}\|_2 \leq \|\boldsymbol{\Sigma}_\mathbf{C}^{-1}\|_2 \leq \frac{1}{\sigma_{\min}(\mathbf{C})}, \\ \|\tau_4\|_2 &= \|\mathbf{u}^\top(\tilde{\mathbf{V}}_\mathbf{C}\tilde{\boldsymbol{\Sigma}}_\mathbf{C}^{-1}\tilde{\mathbf{U}}_\mathbf{C}^\top)(\tilde{\mathbf{U}}_\mathbf{C}\tilde{\boldsymbol{\Sigma}}_\mathbf{C}\tilde{\mathbf{V}}_\mathbf{C}^\top - \mathbf{v}\mathbf{u}^\top)\|_2 \\ &\leq \|\mathbf{u}^\top(\tilde{\mathbf{V}}_\mathbf{C}\tilde{\boldsymbol{\Sigma}}_\mathbf{C}^{-1}\tilde{\mathbf{U}}_\mathbf{C}^\top)(\tilde{\mathbf{U}}_\mathbf{C}\tilde{\boldsymbol{\Sigma}}_\mathbf{C}\tilde{\mathbf{V}}_\mathbf{C}^\top)\|_2 + \|\mathbf{u}^\top(\tilde{\mathbf{V}}_\mathbf{C}\tilde{\boldsymbol{\Sigma}}_\mathbf{C}^{-1}\tilde{\mathbf{U}}_\mathbf{C}^\top)\mathbf{v}\|_2 \leq \sqrt{1+\alpha} + \frac{\sqrt{1+\alpha}}{\sigma_{\min}(\mathbf{C})}. \end{aligned}$$

Using the concentration bound on the Gaussian distribution, each term, τ_1, τ_2, τ_3 , and τ_4 , is less than $\|\tau_i\| \ln(4/\delta_0)$ with probability $1 - \delta_0/2$. The second claim now follows because with probability $1 - \delta_0$,

$$\left| \mathbf{x}^\top(\mathbf{C}\mathbf{C}^\top)^{-1}\mathbf{x} - \mathbf{x}^\top(\tilde{\mathbf{C}}\tilde{\mathbf{C}}^\top)^{-1}\mathbf{x} \right| \leq 2 \left(\frac{\sqrt{1+\alpha}}{\sigma_{\min}(\mathbf{C})} + \frac{1+\alpha}{\sigma_{\min}^2(\mathbf{C})} \right) \ln(4/\delta_0) \leq \varepsilon_0,$$

where the second inequality follows from the choice of σ_{\min} and the fact that $\sigma_{\min}(\mathbf{C}) \geq (1-\alpha)^{1/2}\sigma_{\min}$. \square

Lemma 36 follows by combining **Claim 38** and **Claim 39**.

D.2 Low Space Differentially private Low-rank Factorization Under Priv_2

In **Appendix D.1**, we gave an optimal space algorithm for computing LRF under Priv_1 . However, we cannot use the algorithm of **Theorem 5** to simultaneously prove differential privacy under Priv_2 and get optimal additive error. This is because we need to perturb the input matrix by a noise proportional to $\min\{\sqrt{km}, \sqrt{kn}\}$ to preserve differential privacy under Priv_2 . As a result, the additive error would depend linearly on $\min\{m, n\}$. We show that by maintaining noisy sketches \mathbf{Y} and \mathbf{Z} and some basic linear algebra, we can have a differentially private algorithm that outputs an optimal error LRF of an $m \times n$ matrix under Priv_2 . More concretely, we prove the following theorem.

PRIVATE-FROBENIUS-LRF

Initialization. Set $\eta = \max\{k, \alpha^{-1}\}$, $t = O(\eta\alpha^{-1} \log(k/\delta))$, $v = O(\eta\alpha^{-2} \log(k/\delta))$, and $\rho = \sqrt{(1+\alpha) \ln(1/\delta)}/\varepsilon$. Sample $\Phi \in \mathbb{R}^{m \times t}$ from \mathcal{D}_R as in Lemma 14 and $\mathbf{S} \in \mathbb{R}^{v \times n}$ from \mathcal{D}_R as in Lemma 15.

Computing the factorization. On input the matrix \mathbf{A} ,

1. Sample $\mathbf{N}_1 \sim \mathcal{N}(0, \rho^2)^{m \times t}$, $\mathbf{N}_2 \sim \mathcal{N}(0, \rho^2)^{v \times n}$.
2. Compute $\mathbf{Y} = \mathbf{A}\Phi + \mathbf{N}_1$ and $\mathbf{Z} = \mathbf{S}\mathbf{A} + \mathbf{N}_2$.
3. Compute a matrix $\mathbf{U} \in \mathbb{R}^{m \times t}$ whose columns are an orthonormal basis for the column space of \mathbf{Y} .
4. Compute the singular value decomposition of $\mathbf{S}\mathbf{U} \in \mathbb{R}^{v \times t}$. Let it be $\tilde{\mathbf{U}}\tilde{\Sigma}\tilde{\mathbf{V}}^\top$.
5. Compute the singular value decomposition of $\tilde{\mathbf{V}}\tilde{\Sigma}^\dagger[\tilde{\mathbf{U}}^\top\mathbf{Z}]_k$. Let it be $\mathbf{U}'\Sigma'\mathbf{V}'^\top$.
6. Output $\tilde{\mathbf{U}} = \mathbf{U}\mathbf{U}'$, $\tilde{\Sigma} = \Sigma'$ and $\tilde{\mathbf{V}} = \mathbf{V}'$.

Figure 4: Differentially private LRF Under Priv_2

Theorem 40. Let $m, n \in \mathbb{N}$ and $\alpha, \varepsilon, \delta$ be the input parameters. Let k be the desired rank of the factorization, $s = \max\{m, n\}$, $u = \min\{m, n\}$, and $\eta = \max\{k, \alpha^{-1}\}$. Given a private input matrix $\mathbf{A} \in \mathbb{R}^{m \times n}$, the factorization $\tilde{\mathbf{U}}, \tilde{\Sigma}, \tilde{\mathbf{V}}$ outputted by the algorithm, PRIVATE-FROBENIUS-LRF, presented in Figure 4, is a k -rank factorization and satisfies the following properties:

1. PRIVATE-FROBENIUS-LRF is (ε, δ) -differentially private under Priv_2 .
2. Let $\mathbf{M}_k := \tilde{\mathbf{U}}\tilde{\Sigma}\tilde{\mathbf{V}}^\top$. With probability 9/10 over the coins of PRIVATE-FROBENIUS-LRF,

$$\|\mathbf{A} - \mathbf{M}_k\|_F \leq (1 + \alpha)\|\mathbf{A} - [\mathbf{A}]_k\|_F + O\left(\left(\sqrt{ks} + \sqrt{\frac{u\eta}{\alpha^2}}\right) \frac{\sqrt{\log(1/\delta)}}{\varepsilon}\right).$$

3. The space used by PRIVATE-FROBENIUS-LRF is $O((m + n\alpha^{-1})\eta\alpha^{-1} \log(k/\delta))$.
4. The time required to compute the factorization is $O\left(\text{nn}(\mathbf{A}) \log(1/\delta) + \frac{(m+n\alpha^{-2})\eta^2 \log^2(k/\delta)}{\alpha^2} + \frac{\eta^3 \log^3(k/\delta)}{\alpha^3}\right)$.

We present the algorithm when $m \geq n$, i.e., $s = m$ and $u = n$. The case when $m < n$ follows by symmetry. The space required by the algorithm is the space required to store \mathbf{Y} and \mathbf{Z} , which is $mt + nv = O((m + n\alpha^{-1})\eta\alpha^{-1} \log(k/\delta))$. This proves part 3 of Theorem 40. For the running time of part 4 of Theorem 40, we have the following.

1. Computing the sketch \mathbf{Y} requires $O(\text{nn}(\mathbf{A}) \log(1/\delta)) + mt^2$ time and computing the sketch \mathbf{Z} requires $O(\text{nn}(\mathbf{A}) \log(k/\delta)) + nv^2$.
2. Computing the orthonormal basis \mathbf{U} requires $mt^2 = O(m\eta^2\alpha^{-2} \log^2(k/\delta))$ time.
3. Computing a SVD of the matrix $\mathbf{S}\mathbf{U}$ requires $vt^2 = O(\eta^3\alpha^3 \log^3(k/\delta))$.
4. Computation of $[\tilde{\mathbf{U}}^\top\mathbf{Z}]_k$ requires $O(n\eta^2\alpha^{-2} \log^2(k/\delta))$.
5. Computing a SVD in Step 4 requires $nt^2 = O(n\eta^2\alpha^{-2} \log^2(k/\delta))$ time.

Combining all these terms, we have our claim on running time.

D.2.1 Privacy Proof of PRIVATE-FROBENIUS-LRF

The following lemma proves Part 1 of [Theorem 40](#).

Lemma 41. PRIVATE-FROBENIUS-LRF is (ε, δ) differentially private.

Proof. We use the second claim of both [Lemma 14](#) and [Lemma 15](#), i.e., for all \mathbf{D} , $\|\mathbf{D}\mathbf{T}\|_F^2 \leq (1 - \alpha)\|\mathbf{D}\|_F^2$ for $\mathbf{T} \sim \mathcal{D}_A$ and $\|\mathbf{D}\Phi\|_F^2 \leq (1 - \alpha)\|\mathbf{D}\|_F^2$ for $\Phi \sim \mathcal{D}_R$. Let \mathbf{A} and \mathbf{A}' be two neighboring matrices such that $\mathbf{E} = \mathbf{A} - \mathbf{A}'$ has Frobenius norm 1. Then $\|\mathbf{S}\mathbf{E}\|_F^2 \leq (1 + \alpha)\|\mathbf{E}\|_F^2 = 1 + \alpha$. Publishing \mathbf{Z} preserves (ε, δ) -differential privacy follows from considering the vector form of the matrix $\mathbf{S}\mathbf{A}$ and \mathbf{N}_2 and [Theorem 18](#). Similarly, we use the fact that, for any matrix \mathbf{C} of appropriate dimension, $\|\Phi\mathbf{C}\|_F^2 \leq (1 - \alpha)\|\mathbf{C}\|_F^2$, to prove that publishing $\mathbf{A}\Phi + \mathbf{N}_1$ preserves differential privacy. The lemma follows by applying [Lemma 16](#) and [Theorem 17](#). \square

D.2.2 Correctness Proof of PRIVATE-FROBENIUS-LRF

We now prove Part 2 of [Theorem 40](#). We first show the following result.

Theorem 42. Let $\mathbf{M}_k = \mathbf{U}\tilde{\mathbf{V}}\tilde{\Sigma}^\dagger[\tilde{\mathbf{U}}^\top\mathbf{Z}]_k$ be the product of the factorization outputted by the algorithm in [Figure 4](#). Then with probability $1 - O(\delta)$ over $\Phi \sim \mathcal{D}_R$ and $\mathbf{S} \sim \mathcal{D}_A$,

$$\|\mathbf{M}_k - \mathbf{A}\|_F \leq (1 + \alpha)\|\mathbf{A} - [\mathbf{A}]_k\|_F + 3\|\mathbf{S}^\dagger\mathbf{N}_2\|_F + 2\|\mathbf{N}_1([\mathbf{A}]_k\Phi)^\dagger[\mathbf{A}]_k\|_F.$$

Proof. We prove the result by proving a series of results. We provide an upper and a lower bound on $\min_{\mathbf{X}, r(\mathbf{X}) \leq k} \|\mathbf{Y}\mathbf{X} - \mathbf{B}\|_F$ in terms of $\|\mathbf{A} - [\mathbf{A}]_k\|_F$ and the output of the algorithm.

Lemma 43. Let \mathbf{A} be the input matrix. Let $\Phi \sim \mathcal{D}_R$, $\mathbf{S} \sim \mathcal{D}_A$ be as in [Figure 4](#). Let $\mathbf{Y} = \Phi\mathbf{A} + \mathbf{N}_1$ and $\mathbf{B} = \mathbf{A} + \mathbf{S}^\dagger\mathbf{N}_2$ for $\mathbf{N}_1, \mathbf{N}_2$ as defined in [Figure 4](#). Then with probability $1 - \delta$ over $\Phi \sim \mathcal{D}_R$,

$$\min_{\substack{\mathbf{X} \\ r(\mathbf{X}) \leq k}} \|\mathbf{Y}\mathbf{X} - \mathbf{B}\|_F \leq (1 + \alpha)\|\mathbf{A} - [\mathbf{A}]_k\|_F + \|\mathbf{S}^\dagger\mathbf{N}_2\|_F + \|\mathbf{N}_1([\mathbf{A}]_k\Phi)^\dagger[\mathbf{A}]_k\|_F.$$

Proof. Set $r = k$, $\mathbf{P} = [\mathbf{A}]_k^\top$, and $\mathbf{Q} = \mathbf{A}^\top$ in [Lemma 14](#). Then using [Lemma 14](#), we have

$$\|[\mathbf{A}]_k^\top\mathbf{X}' - \mathbf{A}^\top\| \leq (1 + \alpha) \min_{\mathbf{X}} \|[\mathbf{A}]_k^\top\mathbf{X} - \mathbf{A}^\top\|_F,$$

where $\mathbf{X}' = \operatorname{argmin}_{\mathbf{X}} \|\Phi^\top([\mathbf{A}]_k^\top\mathbf{X} - \mathbf{A}^\top)\|_F$. Let $[\mathbf{A}]_k = \mathbf{U}_k\mathbf{\Sigma}_k\mathbf{V}_k^\top$. Taking the transpose and the fact that the Frobenius norm is preserved under transpose and $\mathbf{X}' = (([\mathbf{A}]_k\Phi)^\top)^\dagger(\mathbf{A}\Phi)^\top$, we have with probability $1 - \delta$ over $\Phi \sim \mathcal{D}_R$,

$$\|\mathbf{A}\Phi([\mathbf{A}]_k\Phi)^\dagger[\mathbf{A}]_k - \mathbf{A}\|_F \leq (1 + \alpha) \min_{\mathbf{X}} \|[\mathbf{A}]_k^\top\mathbf{X} - \mathbf{A}^\top\|_F \leq (1 + \alpha)\|\mathbf{A} - [\mathbf{A}]_k\|_F, \quad (18)$$

where the inequality follows by setting $\mathbf{X} = \mathbf{U}_k\mathbf{U}_k^\top$.

Moreover, since $([\mathbf{A}]_k\Phi)^\dagger[\mathbf{A}]_k$ has rank at most k , $\mathbf{B} = \mathbf{A} + \mathbf{S}^\dagger\mathbf{N}_2$, and $\mathbf{Y} = \mathbf{A}\Phi + \mathbf{N}_1$, with probability $1 - \delta$ over $\Phi \sim \mathcal{D}_R$,

$$\begin{aligned} \min_{\substack{\mathbf{X} \\ r(\mathbf{X}) \leq k}} \|\mathbf{Y}\mathbf{X} - \mathbf{B}\|_F &\leq \|\mathbf{A}\Phi([\mathbf{A}]_k\Phi)^\dagger[\mathbf{A}]_k + \mathbf{N}_1([\mathbf{A}]_k\Phi)^\dagger[\mathbf{A}]_k - \mathbf{B}\|_F \\ &= \|\mathbf{A}\Phi([\mathbf{A}]_k\Phi)^\dagger[\mathbf{A}]_k + \mathbf{N}_1([\mathbf{A}]_k\Phi)^\dagger[\mathbf{A}]_k - \mathbf{A} - \mathbf{S}^\dagger\mathbf{N}_2\|_F \\ &\leq \|\mathbf{A}\Phi([\mathbf{A}]_k\Phi)^\dagger[\mathbf{A}]_k - \mathbf{A}\|_F + \|\mathbf{N}_1([\mathbf{A}]_k\Phi)^\dagger[\mathbf{A}]_k\|_F + \|\mathbf{S}^\dagger\mathbf{N}_2\|_F \end{aligned} \quad (19)$$

Combining [equation \(18\)](#) and [equation \(19\)](#), we have with probability $1 - \delta$ over $\Phi \sim \mathcal{D}_R$,

$$\min_{\substack{\mathbf{X} \\ r(\mathbf{X}) \leq k}} \|\mathbf{Y}\mathbf{X} - \mathbf{B}\|_F \leq (1 + \alpha)\|\mathbf{A} - [\mathbf{A}]_k\|_F + \|\mathbf{N}_1([\mathbf{A}]_k\Phi)^\dagger[\mathbf{A}]_k\|_F + \|\mathbf{S}^\dagger\mathbf{N}_2\|_F. \quad (20)$$

This completes the proof of [Lemma 43](#). \square

Lemma 43 relates $\min_{\mathbf{X}, r(\mathbf{X}) \leq k} \|\mathbf{Y}\mathbf{X} - \mathbf{B}\|$ with $(1 + \alpha)\|\mathbf{A} - [\mathbf{A}]_k\|_F$, $\|\mathbf{N}_1([\mathbf{A}]_k\Phi)^\dagger[\mathbf{A}]_k\|_F$, and $\|\mathbf{S}^\dagger\mathbf{N}_2\|_F$. Since \mathbf{U} is the orthonormal basis for the column space of \mathbf{Y} , we further have

$$\min_{\substack{\mathbf{X} \\ r(\mathbf{X}) \leq k}} \|\mathbf{U}\mathbf{X} - \mathbf{B}\|_F \leq \min_{\substack{\mathbf{X} \\ r(\mathbf{X}) \leq k}} \|\mathbf{Y}\mathbf{X} - \mathbf{B}\|_F. \quad (21)$$

Combining [equation \(20\)](#) and [equation \(21\)](#), we have with probability $1 - \delta$ over $\Phi \sim \mathcal{D}_R$,

$$\min_{\substack{\mathbf{X} \\ r(\mathbf{X}) \leq k}} \|\mathbf{U}\mathbf{X} - \mathbf{B}\|_F \leq (1 + \alpha)\|\mathbf{A} - [\mathbf{A}]_k\|_F + (\|\mathbf{N}_1([\mathbf{A}]_k\Phi)^\dagger[\mathbf{A}]_k\|_F + \|\mathbf{S}^\dagger\mathbf{N}_2\|_F). \quad (22)$$

Lemma 44. Let $\mathbf{U}, \mathbf{B}, \mathbf{A}, \mathbf{S}, \mathbf{N}_1$, and \mathbf{N}_2 be as above, and let $\tilde{\mathbf{X}} = \operatorname{argmin}_{\mathbf{X}, r(\mathbf{X})=k} \|\mathbf{S}(\mathbf{U}\mathbf{X} - \mathbf{B})\|_F$. Let \mathcal{D}_A be a distribution that satisfies (α, δ) -subspace embedding. Then with probability $1 - 4\delta$ over $\mathbf{S} \sim \mathcal{D}_A$,

$$\|(\mathbf{U}\tilde{\mathbf{X}} - \mathbf{B})\|_F \leq (1 + \alpha)^2\|\mathbf{A} - [\mathbf{A}]_k\|_F + (1 + \alpha)(\|\mathbf{S}^\dagger\mathbf{N}_2\|_F + \|\mathbf{N}_1([\mathbf{A}]_k\Phi)^\dagger[\mathbf{A}]_k\|_F).$$

Proof. Set $p = k/\alpha$, $\mathbf{D} = \mathbf{U}$ and $\mathbf{E} = \mathbf{B}$ in the statement of [Lemma 15](#). Let us restrict our attention to rank k matrices \mathbf{X} and denote by $\hat{\mathbf{X}} = \operatorname{argmin}_{\mathbf{X}, r(\mathbf{X})=k} \|\mathbf{U}\mathbf{X} - \mathbf{E}\|_F$ and $\tilde{\mathbf{X}} = \operatorname{argmin}_{\mathbf{X}, r(\mathbf{X})=k} \|\mathbf{S}(\mathbf{U}\mathbf{X} - \mathbf{B})\|_F$. Then we have with probability $1 - \delta$ over $\mathbf{S} \sim \mathcal{D}_A$,

$$\begin{aligned} (1 + \alpha) \min_{\substack{\mathbf{X} \\ r(\mathbf{X})=k}} \|\mathbf{U}\mathbf{X} - \mathbf{B}\|_F &= \|\mathbf{U}\hat{\mathbf{X}} - \mathbf{B}\|_F \geq (1 + \alpha)^{1/2} \|\mathbf{S}(\mathbf{U}\hat{\mathbf{X}} - \mathbf{B})\|_F \\ &\geq (1 + \alpha)^{1/2} \min_{\substack{\mathbf{X} \\ r(\mathbf{X})}} \|\mathbf{S}(\mathbf{U}\mathbf{X} - \mathbf{B})\|_F \\ &= (1 + \alpha)^{1/2} \|\mathbf{S}(\mathbf{U}\tilde{\mathbf{X}} - \mathbf{B})\|_F \geq \|(\mathbf{U}\tilde{\mathbf{X}} - \mathbf{B})\|_F. \end{aligned} \quad (23)$$

Combining [equation \(23\)](#) with [equation \(22\)](#), we have with probability $1 - 2\delta$ over $\Phi \sim \mathcal{D}_R$ and $\mathbf{S} \sim \mathcal{D}_A$,

$$\|(\mathbf{U}\tilde{\mathbf{X}} - \mathbf{B})\|_F \leq (1 + \alpha)^2\|\mathbf{A} - [\mathbf{A}]_k\|_F + (1 + \alpha)(\|\mathbf{S}^\dagger\mathbf{N}_2\|_F + \|\mathbf{N}_1([\mathbf{A}]_k\Phi)^\dagger[\mathbf{A}]_k\|_F). \quad (24)$$

This completes the proof of [Lemma 44](#). \square

To finalize the proof of [Theorem 42](#), we need to compute $\tilde{\mathbf{X}} = \operatorname{argmin}_{\mathbf{X}, r(\mathbf{X}) \leq k} \|\mathbf{S}(\mathbf{U}\mathbf{X} - \mathbf{B})\|_F$ and lower bound $\|(\mathbf{U}\tilde{\mathbf{X}} - \mathbf{B})\|_F$. Invoking [[CW09](#), Lem 4.2] with $\mathbf{O} = \tilde{\mathbf{U}}$ and $\mathbf{Z} = \mathbf{S}\mathbf{B}$, we get

$$[\tilde{\mathbf{U}}^\top \mathbf{Z}]_k = [\tilde{\mathbf{U}}^\top \mathbf{S}\mathbf{B}]_k = \operatorname{argmin}_{\substack{\mathbf{X} \\ r(\mathbf{X}) \leq k}} \|\tilde{\mathbf{U}}\mathbf{X} - \mathbf{S}\mathbf{B}\|_F.$$

This in particular implies that

$$\tilde{\mathbf{X}} = \tilde{\mathbf{V}}\tilde{\Sigma}^\dagger[\tilde{\mathbf{U}}^\top \mathbf{Z}]_k = \operatorname{argmin}_{\substack{\mathbf{X} \\ r(\mathbf{X}) \leq k}} \|\mathbf{S}(\mathbf{U}\mathbf{X} - \mathbf{B})\|_F. \quad (25)$$

Using [equation \(25\)](#) in [equation \(24\)](#), and the fact that $\mathbf{B} = \mathbf{A} + \mathbf{S}^\dagger\mathbf{N}_2$, we have the final result.

$$\begin{aligned} \|\mathbf{U}\tilde{\mathbf{V}}\tilde{\Sigma}^\dagger[\tilde{\mathbf{U}}^\top \mathbf{Z}]_k - \mathbf{A}\|_F - \|\mathbf{S}^\dagger\mathbf{N}_2\|_F &\leq \|\mathbf{U}\tilde{\mathbf{V}}\tilde{\Sigma}^\dagger[\tilde{\mathbf{U}}^\top \mathbf{S}\mathbf{A}]_k - \mathbf{B}\|_F \\ &\leq (1 + \alpha)^2\|\mathbf{A} - [\mathbf{A}]_k\|_F + (1 + \alpha)(\|\mathbf{S}^\dagger\mathbf{N}_2\|_F + \|\mathbf{N}_1([\mathbf{A}]_k\Phi)^\dagger[\mathbf{A}]_k\|_F). \end{aligned}$$

This implies that

$$\|\mathbf{U}\tilde{\mathbf{V}}\tilde{\Sigma}^\dagger[\tilde{\mathbf{U}}^\top \mathbf{Z}]_k - \mathbf{A}\|_F \leq (1 + 3\alpha)\|\mathbf{A} - [\mathbf{A}]_k\|_F + 3\|\mathbf{S}^\dagger\mathbf{N}_2\|_F + 2\|\mathbf{N}_1([\mathbf{A}]_k\Phi)^\dagger[\mathbf{A}]_k\|_F.$$

This completes the proof of [Theorem 42](#). \square

Lemma 45. Let $\mathbf{N}_1 \sim \mathcal{N}(0, \rho^2)^{m \times t}$. Then

$$\|\mathbf{N}_1([\mathbf{A}]_k \Phi)^\dagger [\mathbf{A}]_k\|_F = O(\rho \sqrt{km})$$

with probability 99/100 over $\Phi \sim \mathcal{D}_R$.

Proof. Let $\mathbf{C} = \mathbf{N}_1([\mathbf{A}]_k \Phi)^\dagger [\mathbf{A}]_k$. Then $\mathbf{C}\Phi = \mathbf{N}_1([\mathbf{A}]_k \Phi)^\dagger [\mathbf{A}]_k \Phi$. Now $([\mathbf{A}]_k \Phi)^\dagger [\mathbf{A}]_k \Phi$ is a projection onto a random subspace of dimension k . Since every entries of \mathbf{N}_1 is picked i.i.d. from $\mathcal{N}(0, \rho^2)$, $\mathbf{C}\Phi = \mathbf{N}_1([\mathbf{A}]_k \Phi)^\dagger [\mathbf{A}]_k \Phi = \tilde{\mathbf{N}}_1$, where $\tilde{\mathbf{N}}_1$ is an $m \times k$ matrix with every entries picked i.i.d. from $\mathcal{N}(0, \rho^2)$. This is because we can write $([\mathbf{A}]_k \Phi)^\dagger [\mathbf{A}]_k \Phi$ is a projection onto a random subspace of dimension k . Using [Lemma 20](#), this implies that

$$\mathbb{E}[\|\mathbf{C}\Phi\|_F^2] = \mathbb{E}[\|\tilde{\mathbf{N}}_1\|_F^2] = \sum_{i,j} \mathbb{E}[(\tilde{\mathbf{N}}_1)_{ij}^2] = km\rho^2.$$

The result follows using Markov's inequality, the fact that $\|\mathbf{C}\Phi\|_F^2 = (1 + \alpha)\|\mathbf{C}\|_F^2$, and $\alpha < 1$. \square

Lemma 46. Let $\mathbf{N}_2 \sim \mathcal{N}(0, \rho^2)^{v \times n}$. Then $\|\mathbf{S}^\dagger \mathbf{N}_2\|_F = O(\rho \sqrt{vn})$ with probability 99/100 over $\mathbf{S} \sim \mathcal{D}_A$.

Proof. Let $\mathbf{C} = \mathbf{S}^\dagger \mathbf{N}_2$. Then $\mathbf{S}\mathbf{C} = \mathbf{S}\mathbf{S}^\dagger \mathbf{N}_2$. Now $\mathbf{S}\mathbf{S}^\dagger$ is a projection onto a random subspace of dimension k . Since every entries of \mathbf{N}_2 is picked i.i.d. from $\mathcal{N}(0, \rho^2)$, $\mathbf{S}\mathbf{C} = \tilde{\mathbf{N}}_2$, where $\tilde{\mathbf{N}}_2$ is an $v \times n$ matrix with every entries picked i.i.d. from $\mathcal{N}(0, \rho^2)$. Using [Lemma 20](#), this implies that

$$\mathbb{E}[\|\mathbf{S}\mathbf{C}\|_F^2] = \mathbb{E}[\|\tilde{\mathbf{N}}_2\|_F^2] = \sum_{i,j} \mathbb{E}[(\tilde{\mathbf{N}}_2)_{ij}^2] = vn\rho^2.$$

The result follows using Markov's inequality and the fact that $\|\mathbf{S}\mathbf{C}\|_F^2 = (1 + \alpha)\|\mathbf{C}\|_F^2$ and $\alpha \leq 1$. \square

[Theorem 40](#) now follows from [Theorem 42](#), [Lemma 45](#), [Lemma 46](#), and the choice of ρ in [Lemma 41](#).

E Differentially private LRF Under General Turnstile Model

In this section, we are interested in computing a low-rank factorization of a private matrix in the general turnstile update model while preserving differential privacy. In this setting, we are allowed only one pass over the private matrix, and by the end of the stream, we are required to output a low-rank factorization. In [Appendix E.1](#), we give a differentially private low rank factorization under Priv_1 . We give a differentially private low rank factorization under a much stronger privacy guarantee, Priv_2 , in [Appendix E.2](#).

E.1 Space Optimal Differentially private Low-rank Factorization Under Priv_1

The main idea behind the differentially private algorithm for low-rank factorization under Priv_1 in turnstile update model is that the corresponding algorithm (PRIVATE-SPACE-OPTIMAL-LRF) maintains linear sketches. It has been shown by Li *et al.* [\[LNW14\]](#) that in general turnstile update model, it is better off to just use linear sketches. Together with our low space algorithm, this gives us the insight to develop a private algorithm in the general turnstile update model. [Figure 5](#) gives the detail description of our algorithm. We show the following:

Theorem 47. Let $m, n, k \in \mathbb{N}$ and $\alpha, \varepsilon, \delta$ be the input parameters. Let $s = \max\{m, n\}$, $u = \min\{m, n\}$, $\kappa = (1+\alpha)/(1-\alpha)$, $\eta = \max\{k, \alpha^{-1}\}$, and $\sigma_{\min} = 16 \log(1/\delta) \sqrt{t\kappa \ln(1/\delta)}/\varepsilon$. Given an $m \times n$ matrix \mathbf{A} in a turnstile update model, PRIVATE-STREAMING-SPACE-OPTIMAL-LRF, described in [Figure 5](#), outputs a factorization $\tilde{\mathbf{U}}, \tilde{\Sigma}, \tilde{\mathbf{V}}$ such that

PRIVATE-STREAMING-SPACE-OPTIMAL-LRF

Initialization. Set $\eta = \max\{k, \alpha^{-1}\}$, and the dimension of random projections to be $t = O(\eta\alpha^{-1} \log(k/\delta)), v = O(\eta\alpha^{-2} \log(k/\delta))$. Let $\rho_1 = \sqrt{(1+\alpha) \ln(1/\delta)}/\varepsilon$ and $\rho_2 = (1+\alpha)\sqrt{\ln(1/\delta)}/\varepsilon$. Set $\sigma_{\min} = 16 \log(1/\delta)\sqrt{t(1+\alpha)(1-\alpha)^{-1} \ln(1/\delta)}/\varepsilon$.

1. Sample $\mathbf{\Omega} \sim \mathcal{N}(0, 1)^{m \times t}$. Let $\mathbf{\Phi} \in \mathbb{R}^{(m+n) \times m}, \mathbf{\Psi} \in \mathbb{R}^{t \times m}$ such that $\mathbf{\Phi}^\top \sim \mathcal{D}_R, \mathbf{\Psi} \sim \mathcal{D}_R$ satisfies **Lemma 14**.
2. Let $\mathbf{S} \in \mathbb{R}^{v \times m}, \mathbf{T} \in \mathbb{R}^{v \times (m+n)}$ such that $\mathbf{S} \sim \mathcal{D}_A, \mathbf{T}^\top \sim \mathcal{D}_A$ satisfies **Lemma 15**.
3. Sample $\mathbf{N}_1 \sim \mathcal{N}(0, \rho_1^2)^{t \times (m+n)}$ and $\mathbf{N}_2 \sim \mathcal{N}(0, \rho_2^2)^{v \times v}$. Define $\widehat{\mathbf{\Phi}} = t^{-1} \mathbf{\Phi} \mathbf{\Omega} \in \mathbb{R}^{(m+n) \times t}$.

Update Stage. Set $\widehat{\mathbf{A}} = (\mathbf{0}^{m \times n} \quad \sigma_{\min} \mathbb{I}_m)$. Compute $\mathbf{Y}_c = \widehat{\mathbf{A}} \widehat{\mathbf{\Phi}}, \mathbf{Y}'_r = \mathbf{\Psi} \widehat{\mathbf{A}}$, and $\mathbf{Z}' = \mathbf{S} \widehat{\mathbf{A}} \mathbf{T}^\top$.

Update rule. When $(i_\tau, j_\tau, \Delta_\tau)$, where $(i_\tau, j_\tau) \in [m] \times [n]$ and $\Delta_\tau \in \mathbb{R}$, is streamed, update the matrices by the following rule: (i) $\mathbf{Y}_c = \mathbf{Y}_c + \mathbf{A}_\tau \widehat{\mathbf{\Phi}}$, (ii) $\mathbf{Y}'_r = \mathbf{Y}'_r + \mathbf{\Psi} \mathbf{A}_\tau$, and (iii) $\mathbf{Z}' = \mathbf{Z}' + \mathbf{S} \mathbf{A}_\tau \mathbf{T}^\top$, where \mathbf{A}_τ is an $m \times (n+m)$ matrix with only non-zero entry Δ_τ in position (i_τ, j_τ) .

Computing the factorization. Once the matrix is streamed, we follow the following steps.

1. Compute $\mathbf{Y}_r = \mathbf{Y}'_r + \mathbf{N}_1 = \mathbf{\Psi} \widehat{\mathbf{A}} + \mathbf{N}_1$, and $\mathbf{Z} = \mathbf{Z}' + \mathbf{N}_2 = \mathbf{S} \widehat{\mathbf{A}} \mathbf{T}^\top + \mathbf{N}_2$.
2. Output **FACTOR**($\mathbf{Y}_c, \mathbf{Y}_r, \mathbf{Z}, \mathbf{S}, \mathbf{T}, m, m+n, k, t, v$).

FACTOR($\mathbf{Y}_c, \mathbf{Y}_r, \mathbf{Z}, \mathbf{S}, \mathbf{T}, m, n, k, t, v$)

1. Compute a matrix $\mathbf{U} \in \mathbb{R}^{m \times t}$ whose columns are orthonormal basis for the column space of \mathbf{Y}_c and matrix $\mathbf{V} \in \mathbb{R}^{t \times n}$ whose rows are the orthonormal basis for the row space of \mathbf{Y}_r .
2. Compute a SVD of $\mathbf{S} \mathbf{U} := \widetilde{\mathbf{U}}_s \widetilde{\mathbf{\Sigma}}_s \widetilde{\mathbf{V}}_s^\top \in \mathbb{R}^{v \times t}$ and a SVD of $\mathbf{V} \mathbf{T}^\top := \widetilde{\mathbf{U}}_t \widetilde{\mathbf{\Sigma}}_t \widetilde{\mathbf{V}}_t^\top \in \mathbb{R}^{t \times v}$.
3. Compute a SVD of $\widetilde{\mathbf{V}}_s \widetilde{\mathbf{\Sigma}}_s^\dagger [\widetilde{\mathbf{U}}_s^\top \mathbf{Z} \widetilde{\mathbf{V}}_t]_k \widetilde{\mathbf{\Sigma}}_t^\dagger \widetilde{\mathbf{U}}_t^\top$. Let it be $\mathbf{U}' \mathbf{\Sigma}' \mathbf{V}'^\top$.
4. Output the matrix $\widetilde{\mathbf{U}} = \mathbf{U} \mathbf{U}'$ comprising of left singular vectors, diagonal matrix $\widetilde{\mathbf{\Sigma}} = \mathbf{\Sigma}'$, and the matrix $\widetilde{\mathbf{V}} = \mathbf{V}'^\top \mathbf{V}'$ with right-singular vectors.

Figure 5: Differentially private LRF Under Priv_1 in Turnstile Update Model

1. PRIVATE-STREAMING-SPACE-OPTIMAL-LRF is $(3\varepsilon, 3\delta)$ differentially private under Priv_1 .
2. Let $\mathbf{M}_k = \widetilde{\mathbf{U}} \widetilde{\mathbf{\Sigma}} \widetilde{\mathbf{V}}^\top$. With probability 9/10 over the random coins of PRIVATE-STREAMING-SPACE-OPTIMAL-LRF,

$$\|(\mathbf{A} \quad \mathbf{0}) - \mathbf{M}_k\|_F \leq (1+\alpha) \|\mathbf{A} - [\mathbf{A}]_k\|_F + O(\sigma_{\min} \sqrt{u} + \varepsilon^{-1} \sqrt{ks \ln(1/\delta)}),$$

3. The space used by PRIVATE-STREAMING-SPACE-OPTIMAL-LRF is $O((m+n)\eta\alpha^{-1} \log(k/\delta))$.
4. The initialization time is $O((m+n)u \log(k/\delta))$ and the total computational time is

$$O\left(\text{nn}(\mathbf{A}) \log(1/\delta) + \frac{(m+n)\eta^2 \log^2(k/\delta)}{\alpha^2} + \frac{\eta^3 \log^3(k/\delta)}{\alpha^5}\right).$$

PRIVATE-STREAMING-FROBENIUS-LRF

Initialization. Set $\eta = \max\{k, \alpha^{-1}\}$, $t = O(\eta\alpha^{-1} \log(k/\delta))$, $v = O(\eta\alpha^{-2} \log(k/\delta))$, and $\rho = \sqrt{(1+\alpha) \ln(1/\delta)}/\varepsilon$. Sample $\mathbf{N}_1 \sim \mathcal{N}(0, \rho^2)^{m \times t}$, $\mathbf{N}_2 \sim \mathcal{N}(0, \rho^2)^{v \times n}$. Sample $\Phi \in \mathbb{R}^{m \times t}$ from \mathcal{D}_R as in [Lemma 14](#) and $\mathbf{S} \in \mathbb{R}^{v \times n}$ from \mathcal{D}_R as in [Lemma 15](#). Initialize an all zero $m \times t$ matrix \mathbf{Y}' and an all zero $v \times n$ matrix \mathbf{Z}' .

Update rule. Suppose at time τ , the stream is $(i_\tau, j_\tau, \Delta_\tau)$, where $(i_\tau, j_\tau) \in [m] \times [n]$. Let \mathbf{A}_τ be a matrix with only non-zero entry Δ_τ in position (i_τ, j_τ) . Update the matrices by the following rule: $\mathbf{Y}' = \mathbf{Y}' + \mathbf{A}_\tau \Phi$ and $\mathbf{Z}' = \mathbf{Z}' + \mathbf{S} \mathbf{A}_\tau$.

Computing the factorization. Once the matrix is streamed, we follow the following steps.

1. Compute $\mathbf{Y} = \mathbf{Y}' + \mathbf{N}_1$ and $\mathbf{Z} = \mathbf{Z}' + \mathbf{N}_2$.
2. Compute a matrix $\mathbf{U} \in \mathbb{R}^{m \times t}$ whose columns are an orthonormal basis for the column space of \mathbf{Y} .
3. Compute the singular value decomposition of $\mathbf{S} \mathbf{U} \in \mathbb{R}^{v \times t}$. Let it be $\tilde{\mathbf{U}} \tilde{\Sigma} \tilde{\mathbf{V}}^\top$.
4. Compute the singular value decomposition of $\tilde{\mathbf{V}} \tilde{\Sigma}^\dagger [\tilde{\mathbf{U}}^\top \mathbf{Z}]_k$. Let it be $\mathbf{U}' \Sigma' \mathbf{V}'^\top$.
5. Output $\tilde{\mathbf{U}} = \mathbf{U} \mathbf{U}'$, $\tilde{\Sigma} = \Sigma'$ and $\tilde{\mathbf{V}} = \mathbf{V}'$.

Figure 6: Differentially private LRF Under Priv_2 in Turnstile Update Model

Proof. Part 3 follows immediately by setting the values of t and v . Part 4 of [Theorem 47](#) requires some computation. More precisely, we have the following. Computing \mathbf{Y}_c requires $O(\text{nn}(\mathbf{A}) \log(1/\delta)) + mt^2$ time and computing \mathbf{Y}_r requires $O(\text{nn}(\mathbf{A}) \log(1/\delta)) + (m+n)t^2$ time. Computing \mathbf{U} and \mathbf{V} requires $O((m+n)\eta^2\alpha^{-2} \log^2(k/\delta))$ time. Computing a SVD of the matrix $\mathbf{S} \mathbf{U}$ and $\mathbf{T} \mathbf{V}^\top$ requires $vt^2 + tv^2 = O(k^3\alpha^{-5} \log^2(k/\delta))$. Computing \mathbf{Z} requires $O(\text{nn}(\mathbf{A}) \log(k/\delta) + \eta^2/\alpha^2 \log^2(k/\delta) + n\eta^2\alpha^{-2} \log^2(k/\delta))$. Computation of $[\tilde{\mathbf{U}}^\top \mathbf{Z}]_k$ requires $O_\delta(\text{nn}(\mathbf{A})) + tv^2 = O(\text{nn}(\mathbf{A}) + k^3\alpha^{-5} \log^3(k/\delta))$ time. Computation of the last SVD requires $O((m+n)\eta^2\alpha^{-2} \log^2(k/\delta))$ time. Combining all these terms, we have our claim on the running time.

Furthermore, combining [Lemma 20](#), [Lemma 29](#), [Lemma 30](#), [Claim 33](#), [Claim 34](#), and [Lemma 32](#), we have part 2 while part 1 follows from [Lemma 36](#). This completes the proof of [Theorem 47](#). \square

E.2 Differentially private Low-rank Factorization Under Priv_2 in Turnstile Update Model

We describe and analyze the algorithm when $m \geq n$, i.e., $s = m$ and $u = n$ in the theorem that follows. The case when $m < n$ follows by symmetry. We prove the following.

Theorem 48. *Let $m, n \in \mathbb{N}$ and $\alpha, \varepsilon, \delta$ be the input parameters. Let k be the desired rank of the factorization and $\eta = \max\{k, \alpha^{-1}\}$. Let $s = \max\{m, n\}$ and $u = \min\{m, n\}$. Given a private input matrix $\mathbf{A} \in \mathbb{R}^{m \times n}$ received in a turnstile model, the factorization $\tilde{\mathbf{U}}, \tilde{\Sigma}, \tilde{\mathbf{V}}$ outputted by the algorithm, PRIVATE-STREAMING-FROBENIUS-LRF, presented in [Figure 6](#), is a k -rank factorization and satisfies the following properties:*

1. PRIVATE-STREAMING-FROBENIUS-LRF is (ε, δ) -differentially private under Priv_2 .
2. Let $\mathbf{M}_k := \tilde{\mathbf{U}} \tilde{\Sigma} \tilde{\mathbf{V}}^\top$. With probability 9/10 over the coins of PRIVATE-STREAMING-FROBENIUS-

LRF,

$$\|\mathbf{A} - \mathbf{M}_k\|_F \leq (1 + \alpha)\|\mathbf{A} - [\mathbf{A}]_k\|_F + O\left(\left(\sqrt{ks} + \sqrt{\frac{u\eta}{\alpha^2}}\right) \frac{\sqrt{\log(1/\delta)}}{\varepsilon}\right).$$

3. The space used by PRIVATE-STREAMING-FROBENIUS-LRF is $O((m + n\alpha^{-1})\eta\alpha^{-1} \log(k/\delta))$.

4. The time required to compute the factorization is

$$O\left(\text{nn}(\mathbf{A}) \log(1/\delta) + \frac{(m + n\alpha^{-2})\eta^2 \log^2(k/\delta)}{\alpha^2} + \frac{\eta^3 \log^3(k/\delta)}{\alpha^3}\right).$$

Proof. The space required by the algorithm is the space required to store \mathbf{Y} and \mathbf{Z} , which is $mt + nv = O((m + n\alpha^{-1})k\alpha^{-1} \log k \log(1/\delta))$. This proves part 3 of [Theorem 48](#). For the running time of part 4 of [Theorem 48](#), we have the following. Computing the sketch \mathbf{Y} requires $O(\text{nn}(\mathbf{A}) \log(k/\delta)) + mt^2$ time and computing the sketch \mathbf{Z} requires $O(\text{nn}(\mathbf{A}) \log(k/\delta)) + nv^2$. Computing the orthonormal basis \mathbf{U} requires $mt^2 = O(m\eta^2\alpha^{-2} \log^2(k/\delta))$ time. Computing a SVD of the matrix $\mathbf{S}\mathbf{U}$ requires $vt^2 = O(\eta^3\alpha^3 \log^3(k/\delta))$. Computation of $[\tilde{\mathbf{U}}^T \mathbf{Z}]_k$ requires $O(n\eta^2\alpha^{-2} \log^2(k/\delta))$. Computing a SVD in Step 4 requires $nt^2 = O(n\eta^2\alpha^{-2} \log^2(k/\delta))$ time. Combining all these terms, we have our claim on running time.

Part 2 follows from [Lemma 46](#), [Lemma 45](#), and [Theorem 42](#). Part 1 follows from [Lemma 41](#). This completes the proof of [Theorem 48](#). \square

F Case Study: Normalized Row Matrices

An important class of matrices is matrices with normalized rows. In this section, we give a bound on such matrices. [Figure 7](#) is the detailed description of the algorithm. It receives the matrix row-wise and computes the low-rank factorization.

Theorem 49. *Let $m, n \in \mathbb{N}$ and $\alpha, \varepsilon, \delta$ be the input parameters (with $m > n$). Let k be the desired rank of the factorization and $\eta = \max\{k, \alpha^{-1}\}$. Given a private input matrix $\mathbf{A} \in \mathbb{R}^{m \times n}$ received in a row wise update model, the factorization $\tilde{\mathbf{U}}, \tilde{\Sigma}, \tilde{\mathbf{V}}$ outputted by the algorithm, PRIVATE-COVARIANCE-LRF, presented in [Figure 6](#), is a k -rank factorization and satisfies the following properties:*

1. PRIVATE-COVARIANCE-LRF is (ε, δ) -differentially private under Priv_2 .
2. Let $\mathbf{M}_k := \tilde{\mathbf{U}}\tilde{\Sigma}\tilde{\mathbf{V}}^T$. With probability 9/10 over the coins of PRIVATE-COVARIANCE-LRF,

$$\|\mathbf{A}^T \mathbf{A} - \mathbf{M}_k\|_F \leq (1 + \alpha)\|\mathbf{A}^T \mathbf{A} - [\mathbf{A}^T \mathbf{A}]_k\|_F + O\left(\frac{\sqrt{n\eta \log(1/\delta)}}{\varepsilon\alpha}\right).$$

3. The space used by PRIVATE-COVARIANCE-LRF is $O(n\alpha^{-2}\eta \log(k/\delta))$.

Proof. The space required by the algorithm is the space required to store \mathbf{Y} and \mathbf{Z} , which is $mt + nv = O((m + n\alpha^{-1})k\alpha^{-1} \log k \log(1/\delta))$. This proves part 3 of [Theorem 49](#).

Part 2 follows from [Lemma 46](#), [Lemma 45](#), and [Theorem 42](#). For part 1, first notice that since every row has bounded norm 1, the sensitivity of the function $\mathbf{A}^T \mathbf{A}$ is at most 1; i.e., the sensitivity of the vector form of $\mathbf{A}^T \mathbf{A}$ is at most 1. Part 1 then follows from [Lemma 41](#). This completes the proof of [Theorem 49](#). \square

PRIVATE-COVARIANCE-LRF

Initialization. Set $\eta = \max\{k, \alpha^{-1}\}$, $t = O(\eta\alpha^{-1} \log(k/\delta))$, $v = O(\eta\alpha^{-2} \log(k/\delta))$, and $\rho = \sqrt{(1 + \alpha) \ln(1/\delta)}/\varepsilon$. Sample $\mathbf{N}_1 \sim \mathcal{N}(0, \rho^2)^{n \times t}$, $\mathbf{N}_2 \sim \mathcal{N}(0, \rho^2)^{v \times n}$. Sample $\Phi \in \mathbb{R}^{n \times t}$ from \mathcal{D}_R as in Lemma 14 and $\mathbf{S} \in \mathbb{R}^{v \times n}$ from \mathcal{D}_R as in Lemma 15. Initialize an all zero $n \times t$ matrix \mathbf{Y}' and an all zero $v \times n$ matrix \mathbf{Z}' .

Update rule. Suppose at time τ , the stream is an index-row tuple $(i_\tau, \mathbf{A}_{i_\tau})$, where $i_\tau \in [m]$ and $\mathbf{A}_{i_\tau} \in \mathbb{R}^n$. Let \mathbf{A}_τ be a matrix with only non-zero row \mathbf{A}_{i_τ} in the row i_τ . Update the matrices by the following rule: $\mathbf{Y}' = \mathbf{Y}' + \mathbf{A}_\tau^\top \mathbf{A}_\tau \Phi$ and $\mathbf{Z}' = \mathbf{Z}' + \mathbf{S} \mathbf{A}_\tau^\top \mathbf{A}_\tau$.

Computing the factorization. Once the matrix is streamed, we follow the following steps.

1. Compute $\mathbf{Y} = \mathbf{Y}' + \mathbf{N}_1$ and $\mathbf{Z} = \mathbf{Z}' + \mathbf{N}_2$.
2. Compute a matrix $\mathbf{U} \in \mathbb{R}^{m \times t}$ whose columns are an orthonormal basis for the column space of \mathbf{Y} .
3. Compute the singular value decomposition of $\mathbf{S}\mathbf{U} \in \mathbb{R}^{v \times t}$. Let it be $\tilde{\mathbf{U}} \tilde{\Sigma} \tilde{\mathbf{V}}^\top$.
4. Compute the singular value decomposition of $\tilde{\mathbf{V}} \tilde{\Sigma}^\dagger [\tilde{\mathbf{U}}^\top \mathbf{Z}]_k$. Let it be $\mathbf{U}' \Sigma' \mathbf{V}'^\top$.
5. Output $\tilde{\mathbf{U}} = \mathbf{U}\mathbf{U}'$, $\tilde{\Sigma} = \Sigma'$ and $\tilde{\mathbf{V}} = \mathbf{V}'$.

Figure 7: Differentially private Covariance Approximation Under Priv_2 in Row-wise Update Model

G Case Study 2: Low-rank factorization Under Continual Release Model

In this section, we are interested in computing a low-rank factorization of a private matrix in the continual release model while preserving differential privacy. In this setting, we are allowed only one pass over the private matrix, and at every time epoch, we are required to output a low-rank factorization (see Definition 9 for a formal definition). In Appendix G.1, we give a differentially private low rank factorization under Priv_1 . We give a differentially private low rank factorization under a much stronger privacy guarantee, Priv_2 , in Appendix G.2.

In past, there are known algorithms for converting any “one-shot” algorithm for any monotonic function to an algorithm that continually release the output [DNPR10]. Since optimization function like low-rank factorization are not monotonic, it is not clear whether we can use the generic transformation. Our algorithm generates and maintains linear sketches during the updates and later compute low-rank factorization using these sketches. This allows us to use the generic transformation to maintain the updates. For computing the factorization, we collect all the sketches for any range using range queries.

G.1 Differentially Private Continual Release Low Rank Factorization Under Priv_2

We start by giving a differentially private algorithm under Priv_2 that continually release a low rank factorization. We first give an overview of our algorithm with the details of the algorithm appearing in Figure 8.

The idea behind our algorithm for continual release is the fact that the factorization stage only uses a small space sketches of the matrix and the sketches are linear sketches. Since the sketches are linear, we can use the binary tree mechanism [CSS11, DNPR10] to get low-rank factorization under continual release model. The algorithm stores the sketches of matrix generated at various time epochs in the form of a binary tree. Every leaf node τ stores the sketches of \mathbf{A}_τ , where \mathbf{A}_τ is the stream at time τ . The root node stores the sketch of the entire matrix streamed in $[0, T]$, and every other node n stores the sketch corresponding

PRIVATE-FROBENIUS-CONTINUAL-LRF

Input: A time upper bound T , privacy parameters ε, δ , and a stream $\mathbf{s} \in \mathbb{R}^T$.

Output: At each time step τ , output a factorization $\widehat{\mathbf{U}}_k(\tau)$, $\widehat{\Sigma}_k(\tau)$, and $\widehat{\mathbf{V}}_k(\tau)$.

Initialization: Set t, v, Φ, \mathbf{S} as in [Figure 4](#). Every $\widehat{\mathbf{Y}}_i$ and $\widehat{\mathbf{Z}}_i$ are initialized to an all zero matrices for $i \in [\log T]$. Set $\varepsilon' = \varepsilon/\sqrt{\log T}$, $\delta' = \delta/2 \log T$ and $\rho = \sqrt{(1 + \alpha) \ln(1/\delta)}/\varepsilon'$.

Estimating the LRF at time t . On receiving an input (r, c, \mathbf{s}_τ) where $\mathbf{s}_\tau \in \mathbb{R}$ at $1 \leq \tau \leq T$, form a matrix $\mathbf{A}_\tau \in \mathbb{R}^{m \times n}$ which is an all zero matrix except with only non-zero entry \mathbf{s}_τ at location $(r, c) \in [m] \times [n]$.

1. Compute $i := \min \{j : \tau_j \neq 0\}$, where $\tau = \sum_j \tau_j \cdot 2^j$ is the binary expansion of τ .
2. Compute $\widehat{\mathbf{Y}}_i := \mathbf{A}_\tau \Phi + \sum_{j < i} \widehat{\mathbf{Y}}_j$ and $\widehat{\mathbf{Z}}_i := \mathbf{S} \mathbf{A}_\tau + \sum_{j < i} \widehat{\mathbf{Z}}_j$.
3. For $j := 0, \dots, i-1$, set $\mathbf{Y}_j = \widehat{\mathbf{Y}}_j = \mathbf{0}$ and $\mathbf{Z}_j = \widehat{\mathbf{Z}}_j = \mathbf{0}$. Compute $\mathbf{Y}_i = \widehat{\mathbf{Y}}_i + \mathcal{N}(0, \rho^2)^{\times n}$ and $\mathbf{Z}_i = \widehat{\mathbf{Z}}_i + \mathcal{N}(0, \rho^2)^{m \times v}$. Compute $\mathbf{Y}(\tau) = \sum_{j: \tau_j=1} \mathbf{Y}_j$ and $\mathbf{Z}(\tau) = \sum_{j: \tau_j=1} \mathbf{Z}_j$.
4. Compute a matrix $\mathbf{U} \in \mathbb{R}^{m \times t}$ whose columns are an orthonormal basis for the column space of $\mathbf{Y}(\tau)$.
5. Compute the singular value decomposition of $\mathbf{S} \mathbf{U} \in \mathbb{R}^{v \times t}$. Let it be $\widetilde{\mathbf{U}} \widetilde{\Sigma} \widetilde{\mathbf{V}}^\top$.
6. Compute the singular value decomposition of $\widetilde{\mathbf{V}} \widetilde{\Sigma}^\dagger \widetilde{\mathbf{U}}^\top [\widetilde{\mathbf{U}} \widetilde{\mathbf{U}}^\top \mathbf{Z}(\tau)]_k$. Let it be $\mathbf{U}' \Sigma' \mathbf{V}'^\top$.
7. Output $\widehat{\mathbf{U}}_k(\tau) := \mathbf{U} \mathbf{U}'$, $\widehat{\Sigma}_k(\tau) := \Sigma'$ and $\widehat{\mathbf{V}}_k(\tau) := \mathbf{V}'$.
8. Let $\mathbf{M}_k(\tau) := \mathbf{U}_k(\tau) \Sigma_k(\tau) \mathbf{V}_k(\tau)^\top$.

Figure 8: Differentially private Low-rank Factorization Under Continual Release

to the updates in a time range represented by the leaves of the subtree rooted at n , i.e., $\widehat{\mathbf{Y}}_i$ and $\widehat{\mathbf{Z}}_i$ stores sketches involving 2^i updates to \mathbf{A} . If a query is to compute the low-rank factorization of the matrix from a particular time range $[1, \tau]$, we find the nodes that uniquely cover the time range $[1, \tau]$. We then use the value of $\mathbf{Y}(\tau)$ and $\mathbf{Z}(\tau)$ formed using those nodes to compute the low-rank factorization. From the binary tree construction, every time epoch appears in exactly $O(\log T)$ nodes (from the leaf to the root node). Moreover, every range $[1, \tau]$ appears in at most $O(\log T)$ nodes of the tree (including leaves and root node). A straightforward application of the analysis of Chan *et al.* [[CSS11](#)] to [Theorem 48](#) gives us the following

Theorem 50. *Let \mathbf{A} be an $m \times n$ matrix with $\text{nn}(\mathbf{A})$ non-zero entries with $m \leq n$. Let $\eta = \max \{k, \alpha^{-1}\}$. Then there is an (ε, δ) -differentially private algorithm, PRIVATE-FROBENIUS-CONTINUAL-LRF defined in [Figure 8](#), under Priv_2 that receives \mathbf{A} as a stream and outputs a rank- k factorization $\widetilde{\mathbf{U}} := \widehat{\mathbf{U}}_k(\tau)$, $\widetilde{\Sigma} := \widehat{\Sigma}_k(\tau)$, $\widetilde{\mathbf{V}} := \widehat{\mathbf{V}}_k(\tau)$ under the continual release for T time epochs such that, with probability $9/10$,*

$$\|\mathbf{A} - \mathbf{M}_k\|_F \leq (1 + \alpha) \|\mathbf{A} - [\mathbf{A}]_k\|_F + O\left(\left(\sqrt{km} + \sqrt{\frac{n\eta}{\alpha^2}}\right) \frac{\sqrt{\log(1/\delta)} \log T}{\varepsilon}\right)$$

where $\mathbf{M}_k = \widetilde{\mathbf{U}} \widetilde{\Sigma} \widetilde{\mathbf{V}}^\top$ and $\mathbf{A}(\tau)$ is the matrix received till time τ .

G.2 Differentially Private Continual Release Low Rank Factorization Under Priv_1

We can also convert the algorithm PRIVATE-SPACE-OPTIMAL-LRF to one that outputs a low-rank factorization under continual release by using less space than PRIVATE-CONTINUAL-FROBENIUS-LRF and secure under Priv_2 . We make the following changes to PRIVATE-CONTINUAL-FROBENIUS-LRF: (i) Initialize $(\widehat{\mathbf{Y}}_c)_i, (\widehat{\mathbf{Y}}_r)_i$, and $(\widehat{\mathbf{Z}})_i$ as we initialize $\mathbf{Y}_c, \widehat{\mathbf{Y}}_r$ and $\widehat{\mathbf{Z}}$ in Figure 5 for all $i \in [\log T]$, (ii) we maintain $(\mathbf{Y}_c)_j, (\widehat{\mathbf{Y}}_c)_j, (\mathbf{Y}_r)_j, (\widehat{\mathbf{Y}}_r)_j, \mathbf{Z}_j$, and $\widehat{\mathbf{Z}}_j$. A straightforward application of the analysis of Chan *et al.* [CSS11] to Theorem 47 gives us the following theorem.

Theorem 51. *Let \mathbf{A} be an $m \times n$ matrix with $\text{nn}(\mathbf{A})$ non-zero entries with $m \leq n$. Let $\eta = \max\{k, \alpha^{-1}\}$. Let $s = \max\{m, n\}, u = \min\{m, n\}, \kappa = (1 + \alpha)/(1 - \alpha)$, and $\sigma_{\min} = 16 \log(1/\delta) \sqrt{t\kappa \ln(1/\delta)}/\varepsilon$. Then there is an (ε, δ) -differentially private algorithm under Priv_1 that receives \mathbf{A} as a stream and outputs a rank- k factorization $\widetilde{\mathbf{U}} := \widehat{\mathbf{U}}_k(\tau), \widetilde{\Sigma} := \widetilde{\Sigma}_k(\tau), \widetilde{\mathbf{V}} := \widehat{\mathbf{V}}_k(\tau)$ under the continual release for T time epochs such that, with probability $9/10$,*

$$\|(\mathbf{A}(\tau) \ \mathbf{0}) - \mathbf{M}_k\|_F \leq (1 + \alpha)\|\mathbf{A}(\tau) - [\mathbf{A}(\tau)]_k\|_F + O\left(\left(\sigma_{\min}\sqrt{u} + \varepsilon^{-1}\sqrt{ks \ln(1/\delta)}\right) \log T\right),$$

where $\mathbf{M}_k = \widetilde{\mathbf{U}}\widetilde{\Sigma}\widetilde{\mathbf{V}}^\top$ and $\mathbf{A}(\tau)$ is the matrix received till time τ .

H Space Lower Bound for Low-rank Factorization When $\gamma \neq 0$

This section is devoted to proving a lower bound on the space requirement for low-rank factorization with non-trivial additive error. It is well known that any private algorithm (not necessarily differentially private) incurs an additive error $o(\sqrt{k(m+n)})$ [HR12] due to linear reconstruction attack. On the other hand, the only known space lower bound of Clarkson and Woodruff [CW09] holds when $\gamma = 0$; therefore, one might hope to construct an improve space algorithm when we allow $\gamma \neq 0$. In this section, we show that for any non-trivial values of γ , this is not the case. This directly implies that our algorithm uses optimal space for a large range of parameters.

Theorem 52. *Let $m, n, k \in \mathbb{N}$ and $\alpha > 0$. Then the space used by any randomized single-pass algorithm for $(\alpha, 5/6, O(m+n), k)$ -LRA in the general turnstile model is at least $\Omega((m+n)k/\alpha)$.*

Theorem 52 shows that PRIVATE-SPACE-OPTIMAL-LRF uses optimal space when $\gamma = O(m+n)$ and $k \geq 1/\alpha$. If we set $\alpha = \sqrt{2} - 1$ (as in Hardt and Roth [HR12]) and note any non-trivial result implies that $\gamma = o(m+n)$, we have a matching lower bound for all $k \geq 3$.

The space lower bound in the turnstile update model is shown by showing that any algorithm Alg in the turnstile model yields a single round communication protocol for some function f . The idea is as follows. On input \mathbf{x} , Alice invokes Alg on its input to compute $\text{Alg}(\mathbf{x})$. She then sends the state st to Bob, who computes $\text{Alg}(\mathbf{x}|\mathbf{y})$ using his input \mathbf{y} and st , and uses this to compute the function f . The communication is therefore the same as the space required by the algorithm. In what follows, we use the notation $\mathbf{C}_{:i}$ to denote the i -th column of the matrix \mathbf{C} .

We give a reduction to the augmented indexing problem, AIND. It is defined as follows.

Definition 53. (AIND problem). *Alice is given an N -bit string \mathbf{x} and Bob is given an index $\text{ind} \in [N]$ together with $\mathbf{x}_{\text{ind}+1}, \dots, \mathbf{x}_N$. The goal of Bob is to output \mathbf{x}_{ind} .*

The communication complexity for solving AIND is well known due to the result of Miltersen *et al.* [MNSW95].

Theorem 54. *The minimum bits of communication required to solve AIND with probability $2/3$, when the message is sent only in one direction, i.e., either from Alice to Bob or from Bob to Alice, is $\Omega(n)$. This lower bound holds even if the index, ind , and the string, \mathbf{x} , is chosen uniformly at random.*

Before we state our result and its proof, we fix a notation. For a matrix \mathbf{A} and set of indices C , we use the notation $\mathbf{A}(C)$ to denote the submatrix formed by the columns indexed by C .

Proof of Theorem 52. We adapt the proof of Clarkson and Woodruff [CW09] for the case when $\gamma \neq 0$. Suppose $m \geq n$ and let $a = k/20\alpha$. Without loss of generality, we can assume that a is at most $n/2$. Let ℓ be the word size. We assume Alice has a string $\mathbf{x} \in \{-1, +1\}^{(m-a)a}$ and Bob has an index $\text{ind} \in [(m-a)a]$. The idea is to define the matrix \mathbf{A} with high Frobenius norm. The matrix \mathbf{A} is the summation of the matrix $\tilde{\mathbf{A}}$ constructed by Alice and $\bar{\mathbf{A}}$ constructed by Bob. We first define how Alice and Bob construct the instant $\mathbf{A} = \tilde{\mathbf{A}} + \bar{\mathbf{A}}$.

Alice constructs its matrix $\tilde{\mathbf{A}}$ as follows. Alice partitions the set $\{1, \dots, a\}$ in to ℓ disjoint sets I_1, \dots, I_ℓ such that $I_i := \{(i-1)a/\ell + 1, \dots, ia/\ell\}$. Let $\mathbf{M}(I_i)$ be an $(m-a) \times a/\ell$ matrix for all $1 \leq i \leq \ell$. We form a bijection between entries of \mathbf{x} and the entries of \mathbf{M} in the following manner. Every entry of $\mathbf{M}(I_i)$ is defined by a unique bit of \mathbf{x} , i.e., $\mathbf{M}(I_i)_{j,k} = (-1)^{\mathbf{x}_d} (10)^i$ for $d = (i-1)(m-a)a/\ell + (k-1)(m-a) + j$. The matrix $\tilde{\mathbf{A}}$ is now defined as follows.

$$\tilde{\mathbf{A}} = \begin{pmatrix} \mathbf{0}^{a \times a} & \mathbf{0}^{a \times (n-a)} \\ \mathbf{M} & \mathbf{0}^{(m-a) \times (n-a)} \end{pmatrix},$$

where $\mathbf{M} = (\mathbf{M}_{I_1} \ \dots \ \mathbf{M}_{I_\ell})$.

Suppose Bob is given an index $\text{ind} \in [(m-a)a]$ such that \mathbf{x}_{ind} corresponds to the sub-matrix $\mathbf{M}(I_\theta)$ for some $1 \leq \theta \leq \ell$. Then we can assume that Bob also knows every entry in the sub-matrix $\mathbf{M}(I_{\theta'})$ for $\theta' > \theta$. Bob forms a second level partition of the columns of $\mathbf{M}(I_\theta)$ in to equal size groups $G_1, \dots, G_{a/k\ell}$. Due to our construction, there exists a unique r such that \mathbf{x}_{ind} maps to an entry in the sub-matrix formed by columns indexed by one of the second level partition G_r . Let $C = \{c, c+1, \dots, c+k-1\}$ be the columns corresponding to the k -size group of I_θ in which ind is present. As its input, Bob streams a matrix $\bar{\mathbf{A}}$ which is an all-zero matrix, except for entries $\bar{\mathbf{A}}_{c+i, c+i} = \zeta$ for $0 \leq i \leq k-1$ and ζ to be chosen later. In other words, Bob inserts a scaled identity matrix in the stream, where the scaling parameter ζ is large enough to make sure that most of the error of any randomized algorithm is due to other columns of \mathbf{A} . As we shall see later, we set the value of ζ as a large polynomial in the approximation error of the algorithm.

Let \mathcal{A} be the algorithm that computes LRA under the turnstile model. Alice feeds its matrix $\tilde{\mathbf{A}}$ to \mathcal{A} in the turnstile manner and send the state of the algorithm by the end of her feed to Bob. Bob uses the state received by Alice and feed the algorithm \mathcal{A} with its own matrix $\bar{\mathbf{A}}$ in a turnstile manner. Therefore, the algorithm \mathcal{A} gets as input a matrix $\mathbf{A} = \tilde{\mathbf{A}} + \bar{\mathbf{A}}$ and it is required to output a rank- k matrix \mathbf{B} with additive error $\gamma = O(m+n)$. We will show that any such output allows us to solve AIND. Denote by $\mathbf{A}(C)$ the sub-matrix formed by the columns $C := \{c, c+1, \dots, c+k-1\}$.

Let us first understand the properties of the constructed matrix \mathbf{A} . To compute the Frobenius norm of this matrix, we need to consider two cases: the case for sub-matrices in which ind belongs, i.e., $\mathbf{M}(I_r)$, and the rest of the matrix. For the sub-matrix corresponding to the columns indexed by C , the columns of $\mathbf{A}(I_\theta)$ have Euclidean length $(\zeta^2 + (m-a)100^\theta)^{1/2}$. For $\theta' < \theta$, every columns have Euclidean norm $(a(m-a))^{1/2}10^{\theta'}$. Therefore, we have the following:

$$\begin{aligned} \|\mathbf{A} - [\mathbf{A}]_k\|_F^2 &\leq \frac{((a-k)(m-a)100^\theta)}{\ell} + \sum_{\theta' < \theta} \frac{a(m-a)100^{\theta'}}{\ell} \\ &\leq \frac{((a-k)(m-a)100^\theta)}{\ell} + \frac{a(m-a)100^\theta}{99\ell} \\ &\leq 2 \cdot (100)^\theta m^2 / \ell = \Gamma \end{aligned}$$

In order to solve $(\alpha, \beta, \gamma, k)$ -LRF, the algorithm needs to output a matrix \mathbf{B} of rank at most k such that, with probability $5/6$ over its random coins,

$$\begin{aligned} \|\mathbf{A} - \mathbf{B}\|_F^2 &\leq \left[(1 + \alpha)\sqrt{\Gamma} + \gamma \right]^2 \leq 2(1 + \alpha)\Gamma + 2\gamma^2 \\ &\leq 2\Gamma + 100^\theta k(m - a) \left(\frac{1}{10} + \frac{1}{99} \right) + 2\gamma^2 \\ &\leq 4 \cdot (100)^\theta m^2 / \ell + \frac{100^\theta k(m - a)}{5} + 2\gamma^2 \end{aligned}$$

Let us denote by $\Upsilon := 4 \cdot (100)^\theta m^2 / \ell + 100^\theta k(m - a) \left(\frac{1}{10} + \frac{1}{99} \right) + 2\gamma^2$. The proof idea is now to show the following:

- (i) Columns of \mathbf{B} corresponding to index set in C are linearly independent.
- (ii) Bound the error incurred by $\|\mathbf{A} - \mathbf{B}\|_F$ in terms of the columns indexed by G_r .

The idea is to show that most of the error is due to the other columns in \mathbf{B} ; and therefore, sign in the submatrix $\mathbf{A}(C)$ agrees with that of the signs of those in the submatrix $\mathbf{B}(C)$. This allows Bob to solve the AIND problem as Bob can just output the sign of the corresponding position.

Let

$$R := \{ra/k + 1, \dots, (r + 1)a/k\}$$

and

$$C := \{c, \dots, c + k - 1\}.$$

Let \mathbf{Y} be the submatrix of \mathbf{B} formed by the rows indexed by R and columns indexed by C .

The following lemma proves that when ζ is large enough, then the columns of \mathbf{B} corresponding to index set C are linearly independent. This proves part (i) of our proof idea.

Lemma 55. *Let $\mathbf{B}(C) := [\mathbf{B}_{:c} \ \dots \ \mathbf{B}_{:c+k-1}]$ be the columns corresponding to the sub-matrix formed by columns $c, \dots, c + k - 1$ of \mathbf{B} . If $\zeta \geq 2\Upsilon^2$, then the columns of $\mathbf{B}(C)$ spans the column space of $[\mathbf{A}]_k$.*

Proof. We will prove the lemma by considering the $k \times k$ sub-matrix, say \mathbf{Y} . Recall that \mathbf{Y} is a submatrix of \mathbf{B} formed by the rows indexed by R and the columns indexed by C . For the sake of brevity and abuse of notation, let us denote the restriction of \mathbf{B} to this sub-matrix $\mathbf{Y} := [\mathbf{Y}_{:1}, \dots, \mathbf{Y}_{:k}]$. In what follows, we prove a stronger claim that the submatrix \mathbf{Y} is a rank- k matrix.

Suppose, for the sake of contradiction that the vectors $\{\mathbf{Y}_{:1}, \dots, \mathbf{Y}_{:k}\}$ are linearly dependent. In other words, there exists a vector $\mathbf{Y}_{:i}$ and real numbers a_1, \dots, a_k , not all of which are identically zero, such that

$$\mathbf{Y}_{:i} = \sum_{j=1, j \neq i}^k a_j \mathbf{Y}_{:j}.$$

From the construction, since Bob inserts a sub-matrix $\zeta \mathbb{I}_k$, we know that

$$\sum_{j=1}^k (\mathbf{Y}_{j,j} - \zeta)^2 \leq \|\mathbf{A} - \mathbf{B}\|_F^2 \leq \Upsilon. \quad (26)$$

$$\sum_{j=1}^k \sum_{p \neq j} \mathbf{Y}_{p,j}^2 \leq \|\mathbf{A} - \mathbf{B}\|_F^2 \leq \Upsilon. \quad (27)$$

From [equation \(26\)](#) and choice of ζ , for all j , we have $\mathbf{Y}_{j,j} \geq \Upsilon^2$. Further, [equation \(27\)](#) implies that $\mathbf{Y}_{p,j} \leq \sqrt{\Upsilon}$. We have

$$\mathbf{Y}_{i,i} = \sum_{j=1, j \neq i}^k a_j \mathbf{Y}_{i,j} \geq \Upsilon^2$$

imply that there is an $p \in \{1, \dots, k\} \setminus \{i\}$ such that $|a_p| \geq \frac{\Upsilon^2}{k\sqrt{\Upsilon}}$.

Let \tilde{i} be the index in $\{1, \dots, k\} \setminus \{i\}$ for which $|a_{\tilde{i}}|$ attains the maximum value. We have $|a_{\tilde{i}} \mathbf{Y}_{\tilde{i}, \tilde{i}}| \geq |a_{\tilde{i}}| \Upsilon^2$ and $|a_j \mathbf{Y}_{\tilde{i}, j}| \leq |a_{\tilde{i}}| \sqrt{\Upsilon}$. Now consider the \tilde{i} -entry of $\mathbf{Y}_{:i}$. Note that $\tilde{i} \neq i$. Since Υ depends quadratically on m and γ , we have

$$\left| \sum_{j=1, j \neq i}^k a_j \mathbf{Y}_{\tilde{i}, j} \right| \geq |a_{\tilde{i}}| (\Upsilon^2 - k\sqrt{\Upsilon}) \geq (\Upsilon^2 - k\sqrt{\Upsilon}) \frac{\Upsilon^2}{k\sqrt{\Upsilon}} > \sqrt{\Upsilon}.$$

This is a contradiction because $\mathbf{Y}_{p,j} \leq \sqrt{\Upsilon}$ due to [equation \(27\)](#) for $p \neq j$. This completes the proof. \square

For the sake of brevity, let $\mathbf{V}_{:1}, \dots, \mathbf{V}_{:k}$ be the columns of $\mathbf{B}(C)$ and $\tilde{\mathbf{V}}_{:1}, \dots, \tilde{\mathbf{V}}_{:k}$ be the restriction of these column vectors to the rows $a+1, \dots, m$. In other words, vectors $\tilde{\mathbf{V}}_{:1}, \dots, \tilde{\mathbf{V}}_{:k}$ are the column vectors corresponding to the columns in \mathbf{M} . We showed in [Lemma 55](#) that the columns $\mathbf{B}(C)$ spans the column space of \mathbf{B} . We can assume that the last $n - a$ columns of \mathbf{B} are all zero vectors because \mathbf{B} is a rank- k matrix. We can also assume without any loss of generality that, except for the entries in the row indexed by R , all the other entries of $\mathbf{B}(C)$ are zero. This is because we have shown in [Lemma 55](#), we showed that the submatrix of $\mathbf{B}(C)$ formed by rows indexed by R and columns indexed by C have rank k .

Now any row i of \mathbf{B} can be therefore represented as $\sum \eta_{i,j} \mathbf{V}_{:j}$, for real numbers $\eta_{i,j}$, not all of which are identically zero. The following lemma proves part (ii) of our proof idea. For

Lemma 56. *Let $\mathbf{V}_{:1}, \dots, \mathbf{V}_{:k}$ be as defined above. Then column i of \mathbf{B} can be written as linear combination of real numbers $\eta_{i,1}, \dots, \eta_{i,k}$ of the vectors $\mathbf{V}_{:1}, \dots, \mathbf{V}_{:k}$ such that, for all j and $i \in R$, $\eta_{i,j}^2 \leq 4/\Upsilon^3$.*

Proof. Let $\mathbf{M}_{:1}, \dots, \mathbf{M}_{:a}$ be the columns of \mathbf{M} , where \mathbf{M} is the $(m - a) \times a$ submatrix of the matrix $\tilde{\mathbf{A}}$ corresponding to the input of Alice. We have

$$\begin{aligned} \Upsilon \geq & \|\mathbf{A} - \mathbf{B}\|_F^2 \sum_{i=1}^k (\zeta - \mathbf{V}_{r(a/k)+i,i})^2 + \sum_{i=1}^k \sum_{j \neq i} \mathbf{V}_{r(a/k)+i,j}^2 + \sum_{i=1}^k \|\mathbf{M}_{:r(a/k)+i} - \tilde{\mathbf{V}}_{:i}\|^2 \\ & + \sum_{i \notin R} \sum_{j=1}^k \left(\eta_{i,j} \mathbf{V}_{ra/k+j,j} + \sum_{j' \neq j} \eta_{i,j'} \mathbf{V}_{ra/k+j,j'} \right)^2 + \sum_{i \notin R} \left\| \mathbf{M}_{:i} - \sum_{j=1}^k \eta_{i,j} \tilde{\mathbf{V}}_{:j} \right\|^2. \end{aligned}$$

As in the proof of [Lemma 55](#), we have $|\mathbf{V}_{r(a/k)+i,j}^2| \leq \sqrt{\Upsilon}$ and $|\mathbf{V}_{r(a/k)+i,i}| \geq \Upsilon^2$. Let j_i be the index such that $|\eta_{i,j_i}|$ is the maximum. Then the above expression is at least $|\eta_{i,j_i}|^2 (\Upsilon^2 - k\sqrt{\Upsilon})^2 \geq |\eta_{i,j_i}|^2 \Upsilon^4 / 4$. Since this is less than Υ , the result follows from the definition of j_i . \square

We can now complete the proof. First note that since \mathbf{M} is a signed matrix, each $\tilde{\mathbf{V}}_i$ in the third term of the above expression is at least $\sqrt{\Upsilon}$. Therefore, for all $i \notin S$ and all j

$$\left| \sum_{j=1}^k \eta_{i,j} \tilde{\mathbf{V}}_{:j} \right| \leq \frac{4k\Upsilon^{1/2}}{\Upsilon^{3/2}} = \frac{4k}{\Upsilon}.$$

As $\mathbf{M}_{:i}$ is a sign vector and if $\gamma = O(m + n) = O(m)$, this implies that

$$\begin{aligned} \sum_{i \notin R} \left\| \mathbf{M}_{:i} - \sum_{j=1}^k \eta_{i,j} \tilde{\mathbf{V}}_{:j} \right\|^2 &\geq \sum_{i \notin R} \|\mathbf{M}_{:i}\|^2 \left(1 - \frac{4k}{\Upsilon}\right) \geq O((100)^\theta m^2 / \ell) - O(100^\theta a) \\ \sum_{i=1}^k \left\| \mathbf{M}_{:r(a/k)+i} - \tilde{\mathbf{V}}_{:i} \right\|^2 &= \sum_{i=1}^k \sum_{j=1}^{m-a} (\mathbf{M}_{j,r(a/k)+i} - (\tilde{\mathbf{V}}_i)_j)^2 \leq \frac{100^\theta k(m-a)}{5} + O(100^\theta a) \end{aligned}$$

Now, since there are in total $k(m-a)$ entries in the submatrix formed by the columns indexed by C , at least $1 - (\frac{1}{10} + \frac{1}{99} + o(1))$ fraction of the entries have the property that the sign of $\mathbf{M}_{j,r(a/k)+i}$ matches the sign of $\tilde{\mathbf{V}}_{j,i}$. Since ind is in one of the columns of $\mathbf{M}_{:ra/k+1}, \dots, \mathbf{M}_{:ra/k+k}$, with probability at least $1 - (\frac{1}{10} + \frac{1}{99} + o(1))$, if Bob outputs the sign of the corresponding entry in \mathbf{B} , then Bob succeeds in solving AIND. This gives a lower bound of $\Omega((m-a)a) = \Omega(mk\ell/\alpha)$ space. The case when $m \leq n$ is analogous and gives a lower bound of $\Omega(nk\ell/\alpha)$. Thus, there is a lower bound of $\Omega((m+n)k\ell/\alpha)$. \square

I Noninteractive Local Differentially Private PCA

In this section, we give our noninteractive local differentially private principal component analysis (see [Definition 10](#)). In the *local* model [[EGS03](#)], each individual applies a differentially private algorithm locally to their data and shares only the output of the algorithm—called a report—with a server that aggregates users' reports. In principle, one could also use cryptographic techniques such as secure function evaluation to simulate central model algorithms in a local model, but such algorithms currently impose bandwidth and liveness constraints that make them impractical for large deployments. A long line of work studies what is achievable by local differentially private algorithms [[AHP09](#), [BS15](#), [DJW13](#), [EPK14](#), [EGS03](#), [HKR12](#), [KLN⁺11](#), [MS06](#), [War65](#)]. Tight upper and lower bounds known on the achievable accuracy for many problems; however, low-rank factorization (and even low-rank approximation) has not been studied in this model. The naive approach to convert existing algorithms to locally private algorithms leads to a large additive error and are interactive. On the other hand, low-rank factorization is a special optimization problem and the role of interaction in local differentially private optimization was recently investigated by Smith *et al.* [[STU17](#)].

Theorem 57. *Let $m, n \in \mathbb{N}$ and $\alpha, \varepsilon, \delta$ be the input parameters. Let k be the desired rank of the factorization and $\eta = \max\{k, \alpha^{-1}\}$. Let $t = O(\eta\alpha^{-1} \log(k/\delta))$ and $v = O(\eta\alpha^{-2} \log(k/\delta))$. Given a private input matrix $\mathbf{A} \in \mathbb{R}^{m \times n}$ distributed in a row-wise manner amongst m users, the output \mathbf{U} of the algorithm, PRIVATE-LOCAL-LRF, presented in [Figure 9](#), is a k -rank orthonormal matrix such that*

1. PRIVATE-LOCAL-LRF is a non-interactive (ε, δ) -local differentially private under Priv_2 .
2. With probability $9/10$ over the coins of PRIVATE-LOCAL-LRF,

$$\|\mathbf{A} - \mathbf{U}\mathbf{U}^\top \mathbf{A}\|_F \leq (1 + O(\alpha)) \|\mathbf{A} - [\mathbf{A}]_k\|_F + O\left(v\sqrt{m \log(1/\delta)}/\varepsilon\right).$$

3. The words of communication used by every users in PRIVATE-LOCAL-LRF is $O(v^2)$ words.

Proof. The local privacy is easy to follow from the Gaussian mechanism and as in [Lemma 36](#) with the choice of ρ_1 and ρ_2 . For the communication cost, note that every user i has to send a sketch $\mathbf{Y}_{i:}$, $\hat{\mathbf{Y}}_{i:}$, and $\mathbf{Z}_{i:}$. The sketch $\mathbf{Y}_{i:}$ is a real $1 \times t$ matrix, $\hat{\mathbf{Y}}_{i:}$ is an $t \times v$ real matrix, and $\mathbf{Z}_{i:}$ is a $v \times v$ real matrix. The total communication cost is $O((tv + v^2) \log(nm))$ words. Since $t \leq v$, the result on the communication cost follows.

PRIVATE-LOCAL-LRF

Initialization. Let $\eta = \max\{k, \alpha^{-1}\}$, $t = O(\eta\alpha^{-1} \log(k/\delta))$, $v = O(\eta\alpha^{-2} \log(k/\delta))$. Let $\rho_1 = \sqrt{(1+\alpha) \ln(1/\delta)}/\varepsilon$, $\rho_2 = (1+\alpha)\sqrt{\ln(1/\delta)}/\varepsilon$. Sample $\Phi \sim \mathcal{N}(0, 1)^{n \times t}$, $\Psi \sim \mathcal{N}(0, 1)^{t \times m}$, $\mathbf{S} \sim \mathcal{N}(0, 1)^{v \times m}$, and $\mathbf{T} \sim \mathcal{N}(0, 1)^{n \times v}$. Make them public.

User- i computation. On input the row $\mathbf{A}_{i\cdot}$, user- i does the following:

1. Sample $\mathbf{N}_{1,i} \sim \mathcal{N}(0, \rho_1^2)^{1 \times t}$, $\mathbf{N}_{2,i} \sim \mathcal{N}(0, \rho_2^2)^{t \times v}$ and $\mathbf{N}_{3,i} \sim \mathcal{N}(0, \rho_2^2)^{v \times v}$.
2. Set $\hat{\mathbf{A}}_{i\cdot} \in \mathbb{R}^{m \times n}$ such that every row other than row- i is an all zero vector. Compute $\mathbf{Y}_{i\cdot} = \mathbf{A}_{i\cdot}\Phi + \mathbf{N}_{1,i}$, $\tilde{\mathbf{Y}}_{i\cdot} = \Psi\hat{\mathbf{A}}_{i\cdot}\mathbf{T} + \mathbf{N}_{2,i}$, and $\mathbf{Z}_{i\cdot} = \mathbf{S}\hat{\mathbf{A}}_{i\cdot}\mathbf{T} + \mathbf{N}_{3,i}$.

Server side computation. Once the server receives the reports from all the users, it follows the following steps.

1. Form \mathbf{Y} whose row- i is $\mathbf{Y}_{i\cdot}$. Compute $\mathbf{Z} = \sum \mathbf{Z}_{i\cdot}$ and $\tilde{\mathbf{Y}} = \sum \tilde{\mathbf{Y}}_{i\cdot}$. Compute $\hat{\mathbf{Y}} = \mathbf{S}\mathbf{Y}$.
2. Compute $\tilde{\mathbf{X}} := \operatorname{argmin}_{\operatorname{rk}(\mathbf{X}) \leq k} \|\hat{\mathbf{Y}}\mathbf{X}\tilde{\mathbf{Y}} - \mathbf{Z}\|_F$. Compute a SVD of $\tilde{\mathbf{X}}$. Let it be $\mathbf{U}'\Sigma'\mathbf{V}'^T$.
3. Output the orthonormal basis \mathbf{U} for the span of $\mathbf{Y}\mathbf{U}'$.

Figure 9: Non-interactive Local Differentially private LRF Under Priv_1

We now prove **Part 2** of **Theorem 57**. Let \mathbf{N}_1 be a random Gaussian matrices whose row- i is $\mathbf{N}_{1,i}$. Let $\mathbf{N}_2 = \sum \mathbf{N}_{2,i}$, $\mathbf{N}_3 = \sum \mathbf{N}_{3,i}$. Note that $\mathbf{N}_1 \sim \mathcal{N}(0, \rho_1^2)^{m \times t}$, $\mathbf{N}_2 \sim \mathcal{N}(0, m\rho_2^2)^{t \times v}$, and $\mathbf{N}_3 \sim \mathcal{N}(0, m\rho_2^2)^{v \times v}$. Let \mathbf{Y} be the matrix whose row- i is $\mathbf{Y}_{i\cdot}$. Further, $\mathbf{Z} = \sum \mathbf{Z}_{i\cdot}$ and $\tilde{\mathbf{Y}} = \sum \tilde{\mathbf{Y}}_{i\cdot}$. If the matrix distributed among the users is \mathbf{A} , then it means that $\mathbf{Y} = \Phi\mathbf{A} + \mathbf{N}_1$, $\tilde{\mathbf{Y}} = \Psi\mathbf{A}\mathbf{T} + \mathbf{N}_3$ and $\mathbf{Z} = \mathbf{S}\mathbf{A}\mathbf{T} + \mathbf{N}_2$.

Let the singular value decomposition of $[\mathbf{A}]_k$ be $[\mathbf{A}]_k = \mathbf{U}_k \Sigma_k \mathbf{V}_k^T$. Let $\mathbf{C} = \Psi(\mathbf{A} + \Psi^\dagger \mathbf{N}_2 \mathbf{T}^\dagger)$. We will use **Lemma 14** to relate $\min_{\operatorname{rk}(\mathbf{X}) \leq k} \|\mathbf{Y}\mathbf{X}\mathbf{C} - (\mathbf{A} + \mathbf{S}^\dagger \mathbf{N}_3 \mathbf{T}^\dagger)\|_F$ with $\|\mathbf{A} - [\mathbf{A}]_k\|_F$. Set $\Phi = \Psi$, $\mathbf{P} = [\mathbf{A}]_k$, $\mathbf{Q} = \mathbf{A} + \Psi^\dagger \mathbf{N}_2 \mathbf{T}^\dagger$ in **Lemma 14**. For

$$\tilde{\mathbf{X}} := (\Psi[\mathbf{A}]_k)^\dagger (\Psi\mathbf{A} + \mathbf{N}_2 \mathbf{T}^\dagger) = (\Psi[\mathbf{A}]_k)^\dagger \mathbf{C} = \operatorname{argmin}_{\mathbf{X}} \|\Psi([\mathbf{A}]_k \mathbf{X} - \mathbf{A} + (\Psi^\dagger \mathbf{N}_2 \mathbf{T}^\dagger))\|,$$

we have with probability $1 - \delta$ over $\Psi \sim \mathcal{D}_R$,

$$\begin{aligned} \|[\mathbf{A}]_k \tilde{\mathbf{X}} - (\mathbf{A} + \Psi^\dagger \mathbf{N}_2 \mathbf{T}^\dagger)\|_F &\leq (1 + \alpha) \min_{\mathbf{X}} \|[\mathbf{A}]_k \mathbf{X} - (\mathbf{A} + \Psi^\dagger \mathbf{N}_2 \mathbf{T}^\dagger)\|_F \\ &\leq (1 + \alpha) \|[\mathbf{A}]_k - \mathbf{A}\|_F + (1 + \alpha) \|\Psi^\dagger \mathbf{N}_2 \mathbf{T}^\dagger\|_F. \end{aligned} \quad (28)$$

In the above, the second inequality follows by setting $\mathbf{X} = \mathbf{V}_k \mathbf{V}_k^T$.

Let $\mathbf{W}^T := \tilde{\mathbf{X}} = (\Psi[\mathbf{A}]_k)^\dagger \mathbf{C}$. We now use **Lemma 14** on the following regression problem:

$$\min_{\mathbf{X}} \|\Phi^T(\mathbf{W}\mathbf{X} - \mathbf{B})\| \quad \text{and} \quad \min_{\mathbf{X}} \|\mathbf{W}\mathbf{X} - \mathbf{B}\|_F, \quad \text{where } \mathbf{B} = (\mathbf{A} + \mathbf{N}_1 \Phi^\dagger)^T$$

with the candidate solutions

$$\hat{\mathbf{X}} = \operatorname{argmin}_{\mathbf{X}} \|\Phi^T(\mathbf{W}\mathbf{X} - \mathbf{A})\|_F \quad \text{and} \quad \tilde{\mathbf{X}} = \operatorname{argmin}_{\mathbf{X}} \|(\mathbf{W}\mathbf{X} - \mathbf{A})\|_F$$

One of the candidate solutions to $\operatorname{argmin}_{\mathbf{X}} \|\Phi^T(\mathbf{W}\mathbf{X} - \mathbf{A})\|_F$ is $\hat{\mathbf{X}} := (\Phi^T \mathbf{W})^\dagger (\Phi^T \mathbf{B})$. Since $[\mathbf{A}]_k$

has rank k , [Lemma 14](#) and [equation \(28\)](#) gives with probability $1 - \delta$ over $\Psi \sim \mathcal{D}_R$

$$\begin{aligned} \|\widehat{\mathbf{X}}^\top \mathbf{W}^\top - \mathbf{B}^\top\|_F &\leq (1 + \alpha) \min_{\mathbf{X}} \|\mathbf{X}^\top \mathbf{W}^\top - \mathbf{B}^\top\|_F \leq (1 + \alpha) \|[\mathbf{A}]_k (\Psi[\mathbf{A}]_k)^\dagger \mathbf{C} - \mathbf{B}^\top\|_F \\ &\leq (1 + \alpha) \|[\mathbf{A}]_k (\Psi[\mathbf{A}]_k)^\dagger \mathbf{C} - \mathbf{A}\|_F + (1 + \alpha) \|\mathbf{N}_1 \Phi^\dagger\|_F \\ &\leq (1 + \alpha)^2 \|\mathbf{A} - [\mathbf{A}]_k\|_F + (1 + \alpha)(2 + \alpha) \|\Psi^\dagger \mathbf{N}_2 \mathbf{T}^\dagger\|_F + (1 + \alpha) \|\mathbf{N}_1 \Phi^\dagger\|_F \end{aligned}$$

This in particular implies that

$$\|\widehat{\mathbf{X}}^\top \mathbf{W}^\top - \mathbf{A}\|_F \leq (1 + \alpha)^2 \|\mathbf{A} - [\mathbf{A}]_k\|_F + (1 + \alpha)(2 + \alpha) \|\Psi^\dagger \mathbf{N}_2 \mathbf{T}^\dagger\|_F + (2 + \alpha) \|\mathbf{N}_1 \Phi^\dagger\|_F.$$

Let

$$\tau_1 = (1 + \alpha)(2 + \alpha) \|\Psi^\dagger \mathbf{N}_2 \mathbf{T}^\dagger\|_F + (2 + \alpha) \|\mathbf{N}_1 \Phi^\dagger\|_F$$

be the additive error due to the effect of noise \mathbf{N}_1 and \mathbf{N}_2 .

Substituting the value of $\widehat{\mathbf{X}}^\top := (\mathbf{B}^\top \Phi)(\mathbf{W}^\top \Phi)^\dagger = (\mathbf{A} \Phi + \mathbf{N}_1)(\mathbf{W}^\top \Phi)^\dagger = \mathbf{Y}(\mathbf{W}^\top \Phi)^\dagger$, with probability $1 - 2\delta$ over $\Phi^\top, \Psi \sim \mathcal{D}_R$, we have

$$\|\mathbf{Y}(\mathbf{W}^\top \Phi)^\dagger (\Psi[\mathbf{A}]_k)^\dagger \mathbf{C} - \mathbf{A}\|_F \leq (1 + \alpha)^2 \|\mathbf{A} - [\mathbf{A}]_k\|_F + \tau_1.$$

Let $\mathbf{X}_* := (\mathbf{W}^\top \Phi)^\dagger (\Psi[\mathbf{A}]_k)^\dagger$, i.e.,

$$\|\mathbf{Y} \mathbf{X}_* \mathbf{C} - \mathbf{A}\|_F \leq (1 + \alpha)^2 \|\mathbf{A} - [\mathbf{A}]_k\|_F + \tau_1.$$

Let $\mathbf{E} = \mathbf{A} + \mathbf{S}^\dagger \mathbf{N}_3 \mathbf{T}^\dagger$. Since \mathbf{X}_* has rank at most k , this implies that

$$\begin{aligned} \min_{\substack{\mathbf{X} \\ \text{rk}(\mathbf{X}) \leq k}} \|(\mathbf{Y} \mathbf{X} \mathbf{C} - \mathbf{E})\|_F &\leq \|(\mathbf{Y} \mathbf{X}_* \mathbf{C} - \mathbf{E})\|_F \\ &\leq \|(\mathbf{Y} \mathbf{X}_* \mathbf{C} - \mathbf{A})\|_F + \|\mathbf{S}^\dagger \mathbf{N}_3 \mathbf{T}^\dagger\|_F \\ &\leq (1 + \alpha)^2 \|\mathbf{A} - [\mathbf{A}]_k\|_F + \tau_1 + \|\mathbf{S}^\dagger \mathbf{N}_3 \mathbf{T}^\dagger\|_F. \end{aligned}$$

Since $\alpha \in (0, 1)$ and substituting the value of τ_1 , we can get an upper bound on the additive terms.

$$\min_{\substack{\mathbf{X} \\ \text{rk}(\mathbf{X}) \leq k}} \|(\mathbf{Y} \mathbf{X} \mathbf{C} - \mathbf{E})\|_F \leq (1 + \alpha)^2 \|\mathbf{A} - [\mathbf{A}]_k\|_F + O\left(\tau_1 + \|\mathbf{S}^\dagger \mathbf{N}_3 \mathbf{T}^\dagger\|_F\right). \quad (29)$$

Now consider the following two regression problems:

$$\min_{\substack{\mathbf{X} \\ \text{rk}(\mathbf{X}) \leq k}} \|\mathbf{S} \mathbf{Y} \mathbf{X} \mathbf{C} \mathbf{T} - \mathbf{S} \mathbf{E} \mathbf{T}\|_F \quad \text{and} \quad \min_{\substack{\mathbf{X} \\ \text{rk}(\mathbf{X}) \leq k}} \|\mathbf{Y} \mathbf{X} \mathbf{C} - \mathbf{E}\|_F \quad (30)$$

with candidate solutions $\widetilde{\mathbf{X}} := \arg\min_{\substack{\mathbf{X} \\ \text{rk}(\mathbf{X}) \leq k}} \|\mathbf{S} \mathbf{Y} \mathbf{X} \mathbf{C} \mathbf{T} - \mathbf{S} \mathbf{E} \mathbf{T}\|_F$ and $\widehat{\mathbf{X}} := \arg\min_{\substack{\mathbf{X} \\ \text{rk}(\mathbf{X}) \leq k}} \|\mathbf{Y} \mathbf{X} \mathbf{C} - \mathbf{E}\|_F$, respectively. Set $p = k/\alpha$, $\mathbf{D} = \mathbf{Y} \mathbf{X} \mathbf{C}$ and $\mathbf{E} = \mathbf{A} + \mathbf{S}^\dagger \mathbf{N}_3 \mathbf{T}^\dagger$ in the statement of [Lemma 15](#). Then we have with probability $1 - 2\delta$ over $\mathbf{S}, \mathbf{T} \sim \mathcal{D}_A$,

$$\begin{aligned} \min_{\substack{\mathbf{X} \\ \text{rk}(\mathbf{X}) = k}} \|\mathbf{Y} \mathbf{X} \mathbf{C} - \mathbf{E}\|_F^2 &= \|\mathbf{Y} \widehat{\mathbf{X}} \mathbf{C} - \mathbf{E}\|_F^2 = \|\mathbf{Y} \widehat{\mathbf{X}} \mathbf{C} - (\mathbf{A} + \mathbf{S}^\dagger \mathbf{N}_3 \mathbf{T}^\dagger)\|_F^2 \\ &\geq (1 + \alpha) \|\mathbf{S}(\mathbf{Y} \widehat{\mathbf{X}} \mathbf{C} - (\mathbf{A} + \mathbf{S}^\dagger \mathbf{N}_3 \mathbf{T}^\dagger))\mathbf{T}\|_F^2 \\ &\geq (1 + \alpha) \min_{\substack{\mathbf{X} \\ \text{rk}(\mathbf{X})}} \|\mathbf{S} \mathbf{Y} \mathbf{X} \mathbf{C} \mathbf{T} - \mathbf{S}(\mathbf{A} + \mathbf{S}^\dagger \mathbf{N}_3 \mathbf{T}^\dagger)\mathbf{T}\|_F^2 \\ &= (1 + \alpha) \|\widehat{\mathbf{Y}} \widetilde{\mathbf{X}} \widetilde{\mathbf{Y}} - \mathbf{Z}\|_F^2. \end{aligned} \quad (31)$$

The second and last equality follows from the definition, the first inequality follows from [Lemma 15](#) and the second inequality follows from the fact that minimum is smaller than any other choice of \mathbf{X} , more specifically $\mathbf{X} = \tilde{\mathbf{X}}$. Since \mathbf{U} is in the span of $\mathbf{Y}\mathbf{U}'$, where \mathbf{U}' is the left singular vectors of $\tilde{\mathbf{X}}$, using Boutsidis *et al.* [[BWZ16](#)] we have $\|(\mathbb{I} - \mathbf{U}\mathbf{U}^\top)(\mathbf{A} + \mathbf{N}_1\Phi^\dagger)\|_F \leq \|\tilde{\mathbf{Y}}\tilde{\mathbf{X}}\tilde{\mathbf{Y}} - \mathbf{Z}\|_F$. Combining [equation \(31\)](#) and [equation \(29\)](#), this implies that

$$\|(\mathbb{I} - \mathbf{U}\mathbf{U}^\top)\mathbf{A}\|_F \leq (1 + O(\alpha))\|\mathbf{A} - [\mathbf{A}]_k\|_F + O\left(\|\Psi^\dagger\mathbf{N}_2\mathbf{T}^\dagger\|_F + \|\mathbf{N}_1\Phi^\dagger\|_F + \|\mathbf{S}^\dagger\mathbf{N}_3\mathbf{T}^\dagger\|_F\right).$$

As in the proof of [Theorem 5](#), for the choice of v and t , for every matrices \mathbf{D} , $\|\mathbf{S}\mathbf{D}\|_F \leq (1 + \alpha)\|\mathbf{D}\|_F$, $\|\mathbf{D}\mathbf{T}\|_F \leq (1 + \alpha)\|\mathbf{D}\|_F$, $\|\Psi\mathbf{D}\|_F \leq (1 + \alpha)\|\mathbf{D}\|_F$, and $\|\mathbf{D}\Phi\|_F \leq (1 + \alpha)\|\mathbf{D}\|_F$. In other words, $\|\Psi^\dagger\mathbf{N}_2\mathbf{T}^\dagger\|_F \leq (1 + \alpha)\|\mathbf{N}_2\|_F$, $\|\mathbf{N}_1\Phi^\dagger\|_F \leq \sqrt{1 + \alpha}\|\mathbf{N}_1\|_F$, $\|\mathbf{S}^\dagger\mathbf{N}_3\mathbf{T}^\dagger\|_F \leq (1 + \alpha)\|\mathbf{N}_3\|_F$. Since $\alpha \in (0, 1)$,

$$\|(\mathbb{I} - \mathbf{U}\mathbf{U}^\top)\mathbf{A}\|_F \leq (1 + O(\alpha))\|\mathbf{A} - [\mathbf{A}]_k\|_F + O(\|\mathbf{N}_2\|_F + \|\mathbf{N}_1\|_F + \|\mathbf{N}_3\|_F).$$

The result follows using [Lemma 20](#), Markov's inequality, and values of ρ_1 and ρ_2 . \square

J Empirical Evaluation of Our Algorithms

Any algorithm to compute the low-rank factorization In this section, we give the experimental evaluation of our algorithms and compare it with the best known results. We ran our algorithms on a 2.7 GHz Intel Core i5 processor with 16 GB 1867 MHz DDR3 RAM. Our algorithms keep on sampling a random matrix randomly until we sample a matrix with number of columns more than 200.

J.1 Empirical Evaluation of PRIVATE-OPTIMAL-SPACE-LRF

We first start with the discussion on the empirical evaluation of PRIVATE-OPTIMAL-SPACE-LRF (see [Figure 2](#) for the detail description and [Appendix L.2](#) for the source code). Since the error incurred by PRIVATE-FROBENIUS-LRF is strictly less than that by PRIVATE-OPTIMAL-SPACE-LRF, we only concern ourselves with PRIVATE-OPTIMAL-SPACE-LRF. For the private setting, we sampled matrices from the following distributions:

1. All the entries are sampled uniformly from the interval $[1, 5000]$
2. All the entries are integers sampled uniformly from the interval $[1, 5000]$.

In our experimental set-up, we keep the value of $\alpha = 0.25$ and $k = 10$ fixed to get a better understanding of how the approximation changes with the changing values of dimensions.

We start by explaining what every columns in [Table 3](#) means. The first two columns are the dimension of the private matrix, the third column is the desired rank of the output matrix, and the fourth column is the value of multiplicative approximation. For the ease of comparison, we have set k and α to be a constant parameter in this experiment and let the dimension to be the free parameters.

Recall that the problem of the low-rank factorization is to output a singular value decomposition $\tilde{\mathbf{U}}, \tilde{\Sigma}, \tilde{\mathbf{V}}$ such that $\mathbf{M}_k = \tilde{\mathbf{U}}\tilde{\Sigma}\tilde{\mathbf{V}}^\top$ is a rank- k matrix and

$$\|\mathbf{A} - \mathbf{M}_k\|_F \leq (1 + \alpha)\|\mathbf{A} - [\mathbf{A}]_k\|_F + \gamma,$$

where γ is the additive error. The fifth and the sixth columns enumerate the value of the expression resulting from running our algorithm PRIVATE-OPTIMAL-SPACE-LRF and that by Hardt and Roth [[HR12](#)], respectively. The last column represents the optimal low-rank factorization, $\|\mathbf{A} - [\mathbf{A}]_k\|_F$.

There is no way to compute the actual additive error, γ , empirically. This is because there is a factor of multiplicative error and it is tough to argue what part of error is due to the multiplicative factor alone. In other words, the best we can compute is $\alpha\Delta_k + \gamma$ or the total approximation error incurred by our algorithm. From the practitioner point of view, the total error is a much useful parameter than the $\alpha\Delta_k + \gamma$. Therefore, in this section, we use the total approximation error ($\|\mathbf{A} - \mathbf{M}_k\|_F$) as the measure for our evaluation.

Distribution of \mathbf{A}	Rows	Columns	k	α	Our error $\ \mathbf{A} - \mathbf{M}_k\ _F$	Hardt-Roth [HR12] $\ \mathbf{A} - \mathbf{M}_k\ _F$	Optimal Error $\ \mathbf{A} - [\mathbf{A}]_k\ _F$
Uniform real	535	50	10	0.25	223649.755822	552969.553361	190493.286508
	581	57	10	0.25	254568.54093	491061.894752	213747.405532
	671	65	10	0.25	295444.274372	470153.533646	250629.568178
	705	70	10	0.25	317280.295345	546149.007321	269647.886009
	709	68	10	0.25	309627.397618	664748.40864	265799.14431
	764	74	10	0.25	344154.666385	529618.155224	291053.598305
	777	50	10	0.25	270458.465497	436864.395454	235057.184632
	861	57	10	0.25	311968.552859	494331.526734	269761.822539
	1020	65	10	0.25	367175.274642	562322.74973	317998.616149
	1054	70	10	0.25	389357.219211	490379.45171	338605.316751
	1061	68	10	0.25	386772.176623	497648.401337	334581.574424
	1137	74	10	0.25	413134.221292	528692.808214	364187.907915
	1606	158	10	0.25	736233.063187	848827.366953	654600.528481
1733	169	10	0.25	786963.961154	932695.219591	706550.246496	
Uniform integers	522	50	10	0.25	217497.498819	496080.416815	185817.742179
	555	51	10	0.25	229555.549295	463022.451669	195569.953293
	605	60	10	0.25	267625.256679	525350.686285	225614.671569
	714	70	10	0.25	316232.378407	477066.707503	270968.006565
	804	51	10	0.25	284102.975661	548426.535153	241720.509615
	899	86	10	0.25	402886.168791	554702.285328	346840.731082
	906	60	10	0.25	328747.816311	455091.762984	284433.77154
	913	90	10	0.25	412114.948358	634520.151202	358345.162361
	1061	106	10	0.25	486139.117249	618819.626784	423775.149619
	1063	70	10	0.25	395772.128472	485655.074685	339950.706212
	1305	86	10	0.25	488729.886028	551863.893152	427234.256941
	1383	90	10	0.25	513573.18853	595195.801858	451019.165808
	1486	145	10	0.25	677118.945777	776008.62945	600584.597101
	1481	146	10	0.25	670290.341074	733574.295922	600877.636254
	1635	106	10	0.25	616323.217861	652624.510827	541305.826364
	1848	180	10	0.25	836139.102987	884143.446663	755160.753156
1983	194	10	0.25	896926.450848	1005652.63777	814717.343468	

Table 3: Empirical Comparison Between PRIVATE-OPTIMAL-SPACE-LRF and Hardt and Roth [HR12].

The empirical evaluations, listed in Table 3, reflect that our algorithm perform consistently better than that of Hardt and Roth [HR12] for all the dimension range. This agrees with our analysis and our discussion in Section 1.1.1. In particular, we showed that theoretically we perform better than Hardt and Roth [HR12] by a factor of $O(c\sqrt{k})$, where c is the largest entry in their projection matrix.

Another observation that one can make from our evaluation is that the error of our algorithm is quiet close to the actual error of approximation for all the dimension range. On the other hand, the error of Hardt and Roth [HR12] is close to optimal error in the large dimensional matrices. For small dimensional matrices, the error incurred by Hardt and Roth [HR12] is lot more than the actual error. The error of Hardt and Roth [HR12] starts getting better as the dimension increases. We believe that the fact that our algorithm

Rows	Columns	k	α	Our additive error	Hardt-Roth Additive Error	Expected Additive Error
546	50	10	0.25	665.797531323	13971.0499468	818.4149601308452
780	50	10	0.25	777.586619111	16772.4716145	915.2974642186384
532	51	10	0.25	719.492368601	23512.4449181	817.9937262895351
808	51	10	0.25	796.220653146	14613.575971	932.3276903711178
655	62	10	0.25	845.550304391	34161.5584705	941.6210056415899
951	62	10	0.25	903.21367849	14101.7225434	1055.244933017033
891	89	10	0.25	1040.90463257	17863.8728746	1190.7199415503355
1344	89	10	0.25	1273.05275389	18646.717977	1342.904603982863
522	50	10	0.25	691.996294265	23193.0915951	806.8851715645378
791	50	10	0.25	764.535817382	16245.8487264	919.3095213779045
1449	140	10	0.25	1392.08606822	20835.1618122	1639.1144500265145
2143	140	10	0.25	1518.90720786	13521.4077062	1827.1906485042728
834	80	10	0.25	969.883327308	22051.2853027	1119.4759720856953
1234	80	10	0.25	1005.64736332	13617.4286089	1257.2282266407094
682	64	10	0.25	833.555604169	19875.8713339	965.2425226826088
967	64	10	0.25	872.993347497	15774.1091244	1073.4637306190796
924	90	10	0.25	1024.67412984	20018.1421648	1208.8365389072335
1374	90	10	0.25	1168.33857697	15267.6596425	1357.3931639793143
1981	194	10	0.25	2845.12484193	19457.1056713	2035.7863227397222
2945	194	10	0.25	1938.83169063	14210.6828353	2263.796573983761
1022	100	10	0.25	1130.29734323	14839.3883841	1298.0001587502882
1530	100	10	0.25	1289.31236852	14886.7349415	1458.2654318931454
1867	182	10	0.25	1806.04962492	13443.8218792	1952.5511080639412
2757	182	10	0.25	1983.37270829	13509.2925192	2168.928742648721

Table 4: Empirical Comparison of Additive Error of PRIVATE-OPTIMAL-SPACE-LRF and Hardt and Roth [HR12].

performs well over all the range of dimensions makes it more stable with respect to different datasets. In practice, this is highly desirable as one would like the algorithm to perform well on both large and small datasets.

The last key observation one can gather from the empirical evaluation is that though the total error depends on the Frobenius norm, the additive error is independent of the Frobenius norm of the original matrix. It is expected that the total error depends on the Frobenius norm because of the multiplicative factor, but if we see the difference between the errors (of both our and Hardt and Roth’s algorithm) and the optimal error, the difference scales proportional to the dimensions of the matrices.

J.1.1 Empirical Evaluation of Additive Error for various dimension

As we mentioned earlier, if the matrix has rank greater than k , it is not possible to empirically evaluate the additive error. However, we believe it is still imperative to analyze the effect of differential privacy on the low-rank approximation of matrices. This in turn implies that one should also define experiments to empirically evaluate the additive error. One easy way to do this is to take as input a matrix with rank exactly k and compare the error incurred with that of expected error promised by our theoretical results. In the next experiment we do the same and prune the last $n - k$ columns of the matrix and make it identically zero (see Figure 2 for the detail description and Appendix L.3 for the source code). The result of our experiment is presented in Table 4. Since every entries of the matrix is identically zero, we notice that the same trend as in Table 3:

1. The additive error incurred by our algorithm is way less than the additive error incurred by Hardt and Roth [HR12] for all ranges of the dimension. We note that the matrices are highly incoherent as all

the entries are sampled i.i.d. We believe the reason for this behavior is the fact that the theoretical result provided by Hardt and Roth [HR12] for incoherent matrices depended on the Frobenius norm of the input matrix.

2. Our algorithm consistently perform better than the additive error guaranteed by the theoretical results, but the difference becomes smaller as the dimension increases. This trend can be seen as due to the fact that our results are asymptotic and we believe as m and n are sufficiently large, our theoretical result would match the empirical results.

J.1.2 Empirical Evaluation of Additive Error for various values of α .

An important parameter that comes in our bounds and is absent in the bounds of Hardt and Roth [HR12] is the factor of α . This is because Hardt and Roth [HR12] consider a constant α . Therefore, we feel it is important to analyze the additive error with respect to the change in α in order to better understand the effect of differential privacy on the low-rank approximation of matrices. Again, we take as input a matrix with rank exactly k and compare the error incurred with that of expected error promised by our theoretical results while keeping the dimensions and the value of k constant (see Figure 2 for the detail description and Appendix L.3 for the source code). The result of our experiment is presented in Table 5. Since every entries of the matrix is identically zero, we notice that the same trend as in Table 3:

1. The additive error incurred by our algorithm is way less than the additive error incurred by Hardt and Roth [HR12] for all ranges of the dimension. We note that the matrices are highly incoherent as all the entries are sampled i.i.d. We believe the reason for this behavior is the fact that the theoretical result provided by Hardt and Roth [HR12] for incoherent matrices depended on the Frobenius norm of the input matrix.
2. Our algorithm consistently perform better than the additive error guaranteed by the theoretical results, except for certain values of the dimensions and multiplicative error ($m = 2800, n = 200, \alpha = 0.24$). Even in these cases, the error is not that far from what is predicted from the theoretical analysis.

J.1.3 Empirical Evaluation of Additive Error for various values of k .

The last parameter that comes in our bounds and in the bounds of Hardt and Roth [HR12] is the factor of k . Therefore, we feel it is important to analyze the additive error with respect to the change in k in order to better understand the effect of differential privacy on the low-rank approximation of matrices. Again, we take as input a matrix with rank exactly k and compare the error incurred with that of expected error promised by our theoretical results while keeping the dimensions and the value of k constant (see Figure 2 for the detail description and Appendix L.3 for the source code). The result of our experiment is presented in Table 6. Since every entries of the matrix is identically zero, we notice that the same trend as in Table 3:

1. The additive error incurred by our algorithm is way less than the additive error incurred by Hardt and Roth [HR12] for all ranges of the dimension. We note that the matrices are highly incoherent as all the entries are sampled i.i.d. We believe the reason for this behavior is the fact that the theoretical result provided by Hardt and Roth [HR12] for incoherent matrices depended on the Frobenius norm of the input matrix.
2. Our algorithm is almost the same as the additive error guaranteed by the theoretical results.

Rows	Columns	k	α	Expected Additive Error	Our additive error	Hardt-Roth Additive Error
1800	200	10	0.1	7889.477972559828	8056.91337611	18155.7964938
1800	200	10	0.12	7114.371042156239	6986.62461896	16748.9933963
1800	200	10	0.14	6234.5851506132285	6171.60624904	26904.2257957
1800	200	10	0.16	6234.5851506132285	5982.88510433	16983.3495414
1800	200	10	0.18	5190.996544903864	4956.753081	15746.884528
1800	200	10	0.2	5190.996544903864	5044.67253402	14124.190425
1800	200	10	0.22	5190.996544903864	5012.95041479	18030.3508985
1800	200	10	0.24	5190.996544903864	4951.97119364	18013.7573095
2800	200	10	0.1	8690.661799154163	8550.34968943	12281.3954039
2800	200	10	0.12	7846.020358487806	7607.18833498	14296.1174909
2800	200	10	0.14	6887.309251977769	6494.49329799	11674.4990144
2800	200	10	0.16	6887.309251977769	6603.16942717	13860.6899516
2800	200	10	0.18	5750.100760072804	5417.53433303	13425.7590356
2800	200	10	0.2	5750.100760072804	5612.34884207	12731.6645942
2800	200	10	0.22	5750.100760072804	5524.92292528	10703.6065701
2800	200	10	0.24	5750.100760072804	6450.77223767	12610.5718019

Table 5: Empirical Comparison of Additive Error of PRIVATE-OPTIMAL-SPACE-LRF for various values of α with Hardt and Roth [HR12].

J.2 Empirical Evaluation of PRIVATE-LOCAL-LRF

In this section, we understand the result of our empirical evaluation of PRIVATE-LOCAL-LRF (see Figure 2 for the detail description and Appendix L.4 for the source code). Recall that in this case, we output a rank- k orthonormal matrix \mathbf{U} such that $\mathbf{U}\mathbf{U}^T\mathbf{A}$ well approximates the matrix \mathbf{A} with high probability, i.e.,

$$\|\mathbf{A} - \mathbf{U}\mathbf{U}^T\mathbf{A}\|_F \leq (1 + \alpha)\|\mathbf{A} - [\mathbf{A}]_k\|_F + \gamma$$

with probability at least $1 - \beta$.

For empirical evaluation of our locally-private algorithm, we sampled matrices such that every entries are uniform real number between $[0, 500]$. In our experimental set-up, we keep the value of $\alpha = 0.25$ and $k = 10$ fixed to get a better understanding of how the approximation changes with the changing values of dimensions. Our empirical results are listed in Table 7. From the table, we can immediately see the effect of the role of the dimension m and can see the difference between the optimal approximation and our approximation scale faster than in the case of PRIVATE-OPTIMAL-SPACE-LRF. However, even in the case of very large matrices, our approximation error is very small compared to the actual approximation error. In other words, this evaluation gives us a hint that our algorithm does not pay a lot for local model of computation. We make this more explicit in our next set of experiments given in the following sections when we empirically evaluate the additive error to better understand the effect of local differential privacy on the accuracy of the algorithm.

J.2.1 Empirical Evaluation of Additive Error for Various Dimension

As we argued earlier, it is still imperative to analyze the effect of differential privacy on the principal component analysis of matrices. This in turn implies that one should also define experiments to empirically evaluate the additive error. As earlier, we take as input a matrix with rank exactly k and compare the error incurred with that of expected error promised by our theoretical results. In the next experiment we do the same and prune the last $n - k$ columns of the matrix and make it identically zero (see Figure 2 for the detail description and Appendix L.5 for the source code). The result of our experiment is presented in Table 8.

Rows	Columns	k	α	Expected Additive Error	Our additive error	Hardt-Roth Additive Error
450	50	10	0.25	1955.5571620375354	1898.46860098	20016.9761114
450	50	11	0.25	1967.6211924065349	2067.40361185	24063.2388836
450	50	12	0.25	1979.148228191017	1915.44710901	23731.1221157
450	50	13	0.25	1990.2041707005583	1975.07412336	28148.8596261
450	50	14	0.25	2000.8424524636212	1937.32846282	44746.5335036
450	50	15	0.25	2395.058604918562	2656.30764859	38466.5764635
450	50	16	0.25	2404.9864394488554	2396.43074838	51068.6496986
450	50	17	0.25	2414.6085814624234	2518.70267919	59951.048053
450	50	18	0.25	2423.9516422006986	2412.15253004	49652.4140161
450	50	19	0.25	2433.0385823622364	2421.29320351	60475.2111995
700	50	10	0.25	2210.505167206932	2137.57732175	18322.4177099
700	50	11	0.25	2225.805492035416	2244.60952111	15915.3100262
700	50	12	0.25	2240.424768215734	2341.16599056	18904.9300369
700	50	13	0.25	2254.4465757300545	2356.95623935	23088.1856217
700	50	14	0.25	2267.9386809066186	2251.25863623	29899.7509467
700	50	15	0.25	2707.304866721297	2948.78705396	33654.4497548
700	50	16	0.25	2719.895940227483	2906.80323902	36885.4983615
700	50	17	0.25	2732.0993162013783	2677.54649011	36275.4890195
700	50	18	0.25	2743.9487446109097	2849.04550002	37581.6388795
700	50	19	0.25	2755.473345587197	2658.52670606	47314.5277845

Table 6: Empirical Comparison of Additive Error of PRIVATE-OPTIMAL-SPACE-LRF and Hardt and Roth [HR12] for various values of k .

Recall that the additive error incurred by our algorithm is

$$\gamma := O\left(\eta\alpha^{-2}\log(k/\delta)\sqrt{m\log(1/\delta)}/\epsilon\right)$$

for $\eta = \max\{k, 1/\alpha\}$.

Since every entries of the matrix $\mathbf{A} - [\mathbf{A}]_k$ is identically zero, the error listed in the Table 8 is the additive error. We note that the trend of Table 8 shows the same trend as in Table 7.

Our algorithm consistently perform better than the additive error guaranteed by the theoretical results (except for $m = 1835$ and $n = 131$), but the difference becomes smaller as the dimension increases. This trend can be seen as due to the fact that our results are asymptotic and we believe when m is sufficiently large, our theoretical result would match the empirical results.

J.2.2 Empirical Evaluation of Additive Error for various values of α .

An important parameter that comes in our bounds is the factor of α . Our theoretical result shows a tradeoff between the additive error and the multiplicative approximation factor. This makes it important to analyze the additive error with respect to the change in α in order to better understand the effect of differential privacy on the low-rank approximation of matrices. Again, we take as input a matrix with rank exactly k and compare the error incurred with that of expected error promised by our theoretical results while keeping the dimensions and the value of k constant. The result of our experiment is presented in Table 9.

Recall that the additive error incurred by our algorithm is

$$\gamma := O\left(\eta\alpha^{-2}\log(k/\delta)\sqrt{m\log(1/\delta)}/\epsilon\right)$$

for $\eta = \max\{k, 1/\alpha\}$.

Rows	Columns	k	α	Our error ($\ \mathbf{A} - \mathbf{U}\mathbf{U}^\top \mathbf{A}\ _F$)	Optimal Error ($\ \mathbf{A} - [\mathbf{A}]_k\ _F$)
460	50	10	0.25	26730.7062683	18376.5128345
486	50	10	0.25	28080.8322915	18964.3784188
516	55	10	0.25	30526.641347	20870.0427927
553	56	10	0.25	29787.7727748	21862.0631087
568	59	10	0.25	31632.1354094	22760.6941581
616	64	10	0.25	33981.2524409	25159.7572035
709	50	10	0.25	36449.213243	23110.1192303
730	50	10	0.25	35232.7419048	23414.630713
742	50	10	0.25	36167.200779	23613.9643873
805	56	10	0.25	38175.3014108	26613.9920423
817	56	10	0.25	38604.715515	26721.6604408
846	59	10	0.25	39702.5550961	28179.965914
907	64	10	0.25	41889.0912424	30717.3035814
924	101	10	0.25	50376.7374653	40511.7157875
1195	130	10	0.25	66049.3867783	53122.2489582
1262	138	10	0.25	70596.6678822	56526.8303644
1433	101	10	0.25	63976.8587336	50810.8395315
1698	186	10	0.25	91159.7299285	77358.5067276
1857	130	10	0.25	85812.7647106	66588.7353796
1956	138	10	0.25	82720.7186764	70710.4258919

Table 7: Empirical Evaluation of PRIVATE-LOCAL-LRF.

Since every entries of the matrix $\mathbf{A} - [\mathbf{A}]_k$ is identically zero, the error listed is the additive error incurred by our algorithm. We notice that the same trend as in Table 7.

We ran our algorithm for $m = \{450, 700\}$ and $n = 50$ with $k = 10$ and α ranging from 0.10 to 0.24 in the step-size of 0.02. Our algorithm consistently perform better than the additive error guaranteed by the theoretical results. The empirical error is way better than the error predicted by the theoretical result for small values of α and it starts getting closer as the values of α increases.

J.2.3 Empirical Evaluation of Additive Error for various values of k .

The last parameter that comes in our bounds for local differentially private algorithm is the factor of k . Therefore, we feel it is important to analyze the additive error with respect to the change in k in order to better understand the effect of differential privacy on the low-rank approximation of matrices. Again, we take as input a matrix with rank exactly k for varying values of k and compare the error incurred with that of expected error promised by our theoretical results while keeping the dimensions and the value of k constant. The result of our experiment is presented in Table 10.

Recall that the additive error incurred by our algorithm is

$$\gamma := O\left(\eta\alpha^{-2}\log(k/\delta)\sqrt{m\log(1/\delta)}/\epsilon\right)$$

for $\eta = \max\{k, 1/\alpha\}$.

Since every entries of the matrix $\mathbf{A} - [\mathbf{A}]_k$ is identically zero, the error of our algorithm is due to the additive error. Again as predicted by our results, we notice that the same trend as in Table 7:

We run our algorithm for $m = \{450, 700\}$ and $n = 50$ with $\alpha = 0.25$ and k ranging from 10 to 19. Our algorithm consistently perform better than the additive error guaranteed by the theoretical results. The empirical error is way better than the error predicted by the theoretical result for small values of α and it starts getting closer as the values of α increases.

Rows	Columns	k	α	Our Additive Error	Expected Additive Error
454	50	10	0.25	1591.70826988	2236.0029137367846
494	53	10	0.25	1659.12206578	2348.466431926056
511	52	10	0.25	1737.01336788	2395.0391957271527
562	60	10	0.25	2000.5063552	2530.799729601783
622	66	10	0.25	1580.25894963	2683.7137939487484
643	70	10	0.25	1962.46122303	2735.6746706859394
645	70	10	0.25	2172.80349046	2740.583809665359
702	50	10	0.25	1989.93430285	2877.768275821911
728	52	10	0.25	2059.26581077	2938.6953727048567
743	53	10	0.25	1993.78092528	2973.406277353555
844	60	10	0.25	2328.32881246	3199.4689043324324
853	94	10	0.25	2557.29517064	3219.0131110666084
925	66	10	0.25	2484.75888129	3372.181278187486
981	70	10	0.25	2198.25471982	3487.6698882062387
983	70	10	0.25	2597.33562269	3491.7393627228817
1055	113	10	0.25	3217.07445615	3635.863197534171
1190	131	10	0.25	4220.63858322	3894.742583462755
1320	94	10	0.25	2808.85540377	4131.88571345083
1583	113	10	0.25	3870.14181092	4581.675389464531
1713	186	10	0.25	4445.32063486	4791.555177594492
1835	131	10	0.25	5447.86868861	4982.106342591863
1900	206	10	0.25	4732.78855445	5081.305279633226
2213	158	10	0.25	4145.11357428	5539.0037396773205
2888	206	10	0.25	6234.47976474	6436.032325032722

Table 8: Empirical Evaluation of Additive Error of PRIVATE-LOCAL-LRF for varying values of dimensions.

J.3 Empirical Evaluation of OPTIMAL-SPACE-LRF

In this section, we understand the result of our empirical evaluation of PRIVATE-LOCAL-LRF (see Figure ?? for the detail description and Appendix L.1 for the source code). Recall that in the non-private setting, we want to output a low-rank factorization such that its product \mathbf{M}_k satisfies the following inequality with high probability:

$$\|\mathbf{M}_k - \mathbf{A}\|_F \leq (1 + \alpha) \|\mathbf{A} - [\mathbf{A}]_k\|_F.$$

For the empirical evaluation of our non-private algorithm, we sampled matrices such that every entries are uniform real number between $[0, 5000]$. In our experimental set-up, we keep the value of $\alpha = 0.25$ and $k = 10$ fixed to get a better understanding of how the approximation changes with the changing values of dimensions. Our empirical results are listed in Table 11. We see that for all the ranges of dimensions we evaluated on, the value in the column marked as $\|\mathbf{A} - \mathbf{M}_k\|_F$ is well within a $(1 + \alpha)$ factor of the corresponding entries marked under the column $\|\mathbf{A} - [\mathbf{A}]_k\|_F$. In fact, empirical evidence suggests that our algorithms gives a much better approximation than $\alpha = 0.25$ (in fact, it is closer to $\alpha = 0.05$). This gives a clear indication that our algorithm performs as the theoretical bound suggests for a large range of dimensions.

K Analysis of Boutsidis *et al.* Under Noisy Storage

The algorithm of Boutsidis *et al.* [BWZ16] maintains five sketches, $\mathbf{M} = \mathbf{T}_l \mathbf{A} \mathbf{T}_r$, $\mathbf{L} = \mathbf{S} \mathbf{A} \mathbf{T}_r$, $\mathbf{N} = \mathbf{T}_l \mathbf{A} \mathbf{R}$, $\mathbf{D} = \mathbf{A} \mathbf{R}$ and $\mathbf{C} = \mathbf{S} \mathbf{A}$, where \mathbf{S} and \mathbf{R} are the embedding for the generalized linear regression

Rows	Columns	k	α	Our Additive Error	Expected Additive Error
450	50	10	0.10	750.710811389	14088.628533821675
450	50	10	0.12	748.91024846	9639.587944193776
450	50	10	0.14	764.598714683	7415.067649379828
450	50	10	0.16	727.388618355	5190.54735456588
450	50	10	0.18	748.286674358	4449.040589627896
450	50	10	0.20	722.269126382	3707.533824689914
450	50	10	0.22	695.354504806	2966.027059751931
450	50	10	0.24	687.993333996	2224.520294813948
700	50	10	0.1	932.294964215	18195.922623848826
700	50	10	0.12	937.676945315	12449.841795264987
700	50	10	0.14	939.872486613	9576.801380973067
700	50	10	0.16	942.039074746	6703.760966681148
700	50	10	0.18	909.247538784	5746.08082858384
700	50	10	0.20	948.147219877	4788.400690486534
700	50	10	0.22	860.725294579	3830.7205523892267
700	50	10	0.24	882.673634462	2873.04041429192

Table 9: Empirical Evaluation of Additive Error of PRIVATE-LOCAL-LRF for various values of α .

and \mathbf{T}_l and \mathbf{T}_r are affine embedding matrices. It then computes

$$\mathbf{X}_* = \operatorname{argmin}_{r(\mathbf{X}) \leq k} \|\mathbf{NXL} - \mathbf{M}\|_F$$

and its SVD as $\mathbf{X}_* = \mathbf{U}_* \mathbf{\Sigma}_* \mathbf{V}_*^\top$. It then outputs \mathbf{DU}_* , $\mathbf{\Sigma}_*$, and $\mathbf{V}_*^\top \mathbf{C}$. Note that it does not compute a singular value decomposition of the low-rank approximation, but a different form of factorization.

Boutsidis *et al*, [BWZ16] prove the following three lemmas, combining which they get their result.

Lemma 58. For all matrices $\mathbf{X} \in \mathbb{R}^{t \times t}$, with probability at least 98/100, we have

$$(1 - \alpha)^2 \|\mathbf{ARXSA} - \mathbf{A}\|_F^2 \leq \|\mathbf{T}_l(\mathbf{ARXSA} - \mathbf{A})\mathbf{T}_r\|_F^2 \leq (1 + \alpha)^2 \|\mathbf{ARXSA} - \mathbf{A}\|_F^2.$$

Lemma 59. Let $\tilde{\mathbf{X}} = \operatorname{argmin}_{r(\mathbf{X}) \leq k} \|\mathbf{ARXSA} - \mathbf{A}\|_F^2$. Then with probability at least 98/100, we have

$$\min_{r(\mathbf{X}) \leq k} \|\mathbf{T}_l(\mathbf{ARXSA} - \mathbf{A})\mathbf{T}_r\|_F^2 \leq \|\mathbf{ARX}_* \mathbf{SA} - \mathbf{A}\|_F^2 \leq \|\mathbf{AR}\tilde{\mathbf{X}}\mathbf{SA} - \mathbf{A}\|_F^2.$$

Lemma 60. Let $\tilde{\mathbf{X}} = \operatorname{argmin}_{r(\mathbf{X}) \leq k} \|\mathbf{ARXSA} - \mathbf{A}\|_F^2$. Then with probability at least 98/100, we have

$$\|\mathbf{AR}\tilde{\mathbf{X}}\mathbf{SA} - \mathbf{A}\|_F^2 \leq (1 + \alpha) \Delta_k(\mathbf{A})^2.$$

To compute the value of $\tilde{\mathbf{X}}$, they use a result in generalized rank-constrained matrix approximations, which says that

$$\mathbf{N}^\dagger \left[\mathbf{U}_\mathbf{N} \mathbf{U}_\mathbf{N}^\top \mathbf{M} \mathbf{V}_\mathbf{L} \mathbf{V}_\mathbf{L}^\top \right]_k \mathbf{L}^\dagger = \operatorname{argmin}_{r(\mathbf{X}) \leq k} \|\mathbf{NXL} - \mathbf{M}\|_F, \quad (32)$$

where $\mathbf{U}_\mathbf{N}$ is the matrix whose columns are the left singular vectors of \mathbf{N} and $\mathbf{V}_\mathbf{L}$ is the matrix whose columns are the right singular vectors of \mathbf{L} .

Now, in order to make the above algorithm differentially private, we need to use the same trick as we used in the algorithm for PRIVATE-OPTIMAL-SPACE-LRF; otherwise, we would suffer from the problems mentioned earlier in Section ?? . More precisely, we compute $\hat{\mathbf{A}} = (\mathbf{A} \quad \sigma_{\min} \mathbb{I})$ and then store the following

Rows	Columns	k	α	Our Additive Error	Expected Additive Error
450	50	10	0.2	739.297184071	2966.027059751931
450	50	11	0.2	792.139775851	3707.533824689914
450	50	12	0.2	827.193502967	3707.533824689914
450	50	13	0.2	857.238846842	4449.040589627896
450	50	14	0.2	881.890196768	4449.040589627896
450	50	15	0.2	877.407208023	5190.54735456588
450	50	16	0.2	955.688935848	5190.54735456588
450	50	17	0.2	942.773082147	5932.054119503862
450	50	18	0.2	1019.96432587	5932.054119503862
450	50	19	0.2	1033.82124639	6673.560884441846
700	50	10	0.2	921.415775041	3830.7205523892267
700	50	11	0.2	903.693226831	4788.400690486534
700	50	12	0.2	961.550364155	4788.400690486534
700	50	13	0.2	1055.58902486	5746.08082858384
700	50	14	0.2	1102.54543656	5746.08082858384
700	50	15	0.2	1139.854348	6703.760966681148
700	50	16	0.2	1188.983938	6703.760966681148
700	50	17	0.2	1216.1836631	7661.441104778453
700	50	18	0.2	1207.76296999	7661.441104778453
700	50	19	0.2	1303.58983727	8619.121242875759

Table 10: Empirical Evaluation of Additive Error of PRIVATE-LOCAL-LRF for various values of k .

sketches: $\mathbf{M} = \mathbf{T}_l \widehat{\mathbf{A}} \mathbf{T}_r + \mathbf{N}_1$, $\mathbf{L} = \mathbf{S} \widehat{\mathbf{A}} \mathbf{T}_r + \mathbf{N}_2$, $\mathbf{N} = \mathbf{T}_l \widehat{\mathbf{A}} \mathbf{R} + \mathbf{N}_3$, $\mathbf{D} = \widehat{\mathbf{A}} \mathbf{R}$ and $\mathbf{C} = \mathbf{S} \widehat{\mathbf{A}} + \mathbf{N}_4$, where $\mathbf{R} = t^{-1} \boldsymbol{\Omega} \boldsymbol{\Phi}$ with $\boldsymbol{\Omega}$ being a Gaussian matrix.

As in the proof of [Theorem 47](#), there are three terms that contributes to the additive error. The first and the third term are the same as in the proof of [Theorem 47](#). However, the second term differs. In order to compute the additive error incurred due to the second term, we note that \mathbf{X} in [Lemma 58](#) needs to be

$$\mathbf{X} := \widehat{\mathbf{X}} = \underset{r(\mathbf{X}) \leq k}{\operatorname{argmin}} \|\mathbf{T}_l (\widehat{\mathbf{A}} \mathbf{R} \mathbf{X} \mathbf{S} \widehat{\mathbf{A}} - \widehat{\mathbf{A}}) \mathbf{T}_r\|_F^2.$$

The reason for this value of $\widehat{\mathbf{X}}$ is the same as in the proof of [Claim 31](#). Moreover, all the occurrence of \mathbf{A} is replaced by $\widehat{\mathbf{A}}$. In other words, we get the following by combining [Lemma 58](#), [Lemma 59](#), and [Lemma 60](#).

$$(1 - \alpha)^2 \|\widehat{\mathbf{A}} \mathbf{R} \widehat{\mathbf{X}} (\mathbf{S} \widehat{\mathbf{A}} + \mathbf{N}_4) - \widehat{\mathbf{A}}\|_F^2 \leq (1 + \alpha) \Delta_k(\widehat{\mathbf{A}})^2.$$

In other words, the additive error incurred by this expression is $(1 - \alpha) \|\widehat{\mathbf{A}} \mathbf{R} \widehat{\mathbf{X}} \mathbf{N}_4\|_F$. Using [equation \(32\)](#), we have $\gamma_2 = (1 - \alpha) \|\widehat{\mathbf{A}} \mathbf{R} \mathbf{N}^\dagger [\mathbf{U}_\mathbf{N} \mathbf{U}_\mathbf{N}^\top \mathbf{M} \mathbf{V}_\mathbf{L} \mathbf{V}_\mathbf{L}^\top]_k \mathbf{L}^\dagger \mathbf{N}_4\|_F$, where \mathbf{N} , \mathbf{M} , and \mathbf{L} are as defined above. This term depends on the singular values of $\widehat{\mathbf{A}}$ and hence can be arbitrarily large.

Rows	Columns	k	α	Total error ($\ \mathbf{A} - \mathbf{M}_k\ _F$)	Optimal Error ($\ \mathbf{A} - [\mathbf{A}]_k\ _F$)
498	52	10	0.25	203636.487171	197577.81058
565	62	10	0.25	241322.216245	234585.873351
600	66	10	0.25	258293.615653	251581.697045
634	68	10	0.25	272545.864945	265331.39875
701	50	10	0.25	236960.63674	230358.636959
719	76	10	0.25	311278.453125	302812.926139
736	50	10	0.25	243505.180195	236083.969219
775	52	10	0.25	255720.933052	248391.690752
780	86	10	0.25	348405.00368	340148.071775
818	90	10	0.25	364630.812101	355410.694701
888	62	10	0.25	306043.651247	297740.00906
954	66	10	0.25	330351.384387	321254.463405
966	68	10	0.25	337962.399198	329606.663985
1102	76	10	0.25	385372.431742	376530.056249
1149	127	10	0.25	529627.844251	516435.343938
1184	130	10	0.25	545340.762064	531377.485355
1206	86	10	0.25	434705.450777	424823.785653
1288	90	10	0.25	461257.277745	451382.89648
1549	169	10	0.25	729124.244066	701894.583657
1612	113	10	0.25	587309.340404	575305.302626
1802	127	10	0.25	666645.03627	650960.768662
1866	130	10	0.25	686638.036543	669968.400955
2367	169	10	0.25	904435.683545	870912.869511

Table 11: Empirical Evaluation of OPTIMAL-SPACE-LRF.

L Source Codes for Our Experiments

We run our algorithm of random matrices of size that is randomly sampled. In other words, all the private matrices used in our evaluation are dense matrices. As a result, there is no benefit of using the random projection matrices of Clarkson and Woodruff [CW13]. Therefore, to ease the overload on the code, we use random Gaussian matrices with appropriate variance as all our random projection matrices.

L.1 Source Code for OPTIMAL-SPACE-LRF

```
import math
from numpy import linalg as la

def randomGaussianMatrix(rows, columns, variance):
    G = np.zeros((rows, columns))
    for i in range(rows):
        for j in range(columns):
            G[i][j] = np.random.normal(0, variance)
    return G

def computeSingular(singular, Matrix):
    Sigma = np.zeros(np.shape(Matrix))
    i = 0
    while i < len(Matrix) and i < len(Matrix[0]):
        Sigma[i][i] = singular[i]
        i += 1
    return Sigma

def lowrank(k, A):
    a = np.zeros(np.shape(A))
    Left, singular, Right = np.linalg.svd(A, full_matrices=1, compute_uv=1)
    singularmatrix = computeSingular(singular, A)
    top_right = Right[:k, :]
    top_left = Left[:, :k]
    top_singular = singularmatrix[:k, :k]
    a += np.dot(np.dot(top_left, top_singular), top_right)
    return a

def Upadhyay(Ycolumn, Yrow, Z, S, T):
    U, sc, Vc = np.linalg.svd(Ycolumn)
    Ur, sr, V = np.linalg.svd(Yrow)
    t = len(Yrow)
    v = len(S)
    U = U[:, :t]
    V = V[:t, :]
    TopU = np.dot(S, U)
    TopV = np.dot(V, T)
    Us, Ss, Vs = np.linalg.svd(TopU)
    Ut, St, Vt = np.linalg.svd(TopV)
    inn = np.dot(Us.T, np.dot(Z, Vt.T))
    innlow = lowrank(k, inn)
    SingularS = computeSingular(np.reciprocal(Ss), TopU)
    SingularT = computeSingular(np.reciprocal(St), TopV)
    outerT = np.dot(innlow, np.dot(SingularT.T, Ut.T))
```

```

    outerS = np.dot(Vs.T,np.dot( SingularS.T, outerT))
    B = np.dot(U, np.dot(outerS ,V))
    return B

def Initialization (A,m,n,k, alpha ):
    Ak = lowrank(k, A)
    t = int(k/alpha)
    v = int(k/(alpha ** 2))
    Phi = randomGaussianMatrix(n,t,1/t)
    Psi = randomGaussianMatrix(t,m,1/t)
    S = randomGaussianMatrix(v,m,1/v)
    T = randomGaussianMatrix(n,v,1/v)
    Ycolumn = np.dot(A, Phi)
    Yrow = np.dot(Psi , A)
    Z = np.dot(S, np.dot(A, T))
    B =Upadhyay(Ycolumn, Yrow, Z, S, T)
    frobupadhyay = la.norm(A - B, 'fro')
    actual = la.norm(A - Ak, 'fro')
    print (m, n, k, alpha , frobupadhyay , actual)

i=1
n=50
while n< 200:
    m=9*n+int(50*np.random.rand())
    alpha=0.25
    k=10
    Initialization (randomMatrix(m,n,1,5000), m,n,k, alpha)
    Initialization (5000*np.random.rand(m, n), m,n,k, alpha)
    m = 14 * n + int(50*np.random.rand())
    Initialization (randomMatrix(m,n,1,5000), m,n,k, alpha)
    Initialization (5000*np.random.rand(m, n),m,n,k, alpha)
    n=50 + (i * int(20 * np.random.rand()))
    i=i + 1

```

L.2 Source Code for Comparing Private Algorithms

In this section, we present our source code to compare our algorithm with that of Hardt and Roth [\[HR12\]](#).

```

import math
from numpy import linalg as la

def randomGaussianMatrix(rows , columns , variance ):
    G = np.zeros((rows , columns))
    for i in range(rows):
        for j in range(columns):
            G[i][j] = np.random.normal(0, variance)
    return G

def randomMatrix(rows , columns , a , b):
    A = np.zeros((rows , columns))
    for i in range(rows):
        for j in range(columns):
            A[i][j] = np.random.randint(a, b)
    return A

```

```

def computeSingular(singular , Matrix):
    Sigma = np.zeros(np.shape(Matrix))
    i = 0
    while i < len(Matrix) and i < len(Matrix[0]):
        Sigma[i][i] = singular[i]
        i += 1
    return Sigma

def lowrank(k, A):
    a = np.zeros(np.shape(A))
    Left, singular, Right = np.linalg.svd(A, full_matrices=1, compute_uv=1)
    singularmatrix = computeSingular(singular, A)
    top_right = Right[:k,:]
    top_left = Left[:, :k]
    top_singular = singularmatrix[:k,:k]
    a += np.dot(np.dot(top_left, top_singular), top_right)
    return a

def Upadhyay(Ycolumn, Yrow, Z, S, T):
    U, sc, Vc = np.linalg.svd(Ycolumn)
    Ur, sr, V = np.linalg.svd(Yrow)
    t = len(Yrow)
    v = len(S)
    U = U[:, :t]
    V = V[:t, :]
    TopU = np.dot(S, U)
    TopV = np.dot(V, T)
    Us, Ss, Vs = np.linalg.svd(TopU)
    Ut, St, Vt = np.linalg.svd(TopV)
    inn = np.dot(Us.T, np.dot(Z, Vt.T))
    innlow = lowrank(k, inn)
    SingularS = computeSingular(np.reciprocal(Ss), TopU)
    SingularT = computeSingular(np.reciprocal(St), TopV)
    outerT = np.dot(innlow, np.dot(SingularT.T, Ut.T))
    outerS = np.dot(Vs.T, np.dot(SingularS.T, outerT))
    B = np.dot(U, np.dot(outerS, V))
    return B

def Initialization(A,m,n,k, alpha):
    Ak = lowrank(k, A)
    actual = la.norm(A - Ak, 'fro')
    HR = HardtRoth(A,m,n,k)
    frobHR = la.norm(A - HR, 'fro')
    m = m+n
    epsilon = 1
    delta = 1/(m)
    t = int(k/alpha)
    v = int(k/(alpha ** 2))
    Phi = randomGaussianMatrix(n, t, 1/t)
    Psi = randomGaussianMatrix(t, m, 1/t)
    S = randomGaussianMatrix(v, m, 1/v)
    T = randomGaussianMatrix(n, v, 1/v)
    sigma = 4*math.log(1/delta)*math.sqrt(t*math.log(1/delta)) / epsilon

```

```

Ahat = A
scaledI = sigma*np.identity(n)
for i in range(n):
    Ahat = np.vstack([Ahat, scaledI[i]])
for i in range(n):
    A = np.vstack([A, scaledI[i] - scaledI[i]])
rho1 = math.sqrt(-4*math.log(delta)/epsilon**2)
rho2 = math.sqrt(-6*math.log(delta)/epsilon**2)
Ycolumn = np.dot(Ahat, Phi) + randomGaussianMatrix(m,t,rho1)
Yrow = np.dot(Psi, Ahat)
Z = np.dot(S, np.dot(Ahat, T)) + randomGaussianMatrix(v,v,rho2)
L = np.dot(Yrow, T)
N = np.dot(S, Ycolumn)
B =Upadhyay(Ycolumn, Yrow, Z, S, T)
frobupadhyay = la.norm(Ahat - B, 'fro')
print (m, n, k, alpha ,frobupadhyay ,frobHR ,actual)

```

```

def HardtRoth(A,m,n,k):
    Omega = randomGaussianMatrix(n,2*k,1)
    Y = np.dot(A, Omega)
    epsilon = 1
    delta = 1/(m)
    sigma = - 32 * k * math.log(delta)/epsilon**2
    N = randomGaussianMatrix(m, 2*k , sigma)
    Y += N
    Q = np.zeros(Y.shape)
    for i in range(Y.shape[1]):
        avec = Y[:, i]
        q = avec
        for j in range(i):
            q = q - np.dot(avec, Q[:, j]) * Q[:, j]

        Q[:, i] = q / la.norm(q)
        a = Q[0][0]
        for i in range(Y.shape[0]):
            for j in range(Y.shape[1]):
                if a < Q[i][j]:
                    a = Q[i][j]
        rho = 32*(a**2)*k*math.log(8*k/delta)*math.log(1/delta)/epsilon**2
        inner = np.dot(Q.T, A) + randomGaussianMatrix(2*k,n,rho)
        output = np.dot(Q, inner)
    return output

```

```

i=1
n=50
while n < 200:
    m = 9 * n + int(50*np.random.rand())
    alpha = 0.25
    k = 10
    Initialization(randomMatrix(m,n,1,5000), m,n,k, alpha)
    Initialization(5000*np.random.rand(m, n), m,n,k, alpha)
    m = 14 * n + int(50*np.random.rand())
    Initialization(randomMatrix(m,n,1,5000), m,n,k, alpha)
    Initialization(5000*np.random.rand(m, n),m,n,k, alpha)

```



```
n = 50 + (i * int(20 * np.random.rand()))
i = i + 1
```

L.3 Source Code for Analyzing Additive Error for OPTIMAL-SPACE-PRIVATE-LRF

```
import numpy as np
import math
from numpy import linalg as la

def randomGaussianMatrix(rows, columns, variance):
    G = np.zeros((rows, columns))
    for i in range(rows):
        for j in range(columns):
            G[i][j] = np.random.normal(0, variance)
    return G

def randomMatrixUnit(rows, columns, a, b):
    return (b-a) ** np.random.rand(rows, columns)

def randomMatrix(rows, columns, k, a, b):
    A = np.zeros((rows, columns))
    for i in range(rows):
        a = 0
        for j in range(k):
            A[i][j] = np.random.randint(a, b)
    return A

def computeSingular(singular, Matrix):
    Sigma = np.zeros(np.shape(Matrix))
    i = 0
    while i < len(Matrix) and i < len(Matrix[0]):
        Sigma[i][i] = singular[i]
        i += 1
    return Sigma

def lowrank(k, A):
    a = np.zeros(np.shape(A))
    Left, singular, Right = np.linalg.svd(A, full_matrices=1, compute_uv=1)
    singularmatrix = computeSingular(singular, A)
    top_right = Right[:k, :]
    top_left = Left[:, :k]
    top_singular = singularmatrix[:k, :k]
    a += np.dot(np.dot(top_left, top_singular), top_right)
    return a

def Upadhyay(A, m, n, k, alpha, epsilon, delta):
    m = m + n
    t = int(0.05 * k / alpha)
    v = int(0.05 * k / (alpha ** 2))
    Phi = randomGaussianMatrix(n, t, 1 / t)
    Psi = randomGaussianMatrix(t, m, 1 / t)
    S = randomGaussianMatrix(v, m, 1 / v)
    T = randomGaussianMatrix(n, v, 1 / v)
```

```

sigma = 4*math.log(1 / delta)*math.sqrt(t*math.log(1 / delta)) / epsilon
Ahat = A
scaledI = sigma * np.identity(n)
for i in range(n):
    Ahat = np.vstack([Ahat, scaledI[i]])
for i in range(n):
    A = np.vstack([A, scaledI[i] - scaledI[i]])
rho1 = math.sqrt(-4 * math.log(delta) / epsilon ** 2)
rho2 = math.sqrt(-6 * math.log(delta) / epsilon ** 2)
Ycolumn = np.dot(Ahat, Phi) + randomGaussianMatrix(m, t, rho1)
Yrow = np.dot(Psi, Ahat)
Z = np.dot(S, np.dot(Ahat, T)) + randomGaussianMatrix(v, v, rho2)
U, sc, Vc = np.linalg.svd(Ycolumn)
Ur, sr, V = np.linalg.svd(Yrow)
U = U[:, :t]
V = V[:t, :]
TopU = np.dot(S, U)
TopV = np.dot(V, T)
Us, Ss, Vs = np.linalg.svd(TopU)
Ut, St, Vt = np.linalg.svd(TopV)
inn = np.dot(Us.T, np.dot(Z, Vt.T))
innlow = lowrank(k, inn)
SingularS = computeSingular(np.reciprocal(Ss), TopU)
SingularT = computeSingular(np.reciprocal(St), TopV)
outerT = np.dot(innlow, np.dot(SingularT.T, Ut.T))
outerS = np.dot(Vs.T, np.dot(SingularS.T, outerT))
B = np.dot(U, np.dot(outerS, V))
expected =sigma * math.sqrt(n) + math.sqrt(-k *m * math.log(delta))
return (B, Ahat, expected)

```

```

def HardtRoth(A, m, n, k, epsilon, delta):
    Omega = randomGaussianMatrix(n, 2 * k, 1)
    Y = np.dot(A, Omega)
    epsilon = 1
    delta = 1 / (m)
    sigma = - 32 * k * math.log(delta) / epsilon ** 2
    N = randomGaussianMatrix(m, 2 * k, sigma)
    Y += N
    Q = np.zeros(Y.shape)
    for i in range(Y.shape[1]):
        avec = Y[:, i]
        q = avec
        for j in range(i):
            q = q - np.dot(avec, Q[:, j]) * Q[:, j]

        Q[:, i] = q / la.norm(q)
    a = Q[0][0]
    for i in range(Y.shape[0]):
        for j in range(Y.shape[1]):
            if a < Q[i][j]:
                a = Q[i][j]
    rho = 32*(a**2)*k*math.log(8*k/delta)*math.log(1/delta)/epsilon**2
    inner = np.dot(Q.T, A) + randomGaussianMatrix(2 * k, n, rho)
    output = np.dot(Q, inner)

```

```

return output

def Initialization(m, n, k, alpha):
    epsilon = 1
    delta = 1 / (m ** 2)
    A = randomMatrix(m,n,k,1,20)
    Ak = lowrank(k, A)
    actual = la.norm(A - Ak, 'fro')

    HR = HardtRoth(A, m, n, k, epsilon, delta)
    frobHR = la.norm(A - HR, 'fro')

    (Upadhyay16, Ahat, expected) = Upadhyay(A, m,n, k, alpha, epsilon, delta)
    frobupadhyay = la.norm(Ahat - Upadhyay16, 'fro')
    print (expected, frobupadhyay, frobHR)

#Use this part of the code for varying dimension
i = 1
n = 50
while n < 200:
    m = 9 * n + int(50 * np.random.rand())
    alpha = 0.1
    k = 10
    Initialization(randomMatrix(m, n, 0, 5), m, n, k, alpha)
    m = 14 * n + int(5 * np.random.rand())
    Initialization(randomMatrix(m, n, 0, 5), m, n, k, alpha)
    n = 50 + (i * int(5 * np.random.rand()))
    i = i + 1

#Use this part of the code for varying alpha
n=200
alpha = 0.10
while alpha < 0.25:
    m = 9 * n
    k = 10
    Initialization(m,n,k, alpha)
    m = 14 * n
    Initialization(m,n,k, alpha)
    alpha = alpha + 0.02

#Use this part of the code for varying k
n=50
k = 10
alpha = 0.25
while k<20:
    m = 9 * n
    Initialization(m,n,k, alpha)
    m = 14 * n
    Initialization(m,n,k, alpha)
    k +=1

```

L.4 Source Code for PRIVATE-LOCAL-LRF

```

import math
from numpy import linalg as la

def randomGaussianMatrix(rows , columns , variance ):
    G = np.zeros((rows , columns))
    for i in range(rows):
        for j in range(columns):
            G[i][j] = np.random.normal(0 , variance)
    return G

def randomMatrix(rows , columns , a , b):
    A = np.zeros((rows , columns))
    for i in range(rows):
        for j in range(columns):
            A[i][j] = np.random.randint(a , b)
    return A

def lowrank(k , A):
    a = np.zeros(np.shape(A))
    Left , singular , Right = np.linalg.svd(A , full_matrices=1 , compute_uv=1)
    top_left = Left[:, :k]
    a += np.dot(np.dot(top_left , top_left.T), A)
    return a

def Local(A, Ycolumn , L , Z , S):
    N = np.dot(S, Ycolumn)
    Un, Sn, Vn = np.linalg.svd(N)
    Ul, Sl, Vl = np.linalg.svd(L)
    inner = np.dot(Un, np.dot(Un.T, np.dot(Z, np.dot(Vl.T, Vl))))
    innerlowrank = lowrank(k, inner)
    output = np.dot(la.pinv(N), np.dot(innerlowrank , la.pinv(L)))
    U , s , V = np.linalg.svd(output)
    Y = np.dot(Ycolumn , U)
    Q = np.zeros(Y.shape)
    for i in range(Y.shape[1]):
        avec = Y[:, i]
        q = avec
        for j in range(i):
            q = q - np.dot(avec , Q[:, j]) * Q[:, j]
        Q[:, i] = q / la.norm(q)
    B = np.dot(Q , np.dot(Q.T, A))
    return B

def Initialization (A,m,n,k, alpha):
    t = int(k / (alpha))
    v = int(k / (alpha ** 2))
    Ak = lowrank(k , A)
    actual = la.norm(A - Ak , 'fro')
    epsilon = 0.1
    delta = 1/(m**10)
    Phi = randomGaussianMatrix(n , t , 1 / t)
    Psi = randomGaussianMatrix(t , m , 1 / t)
    S = randomGaussianMatrix(v , m , 1 / v)

```

```

T = randomGaussianMatrix(n, v, 1 / v)
rho1 = math.sqrt(-4 * math.log(delta)/epsilon**2)
rho2 = m * math.sqrt(-6 * math.log(delta)/epsilon**2)
Ycolumn = np.dot(A, Phi) + randomGaussianMatrix(m,t,rho1)
Yrow = np.dot(np.dot(Psi, A), T) + randomGaussianMatrix(t,v,rho2)
Z = np.dot(S, np.dot(A, T)) + randomGaussianMatrix(v,v,rho2)
B = Local(A, Ycolumn, Yrow, Z, S)
frobupadhyay = la.norm(A - B, 'fro')
print (m, n, k, alpha, frobupadhyay, actual)

i=1
n=50
while n < 200:
    m = 9 * n + int(50*np.random.rand())
    alpha = 0.25
    k = 10
    Initialization(randomMatrix(m,n,1,5000), m,n,k, alpha)
    Initialization(5000*np.random.rand(m, n), m,n,k, alpha)
    m = 14 * n + int(50*np.random.rand())
    Initialization(randomMatrix(m,n,1,5000), m,n,k, alpha)
    Initialization(5000*np.random.rand(m, n),m,n,k, alpha)
    n = 50 + (i * int(20 * np.random.rand()))
    i = i + 1

```

L.5 Source Code for Analyzing Additive Error for PRIVATE-LOCAL-LRF

```

import math
from numpy import linalg as la

def randomGaussianMatrix(rows, columns, variance):
    G = np.zeros((rows, columns))
    for i in range(rows):
        for j in range(columns):
            G[i][j] = np.random.normal(0, variance)
    return G

def randomMatrix(rows, columns, k, a, b):
    A = np.zeros((rows, columns))
    for i in range(rows):
        for j in range(k):
            A[i][j] = np.random.randint(a, b)
    return A

def lowrank(k, A):
    a = np.zeros(np.shape(A))
    Left, singular, Right = np.linalg.svd(A, full_matrices=1, compute_uv=1)
    top_left = Left[:, :k]
    a += np.dot(np.dot(top_left, top_left.T), A)
    return a

def Local(A, Ycolumn, L, Z, S):
    N = np.dot(S, Ycolumn)
    Un, Sn, Vn = np.linalg.svd(N)

```

```

U1, S1, V1 = np.linalg.svd(L)
inner = np.dot(Un , np.dot(Un.T , np.dot(Z , np.dot(V1.T,V1 ) ) ) )
innerlowrank = lowrank(k,inner)
output = np.dot( np.linalg.pinv(N),np.dot(innerlowrank ,np.linalg.pinv(L)))
U, s, V = np.linalg.svd(output)
Y = np.dot(Ycolumn, U)
Q = np.zeros(Y.shape)
for i in range(Y.shape[1]):
    avec = Y[:, i]
    q = avec
    for j in range(i):
        q = q - np.dot(avec , Q[:, j]) * Q[:, j]

    Q[:, i] = q / la.norm(q)
B = np.dot(Q, np.dot(Q.T,A))
return B

```

```

def Initialization(m,n,k,alpha):
    t = int(0.05*k / (alpha))
    v = int(0.02*k / (alpha ** 2))
    A = randomMatrix(m,n,k,1,20)
    Ak = lowrank(k, A)
    actual = la.norm(A - Ak, 'fro')
    epsilon = 0.1
    delta = 1/(m**2)
    Phi = randomGaussianMatrix(n, t, 1 / t)
    Psi = randomGaussianMatrix(t, m, 1 / t)
    S = randomGaussianMatrix(v, m, 1 / v)
    T = randomGaussianMatrix(n, v, 1 / v)
    rho1 = math.sqrt(-4 * math.log(delta)/epsilon**2)
    rho2 = m * math.sqrt(-6 * math.log(delta)/epsilon**2)

    Ycolumn = np.dot(A, Phi) + randomGaussianMatrix(m,t,rho1)
    Yrow = np.dot(np.dot(Psi, A), T) + randomGaussianMatrix(t,v,rho2)
    Z = np.dot(S, np.dot(A, T)) + randomGaussianMatrix(v,v,rho2)
    B = Local(A, Ycolumn, Yrow, Z, S)
    frobupadhyay = la.norm(A - B, 'fro')
    expected = v * math.sqrt(-m * math.log(delta))/epsilon
    print (frobupadhyay, expected)

```

#Use this part of the code for varying dimension

```

i = 1
n = 50
while n < 200:
    m = 9 * n + int(50 * np.random.rand())
    alpha = 0.1
    k = 10
    Initialization(randomMatrix(m, n, 0, 5), m, n, k, alpha)
    m = 14 * n + int(5 * np.random.rand())
    Initialization(randomMatrix(m, n, 0, 5), m, n, k, alpha)
    n = 50 + (i * int(5 * np.random.rand()))
    i = i + 1

```

```
#Use this part of the code for varying alpha
i=1
n=200
alpha = 0.10
while alpha < 0.25:
    m = 9 * n
    k = 10
    Initialization(m,n,k, alpha)
    m = 14 * n
    Initialization(m,n,k, alpha)
    alpha = alpha + 0.02

#Use this part of the code for varying k
n=50
k = 10
alpha = 0.25
while k<20:
    m = 9 * n
    Initialization(m,n,k, alpha)
    m = 14 * n
    Initialization(m,n,k, alpha)
    k +=1
```


References

- [AFK⁺01] Yossi Azar, Amos Fiat, Anna Karlin, Frank McSherry, and Jared Saia. Spectral analysis of data. In *STOC*, pages 619–626. ACM, 2001.
- [AFKM01] Dimitris Achlioptas, Amos Fiat, Anna R Karlin, and Frank McSherry. Web search via hub synthesis. In *FOCS*, pages 500–509. IEEE, 2001.
- [AHP09] Shipra Agrawal, Jayant R Haritsa, and B Aditya Prakash. Frapp: a framework for high-accuracy privacy-preserving mining. *Data Mining and Knowledge Discovery*, 18(1):101–139, 2009.
- [AM05] Dimitris Achlioptas and Frank McSherry. On spectral learning of mixtures of distributions. In *Learning Theory*, pages 458–469. Springer, 2005.
- [AM07] Dimitris Achlioptas and Frank McSherry. Fast computation of low-rank matrix approximations. *Journal of the ACM (JACM)*, 54(2):9, 2007.
- [App16] Apple. Apple tries to peek at user habits without violating privacy. *The Wall Street Journal*, 2016.
- [AWBR09] Alekh Agarwal, Martin J Wainwright, Peter L. Bartlett, and Pradeep K. Ravikumar. Information-theoretic lower bounds on the oracle complexity of convex optimization. In Y. Bengio, D. Schuurmans, J. D. Lafferty, C. K. I. Williams, and A. Culotta, editors, *Advances in Neural Information Processing Systems 22*, pages 1–9. Curran Associates, Inc., 2009.
- [BBDS12] Jeremiah Blocki, Avrim Blum, Anupam Datta, and Or Sheffet. The Johnson-Lindenstrauss Transform Itself Preserves Differential Privacy. In *FOCS*, pages 410–419, 2012.
- [BBV06] Maria-Florina Balcan, Avrim Blum, and Santosh Vempala. Kernels as features: On kernels, margins, and low-dimensional mappings. *Machine Learning*, 65(1):79–94, 2006.
- [BCL05] Zheng-Jian Bai, Raymond H Chan, and Franklin T Luk. Principal component analysis for distributed data sets with updating. In *International Workshop on Advanced Parallel Processing Technologies*, pages 471–483. Springer, 2005.
- [BDDW08] Richard Baraniuk, Mark Davenport, Ronald DeVore, and Michael Wakin. A simple proof of the restricted isometry property for random matrices. *Constructive Approximation*, 28(3):253–263, 2008.
- [BDMN05] Avrim Blum, Cynthia Dwork, Frank McSherry, and Kobbi Nissim. Practical privacy: the sulq framework. In Chen Li, editor, *PODS*, pages 128–138. ACM, 2005.
- [Bha13] Rajendra Bhatia. *Matrix analysis*, volume 169. Springer Science & Business Media, 2013.
- [BLR13] Avrim Blum, Katrina Ligett, and Aaron Roth. A learning theory approach to noninteractive database privacy. *J. ACM*, 60(2):12, 2013.
- [Bou85] Jean Bourgain. On lipschitz embedding of finite metric spaces in hilbert space. *Israel Journal of Mathematics*, 52(1-2):46–52, 1985.

- [BS15] Raef Bassily and Adam Smith. Local, private, efficient protocols for succinct histograms. In *Proceedings of the Forty-Seventh Annual ACM on Symposium on Theory of Computing*, pages 127–135. ACM, 2015.
- [BWZ16] Christos Boutsidis, David P. Woodruff, and Peilin Zhong. Optimal principal component analysis in distributed and streaming models. In *STOC*, pages 236–249, 2016.
- [CEM⁺15] Michael B Cohen, Sam Elder, Cameron Musco, Christopher Musco, and Madalina Persu. Dimensionality reduction for k-means clustering and low rank approximation. In *STOC*, pages 163–172. ACM, 2015.
- [CMM17] Michael B Cohen, Cameron Musco, and Christopher Musco. Input sparsity time low-rank approximation via ridge leverage score sampling. In *Proceedings of the Twenty-Eighth Annual ACM-SIAM Symposium on Discrete Algorithms*, pages 1758–1777. SIAM, 2017.
- [CSS11] T-H Hubert Chan, Elaine Shi, and Dawn Song. Private and continual release of statistics. *ACM Transactions on Information and System Security (TISSEC)*, 14(3):26, 2011.
- [CSS12] Kamalika Chaudhuri, Anand D Sarwate, and Kaushik Sinha. Near-optimal differentially private principal components. In *NIPS*, pages 998–1006, 2012.
- [CW09] Kenneth L. Clarkson and David P. Woodruff. Numerical linear algebra in the streaming model. In *STOC*, pages 205–214, 2009.
- [CW12] Kenneth L Clarkson and David P Woodruff. Low rank approximation and regression in input sparsity time. *arXiv preprint arXiv:1207.6365*, 2012.
- [CW13] Kenneth L Clarkson and David P Woodruff. Low rank approximation and regression in input sparsity time. In *STOC*, pages 81–90. ACM, 2013.
- [CW17] Kenneth L Clarkson and David P Woodruff. Low-rank psd approximation in input-sparsity time. In *Proceedings of the Twenty-Eighth Annual ACM-SIAM Symposium on Discrete Algorithms*, pages 2061–2072. SIAM, 2017.
- [DFK⁺04] Petros Drineas, Alan Frieze, Ravi Kannan, Santosh Vempala, and V Vinay. Clustering large graphs via the singular value decomposition. *Machine learning*, 56(1-3):9–33, 2004.
- [DJW13] John C Duchi, Michael I Jordan, and Martin J Wainwright. Local privacy and statistical minimax rates. In *Foundations of Computer Science (FOCS), 2013 IEEE 54th Annual Symposium on*, pages 429–438. IEEE, 2013.
- [DKM06a] Petros Drineas, Ravi Kannan, and Michael W Mahoney. Fast monte carlo algorithms for matrices ii: Computing a low-rank approximation to a matrix. *SIAM Journal on Computing*, 36(1):158–183, 2006.
- [DKM⁺06b] Cynthia Dwork, Krishnaram Kenthapadi, Frank McSherry, Ilya Mironov, and Moni Naor. Our Data, Ourselves: Privacy Via Distributed Noise Generation. In *EUROCRYPT*, pages 486–503, 2006.
- [DKR02] Petros Drineas, Iordanis Kerenidis, and Prabhakar Raghavan. Competitive recommendation systems. In *STOC*, pages 82–90. ACM, 2002.
- [DM05] Petros Drineas and Michael W Mahoney. Approximating a gram matrix for improved kernel-based learning. In *Learning Theory*, pages 323–337. Springer, 2005.

- [DMNS06] Cynthia Dwork, Frank McSherry, Kobbi Nissim, and Adam Smith. Calibrating Noise to Sensitivity in Private Data Analysis. In Shai Halevi and Tal Rabin, editors, *TCC*, volume 3876 of *Lecture Notes in Computer Science*, pages 265–284. Springer, 2006.
- [DN03] Irit Dinur and Kobbi Nissim. Revealing information while preserving privacy. In *PODS*, pages 202–210. ACM, 2003.
- [DNPR10] Cynthia Dwork, Moni Naor, Toniann Pitassi, and Guy N. Rothblum. Differential privacy under continual observation. In *STOC*, pages 715–724, 2010.
- [DR14] Cynthia Dwork and Aaron Roth. The algorithmic foundations of differential privacy. *Foundations and Trends in Theoretical Computer Science*, 9(3-4):211–407, 2014.
- [DRV10] Cynthia Dwork, Guy N. Rothblum, and Salil P. Vadhan. Boosting and Differential Privacy. In *FOCS*, pages 51–60. IEEE Computer Society, 2010.
- [DRVW06] Amit Deshpande, Luis Rademacher, Santosh Vempala, and Grant Wang. Matrix approximation and projective clustering via volume sampling. In *SODA*, pages 1117–1126. Society for Industrial and Applied Mathematics, 2006.
- [DTTZ14] Cynthia Dwork, Kunal Talwar, Abhradeep Thakurta, and Li Zhang. Analyze Gauss: Optimal Bounds for Privacy-Preserving Principal Component Analysis. In *STOC*, pages 11–20, 2014.
- [DV06] Amit Deshpande and Santosh Vempala. Adaptive sampling and fast low-rank matrix approximation. In *Approximation, Randomization, and Combinatorial Optimization. Algorithms and Techniques*, pages 292–303. Springer, 2006.
- [EGS03] Alexandre Evfimievski, Johannes Gehrke, and Ramakrishnan Srikant. Limiting privacy breaches in privacy preserving data mining. In *PODS*, pages 211–222. ACM, 2003.
- [EPK14] Úlfar Erlingsson, Vasyi Pihur, and Aleksandra Korolova. Rappor: Randomized aggregatable privacy-preserving ordinal response. In *Proceedings of the 2014 ACM SIGSAC conference on computer and communications security*, pages 1054–1067. ACM, 2014.
- [EY36] Carl Eckart and Gale Young. The approximation of one matrix by another of lower rank. *Psychometrika*, 1(3):211–218, 1936.
- [FKV04] Alan Frieze, Ravi Kannan, and Santosh Vempala. Fast monte-carlo algorithms for finding low-rank approximations. *Journal of the ACM (JACM)*, 51(6):1025–1041, 2004.
- [GSS17] Dan Garber, Ohad Shamir, and Nathan Srebro. Communication-efficient algorithms for distributed stochastic principal component analysis. *arXiv preprint arXiv:1702.08169*, 2017.
- [HKR12] Justin Hsu, Sanjeev Khanna, and Aaron Roth. Distributed private heavy hitters. In *International Colloquium on Automata, Languages, and Programming*, pages 461–472. Springer, 2012.
- [HMT11] Nathan Halko, Per-Gunnar Martinsson, and Joel A Tropp. Finding structure with randomness: Probabilistic algorithms for constructing approximate matrix decompositions. *SIAM review*, 53(2):217–288, 2011.

- [HP14] Moritz Hardt and Eric Price. The noisy power method: A meta algorithm with applications. In Z. Ghahramani, M. Welling, C. Cortes, N.d. Lawrence, and K.q. Weinberger, editors, *Advances in Neural Information Processing Systems 27*, pages 2861–2869. Curran Associates, Inc., 2014.
- [HR12] Moritz Hardt and Aaron Roth. Beating randomized response on incoherent matrices. In *STOC*, pages 1255–1268, 2012.
- [HR13] Moritz Hardt and Aaron Roth. Beyond worst-case analysis in private singular vector computation. In *STOC*, pages 331–340, 2013.
- [IM98] Piotr Indyk and Rajeev Motwani. Approximate nearest neighbors: Towards removing the curse of dimensionality. In *STOC*, pages 604–613, 1998.
- [JKT12] Prateek Jain, Pravesh Kothari, and Abhradeep Thakurta. Differentially Private Online Learning. In Shie Mannor, Nathan Srebro, and Robert C. Williamson, editors, *COLT*, volume 23 of *JMLR Proceedings*, pages 24.1–24.34. JMLR.org, 2012.
- [JL84] William B Johnson and Joram Lindenstrauss. Extensions of Lipschitz mappings into a Hilbert space. *Contemporary mathematics*, 26(189-206):1, 1984.
- [JNS13] Prateek Jain, Praneeth Netrapalli, and Sujay Sanghavi. Low-rank matrix completion using alternating minimization. In *Proceedings of the forty-fifth annual ACM symposium on Theory of computing*, pages 665–674. ACM, 2013.
- [JXZ15] Wuxuan Jiang, Cong Xie, and Zhihua Zhang. Wishart mechanism for differentially private principal components analysis. *arXiv preprint arXiv:1511.05680*, 2015.
- [KKMM12] Krishnaram Kenthapadi, Aleksandra Korolova, Ilya Mironov, and Nina Mishra. Privacy via the johnson-lindenstrauss transform. *arXiv preprint arXiv:1204.2606*, 2012.
- [Kle99] Jon M Kleinberg. Authoritative sources in a hyperlinked environment. *Journal of the ACM (JACM)*, 46(5):604–632, 1999.
- [KLN⁺11] Shiva Prasad Kasiviswanathan, Homin K Lee, Kobbi Nissim, Sofya Raskhodnikova, and Adam Smith. What can we learn privately? *SIAM Journal on Computing*, 40(3):793–826, 2011.
- [KN14] Daniel M. Kane and Jelani Nelson. Sparser Johnson-Lindenstrauss Transforms. *J. ACM*, 61(1):4, 2014.
- [KSV05] Ravindran Kannan, Hadi Salmasian, and Santosh Vempala. The spectral method for general mixture models. In *Learning Theory*, pages 444–457. Springer, 2005.
- [KT13] Michael Kapralov and Kunal Talwar. On differentially private low rank approximation. In *SODA*, volume 5, page 1. SIAM, 2013.
- [LBKW14] Yingyu Liang, Maria-Florina F Balcan, Vandana Kanchanapally, and David Woodruff. Improved distributed principal component analysis. In *Advances in Neural Information Processing Systems*, pages 3113–3121, 2014.
- [LBRB08] Yann-Aël Le Borgne, Sylvain Raybaud, and Gianluca Bontempi. Distributed principal component analysis for wireless sensor networks. *Sensors*, 8(8):4821–4850, 2008.

- [LKLS13] Joonseok Lee, Seungyeon Kim, Guy Lebanon, and Yoram Singer. Local low-rank matrix approximation. *ICML (2)*, 28:82–90, 2013.
- [LLR95] Nathan Linial, Eran London, and Yuri Rabinovich. The geometry of graphs and some of its algorithmic applications. *Combinatorica*, 15(2):215–245, 1995.
- [LNW14] Yi Li, Huy L. Nguyen, and David P. Woodruff. Turnstile streaming algorithms might as well be linear sketches. In *Symposium on Theory of Computing, STOC 2014, New York, NY, USA, May 31 - June 03, 2014*, pages 174–183, 2014.
- [Mah11] Michael W Mahoney. Randomized algorithms for matrices and data. *Foundations and Trends® in Machine Learning*, 3(2):123–224, 2011.
- [Mar08] Ivan Markovskiy. Structured low-rank approximation and its applications. *Automatica*, 44(4):891–909, 2008.
- [Mar11] Ivan Markovskiy. *Low rank approximation: algorithms, implementation, applications*. Springer Science & Business Media, 2011.
- [McS01] Frank McSherry. Spectral partitioning of random graphs. In *FOCS*, pages 529–537. IEEE, 2001.
- [MM09] Frank McSherry and Ilya Mironov. Differentially private recommender systems: building privacy into the net. In *Proceedings of the 15th ACM SIGKDD international conference on Knowledge discovery and data mining*, pages 627–636. ACM, 2009.
- [MM13] Xiangrui Meng and Michael W Mahoney. Low-distortion subspace embeddings in input-sparsity time and applications to robust linear regression. In *STOC*, pages 91–100. ACM, 2013.
- [MNSW95] Peter Bro Miltersen, Noam Nisan, Shmuel Safra, and Avi Wigderson. On data structures and asymmetric communication complexity. In *STOC*, pages 103–111. ACM, 1995.
- [MS06] Nina Mishra and Mark Sandler. Privacy via pseudorandom sketches. In *Proceedings of the twenty-fifth ACM SIGMOD-SIGACT-SIGART symposium on Principles of database systems*, pages 143–152. ACM, 2006.
- [Mut05] Shanmugavelayutham Muthukrishnan. *Data streams: Algorithms and applications*. Now Publishers Inc, 2005.
- [MW17] Cameron Musco and David P Woodruff. Sublinear time low-rank approximation of positive semidefinite matrices. *arXiv preprint arXiv:1704.03371*, 2017.
- [MZ11] Avner Magen and Anastasios Zouzias. Low rank matrix-valued chernoff bounds and approximate matrix multiplication. In *SODA*, pages 1422–1436. SIAM, 2011.
- [NDT09] Nam H Nguyen, Thong T Do, and Trac D Tran. A fast and efficient algorithm for low-rank approximation of a matrix. In *STOC*, pages 215–224. ACM, 2009.
- [New06] Mark EJ Newman. Finding community structure in networks using the eigenvectors of matrices. *Physical review E*, 74(3):036104, 2006.
- [Ngu17] Huy L. Nguyen. Personal communication. 2017.

- [Nir06] Nir Ailon and Bernard Chazelle. Approximate nearest neighbors and the fast Johnson-Lindenstrauss transform. In *STOC*, pages 557–563, 2006.
- [NS08] Arvind Narayanan and Vitaly Shmatikov. Robust de-anonymization of large sparse datasets. In *Security and Privacy, 2008. SP 2008. IEEE Symposium on*, pages 111–125. IEEE, 2008.
- [PMVdG⁺13] Jack Poulson, Bryan Marker, Robert A Van de Geijn, Jeff R Hammond, and Nichols A Romero. Elemental: A new framework for distributed memory dense matrix computations. *ACM Transactions on Mathematical Software (TOMS)*, 39(2):13, 2013.
- [PTRV98a] Christos H Papadimitriou, Hisao Tamaki, Prabhakar Raghavan, and Santosh Vempala. Latent semantic indexing: A probabilistic analysis. In *Proceedings of the seventeenth ACM SIGACT-SIGMOD-SIGART symposium on Principles of database systems*, pages 159–168. ACM, 1998.
- [PTRV98b] Christos H Papadimitriou, Hisao Tamaki, Prabhakar Raghavan, and Santosh Vempala. Latent semantic indexing: A probabilistic analysis. In *Proceedings of the seventeenth ACM SIGACT-SIGMOD-SIGART symposium on Principles of database systems*, pages 159–168. ACM, 1998.
- [QOSG02] Yongming Qu, George Ostrouchov, Nagiza Samatova, and Al Geist. Principal component analysis for dimension reduction in massive distributed data sets. In *Proceedings of IEEE International Conference on Data Mining (ICDM)*, 2002.
- [RV07] Mark Rudelson and Roman Vershynin. Sampling from large matrices: An approach through geometric functional analysis. *Journal of the ACM (JACM)*, 54(4):21, 2007.
- [Sar06] Tamas Sarlos. Improved approximation algorithms for large matrices via random projections. In *FOCS*, pages 143–152. IEEE, 2006.
- [Sch00] Leonard J Schulman. Clustering for edge-cost minimization. In *Proceedings of the thirty-second annual ACM symposium on Theory of computing*, pages 547–555. ACM, 2000.
- [STC04] John Shawe-Taylor and Nello Cristianini. *Kernel methods for pattern analysis*. Cambridge university press, 2004.
- [Ste08] Alwin Stegeman. Low-rank approximation of generic $p \times q \times 2$ arrays and diverging components in the candecomp/parafac model. *SIAM Journal on Matrix Analysis and Applications*, 30(3):988–1007, 2008.
- [STU17] A. Smith, A. Thakurata, and J. Upadhyay. Is Interaction Necessary for Distributed Private Learning? *To Appear in IEEE Symposium for Security & Privacy*, 2017.
- [TD99] Françoise Tisseur and Jack Dongarra. A parallel divide and conquer algorithm for the symmetric eigenvalue problem on distributed memory architectures. *SIAM Journal on Scientific Computing*, 20(6):2223–2236, 1999.
- [TS13] Abhradeep Guha Thakurta and Adam Smith. (nearly) optimal algorithms for private online learning in full-information and bandit settings. In *Advances in Neural Information Processing Systems*, pages 2733–2741, 2013.
- [Upa13] Jalaj Upadhyay. Random Projections, Graph Sparsification, and Differential Privacy. In *ASIACRYPT (1)*, pages 276–295, 2013.

- [Upa14a] Jalaj Upadhyay. Differentially private linear algebra in the streaming model. *arXiv preprint arXiv:1409.5414*, 2014.
- [Upa14b] Jalaj Upadhyay. Randomness efficient fast-johnson-lindenstrauss transform with applications in differential privacy and compressed sensing. *arXiv preprint arXiv:1410.2470*, 2014.
- [Vem05] Santosh S Vempala. *The random projection method*, volume 65. American Mathematical Soc., 2005.
- [WAH⁺97] Peter D Wentzell, Darren T Andrews, David C Hamilton, Klaas Faber, and Bruce R Kowalski. Maximum likelihood principal component analysis. *Journal of Chemometrics*, 11(4):339–366, 1997.
- [War65] Stanley L. Warner. Randomized response: A survey technique for eliminating evasive answer bias. *Journal of the American Statistical Association*, 60(309):63–69, 1965.
- [WJD12] Martin J Wainwright, Michael I Jordan, and John C Duchi. Privacy aware learning. In *Advances in Neural Information Processing Systems*, pages 1430–1438, 2012.
- [Woo14] David P. Woodruff. Sketching as a tool for numerical linear algebra. *Foundations and Trends in Theoretical Computer Science*, 10(1-2):1–157, 2014.
- [Woo16] David P. Woodruff. Personal communication. 2016.
- [YUTC17] Alp Yurtsever, Madeleine Udell, Joel A Tropp, and Volkan Cevher. Sketchy decisions: Convex low-rank matrix optimization with optimal storage. *arXiv preprint arXiv:1702.06838*, 2017.