## THE PAN-STARRS1 DATABASE AND DATA PRODUCTS

H. A. Flewelling<sup>1</sup>, E. A. Magnier<sup>1</sup>, K. C. Chambers<sup>1</sup>, J. N. Heasley<sup>8</sup>, C. Holmberg<sup>1</sup>, M. E. Huber<sup>1</sup>, W. Sweeney<sup>1</sup>, C. Z. Waters<sup>1</sup>, A. Calamida<sup>4</sup>, S. Casertano<sup>4</sup>, X. Chen<sup>10</sup>, D. Farrow<sup>5</sup> G. Hasinger<sup>1</sup>, R. Henderson<sup>11</sup>, K. S. Long<sup>4</sup>, N. Metcalfe<sup>2</sup>, G. Narayan<sup>4</sup>, M. A. Nieto-Santisteban<sup>4</sup>, P. Norberg<sup>6,7</sup>, A. Rest<sup>4</sup>, R. P. Saglia<sup>5</sup>, A. Szalay<sup>3</sup>, A. R. Thakar<sup>3</sup>, J. L. Tonry<sup>1</sup>, J. Valenti<sup>4</sup>, S. Werner<sup>3</sup>, R. White<sup>4</sup>, L. Denneau<sup>1</sup>, P. W. Draper<sup>2</sup>, K. W. Hodapp<sup>1</sup>, R. Jedicke<sup>1</sup>, N. Kaiser<sup>1</sup>, R. P. Kudritzki<sup>1</sup>, P. A. Price<sup>9</sup>, R. J. Wainscoat<sup>1</sup>, P. S. Builders<sup>PSI</sup>, S. Chastel<sup>1</sup>, B. McLean<sup>4</sup>, M. Postman<sup>4</sup>, B. Shiao<sup>4</sup>.

Draft version January 30, 2019

#### ABSTRACT

This paper describes the organization of the database and the catalog data products from the Pan-STARRS1  $3\pi$  Steradian Survey. The catalog data products are available in the form of an SQL-based relational database from MAST, the Mikulski Archive for Space Telescopes at STScI. The database is described in detail, including the construction of the database, the provenance of the data, the schema, and how the database tables are related. Examples of queries for a range of science goals are included. The catalog data products are available in the form of an SQL-based relational database from MAST, the Mikulski Archive for Space Telescopes at STScI.

Subject headings: astronomical databases, database schemas, queries

#### 1. INTRODUCTION

This is the sixth in a series of seven papers that describe the Pan-STARRS1 Surveys, the data processing algorithms, calibration, and the resulting data Chambers et al. (2019, Paper I) deproducts. scribe the Pan-STARRS1 Surveys, an overview of the Pan-STARRS1 System, the resulting image and catalog data products, a discussion of the overall data quality and basic characteristics, and a summary of important results. Magnier et al. (2017a, Paper II) describe how the various data processing stages of the Pan-STARRS Image Processing Pipeline (IPP) are organised and implemented, Waters et al. (2017, Paper III) describe the details of the pixel processing algorithms, including detrending, warping, and adding (to create stacked images) and subtracting (to create difference images) and resulting image products and their properties. Magnier et al. (2017b, Paper IV) describe the details of the source detection and photometry, including point-spread-function

and extended source fitting models, and the techniques for forced photometry measurements. Magnier et al. (2017c, Paper V) describe the final calibration process, and the resulting photometric and astrometric quality. This paper (Paper VI) describes the Pan-STARRS1 database, the data products, and details of their organization in the Pan-STARRS1 database. Huber et al. (2017, Paper VII) will describe the Medium Deep Survey in detail, including the unique issues and data products specific to that survey.

#### 2. BACKGROUND

The Pan-STARRS1 Project teamed with Alex Szalay's database development group at The Johns Hopkins University to undertake the task of providing a publicly accessible hierarchical database for Pan-STARRS1 (Heasley 2008). The JHU team was the major developer of the SDSS database (Thakar et al. 2003), and it is useful to reuse as much of the software developed for the SDSS as possible. However, due to the Pan-STARRS's data having a larger intrinsic size and more complicated dataset, which covers a larger area of sky than SDSS and which includes measurements on the stacks, single exposures, and mean properties of each, major changes were required. The system developed is called the *Published Science Products Subsystem*, or PSPS (Heasley et al. 2006).

The key to moving from the SDSS database to a system capable of dealing with the large volume of Pan-STARRS1 data is the design of the Data Storage layers. It was immediately clear that a single monolithic database design (like SDSS) would not work for the challenges posed by the PS1 data. Our approach has been to use several features available within the Microsoft SQL Server product line to implement a system that would meet our requirements. While SQL Server does not have (at present) a cluster implementation, a bespoke version can be crafted using a combination of distributed partition views and slices (Heasley 2008). Partitioning data into smaller databases spread over multiple server ma-

<sup>2</sup> Department of Physics, Durham University, South Road, Durham DH1 3LE, UK

<sup>7</sup> Centre for Extragalactic Astronomy, Department of Physics, Durham University, South Road, Durham DH1 3LE, UK

USA  $^4\,\mathrm{Space}$  Telescope Science Institute, 3700 San Martin Drive, Baltimore, MD 21218, USA

<sup>5</sup> Max-Planck Institut für extraterrestrische Physik, Giessenbachstraße 1, D-85748, Garching, Germany

bachstraße 1, D-85748 Garching, Germany

<sup>8</sup> Back Yard Observatory, P.O. BOX 68856, Tucson, AZ 85737

<sup>9</sup> Department of Astrophysical Sciences, Princeton University, Princeton, NJ 08544, USA

<sup>10</sup> Google Inc., 1600 Amphitheatre Pkwy, Mountain View, CA 04043

<sup>11</sup> Spire Global, Sky Park 5,45 Finnieston Street, Glasgow, G3 8JU, UK

PŚ1 Pan-STARRS1 Builders

<sup>&</sup>lt;sup>1</sup> Institute for Astronomy, University of Hawaii, 2680 Woodlawn Drive, Honolulu, Hawaii 96822, USA

<sup>&</sup>lt;sup>6</sup> Institute for Computational Cosmology, Department of Physics, Durham University, South Road, Durham DH1 3LE, UK

<sup>7</sup> Centre for Extragalactic Astronomy, Department of Physics

 $<sup>^3</sup>$  Department of Physics and Astronomy, The Johns Hopkins University, 3400 North Charles Street, Baltimore, MD 21218, USA

chines allows us to still treat the information as a unified table (from the users' perspective). Further, by staying with SQL Server we retain a wealth of software tools developed for SDSS, including the use of Hierarchical Triangular Mesh (Szalay et al. 2007).

#### 3. DATA RELEASES

This paper covers multiple data releases. The first several Pan-STARRS1 data releases will be dedicated to the  $3\pi$  survey, covering the sky North of  $-30 \deg$  (See Chambers et al. 2019, for a description of the various surveys carried out with the PS1 telescope), with plans to release the Medium Deep Survey (MD) data thereafter. The first Pan-STARRS1 data release (DR1, Dec 2016) covers the  $3\pi$  stack images and the static sky catalog. The available pixel data products for DR1 include the PS1 stack image products from the  $3\pi$  survey. The DR1 image products are deep stacked images along with ancillary data including signal, masks, variance, and number maps. The available catalog data products, called Published Science Products Subsystem (PSPS), include the PS1 static sky  $3\pi$  catalog. Source properties are organized into several tables, as described in Table 1; only tables referring to the static results, without time domain information, are included in DR1.

Data Release 2 (DR2), scheduled for January 2019, will add more of the PS1 image products from the  $3\pi$  survey, including the single epoch warp images and their ancillary data, such as signal, masks, and variance maps. DR2 will add the Detection tables and  $Forced^*$  tables, containing the single epoch source detections and the forced photometry. DR2 also contains numerous improvements to the data products in DR1, which it supersedes. Future data releases will provide the  $3\pi$  diff image products and catalogs, and analogous data products for the MD surveys.

#### 4. OVERVIEW OF THE DATA PRODUCTS

Public access to the Pan-STARRS data is located at http://panstarrs.stsci.edu and is provided for by the Barbara A. Mikulski Archive for Space Telescopes (MAST) at STScI. MAST provides the access point for downloading different pixel data products and their associated metadata and source catalogs. This includes FITS images, FITS and JPEG image cutouts, scriptable image access, color JPEG images, and an interactive image browser with catalog overlays through the MAST portal and the MAST PS1 image cutout server. In addition, MAST provides a simple web-based interface to access the Pan-STARRS catalog database. Full database access to the Pan-STARRS tables is available through the Catalog Archive Server Jobs System (CasJobs) interface (see description at http://mastweb.stsci.edu/mcasjobs. CasJobs emulates local free-form SQL access in a web environment, and provides both synchronous and asynchronous query execution. The interface can execute complex, large queries of the PS1 (DR1/DR2) catalogs, with results saved to a private space allocated to each registered user. The Pan-STARRS catalog database accessible through CasJobs contains calibrated catalogs of photometric and astrometric parameters for single epoch exposures, stacks, difference images, and forced photometry. The database schema for the Pan-STARRS catalog database is briefly described in Section 7, and is fully

expanded in Appendix D. Examples of queries are described in Appendix A.

The Pan-STARRS1 catalog database schema is organized into four sections:

- 1. Fundamental Data Products. These are attributes that are calculated from either detrended but untransformed pixels or warped pixels. It should be noted that, once in the database, the instrumental fluxes and magnitudes have been subject to recalibration, as have the sky coordinates. Because of these re-calibrations on the catalogs, the catalog values are to be preferred to making a new measurement directly from the available released pixel data, and care should be taken when using the recalibrated astrometry with the original images (see Table 2).
- Derived Data Products. These are higher order science products that have been calculated from the Fundamental data products, such as proper motions and photometric redshifts. These data products are not yet available and will come in later data releases.
- 3. Observational Metadata. These are metadata that provide detailed information about the individual exposures (e.g. information like exposure time, filter used, etc.) or about which exposures went into an image combination (stacks and diffs), as well as information such as detection efficiencies (see Table 3).
- 4. System Metadata. These tables have fixed information about the system and the database itself, primarily descriptions of various flags and their bits, but also for other metadata such as filter information (see Table 4).

Various database "Views" are also constructed as an aid to the user for standard types of queries. Views act like tables, and primarily consist of joins of different commonly used tables, in order to simplify queries. Views are also used to join slices of tables (sliced by area of sky) into a full sky view. For example, "Detection" is a view of 32 Detection tables, but the individual tables are hidden from the user. For more information on views, including the currently defines ones, see Table 9.

This paper covers the data products and schema for the  $3\pi$  data releases, though most details also apply to the Medium Deep fields. Additional documentation is available together with the data products through MAST.

# 5. FLOW OF DATA FROM PIPELINE TO THE PAN-STARRS CATALOG DATABASE

Here we present a condensed version of the flow of data starting with raw image processing with the IPP, and ending with the steps used to generate the catalog database. This flow provides readers with an overview of the various terms used to describe different data products. The full description of these steps are in Magnier et al. (2017a, Paper II). During the various processing steps some data are removed or flagged out, requiring updates to the list of available data. We describe these procedures here to provide additional information about

the process that will help the user determine the best data products to use. A flowchart of the whole process can be seen in Figure 1.

First, exposures are taken at the summit, then they undergo IPP processing which produces catalogs files from the camera stage, stack stage, diff stage and forced stage. These catalog files (in the form of binary FITS files called cmf/smf files) are then ingested into a "Desktop Virtual Observatory" (DVO, described briefly in section 5.2 and more extensively in Magnier et al. (2017c, Paper V)) database. The DVO database is then calibrated Magnier et al. (2017c, Paper V). Next, IppToPsps creates "batches" or small chunks of sky with the appropriate database schema, from the DVO and smf/cmf files to be loaded into the Pan-STARRS catalog database. The Pan-STARRS catalog database is made available to the user.

## 5.1. Processing Stages

The first stage of data products involves processing raw images into detrended (images with flats/biases/darks and other corrections applied) and warped images, described in Waters et al. (2017, Paper II), followed by the generation of stacks, diff images and catalogs. Finally, forced photometry on the warps is performed using positions of sources detected in the stacks. This processing is done by the *Image Processing Pipeline* (IPP). This first iteration of processing is called nightly science processing. It was designed to be fast to allow the Pan-STARRS1 Moving Object Processing System (Denneau et al. 2013, MOPS) and the PS1 science consortium access to the data a few hours after observation in order to detect moving objects, supernovae, and other time-sensitive transients. The  $3\pi$  data spans 4 years of observations (2010-2014, with some observations in 2009 and 2015), a time during which the IPP was actively being developed and improved. To make a consistent set of data, both for the internal catalog database as well as for the public release, all of the raw images were reprocessed from scratch all using a specific revision number of the IPP code. The data released to the public in DR1 and DR2 are internally called Processing Version 3 (PV3).

We provide a short description of the different stages of this pipeline, separated into sections based on final available image data products and products that are used to create the large relational database below.

## 5.1.1. Download and registry of images

Before processing of images can take place, they must first be transferred to the IPP cluster from the summit, and registered in a metadata database to ensure that all of the > 1.3 million images taken by Pan-STARRS have been properly handled. This is represented as the "image"  $\rightarrow$  "ipp processing" step in Figure 1. The IPP uses an internal database to track all parts of the image processing. This database keeps basic metrics relevant to each stage, including details on what type of image was taken, when an image was processed, how long processing took, flags and other metrics on the quality, etc. While this database is internal to Pan-STARRS, it is referenced frequently in this paper as "GPC1."

## 5.1.2. Chip and Camera Stages

The first step, called "chip" stage, takes the raw images, generally 60 FITS files, one FITS file per OTA, and detrends them, one chip per computing job. Dark, flat, bias, background and other corrections, as described in the detrend paper (Waters et al. 2017), are applied to each chip image, followed by finding the sources and doing photometry on them using psphot (Magnier et al. 2017b). The next step, called "camera" stage, is to mosaic the *chip* processing together, to do basic astrometry on the image, and to generate a binary FITS table, called an smf file, which holds the catalog information for the image. The end product of camera produces the catalog smf files which are later ingested into a relational database (DVO) for internal use. These 2 stages are represented as the "ipp processing"  $\rightarrow$  "camera" steps in Figure 1. Camera stage products are available to the user as the 'Detection' tables, starting with DR2.

## 5.1.3. Warp Stage

The next steps is the warp stage, represented as "camera"  $\rightarrow$  "stacks" in Figure 1. The warp stage geometrically transforms and bins the chip outputs to be on a tangential RA/Dec plane, with 0.25'' pixels, with the images chopped into  $6242 \times 6254$  pixel "skycells." The skycells themselves are tessellated across the sky, and thus any image can be split and projected onto a common layout on the sky. For  $3\pi$ , the skycell tessellation is Rings.V3, based on a Budavari-Magnier Rings tessellation (Magnier et al. 2017a). This tessellation subdivides the sky into projections cell rings, each projection cell is  $4.0 \times 4.0$  degrees, subdivided into  $10 \times 10$  skycells, each with 60'' of overlap on a side. All image data products beyond warp ( $stacks/forced\ warps/diffs/$  etc.) are laid out in skycells as well

The warp image products are available to users via MAST for DR2.

#### 5.1.4. Stack, StaticSky, Skycal Stages

There are 3 stack-related stages: stack, staticsky, and skycal. The stack stage generates the images, and staticsky and skycal generate the catalogs files. All of the stack related stages are represented as "stacks" in Figure 1.

Stacks are generated from adding together warp exposures with the same skycell id and filter; the process described in more detail in Waters et al. (2017). There are several stack types, which are listed in the StackType table in the PSPS database. For the  $3\pi$  database, the stack type is set to DEEP\_STACK, i.e., all available and good quality warps for a given skycell and filter within  $3\pi$  are used to generate the best and deepest stack possible. The  $3\pi$  deep stacks consist of one deep stack per skycell per filter. This step produces unconvolved stacks, stacks with input warps convolved to 6 pixels, and stacks with input warps convolved to 8 pixels. Masks, weights, variance, and number maps are also generated for each deep stack.

Once each *stack* image is created, photometry and astrometry are determined in the *staticsky* and *skycal* stages. For the *staticsky* stage, photometric analysis is run on all 5 filters at once, on the unconvolved stacks. Catalog files, one per filter, of matched sources within a 5 pixel radius are generated. The *skycal* stage calibrates the *staticsky* catalogs relative to the reference

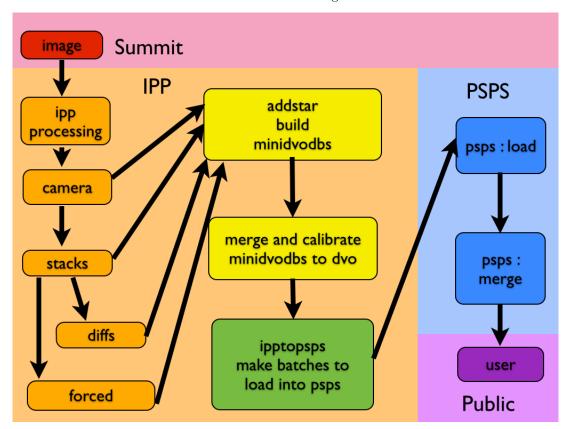


FIG. 1.— An overview of the steps necessary to create publicly accessible Pan-STARRS1 data. The first step is to take exposures from the summit, process them via the image processing pipeline (IPP), ingest the data into the PSPS, and then provide public access to the user. The IPP has many steps of processing, not all are shown here. The camera, stacks, difference images and forced photometry stages produce binary catalog FITS files which are the foundation of building the DVO database, which is then calibrated. The final step of IPP processing is to use IppToPsps to generate small batches of data in the appropriate database schema to be ingested into PSPS. This paper primarily focuses on the PSPS and the database schema. The other steps are explained in enough detail to describe known and potential sources of inconsistencies within the database.

catalog. The *skycal* catalog files are later ingested into the DVO database and then into the PSPS database. Due to the overlap between skycells, sources that land in the overlaps can be reported 2, 3, or 4 times in the DVO and PSPS database. Use the BestDetection or PrimaryDetection flag to select one of these.

Stack data products are available, starting with DR1. Stack image products are available to users via MAST, and Stack\* tables are available in the PSPS database.

### 5.1.5. Diff Stage

In general, for the IPP, there are several different types of diffs. These are WARP\_WARP, WARP\_STACK, STACK\_WARP and STACK\_STACK diffs. For  $3\pi$ , difference images are generated between warps and deep stacks, i.e., WARP\_STACK diffs. For each exposure within the  $3\pi$  dataset, a corresponding diff is generated, subtracting the appropriate  $3\pi$  deep stacks from each good quality warps for that exposure (same filter, and skycell\_ids). The results from this stage of processing include diff catalog files, which will be available in DR3. The diff images can be reconstructed from available data products hosted at STScI, but at this time we anticipate they will not be stored there due to space constraints.

## 5.1.6. Forced Photometry Stage

Most of the photometry done in earlier stages, with the exception of some stack photometry, is unforced. That is,

significant sources are identified on the images, and then photometry is performed. Forced photometry is done with prior knowledge of source positions measured from the stacks. There are 2 steps of forced photometry for the IPP: One performs forced photometry on the individual warp exposures, and the other calculates forced galaxy model fits on the stacks.

The forced warp photometry stage takes the positions of sources located in the deep *stacks* and then measures the PSF model flux at those positions on the individual warps. The catalogs generated by this process are first ingested into the DVO database, then translated using IppToPsps into the  $ForcedWarp^*$  tables for the PSPS, and are available starting with DR2.

For extended sources, galaxy models are fitted on the stack images. These models are then used as a seed to determine galaxy models for each warp image. The position, aspect ratio, and (where appropriate) Sersic radius are kept fixed to the values determined for the stack image, while the major and minor axis values are fitted for each warp image, along with the model normalization. All the models include PSF convolution.

Catalog files are produced for this stage of processing, and these are later ingested into the PSPS database, as the *ForcedGalaxy\** tables.

## 5.2. DVO Database Steps

5.2.1. Building and calibrating a DVO Database

The Desktop Virtual Observatory (DVO) Magnier et al. (2017c), Magnier & Cuillandre (2004) is a database that takes a subset of photometric, astrometric, flags, metadata, etc. from the catalog FITS files smf/cmf from various IPP stages and puts them into a relational database built from FITS files. Within this database, we determine the connection between detections and objects, and we perform the necessary astrometric and photometric calibrations. The smf/cmf files are the core binary fits catalog files generated by IPP processing, and include measurements of all the sources for an exposure or skycell (or other unit) for a given stage, detector efficiency, and for the smf files (for the camera stage, chip level astrometric transformation information.

Catalog files are ingested into the DVO database via the addstar program (part of the IPP code). The output from several stages of IPP processing is ingested into the DVO database. These are the catalogs produced by the *skycal*, *camera*, forced photometry on warps, and forced galaxy model fit stages. Difference image catalogs are ingested into the diff DVO database. Measurements from 2MASS, WISE, and Gaia are merged into the DVO database, and there are flags within the external Pan-STARRS database (and within dvo) that note the presence of these surveys. Finally, the DVO database (and the external Pan-STARRS database) is tied to the Gaia calibration Magnier et al. (2017c).

Once the DVO database is built, it is then calibrated. Steps include relative photometry and astrometry. Average properties are also calculated. Full details are in Magnier et al. (2017c).

Several categories of DVO files are used by *IppToPsps* to populate the PSPS database. Here we give a short summary of the subset of DVO files that are most relevant for *IppToPsps* (see Magnier et al. (2017c) for more details).

- .cpt: Object information each .cpt table has one entry for each object in that region of the sky. It summarizes the average properties of that object as long as those properties can be derived independently of the filter used. Information such as mean RA and Dec are listed in these files.
- .cpm: Measurements each .cpm table contains all of the measurement information for each object in the .cpt file. Contains measurement information for detections from the stack/skycal cmf, camera smfs, and forced warp smfs.
- .cps: Mean properties the .cps table has filterdependent average property information for each object listed in the .cpt file. Information such as mean magnitudes are located in these files.
- .cpx: Lensing measurements the .cpx files contains lensing parameters measured from all the forced warp cmfs.
- .cpy: Lensing Objects the .cpy table has one entry per filter for each object in that region of the sky, same object ids as for objects in the .cpt file. It summarizes the average properties of the lensing measurements.

.cpq: Forced Galaxy - the .cpq table has one entry per filter for each object in that region of the sky, same object ids as for objects in the .cpt files. It summarizes the extended source galaxy shape measurements.

## 5.3. IppToPsps Steps

The DVO database contains a subset of information, primarily average properties of sources, and precisely calibrated astrometric and photometric information. It is necessary, when building the PSPS database, to combine the DVO database as well as extra columns from the individual smf and cmf files. The IppToPsps stage does this for the mean properties (split into mean properties for single exposures, calibrations against the Gaia catalogue (Gaia Collaboration et al. 2016), difference exposures, and forcedwarp exposures), subdivided by DVO FITS files with RA/Dec boundaries, and again for the individual stages, which represent either single exposures or skycells from other stages (camera, stacks, forced warps, difference images). This stage therefore combines information from the various IPP data products that are stored in DVO, and propagates this information into a more homogeneous form in the PSPS database.

The *IppToPsps* translates the DVO and various catalog files associated with processing (*camera/stacks/forced warp/diff*) into smaller batches which are loaded onto data stores to be ingested by PSPS. This is the stage that transforms the data into the same schema used by PSPS, and which users interact with. The *IppToPsps* is written in python/jython, STILTS (Taylor 2006), and uses MySQL to track the processing and for temporary scratch databases. This process also queries the IPP processing database, retrieves files from the IPP cluster, and reads data from the DVO database.

There are multiple types of batches that are generated by IppToPsps. These include: Init (IN), Object (OB), stack (ST), Detection (P2), Forced Mean Objects (FO), Forced warp (FW), Forced Galaxy (FG), Gaia Objects (GO), diff Detection Objects (DO), and diff Detections (DF). For DR1, IN, OB, ST, FO and GO batches are processed through IppToPsps and ingested into PSPS. DR2 has P2, FW, FG batches. An overview of the different batch types and associated DVO files and smf/cmf files is shown in the flowchart in Figure 2.

The init batch (IN) is the first batch created by *Ipp-ToPsps*, and it is first to be ingested into PSPS. This includes the system metadata tables described in Section 7.2, with flag bits listed in Appendix C.

The object batches (OB) create the *ObjectThin* and *MeanObject* tables, described in more detail in Section 7.3. Each batch represents individual DVO files which are subdivided into small rectangular patches of sky. Columns are filled from the DVO database (cpt and cps files).

The detection batches (P2), create the *Detection* tables, described in more detail in Section 7.4.1. Each batch corresponds to a single exposure from Pan-STARRS1. Columns within are filled from the DVO database (cpt and cpm files) as well as the *camera* stage catalog file (smf).

The *stack* batches (ST) create the *stack* tables, described in more detail in Section 7.4.2. Each batch corresponds to a skycell from the skycal stage. Columns are

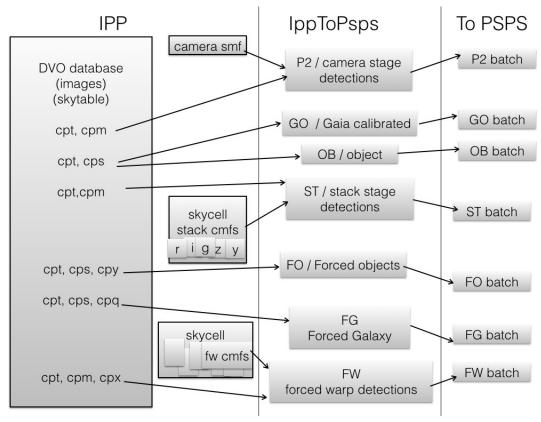


FIG. 2.— This figure shows a flowchart of how data flows from the IPP side into batches for PSPS, using IppToPsps. On the IPP side, the DVO database shows cpt/cpm/cps/cpx/cpy/cpq files, organized and grouped by which IppToPsps batch type uses them. The IPP side also has the smf/cmf files from the camera stage, forced warp stage, and stack (skycal) stages, these smf/cmf files are also needed for IppToPsps. IppToPsps has several different batch types, extracting data from different sources, and generating batches for ingest into PSPS. Batches related to diffs are not shown here, it is a similar process (cpt,cpm) files from the diff DVO and cmf files from the diff skycells go through IppToPsps to create DF batches (analagous to P2 or ST but using diff cmfs). DO batches are created using cpt,cps files from the diff DVO (similar to how OB or GO batches are created).

filled from the DVO database (cpt and cpm files ) as well as from the corresponding skycal catalog files (cmf) for all 5 filters (or what is available).

The forced mean objects (FO) create the Forced-MeanObject and ForcedMeanLensing tables, described in more detail in Section 7.3. Forced warp processing is ingested into a DVO, forced objects are determined and their mean properties are calculated and contained withing the DVO. Each batch contains data from individual DVO files (cpt, cps, cpy).

The forced galaxy batches (FG) create the ForcedGalaxyShape table, described in more detail in Section 7.3. Forced galaxy model fits calculated from the stacks are ingested into the DVO, the forced galaxy objects are determined within the DVO. Each batch contains data from individual DVO files (cpt, cps, cpq).

The forced warp batches (FW) create the Forced Warp\* tables, described in more detail in Section 7.4.3. Each batch corresponds to a different skycell, and contains all the forced warp catalogs for that skycell. Each batch contains data from individual DVO files (cpm, cpt, cpx) as well as from the corresponding forced warp catalog files (cmf).

The diff object batches (DO) create the DiffDetObject table, described in more detail in Section 7.3. Diff detection catalog images are ingested into a DVO, diff objects are defined and mean properties are calculated for the diff objects. Columns are filled from the DVO

diff database (cpt and cps files).

The diff detection batches (DF) create the DiffDetection table, described in more detail in Section 7.4.4. Each batch corresponds to a difference image catalog file created in the diff stage, and will contain all the skycells for a given exposure. Columns are filled from the DVO database (cpt and cpm files), and from the corresponding diff catalog file (cmf).

Gaia DR1 (Gaia Collaboration et al. 2016) was released after all of the object tables were ingested into the PSPS database. We used the Gaia data to recalibrate the DVO object positions, which improved the astrometry significantly. Rather than dump the database and start over (with corrected RA and Dec positions), we added a new type of batch, (GO), that contains minimal metadata information, the ObjID for the objects, the objectInfoFlags, and the corrected RA and Dec as well as the errors. It is based on exactly the same DVO files as OB batches, has updated RA and Dec calibrated to Gaia, and ignores the rest of the DVO columns.

Within *IppToPsps* it is possible to verify that the expected batches were generated, and to re-queue and regenerate batches that failed. Batches fail for a variety of reasons, but none of the failures are terminal. Batches can fail if any of the associated *mysql* databases time out or are unavailable, if there are disk I/O glitches or other disk problems. The DVO database sets the expected number of batches to generate, and failures are

investigated and retried until they are resolved. Within  $Ipp\,ToPsps$  it is also possible to poll the PSPS to verify if batches have been ingested.

#### 6. PSPS

We present an overview of the Published Science Products Subsystem (PSPS), both to help users understand better how the PSPS database is constructed in order to optimize the queries, and to describe the currently known issues within the PSPS database.

#### 6.1. Introduction

The PSPS consists of several parts: the data transformation layer (DXLayer), the Object Database Manager (ODM), the Workflow Manager Database (WMD), and the data retrieval layer (DRL). The user accesses the data through the DRL, using either scripts, the STScI CasJobs interface, or if the user is a Pan-STARRS1 Consortium member, the Published Science Interface (PSI). The DXLayer polls the *IppToPsps* datastores for new batches and prepares them for loading. The ODM is the software that all loading nodes run to load, merge, copy and publish the PSPS databases. The WMD is the database containing all the logs about the PSPS databases. The DRL is the intermediate layer between the client and the PSPS database. The PSI is the web based interface for PS1 consortium members, for interacting with the DRL. Each of these components is described in more detail below, and a diagram of the process is shown in Fig 3

## 6.2. Partitioning the PSPS

The PSPS uses Distributed Partitioned Views, a mechanism that allows tables to be partitioned to reside on different files on different linked servers. The tables are partitioned into slices, with cuts based on declination, and with each slice containing a similar amount of data. Partition slices are customized for each database ( $3\pi$  vs MD); Fig 4 shows how the data is partitioned across a subset of the machines.

## 6.3. The DXLayer

The DXLayer is the first stage in the PSPS. This is the stage that polls for new batches to load and preps them for the next step (ODM). Fig 5 shows the flowchart of the DXLayer process, and Fig 6 shows a more detailed flowchart of how batches are loaded and verified within the DXLayer and ODM. PSPS loads batches created by the *IppToPsps*. A batch corresponds to either products from different processing stages (camera, stack/skycal, diff, forced warp) or from different DVO files (arranged by area of sky). Batches contain a manifest file that describes the batch information such as type of batch, min/max ObjID, MD5 checksum, and the tables to load. Batches data is stored in FITS files, which are transformed into csv files in the DXLayer. The batch area cannot exceed two PSPS slices, else it will not load correctly. The PSPS slices are chosen so that this does not happen.

## 6.4. The ODM

The nodes within the ODM have naming conventions for their roles: load/merge (lm), slice (s), head (h) and

admin (a). All ODM processes are named workflows (load, merge, copy, flip). All logs, processes, and requests are inserted into an administration database called the Workflow Manager Database (WMD). Databases are named by roles: Load, Cold, Warm, Hot. These databases are MS-SQL Server and are broken into four volumes with 96 file partitions each. All of the metadata tables and ObjectThin, GaiaFrameCoordinate, StackObjectThin are merged into a head database to provide faster queries.

#### 6.5. The DRL

The DRL is the layer between the user and the PSPS database. The DRL is responsible for management of queries that the user submits via the DRL API, is based from CasJobs, and has many similar features. It primarily keeps track of all user queries and provides progress of those queries in a secure way. It also kills queries that use too many resources or take too long. The DRL API is accessed via Simple Access Object Protocol (SOAP), allowing for multiple ways for the user to access the database. Consortium members used the PSI (a web user interface), but it is also possible for the users to query the database via SOAP calls from command line scripts. A flowchart of the DRL can be seen in Figure 9.

#### 6.6. *PSI*

The PSI is the web user interface, but only for consortium members. As it was part of the design of PSPS it is included here for reference. This interface provides many useful features including a query request page, information on query progress, MyDB management tools, graphing tools, access to the pixel data products, and interactive help. The query request page allows for the user to easily submit queries to a variety of databases (3pi/MD/MyDB), to upload query files or to check the syntax, to name MyDB results tables and to select the queue to submit to. The MyDB management tools allow the user to easily select which MyDB tables to purge as well as well as methods to extract to csv, FITS or xml files to download. Some of the interactive features include an interactive schema browser, a query builder to easily create a query with multiple joins and conditions, and a flag generator to create bitmasks for the different types of flag tables. The plotting tool allowed the user to quickly plot data from the PSPS databases or their own MyDB within the browser.

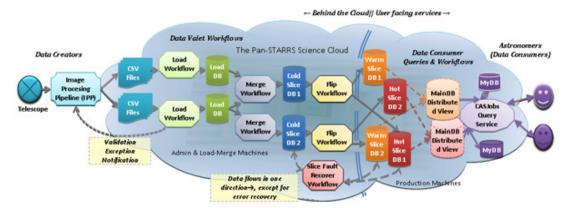


Fig. 3.— This figure shows a flowchart of how data flows from the IPP (via IppToPsps) into the load merge machines, which is then copied to the slice machines to allow for users to query the data (via a modified CasJobs)

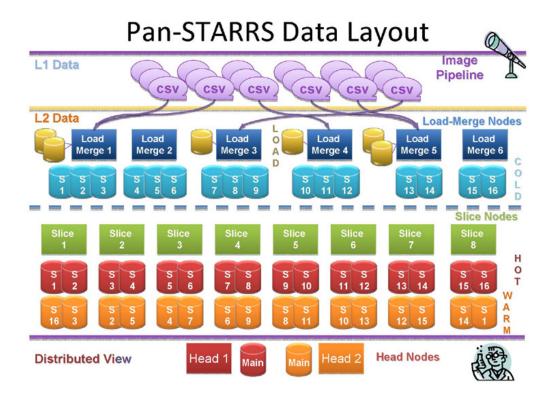


Fig. 4.— This shows how the data (L1 data/csv files/Image Pipeline) is loaded into L2 data (the load merge machines - responsible for loading the data and merging it into the 'cold' part of the database. In this figure there are 8 slice machines which hold hot and warm copies of the database. At the bottom is the head nodes and the main database. The hot database serves the fast response queue and the warm database serves the slow queue. The fast queue is specifically for queries that take less than one minute to complete. The cold database is never accessible by users.


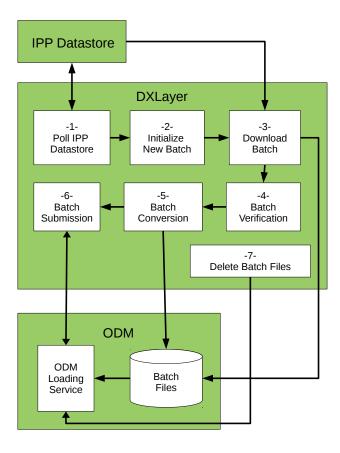


Fig. 5.— A flowchart of the DXLayer process, showing how batches are loaded into the DXLayer, verified, and submitted to the ODM. The shaded rectangles refer to different systems, and the white boxes and white cylinder refer to difference steps for the systems.

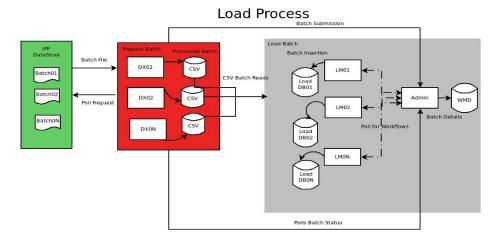

 ${\it Fig.~6.} {\it ---} A \ {\it flowchart of loading data from} \ {\it IppToPsps/IPP} \ {\it as batches into the DXLayer and ODM.}$ 

## **PSPS Merging Specifics**

As the survey goes "deeper" and new objects are found in-between previously known objects, so the Cold database is merging quite regular. The ObjectIDs can be all over a specific cold slice so a constant insertion would cause index-fragmentation.

This process is basically a huge "select into order by" and it is analogous to de-fraging your disk in such a way that the data on the disk is ordered on the hard drive by the ObjectID.




Fig. 7.— A graphical representation of how the database is re-indexed as more data is ingested.

# **PSPS Index Design**

Data Rows in PSPS Tables are ordered sequentially by their primary key column "ObjectID" on the physical hard drives. This "clustered index" of the database is directly associated with the physical location on the disk.



FIG. 8.— PSPS uses ObjID as the index, with specific ObjID ranges associated with physical locations such as different hard disks

## **Accessing the Data**

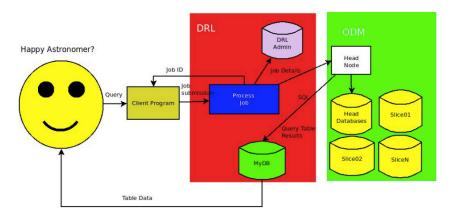


Fig. 9.— A flowchart explaining the DRL, the layer that provides the user access to the database.

# **PSPS Copy Process**

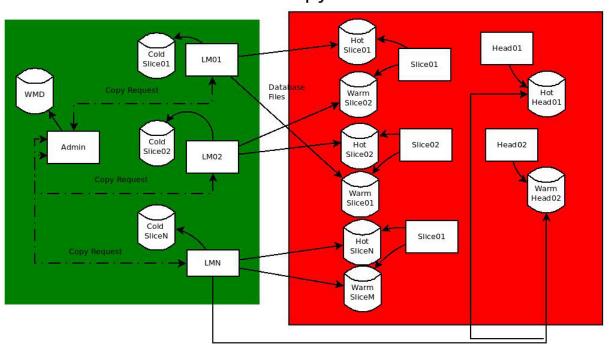


Fig. 10.— A flow chart showing the steps necessary to do the copy workflow.

#### 7. OVERVIEW OF THE PSPS DATABASE SCHEMA

There are over 50 different tables that make up the PSPS schema. Here we give a brief overview of the tables and indexes, to help aid the user in selecting the most appropriate table for queries. The core concept is that the database has a unique ObjID for each object detected within Pan-STARRS1 data. An object is defined to be a source which has measurable flux at a given R.A. and Dec. In general, multiple detections of an object will all share the same ObjID, as well as multiple detections within 1" of that object (which might not be associated with that object, for example, blended sources). A detailed description of the source deblending algorithm and its properties is beyond the scope of this work. This ObjID is the core index used to join the object and detection tables. For example, Object Thin has the astrometric information for the objects; one would join against the Detection table, using ObjID, in order to get the individual photometric attributes for all the detections of that object within the single exposures (at a given RA and Dec).

## 7.1. The Main Categories of Tables

There are 4 main types of tables within the PSPS database: Fundamental Data Product tables, Observational Metadata tables, Derived Data Product tables, and System Metadata tables (see also Section 4). Fundamental Data Product tables can be categorized into either Object Tables (summarized in Section 7.3) or Detection Tables (summarized in Section 7.4). Object tables contain basic information on each source in the sky, including the mean photometric and astrometric information. Detection tables contain photometric and astrometric information on the individual exposures. Detection tables contain detections from individual exposures (Detection), stacked images (Stack\* tables), Forced warp images (forcedWarp\*tables) that contain forced photometry of individual exposures using positional knowledge of sources detected on stacked images, Difference Images (stack - individual exposures). Observational Metadata contains information about the different data products and how they are mapped to the individual exposures. Observational Metadata tables are summarized in Sections 7.4. Derived Data Products will come later and are not described in this paper. System Metadata tables are summarized in Section 7.2; they contain hardwired information about the PSPS, including tables about flags, filters, tessellations and other useful fixed metadata.

This section will start by briefly describing the System Metadata tables (Section 7.2), followed by Object tables (Section 7.3). The Detection tables (Section 7.4) are organized by stage of IPP processing and contain a mix of Fundamental Data Product tables and Observational Metadata tables as this seemed the more natural way to organize this part of the schema.

## 7.2. System Metadata Tables

The system metadata tables primarily contain static information of flags, filters, surveys and other information that is specific to Pan-STARRS1.

There are several tables that describe the different flag bits: ImageFlags, DetectionFlags, DetectionFlags2, DetectionFlags3, ObjectInfoFlags, ObjectFilterFlags, Obj

#### TABLE 1

Summary of the different database tables, their types, and other comments. The column labeled 'Release' specifies the first Data Release a specific product became available. Note that all of the DR1 tables were regenerated for DR2, in order to address minor bugs and inconsistencies discovered in DR1.

PSPS Table Name	Table Type	Release
Filter	System Metadata	DR1
FitModel	System Metadata	DR1
Survey	System Metadata	DR1
PhotoCal	System Metadata	DR1
StackType	System Metadata	DR1
DiffType	System Metadata	DR1
Tessellation Type	System Metadata	DR1
ImageFlags	System Metadata	DR1
DetectionFlags	System Metadata	DR1
DetectionFlags2	System Metadata	DR1
DetectionFlags3	System Metadata	DR1
ObjectInfoFlags	System Metadata	DR1
ObjectFilterFlags	System Metadata	DR1
ObjectQualityFlags	System Metadata	DR1
ForcedGalaxyShapeFlags	System Metadata	DR1
FrameMeta	Observational Metadata	DR2
ImageMeta	Observational Metadata	DR1/DR2
Detection	Detection table	$\mathrm{DR2}^{'}$
ImageDetEffMeta	Observational Metadata	DR2
ObjectThin	Object / Mean properties	DR1
MeanObject	Object / Mean properties	DR1
StackMeta	Observational Metadata	DR1
StackObjectThin	Detection table	DR1
StackObjectAttributes	Detection table	DR1
StackApFlx	Detection table	DR1
StackModelFitExp	Detection table	DR1
StackModelFitDeV	Detection table	DR1
StackModelFitSer	Detection table	DR1
StackApFlxExGalUnc	Detection table	DR1
StackApFlxExGalCon6	Detection table	DR1
StackApFlxExGalCon8	Detection table	DR1
StackPetrosian	Detection table	DR1
StackToImage	Observational Metadata	DR1
StackToFrame	Observational Metadata	DR1
StackDetEffMeta	Observational Metadata	DR1
DiffMeta	Observational Metadata	DR3
DiffDetection	Detection table	DR3
DiffToImage	Observational Metadata	DR3
DiffDetEffMeta	Observational Metadata	DR3
DiffDetObject	Object / Mean properties	DR3
ForcedWarpMeta	Observational Metadata	DR2
ForcedWarpMeasurement	Detection table	DR2
ForcedWarpMasked	Detection table	DR2
ForcedWarpExtended	Detection table	DR2
ForcedWarpLensing	Detection table	DR2
ForcedWarpToImage	Observational Metadata	DR2
ForcedGalaxyShape	Object / Mean properties	DR2
ForcedMeanObject	Object / Mean properties	DR1
ForcedMeanLensing	Object / Mean properties	DR1
GaiaFrameCoordinate	Object / Mean properties	DR1 only

tQualityFlags, and ForcedGalaxyShapeFlags.

There are a handful of other system metadata tables: Filter, Survey, FitModel, PhotoCal, StackType, DiffType, TessellationType. The descriptions of each of those are provided below.

*Filter*: Contains a description of the optical filters used in the survey (Tonry et al. 2012). Filters (g,r,i,z,y) are assigned integer values from 1 to 5 (filterID).

FitModel: Contains descriptions of the models used in fitting detections in images, both PSF-like and extended galaxies (see de Vaucouleurs 1948; Sérsic 1963). Describes the values for column psfModelID (located in various tables).

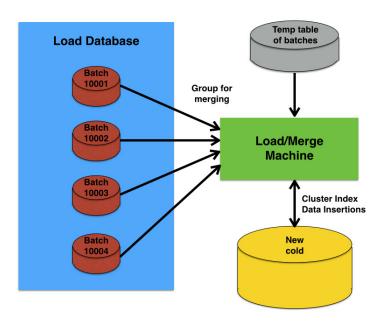


FIG. 11.— Flowchart showing how data from IPP/Ipp ToPsps batches is loaded into the system and then merged into a new cold database.

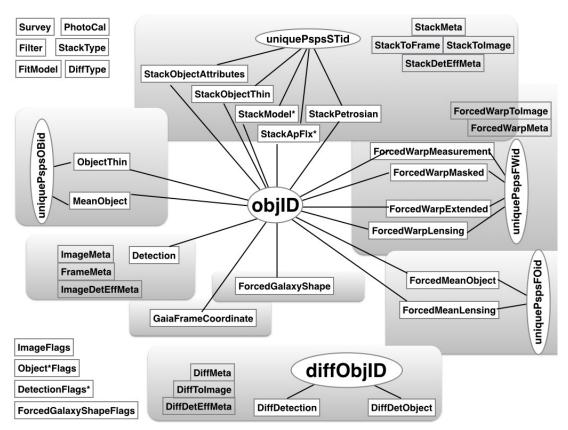


Fig. 12.— A summary of how the different tables are related. The rectangular boxes with words inside represent the different table names. The ovals with words inside represent the column names to use to join the tables. Black lines connect table names to columns (i.e., Detection has a line to ObjID which has a line to StackObjectThin) - this shows that Detection can be joined to StackObjectThin using ObjID). The grey rounded boxes represent different stages of data processing, which corresponds to different stages of loading into the database. Tables within the grey boxes are related; connections to the (grey) metadata tables are shown in Figure 12. The tables that are not in grey rounded boxes represent system metadata, metadata that describes the Pan-STARRS1 system as well as flag information.

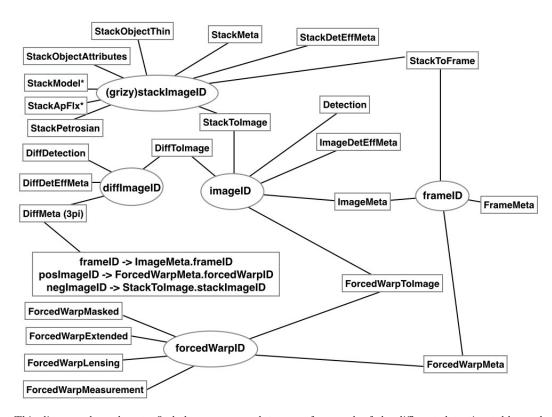


Fig. 13.— This diagram shows how to find the <code>imageID</code> and <code>frameID</code> from each of the different detection tables and metadata tables. The rectangular boxes with words inside represent the different table names. The ovals with words inside represent the column names to use to join the tables. Black lines connect table names to columns (i.e., <code>Detection</code> has a line to <code>imageID</code> which has a line to <code>ImageMeta</code>) this shows that <code>Detection</code> and <code>ImageMeta</code> share the same index <code>imageID</code>).

 ${\bf TABLE~2} \\ {\bf FUNDAMENTAL~IPP~DATA~PRODUCT~DATABASE~TABLES}$ 

Table Class	PSPS Table Name	Source	Note	Release
Detection	Detection	dvo and cam smf	1	DR2
Object	ObjectThin		2	DR1
	MeanObject	dvo	3	DR1
	GaiaFrameCoordinate	dvo	4	DR1
Stack	StackObjectThin	dvo and skycal cmf	5	DR1
	StackObjectAttributes	dvo and skycal cmf	6	DR1
	StackApFlx	dvo and skycal cmf	7	DR1
	StackApFlxExGalUnc	dvo and skycal cmf	7	DR1
	StackApFlxExGalCon6	dvo and skycal cmf	7	DR1
	StackApFlxExGalCon8	dvo and skycal cmf	7	DR1
	StackPetrosian	dvo and skycal cmf	7	DR1
	StackModelFitExp	dvo and skycal cmf	8	DR1
	StackModelFitDeV	dvo and skycal cmf	8	DR1
	StackModelFitSer	dvo and skycal cmf	8	DR1
Difference	DiffDetection	dvo and diff skycal cmf	9	DR2
Difference	DiffDetObject	dvo	10	DR2
Forced	ForcedMeanObject	dvo	11	DR1
	ForcedWarpMeasurement	dvo and forced warp cmf	12	DR2
	ForcedMeanLensing	dvo	13	DR2
	ForcedWarpLensing	dvo and forced warp cmf	13	DR2
	ForcedGalaxyShape	dvo	15	DR2
	ForcedWarpMasked	dvo and forced warp cmf	16	DR2

TABLE 3 Observational Metadata

PSPS Table Name	Rel.
FrameMeta	
ImageMeta	
ImageDetEffMeta	
StackMeta	DR1
StackToImage	DR1
StackToFrame	DR1
StackDetEffMeta	DR1
DiffMeta	
DiffToImage	
DiffDetEffMeta	
ForcedWarpMeta	
ForcedWarpToImage	

TABLE 4 System Metadata tables. Note that DR1 lacked flag information for various bits, this has been corrected for DR2.

PSPS Table Name	Release
Filter	DR1
FitModel	DR1
Survey	DR1
PhotoCal	DR1
StackType	DR1
DiffType	DR1
TessellationType	DR1
ImageFlags	DR1
DetectionFlags	DR1
DetectionFlags2	DR1
DetectionFlags3	DR1
ObjectInfoFlags	DR1
ObjectFilterFlags	DR1
ObjectQualityFlags	DR1
ForcedGalaxyShapeFlags	DR1

Survey: Contains descriptions of the various PS1 Science Consortium Surveys. The  $3\pi$  SurveyID is 0.

**PhotoCal:** Contains photometric calibration information for each filter and detector image combinations. Describes the values of photoCalID within ImageMeta, StackMeta, ForcedWarpMeta, and DiffMeta.

StackType: Contains descriptions of the types of stacked images constructed. For  $3\pi$ , all stacks are DEEP\_STACK.

DiffType: Contains descriptions of the types of difference images constructed. For  $3\pi$ , all diffs are WARP\_STACK, meaning they are constructed by subtracting warps from single exposures from the deep stacks for the corresponding part of sky.

**Tessellation Type**: Contains descriptions of the types of image tessellations for the sky. For  $3\pi$ , this is RINGS.V3. Each MD field has its own *Tessellation Type* (MD01.V3, MD02.V3, etc.). The RINGS.V3 Tessellations are described in more detail in Magnier et al. (2017a), and the MD tessellations in Huber et al. (2017).

## 7.2.1. Flag Tables

There are 45 flag columns within the Pan-STARRS1 database schema (example: Detection.infoFlag, Detection.infoFlag2, and others), and 8 different types of flags (ObjectInfoFlags/ObjectQualityFlags, ObjectFilter-Flags, ImageFlags, ForcedGalaxyShapeFlags, Detection-

Flags, DetectionFlags2, DetectionFlags3). The 8 different types of flags describes the bits in the flag columns (example: ObjectInfoFlags describes the flag bits for the column ObjectThin.objectInfoFlag) This section will give a brief overview of the 8 different types of flags. Table 8 organizes the available flags and is intended to be used as a reference to select the appropriate flag information tables.

ObjectInfoFlags Contains information flag values for ObjectThin.objectInfoFlag, ForcedMeanObject.(grizy)Flags, DiffDetObject.objectInfoFlag, and GaiaFrameCoordinate.gaiaFlag. These Flags are specifically useful for objects, several bits flag the object if it has been identified as QSO, variable, transient, or a known solar system object, if it has large proper motions, if it is extended, and the source of the average position information.

Object Quality Flags Contains information flag values that denote if an object is real or a possible false positive. This is a subset of flags from Object Info Flags, specifically the ones if the object is extended, has good measurements in individual exposures, and has good measurements in the stacks. This describes the flags used in Object Thin. quality Flag and Diff Det Object. quality Flag.

ObjectFilterFlags Contains information flags for the photometric calibration of an object (MeanObject.(grizy)Flags). Bits include if it is ubercal'd, where photometry comes from (single exposures or stacks), information about synthetic photometry, and how the average magnitude was calculated.

*ImageFlags* Contains information flag values for *ImageMeta*.qaFlags. Primarily flags of whether the image is bad or if there are too few measurements.

 $\begin{tabular}{lll} Forced Galaxy Shape Flags & Contains & information & flag & values & that & define & Forced Galaxy Shape & chi-squared & surface & fit & failures, & used & in & Forced Galaxy Shape. (grizy) Gal Flags. \end{tabular}$ 

**DetectionFlags** Contains information flag values for Detection.infoFlag, StackObjectThin.(grizy)infoFlag, ForcedWarpMeasurements.FinfoFlag and DiffDetections.DinfoFlag. Primarily information bits on sources, whether it is blended, used for PSF model, saturated, and many other types of defects, as well as information on types of magnitudes calculated, if it is extended, and fit information.

DetectionFlags2 Contains information flag values for Detection.infoFlag2, StackObjectThin.(grizy)infoFlag2, ForcedWarpMeasurements.FinfoFlag2, and DiffDetections.DinfoFlag2). These flags contain bits specific to difference imaging, if source is near diffraction spikes, star core, burntool, flags relating to petrosians, and information on the fits (if they failed).

**DetectionFlags3** Contains information flag values for Detection.infoFlag3, StackObjectThin.(grizy)infoFlag3, ForcedWarpMeasurements.infoFlag3, and DiffDetections.infoFlag3. Contains flags of whether detection was used for many different mean calculations (astrometric, photometric), and various associations with the DVO database.

## 7.3. Object type tables

The object type tables originate from the DVO database, specifically, the DVO tables that have information about objects, their mean astrometric and photometric properties and information such as the number of detections per objects and other statistics and information. The object type tables form the equivalent of a telephone book for all of the objects, with ObjID being the equivalent of the phone number or social security number. A key defining feature is that objID is unique in these object type tables, there are no instances of 2 objects with the same ObjID in the same object type table. If an object is not in these tables, it has not been detected in any of the stages of processing. The object type tables are Object Thin, Mean Ob $ject, \, Diff Det Object, \, Forced Mean Object, \, Forced Mean Lens$ ing, ForcedGalaxyShape and GaiaFrameCoordinate. For DR1, the available tables are ObjectThin, MeanObject, ForcedMeanObject, ForcedMeanLensing, and GaiaFrame-Coordinate. What follows is a description of each of the object type tables, for DR1 and beyond.

Object Thin Contains the positional information for objects in a number of coordinate systems. The objects associate single epoch detections and the stacked detections within a one arcsecond radius. The mean position from all the available single epoch data is used as the basis for coordinates when available, or the mean position over each filter of an object in the stack when it is not. The right ascension and declination for both the stack and single epoch mean is provided. The number of detections in each filter from single epoch data is listed, along with which filters the object has a stack detection (see Szalay et al. 2007). Use ObjID to join to most tables; uniquePspsOBid to join to MeanObject. For DR1 only, the Gaia-calibrated positions were calculated after ObjectThin was populated, they are provided in *GaiaFrameCoordinate*. For DR2 and beyond, there is no GaiaFrameCoordinate table, as ObjectThin has be re-calibrated and has the Gaia-calibrated positions.

MeanObject Contains the mean photometric information for objects based on the single epoch data, calculated as described in Magnier et al. (2013). To be included in this table, an object must be bright enough to have been detected at least once in an individual exposure. PSF, Kron (1980), and total aperture-based (Stoughton et al. 2002) magnitudes and statistics are listed for all filters. Use ObjID to join to most tables; uniquePspsOBid to join to MeanObject.

s *DiffDetObject* Contains the positional information for difference detection objects in a number of coordinate systems. The objects associate difference detections within a one arcsecond radius. The number of detections in each filter is listed, along with maximum coverage fractions (see Szalay et al. 2007)). Use diffObjID to join to most diff tables. diffObjID and uniquePspsDOid are unique for *DiffDetObject*. Note that (diffObjID and objID will be similar, but not identical, and it will not be easy to join to non-diff tables. We recommend comparing the R.A. and Declination for objects between Diff\* and non-diff tables.

ForcedMeanObject Contains the mean of single-epoch photometric information for sources detected in the stacked data, calculated as described in Magnier et al.

(2013). The mean is calculated for detections associated into objects within a one arcsecond correlation radius. PSF, Kron (1980), and SDSS aperture R5 (r=3.00 arcsec), R6 (r=4.63 arcsec), and R7 (r=7.43 arcsec) total aperture-based (Stoughton et al. 2002) magnitudes and statistics are listed for all filters. See also Kaiser et al. (1995); Magnier et al. (2013). Use ObjID to join to most tables, and use uniquePspsFOid to join to ForcedMeanLensing. ObjID is not unique, but uniquePspsFOid is.

ForcedMeanLensing Contains the mean Kaiser et al. (1995) lensing parameters measured from the forced photometry of objects detected in stacked images on the individual single epoch data. Use ObjID to join to most tables; use uniquePspsFOid to join to ForcedMeanObject. ObjID is not unique, but uniquePspsFOid is.

ForcedGalaxyShape Contains the extended source galaxy shape parameters. All filters are matched into a single row. The positions, magnitudes, fluxes, and Sersic indices are inherited from their parent measurement in the StackModelFit tables, and are reproduced here for convenience. The major and minor axes and orientation are recalculated on a warp-by-warp basis from the best fit given these inherited properties (Sérsic 1963). Use ObjID to join to most tables. ObjID is not unique, but uniquePspsFGid is.

GaiaFrameCoordinate This table contains PSPS objects calibrated against Gaia astrometry, this is the best RA and Dec to use for an object. Use ObjID to join to most tables. Note that this table is only present in the DR1 version of the database. The DR2 version of the database has the PSPS objects calibrated against Gaia astrometry in the ObjectThin tables.

#### 7.4. Individual Exposure Detection Type Tables

The majority of the data in the database is in the form of detection type tables. These are tables that are based on individual stages of processing from the IPP. Specifically, these are tables from the catalog outputs of *camera*, *stack*, *forced photometry* and *diff* stages of the IPP. Each of these categories of tables are described below.

Note that for these tables, if it has an objID column, objID will not unique, and there will be multiple entries with the same objID. If doing joins between tables from the same stage, do the join using the appropriate uniquePspsXXid. For example, to join between Stack-ObjectThin and StackApFlx, use uniquePspsSTid.

## 7.4.1. Tables based on the 'camera' stage of IPP

Images processed through the camera stage of the IPP have been detrended, and have had astrometry and photometry calculated. Basic information from the images are then merged into the DVO database. The core tables based on the camera stage are FrameMeta, ImageMeta, Detection, and ImageDetEffMeta. Each image ingested into the PSPS database has a unique imageID; this can be used to find out, via the FrameMeta, ImageMeta, and ImageDetEffMeta tables, information about each image such as the filter, RA and Dec, exposure time, etc. All of the detections measured in the image are ingested into the Detection table, which also has the imageID, allowing for single detections to be traced back to the OTA that it was imaged on.

FrameMeta Contains metadata related to an individual exposure. A Frame refers to the collection of all images obtained by the 60 OTA devices in the camera in a single exposure. The camera configuration, telescope pointing, observation time, and astrometric solution from the detector focal plane (L,M) to the sky (RA,Dec) is provided.

ImageMeta Contains metadata related to an individual OTA image that comprises a portion of the full exposure. The characterization of the image quality, the detrends applied, and the astrometric solution from the raw pixels (X,Y) to the detector focal plane (L,M) is provided.

**Detection** Contains single epoch photometry of individual detections from a single exposure. The identifiers connecting the detection back to the original image and to the object association are provided. PSF, aperture, and Kron (1980) photometry are included, along with sky and detector coordinate positions. Use ObjID to join to other tables with photometry/astrometry parameters. ObjID is not unique.

Image Det Eff Meta Contains the detection efficiency information for a given individual OTA image. Provides the number of recovered sources out of 500 injected fake source and statistics about the magnitudes of the recovered sources for a range of magnitude offsets.

#### 7.4.2. Tables based on the 'stack' stage of IPP

There are 15 tables based on the *stack* stage of processing. The tables can be categorized into different groups, many of the tables are similar in shape (same column names), but based off of different stack Images (unconvolved vs convolved) or different extended models. The most important table is *StackObjectThin*. This table contains the positional and photometric information for point-source photometry of stack detections. *StackObjectAttributes* extends information from *StackObjectThin* and it contains the PSF, Kron, and aperture fluxes for all objects.

StackApFlx, contains the unconvolved fluxes for 3 SDSS radii, for all sources. (StackApFLx-ExGalUnc, StackApFlxExGalCon6, StackApFlxExGalCon8) are based on the (unconvolved, convolved to 6 pixels, convovolved to 8 pixels) fluxes for 9 SDSS radii, but only for sources not in the galactic plane. (Stack-ModelFitExp, StackModelFitDeV, StackModelFitSer) all contain fit parameters for extended sources for different types of models (Exponential, DeVaucouleurs, Sersic). These are only measured outside the galactic plane and for objects with S/N> 20. StackPetrosian contains the magnitudes and radii for extended sources.

There are several stack metadata tables, they are StackMeta, StackToImage, StackToFrame and StackDetEffMeta. They provide general information about the stack and can be used to find out the exposures used in the stack.

Joins between any of the stack tables, except for the stack meta tables, should join using uniquePspsSTID.

StackMeta Contains the metadata describing the stacked image produced from the combination of a set of single epoch exposures. The nature of the stack is given by the StackTypeID. The astrometric and photometric calibration of the stacked image are listed.

StackObjectThin Contains the positional and mag-

nitude information for PSF, Kron (1980) and total aperture-based measurements of stack detections. The information for all filters are joined into a single row, with metadata indicating if this stack object represents the primary detection. Due to overlaps in the stack tessellations, an object may appear in multiple stack images. The primary detection is the detection that lies in the area of a stack image defined to provide the best sky coverage with minimal projection stretching. such areas are unique on the sky, all other detections of the object in that filter on other, overlapping stacks are secondary, regardless of their properties. The detection flagged as best is the primary detection if that detection has a psfQf value greater than 0.98; if that is not met, then any of the primary or secondary detections with the highest psfQf value is flagged as best (see Kron 1980; Magnier et al. 2017a).

StackObjectAttributes Contains the PSF, Kron (1980), and total aperture-based fluxes for all filters in a single row, along with point-source object shape parameters. Negative fluxes are recorded. The magnitudes in StackObjectThin are derived from this table, where the flux is positive. See StackObjectThin table for discussion of primary, secondary, and best detections.

StackApFlx Contains the unconvolved fluxes within the SDSS R5 (r=3.00 arcsec), R6 (r=4.63 arcsec), and R7 (r=7.43 arcsec) apertures (Stoughton et al. 2002). Convolved fluxes within these same apertures are also provided for images convolved to 6 sky pixels (1.5 arcsec) and 8 sky pixels (2.0 arcsec). All filters are matched into a single row. See StackObjectThin table for discussion of primary, secondary, and best detections.

**StackModelFitExp** Contains the exponential fit parameters to extended sources. See *StackObjectThin* table for discussion of primary, secondary, and best detections.

StackModelFitDeV Contains the de Vaucouleurs (1948) fit parameters to extended sources. See StackObjectThin table for discussion of primary, secondary, and best detections.

**StackModelFitSer** Contains the Sérsic (1963) fit parameters to extended sources. See *StackObjectThin* table for discussion of primary, secondary, and best detections.

StackApFlxExGalUnc Contains the unconvolved fluxes within the SDSS R3 ( $r=1.03~\rm arcsec$ ), R4 ( $r=1.76~\rm arcsec$ ), R5 ( $r=3.00~\rm arcsec$ ), R6 ( $r=4.63~\rm arcsec$ ), R7 ( $r=7.43~\rm arcsec$ ), R8 ( $r=11.42~\rm arcsec$ ), R9 ( $r=18.20~\rm arcsec$ ), R10 ( $r=28.20~\rm arcsec$ ), and R11 ( $r=44.21~\rm arcsec$ ) apertures (Stoughton et al. 2002) for extended sources. These measurements are only provided for objects in the extragalactic sky, i.e., they are not provided for objects in the Galactic plane because they are not useful in crowded areas. See StackObject-Thin table for discussion of primary, secondary, and best detections.

StackApFlxExGalCon6 Contains the fluxes within the SDSS R3, R4, R5, R6, R7, R8, R9, R10, and R11 apertures (Stoughton et al. 2002) for extended sources after the images have been convolved to a target of 6 sky pixels (1.5 arcsec). These measurements are only provided for objects in the extragalactic sky, i.e., they are not provided for objects in the Galactic plane because they are not useful in crowded areas. See StackObjectThin table

for discussion of primary, secondary, and best detections. **StackApFlxExGalCon8** Contains the fluxes within the SDSS R3, R4, R5, R6, R7, R8, R9, R10, and R11 apertures (Stoughton et al. 2002) for extended sources after the images have been convolved to a target of 8 sky pixels (2.0 arcsec). These measurements are only provided for objects in the extragalactic sky, i.e., they are not provided for objects in the Galactic plane because they are not useful in crowded areas. See **StackObjectThin** table for discussion of primary, secondary, and best detections.

StackPetrosian Contains the Petrosian (1976) magnitudes and radii for extended sources. See StackObject-Thin table for discussion of primary, secondary, and best detections.

StackToImage Contains the mapping of which input images were used to construct a particular stack.

**StackToFrame** Contains the mapping of input frames used to construct a particular stack along with processing stats.

StackDetEffMeta Contains the detection efficiency information for a given stacked image. Provides the number of recovered sources out of 500 injected sources for each magnitude bin and statistics about the magnitudes of the recovered sources for a range of magnitude offsets.

## 7.4.3. Tables from the 'forced photometry' stage of IPP

The forced photometry stage of the IPP uses the positions of detections found on the stacks as a list of positions to force calculations of photometry on the individual warps from images. The warp images are essentially the detrended images rotated, rebinned, and chopped into skycells. For a given stack skycell with a list of detected objects, the corresponding warps (from individual images) will have their photometry calculated, based on the list of detected objects in the stack skycell. More extended photometric calculations are performed in the forced photometry stage compared to the camera stage, for example, lensing parameters and extended photometry is calculated for this stage and not for the camera stage. Similar to the stack and camera stages, the end product of this stage of processing is a catalog file, basic information from the catalog file is ingested into the DVO, and then information from both the DVO and the catalog file are later ingested into the PSPS. Basic information about each forced warp skycell can be found in Forced-WarpMeta and a mapping to the individual exposures can be found in ForcedWarpToImage, use forcedWarpID and imageID to make these joins. Tables with photometric information are in ForcedWarpMeasurement and ForcedWarpExtended. ForcedWarpMasked allows one to know if there were no unmasked pixels for a specific forced warp measurement. Joins between ForcedWarpMeasurement, ForcedWarpMasked, ForcedWarpExtended, Forced-WarpLensing should use uniquePspsFWid.

Forced Warp Meta Contains the metadata related to a sky-aligned distortion corrected warp image, upon which forced photometry is performed. The astrometric and photometric calibration of the warp image are listed.

Forced Warp Measurement Contains single epoch forced photometry of individual measurements of objects detected in the stacked images. The identifiers connecting the measurement back to the original image and to

the object association are provided. PSF, total aperturebased, and Kron (1980) photometry are included, along with sky and detector coordinate positions.

Forced Warp Masked Contains an entry for objects detected in the stacked images which were in the footprint of a single epoch exposure, but for which there are no unmasked pixels at that epoch.

Forced Warp Extended Contains the single epoch forced photometry fluxes within the SDSS R5 (r = 3.00 arcsec), R6 (r = 4.63 arcsec), and R7 (r = 7.43 arcsec) apertures (Stoughton et al. 2002) for objects detected in the stacked images.

Forced Warp Lensing Contains the Kaiser et al. (1995) lensing parameters measured from the forced photometry of objects detected in stacked images on the individual single epoch data.

Forced Warp To Image Contains the mapping of which input image comprises a particular warp image used for forced photometry.

### 7.4.4. Tables based on the 'diff' stage of IPP

The diff stage for  $3\pi$  processing subtracts warp images from the deep stack images. Other types of diffs are also possible, but are not used for the  $3\pi$  database. There is one diff image for each single exposure within the  $3\pi$  survey. The diff input images (the stack and warp images) are convolved to have similar PSFs (Waters et al. 2017). Once the diffimages are created, basic photometry is performed in order to find new sources, and diff catalog files are created. The diff catalog files are then ingested into the diff DVO, and later ingested into the PSPS. There are 4 database tables for this stage of processing. Each diff has a unique diffImageId, and all 4 diff tables use this to join to each other. DiffMeta, DiffToImage, and DiffDetEffMeta are metadata tables that describe basic properties of the difference images as well as allows the diffs to be mapped to the stacks and single exposures that were used in the creation of the diffs. DiffDetection contains the photometry from the detections measured from the difference images. More details about these tables are described below.

**DiffMeta** Contains metadata related to a difference image constructed by subtracting a stacked image from a single epoch image, or in the case of the MD Survey from a nightly stack (stack made from all exposures in a single filter in a single night). The astrometric calibration of the reference stack is listed.

**DiffDetection** Contains the photometry of individual detections from a difference image. The identifiers connecting the detection back to the difference image and to the object association are provided. PSF, aperture, and Kron (1980) photometry are included, along with sky and detector coordinate positions.

**DiffToImage** Contains the mapping of which input images were used to construct a particular difference image.

**DiffDetEffMeta** Contains the detection efficiency information for a given individual difference image. Provides the number of recovered sources out of 500 injected sources and statistics about the magnitudes of the recovered sources for a range of magnitude offsets.

# 7.5. Description of ObjID and its relation to R.A. and Dec.

The indices objID and diffObjID are derived from right ascension and declination. The derivation is the same for both. While it is possible to calculate the RA and Dec from the objID, it is not recommended to do this, because the objID is based on the astrometric solutions from individual exposures and stacks as they are ingested into the DVO database, and is not calibrated against 2MASS or Gaia. It is recommended to use raMean, decMean from ObjectThin or (for DR1 only) ra, dec from GaiaFrameCoordinate. For DR1, ObjectThin is calibrated against 2MASS, and GaiaFrameCoordinate is calibrated against Gaia. For DR2 and beyond, ObjectThin is calibrated against 2MASS and Gaia, and there is no GaiaFrameCoordinate as the gaia-calibrated coordinates are included in *ObjectThin*. Included below is the C code for the translation between R.A. and Dec., for users interested in the relationship.

```
uint64_t
CreatePSPSObjectID(double ra, double dec)
{
double zh = 0.0083333;
double zid = (dec + 90.) / zh; // 0 -
180*60*2 = 21600 < 15 bits
int izone = (int) floor(zid);
double zresid = zid - ((float) izone); // 0.0
- 1.0

uint64_t part1, part2, part3;
part1 = (uint64_t)( izone * 10000000000000LL);
;
part2 = ((uint64_t)(ra * 1000000.)) * 10000;
// 0 - 360*1e6 = 3.6e8 (< 29 bits)
part3 = (int) (zresid * 10000.0); // 0 -
10000 (1 bit == 30/10000 arcsec) (< 14 bits)

return part1 + part2 + part3;
}</pre>
```

#### 7.6. Which RA and Dec to use?

There are multiple tables that contain columns that provide the R.A. and Dec.; this section gives information on each so that the user can choose the appropriate R.A. and Dec. A summary of these tables are provided in Table 5 Generally, if the user is not interested in proper motion or moving objects, the best R.A. and Dec. to use is the R.A. and Dec. in *GaiaFrameCoordinate* if using DR1, as this is the weighted mean RA and Dec (similar to *ObjectThin*), but calibrated to Gaia. The reason why this is in a separate table and not part of *ObjectThin* is because the mean properties were calculated and ingested into PSPS prior to Gaia's DR1. *ObjectThin*'s raMean and decMean is calibrated against 2MASS, and is different from Gaia on average by X (Magnier et al. 2017c).

For DR2, there is no GaiaFrameCoordinate table, as DR2's ObjectThin table is already calibrated to Gaia. The best R.A. and Dec. to use for most cases is ObjectThin's raMean and decMean. If the proper motion is high, or the object is moving, and the user is interested

## Example objID calculation for

R.A. = 101.287155

Dec. = -16.71611583

ZH = 0.0083333

ZID = (Dec + 90) / ZH = 08794.0661

ObjID = 087941012871550661

RA = 101.287155

Fig. 14.— Graphical description of how ObjID is calculated from RA and Dec. It is not recommended to derive the RA and Dec from the objID as this will result in an innaccurate RA and Dec, the ObjID is assigned when the stack/skycal cmfs are ingested into the database, and are not yet calibrated against 2MASS and Gaia. ObjID is primarily used for indexing the database.

in the single epoch photometry, they should use ra and dec in the *Detection* table.

#### 7.7. Indexes and Joins

There are multiple columns within the schema that are indexed and designed to be used to join tables together. Generally, if a column name ends in "ID", it is designed to be joined to other tables, either to system metadata tables (examples include filterID, surveyID, ccdID), or to fundamental data tables (for example, objID, diffObjID, uniquePspsSTid). There are a few exceptions, randomID and random(stage)ID should not be used for joins, the contents of each are random numbers to aid the user in selecting repeatable random subsets of data. Also, some of the uniquePspsXXIds are only present in one table, they are used to provide unique IDs for each stage of processing but some stages (DiffDetObject, for example) only have one corresponding table and therefore nothing to join to.

Figure 12 and Figure 13 show graphical representations of how to join various tables. On these figures, the table names are boxed, while the columns to be used to join are in ovals. For the diagram with objID in the middle, it shows that any of the boxes connected to objID can be joined to each other using objID.

All tables with photometric or astrometric information involving different sources or objects have an index, called objID. ObjID is only unique for the object type of tables, and is loosely based on RA and Dec, see Section 7.5 for more information. It is possible to use the ObjID to get a rough estimate of the RA and Dec, but this should not be used for the definitive RA and Dec. Use ObjectThin to get the RA and Dec calibrated to 2MASS, and use GaiaFrameCoordinate(for DR1) or ObjectThin(for DR2)to get the RA and Dec calibrated to Gaia astrometry. When available and possible, if joining 2 tables and they both have the same column

	T	AΒ	LE 5		
Various	LOCATIONS	OF	R.A AND	Dec	COLUMNS

PSPS Table	RA column name	Dec column name	comments
FrameMeta	raBore	decBore	RA/Dec of telescope boresite
ObjectThin	raMean	$\operatorname{decMean}$	mean RA and Dec from single exposure, calibrated against 2MASS
ObjectThin	raStack	decStack	mean RA and Dec calculated from stack skycells
Detection	RA	Dec	RA and Dec for single exposure detections
StackObjectThin	(grizy)ra	(grizy)dec	RA and Dec calculated from individual stack skycells
DiffDetection	RA	Dec	RA and Dec for single diff exposure detections
DiffDetObject	RA	Dec	similar to raMean/decMean, calculated for diff objects
GaiaFrameCoordinate	RA	Dec	Best RA and Dec, recalibrated to Gaia.

 $\begin{array}{c} \text{TABLE 6} \\ \text{Unique indicies for various PSPS Tables} \end{array}$ 

PSPS Table	uniquePspsID name	Release
ObjectThin	uniquePspsOBid	DR1
MeanObject	uniquePspsOBid	DR1
Detection	uniquePspsP2id	DR2
DiffDetection	uniquePspsDFid	DR2
DiffDetObject	uniquePspsDOid	DR2
ForcedGalaxyShape	uniquePspsFGid	DR2
ForcedMeanObject	uniquePspsFOid	DR1
ForcedMeanLensing	uniquePspsFOid	DR1
ForcedWarpMeasurement	uniquePspsFWid	DR2
ForcedWarpExtended	uniquePspsFWid	DR2
ForcedWarpLensing	uniquePspsFWid	DR2
ForcedWarpMasked	uniquePspsFWid	DR2
GaiaFrameCoordinate	uniquePspsGOid	DR1
StackObject* (2 tables)	uniquePspsSTid	DR1
StackApFlx* (4 tables)	uniquePspsSTid	DR1
StackModelFit* (4 tables)	uniquePspsSTid	DR1
StackPetrosian	uniquePspsSTid	DR1

name like uniquePspsXXId, join those 2 tables using the uniquePspsXXId. See Table 6 to see the uniquePsps column name. UniquePspsXXId is designed to be unique, specifically for the cases of when there are multiple detections that are sufficiently close by, they will have the same objID but different uniquePspsXXIds.

It is possible to join every detection, no matter what stage of processing it is from, back to the original exposure(s) and to the OTAs. Figure 13 shows how to do this. For each stage of processing, there is an associated (stage)imageID that is mapped back to the imageID via tables of the name (stage)ToImage. For example, if one wanted to find out which exposures contributed to a detection in StackObjectThin, they would join to StackToImage using the stackImageID. This allows the user to find data within the database as well as to find out the corresponding images to download from MAST.

## 7.8. NULLS as -999

The PSPS uses -999 to denote NULL values, as PSPS is based off of CasJobs which also does not use NULL. The justification for this is explained at the following url: http://skyserver.sdss.org/edr/en/sdss/skyserver/. Specifically, they state "We also insist that all fields are non-null. These integrity constraints are invaluable tools in detecting errors during loading and they aid tools that automatically navigate the database.", and since our own database design has in its roots many of the same parts as the SDSS database, we also adopt this convention of non-null fields.

#### 7.9. Tables and Views

Flag Type	Size	Comments
ObjectInfoFlags	INT	
ObjectQualityFlags	SMALLINT	
ObjectFilterFlags	INT	
ImageFlags	INT	
ForcedGalaxyShapeFlags	SMALLINT	
Detection	BIGINT	
Detection2	INT	
Detection3	INT	

The PSPS has defined several views to aid the user in making database queries. A view is a virtual table that is based on the results from an SQL statement, and looks like a table to the user. These views are constructed to aid the user, to alleviate the need for common joins, and produce query results faster than joins. Table 9 describes the views currently in PSPS.

## 8. THE $3\pi$ DATABASE

The  $3\pi$  Survey is described in detail in Chambers et al. (2019), it covers 3/4 of the sky (everything with Dec > -30) in 5 bands ( $grizy_{P1}$ ), with approximately 60 exposures per patch of sky. For various reasons, a very tiny fraction of the data does not make it into the PSPS database. Some of the data will be ingested at a later time (DR2 and beyond), however some will not be ingested at all. We present the different sources of missing data that we are aware of. This section describes the numbers of exposures that were processed in each stage, including counts for what were expected and as well as counts for known faults and quality issues.

## 8.0.1. IPP Processing stages

All of the  $3\pi$  data was reprocessed in a consistent way with the same version of IPP code, internally called Processing Version 3 (PV3). Details of this are in Magnier et al. (2017a). Small fractions of the raw image data were simply not processed at all, or failed at processing and were not recovered. This can happen at various stages of processing, and we can report the expected numbers here. A more detailed accounting of the various causes that lead to data being filtered out of PV3 requires further documentation and is beyond the scope of this section.

There are 388,177 raw exposures taken between 2009-06-03 and 2015-02-25, that have metadata indicating that they were observed for the  $3\pi$  survey. However, only 381,279 (98.2%) of these were queued for the first stage of processing, the *chip* stage. These exposures were ex-

7	ΓABLE	8
Flag columns	WITHIN	Pan-STARRS1

Table Name	Flag Column	Size	Flag Information Table
ObjectThin	objectInfoFlag	INT	ObjectInfoFlags
ObjectThin	qualityFlag	SMALLINT	ObjectQualityFlags
GaiaFrameCoordinate	gaiaFlag	INT	ObjectInfoFlags
MeanObject	(grizy)Flags	INT	ObjectFilterFlags
ForcedMeanObject	(grizy)Flags	INT	ObjectInfoFlags
DiffDetObject	objectInfoFlag	INT	ObjectInfoFlags
DiffDetObject	qualityFlag	SMALLINT	ObjectQualityFlags
ImageMeta	qaFlags	INT	ImageFlags
ForcedGalaxyShape	(grizy)GalFlags	SMALLINT	ForcedGalaxyShapeFlags
Detection	infoFlag	BIGINT	DetectionFlags
Detection	infoFlag2	INT	DetectionFlags2
Detection	infoFlag3	INT	DetectionFlags3
StackObjectThin	(grizy)infoFlag	BIGINT	DetectionFlags
StackObjectThin	(grizy)infoFlag2	INT	DetectionFlags2
StackObjectThin	(grizy)infoFlag3	INT	DetectionFlags3
DiffDetection	DinfoFlag	BIGINT	DetectionFlags
DiffDetection	DinfoFlag2	INT	DetectionFlags2
DiffDetection	DinfoFlag3	INT	DetectionFlags3
ForcedWarpMeasurement	FinfoFlag	BIGINT	DetectionFlags
ForcedWarpMeasurement	FinfoFlag2	INT	DetectionFlags2
ForcedWarpMeasurement	FinfoFlag3	INT	DetectionFlags3

 $\begin{array}{c} {\rm TABLE~9} \\ {\rm Currently~ Defined~ views~ within~ PSPS} \end{array}$ 

View Name	Tables used to create view
DetectionObjectView	ObjectThin, MeanObject, Detection
MeanObjectView	ObjectThin, MeanObject
StackObjectView	ObjectThin, StackObjectThin, StackObjectAttributes
StackApFlxObjectView	ObjectThin, StackApFlx
StackApFlxExGalUncObjectView	$\operatorname{ObjectThin}$ , $\operatorname{StackApFlxExGalUnc}$
StackApFlxExGalCon6ObjectView	ObjectThin, StackApFlxExGalCon6
StackApFlxExGalCon8ObjectView	ObjectThin, StackApFlxExGalCon8
StackModelObjectView	ObjectThin, StackModelFitExp, StackModelFitDeV, StackModelFitSer, StackPetrosian
StackModelFitExpObjectView	ObjectThin, StackModelFitExp
StackModelFitDeVObjectView	ObjectThin, StackModelFitDeV
StackModelFitSerObjectView	ObjectThin, StackModelFitSer
StackModelFitPetObjectView	ObjectThin, StackPetrosian
StackObjectPrimaryView	${ m ObjectThin, StackObjectThin, StackObjectAttributes, StackApFlx}$
DiffDetObjectView	DiffDetObject, DiffDetection
ForcedDetObjectView	${ m Object Thin, Forced Warp Measurement}$
ForcedMeanObjectView	ObjectThin,ForcedMeanObject
ForcedGalaxyModelView	${ m Object Thin, Forced Galaxy Shape}$

cluded because they did not meet various requirements: they were flagged by the observers to not be used, or they failed to be processed by nightly science processing because of bad seeing or camera issues or other observational or telescope conditions that can ruin an exposure.

Of the 381,279 exposures that were queued up for *chip* processing, 375,573 (98.5%) completed PV3 processing with good quality: no issues detected while detrending or finding sources and performing photometry.

The camera stage started with these 375,573 exposures, of which 374,521 (99.7%) completed processing. The ones that did not, failed because of bad quality: no stars for astrometry analysis, failed single chip astrometry, or failed mosaic astrometry.

The fake/warp stages started off with a larger number of exposures than expected: 379,973 instead of 374,521. This is due to the fact that the images were processed on different computing clusters, some with more computing power, which presented additional difficulties. Of the 379,973 exposures processed, 374,339 (98.5%) are

unique, and 1,234 are duplicates. Of the 379,973, 379,551 (99.9%) have good quality. The *warp* stage is the first stage that repartitions the exposures into the skycell tessellation, and since all later stages process on a skycell level rather than an exposure level, it makes sense to report that the *warp* stage has 206177 distinct skycells.

The stack stage has 200,730 distinct skycells, 200,725 of which have good quality. This is less than the above number 206177, because there is a declination cut on creating stacks, and stacks at declination less than the lower cut will have significantly less coverage and are not useful here. The static sky stage stage has 200,720 distinct skycells that are processed and all have good quality. The skycal stage, the final stage of stack processing, started with 200,722 skycells, of which 2 were essentially duplicate stacks (same inputs, same skycells), 200,684 processed with good quality data.

The stack stages have a couple of additional inconsistencies. First of all, of the 200,684 stacks that we expect, there are 409 stacks (0.2%) that include duplicate

exposures, i.e. the same exposure appears in a stack twice. There are also 130 stacks with camera testing files included (short exposures, 1 second, which have been mislabeled as  $3\pi$  data and managed to get successfully processed). These inconsistencies were discovered during the IppToPsps and PSPS phases, and will be present in the database. Secondly, there are two stack duplicates present (i.e. two stacks for the same filter and skycell), these are also present in the PSPS.

The forced warp stages Forced warps are queued by skycell and filter, and there are 994,890 of these, resulting in 19,266,450 cmf files (one per exposure per skycell) in 373,743 exposures and 199151 distinct skycells. We see no inconsistencies in the numbers. There are slightly less distinct skycells than in the stack stages. This is because there is a ragged edge at the survey limit of -30 (not consistently observed at that declination), and it made no sense to include those in forced photometry processing.

## 8.1. Building the $3\pi$ DVO Database

The  $3\pi$  database was built in stages, with many checks to verify all of the data was included. Full details of the construction and final calibration are in Magnier et al. (2017c). The  $3\pi$  database contains the following counts of data for various processing stages, ordered by how they were ingested into the database:

stack/skycal cmf: The end product from the skycal stage produces 1 cmf file per stack skycell per filter. There are 1-5 cmfs per skycell, corresponding to different filters. We expected 998,101 skycal cmfs, in 200,684 distinct skycells. All were successfully ingested into the DVO.

camera smfs: The camera stage produces 1 cmf file per exposure, with extensions for each of the 60 chips. We expected 374,521 camera stage smf, of which 374,446 of these were ingested with no faults. There are 75 that repeatedly failed to be ingested in the DVO and will not be included in the PSPS.

forced warp cmfs: The forced warp photometry stage produces many cmf files: each of the exposures that are within a given skycell will produce a cmf that is ingested into the database. There are 19266450 of these cmf files, they come from 373,743 exposures, and are in 994,890 skycells.

forced warp summary cmfs: The forced warp photometry stage also produces a summary cmf of the mean properties for a given skycell and filter, based on the forced photometry results for all of the included exposures that are within a given skycell. There are 994,890 of these cmfs, in 199,151 distinct skycells. There are 1-5 cmfs per skycell, corresponding to different filters.

Very tiny amounts of data were not ingested due to quality issues, and there are very minor duplicate issues with processing resulting in some duplicate files being ingested. It is possible to remove those duplicates, but then the mean properties must be recalculated. There are a small number of duplicates that were discovered in ippToPsps and PSPS, and it was not possible to remove and recalibrate them at this time.

## 8.2. IppToPsps Stage

IppToPsps generates batches that includes all of the smf/cmf files categorized by stage of processing, and generates batches corresponding to each DVO file. It is straightforward to verify all the data is accounted for and has been processed through ippToPsps, and easy to regenerate missing batches. This section describes the batch types and expected numbers.

Stacks: *IppToPsps* expected to generate 200,684 *stack* batches. It created 200,681 batches (missing 3) for DR1, these can be recovered and they will be added shortly after DR1. For DR2, it generated 200,683 batches. The 1 missing stack batch ended up being unsuitable data quality for the database.

Object Thin/MeanObject: Ipp ToPsps generated all of the expected 116,252 batches for DR1, and 111,505 for DR2. There are less batches for DR2 because it avoids the ragged edge of the survey and excludes those with Dec <-30.

GaiaFrameCoordinate: IppToPsps generated all of the expected 116,252 batches for DR1. This batch type was not needed for DR2.

Forced Mean Objects: IppToPsps generated all of the expected 113,665 Forced Object batches for DR1, and 113,167 batches for DR2. There are less batches than for ObjectThin because it avoids the ragged edge of the survey at Dec = -30.

Detection Table: We expect 374,446 Detection batches, and we generated 374,344. The 102 missing batches were incorrectly marked as good exposures, are not science quality, and will not be added into the database.

ForcedWarp Tables: We expect 994,890 Forced Warp batches, and we generated 994,826.

Forced Galaxy Objects: We expect 57,758 Forced Galaxy Objects and we generated 57758 Forced Galaxy Object batches. Not all areas of sky will have forced galaxy objects measured, so although the batches are subdivided in the sky the same way as for ObjectThin/MeanObject and ForcedMeanObject, we should expect a smaller number (57,758) than for the other Object types (typically ¿ 110k).

## 8.3. Loading into PSPS

The PSPS database is partitioned into 32 slices, specifically chosen for the  $3\pi$  database to have similar amounts of data in each slice. Fig 15 shows the different database slices for  $3\pi$ , and Table 10 describes the names of the slices and the declination ranges for each slice.

The PSPS has loaded the tables for DR1, however there are a few inconsistencies discovered:

IppToPsps expected to generate 200,684 stack batches. It created 200,681 batches (missing 3), of those that are expected, 1,940 partially loaded, and 14 failed to load into PSPS by the DR1 deadline. These missing batches (1957) will not be included in DR1; they will be added shortly after DR1.

Missing from ObjectThin/MeanObject: ippToPsps generated 116,252 batches. Of the 116,252 batches, 2,902 batches were only partially ingested into PSPS; this represents 2.5% of the total number of batches, and 1.2% of the total number of objects. The missing batch data will be released shortly after DR1.

Missing Forced Objects: We expect 113,665 Forced Object




Fig. 15.— The PSPS  $3\pi$  database is subdivided into 32 slices, i.e, one slice per database machine. These 32 slices have Dec boundaries defined such that each slice contains a similar amount of data. The database tables (Detectio, StackObjectThin, etc.) are composed of views combining the 32 slices. This aspect of the database is intended to be transparent to the user, however, power users may find it useful to know how the slices are subdivided.

TABLE 10 PSPS DEC SLICE BOUNDARIES

Slice Name	Min Dec	Max Dec
Slice 1	-54.82	-28.68
Slice 2	-28.68	-26.41
Slice 3	-26.41	-24.12
Slice 4	-24.12	-21.88
Slice 5	-21.88	-19.55
Slice 6	-19.55	-17.20
Slice 7	-17.20	-14.78
Slice 8	-14.78	-12.24
Slice 9	-12.24	-9.64
Slice 10	-9.64	-7.00
Slice 11	-7.00	-4.29
Slice 12	-4.29	-1.40
Slice 13	-1.40	+1.38
Slice 14	+1.38	+4.13
Slice 15	+4.13	+6.91
Slice 16	+6.91	+9.78
Slice 17	+9.78	+12.70
Slice 18	+12.70	+15.72
Slice 19	+15.72	+18.79
Slice 20	+18.79	+21.93
Slice 21	+21.93	+25.24
Slice 22	+25.24	+28.59
Slice 23	+28.59	+31.95
Slice 24	+31.95	+35.44
Slice 25	+35.44	+38.98
Slice 26	+38.98	+42.73
Slice 27	+42.73	+46.73
Slice 28	+46.73	+50.90
Slice 29	+50.90	+55.41
Slice 30	+55.41	+60.62
Slice 31	+60.62	+67.83
Slice 32	+67.83	+89.99

batches. There are 7,086 batches that have been partially loaded into PSPS, the rest of the batches are fully loaded. These missing batches will not be included in DR1, they will be added shortly after DR1.

#### 8.3.1. Queries to find holes

It is possible to use the PSPS database to verify data and to check there is no missing data. The table *GaiaFrameCoordinate* is complete and has no missing data. It can be used to do quick integrity checks on other tables within PSPS. Finding missing objects from *ObjectThin* is

 ${\bf TABLE~11} \\ {\bf EXPECTED~EXPOSURE~NUMBERS~IN~VARIOUS~STAGES~OF~PROCESSING}$ 

IPP stage	number queued	successful
raw exposures	388177	
chip stage	381279	375573
cam stage	375573	374521
fake/warp (exp)	379973	379551
fake/warp (skycells)		206177
stack	200730	200725
staticsky	200720	200720
skycal	200722	200684
fullforce	200684	200684

TABLE 12 Expected numbers in DVO and PSPS

IPP stage	successfull IPP	in DVO	IppToPsps	PSPS
cam stage	374521	374446		
skycal	200684	200684	200681	198727
fullforce	200684	200684	not yet	
forced galaxy	113665	113665	not yet	
object	116252	116252	$116\overline{2}52$	113350
gaia	116252	116252	116252	116252
forced object	113665	113665	106579	

straightforward: Do a FULL OUTER JOIN for GaiaFrame-Coordinate and ObjectThin using ObjID. Objects with a NULL ObjectThin.batchID are missing. Missing objects from ForcedMeanObject can be found in a similar way as those in ObjectThin, do a FULL OUTER JOIN between GaiaFrameCoordinate and ForcedMeanObject. Objects with a NULL ForcedMeanObject.batchID are missing. Finding missing objects in StackObjectThin is trickier, because not all objects have stack photometry. This requires a FULL OUTER JOIN on StackObjectThin to ObjectThin to GaiaFrameCoordinate. Missing stacks will have valid ObjectThin.raStack and ObjectThin.decStack and NULL StackObjectThin.objID.

#### 9. CONCLUSION

The Pan-STARRS database contains 10,723,304,629 objects. It is the largest data release from the largest digital sky survey to date, distilling the information from 1.6 petabytes of images and tables into a form that is accessible to the astronomical community through MAST. Nevertheless, sifting through such a large database can prove daunting, and this work is intended describe the primary tables and quantities within the database, together with example queries. Data from Pan-STARRS has been used for myriad purposes including detecting moving objects within the solar system (and in the case of Oumuamua, from outside it!), the analysis of tens of thousands of high-energy transient events, mapping the 3D structure of dust within our Galaxy, and studies of the large scale structure of our Universe. Yet these only scratch the surface, and it is likely that mining the database will lead to discoveries that were missed and correlations that were overlooked. As we enter the era of multi-messenger astrophysics, the Pan-STARRS data products will be essential to identifying the host galaxies and electromagnetic counterparts of events detected by gravitational wave, high-energy particle, neutrino and radio observatories. While we have provided

various tools to work with this data release, we anticipate that it will spur the development of new interfaces and ways of working with high-dimensional datasets. This work will be critical to science with future surveys such as LSST. Combining this Pan-STARRS data release with other large catalogs such as *GALEX*, 2MASS and *Gaia* will provide a rich, high-dimensional dataset that will enable new scientific studies, and may yield astronomical treasures that we have not even begun to imagine.

#### 10. ACKNOWLEDGMENTS

Facilities: PS1 (GPC1)

The Pan-STARRS1 Surveys (PS1) have been made possible through contributions of the Institute for Astronomy, the University of Hawaii, the Pan-STARRS Project Office, the Max-Planck Society and its participating institutes, the Max Planck Institute for Astronomy, Heidelberg, and the Max Planck Institute for Extraterrestrial Physics, Garching, The Johns Hopkins University, Durham University, the University of Edinburgh, Queen's University Belfast, the Harvard-Smithsonian Center for Astrophysics, the Las Cumbres Observatory

Global Telescope Network Incorporated, the National Central University of Taiwan, the Space Telescope Science Institute, the National Aeronautics and Space Administration under Grant No. NNX08AR22G issued through the Planetary Science Division of the NASA Science Mission Directorate, the National Science Foundation under Grant No. AST-1238877, the University of Maryland, Eotvos Lorand University (ELTE), the Los Alamos National Laboratory and the Gordon and Betty Moore foundation.

This work has made use of data from the European Space Agency (ESA) mission Gaia (http://www.cosmos.esa.int/gaia), processed by the Gaia Data Processing and Analysis Consortium (DPAC, http://www.cosmos.esa.int/web/gaia/dpac/consortium). Funding for the DPAC has been provided by national institutions, in particular the institutions participating in the Gaia Multilateral Agreement.

HF has some more acknowledgments to add but for now would especially like to thank G. Hasinger for extensive LATEX help, G. Narayan for magical LATEX ninja skills, and S. Isani (Ministry of Fonts) for checking LATEX for typos (he disagrees with my font choice).

#### REFERENCES

Chambers, K. C., Magnier, E., Metcalfe, N., Flewelling, H. A., & et al. 2019, ArXiv e-prints, arXiv:1612.05560

de Vaucouleurs, G. 1948, Annales d'Astrophysique, 11, 247
Denneau, L., Jedicke, R., Grav, T., et al. 2013, PASP, 125, 357
Gaia Collaboration, Brown, A. G. A., Vallenari, A., et al. 2016, A&A, 595, A2

Heasley, J., Smith, W., Eek, R., & Rosen, J. 2006, in The Advanced Maui Optical and Space Surveillance Technologies Conference, E51

Heasley, J. N. 2008, in American Institute of Physics Conference Series, Vol. 1082, American Institute of Physics Conference Series, ed. C. A. L. Bailer-Jones, 352–358

Huber, M., TBD, A., TBD, B., & et al. 2017, ArXiv e-prints, arXiv:YYYY.XXXXX

Kaiser, N., Squires, G., & Broadhurst, T. 1995, ApJ, 449, 460 Kron, R. G. 1980, ApJS, 43, 305

Magnier, E., TBD, A., TBD, B., & et al. 2017a, ArXiv e-prints, arXiv:1612.05240

—. 2017b, ArXiv e-prints, arXiv:1612.05244

—. 2017c, ArXiv e-prints, arXiv:1612.05244

Magnier, E. A., & Cuillandre, J.-C. 2004, Publications of the Astronomical Society of the Pacific, 116, 449 Magnier, E. A., Schlafly, E., Finkbeiner, D., et al. 2013, ApJS, 205, 20

Petrosian, V. 1976, ApJ, 209, L1

Sérsic, J. L. 1963, Boletin de la Asociacion Argentina de Astronomia La Plata Argentina, 6, 41

Stoughton, C., Lupton, R. H., Bernardi, M., et al. 2002, AJ, 123, 485

Szalay, A. S., Gray, J., Fekete, G., et al. 2007, eprint arXiv:cs/0701164, cs/0701164

Taylor, M. B. 2006, in Astronomical Society of the Pacific
Conference Series, Vol. 351, Astronomical Data Analysis
Software and Systems XV, ed. C. Gabriel, C. Arviset, D. Ponz,
& S. Enrique, 666

Thakar, A. R., Szalay, A. S., Vandenberg, J. V., Gray, J., & Stoughton, A. S. 2003, in Astronomical Society of the Pacific Conference Series, Vol. 295, Astronomical Data Analysis Software and Systems XII, ed. H. E. Payne, R. I. Jedrzejewski, & R. N. Hook, 217

Tonry, J. L., Stubbs, C. W., Lykke, K. R., et al. 2012, ApJ, 750, 99

Waters, C., TBD, A., TBD, B., & et al. 2017, ArXiv e-prints, arXiv:1612.05245

### APPENDIX

## QUERY EXAMPLES

This section shows example queries for the Pan-STARRS1 database. The progression will be from simple queries to more complicated queries, with a focus on queries for DR1. Queries for DR2 will be added later.

SQL has no requirements on case. We adopt the standard convention of using CAPITAL LETTERS for SQL reserved words and functions, and CamelCase for the tables and columns within the PSPS database schema.

## 1. Counting the number of rows in a large table

This is an example of a simple query, it needs to be run in the slow queue. The difference between COUNT\_BIG() and COUNT() is that COUNT\_BIG() returns a BIGINT, while COUNT() returns an INT. The PSPS tables are so large that COUNT(), which goes up to 2.14 billion, is too small of a number. Users should choose the method of counting rows that is appropriate for their data ranges. Unless it involves large tables and large areas of sky, COUNT() is recommended.

SELECT COUNT\_BIG(objID) FROM ObjectThin

## 2. Return mean PSF magnitudes and errors for all filters (grizy) for a rectangular patch of sky

```
SELECT ObjectThin.objID, nDetections, raMean, decMean, gMeanPSFMag, gMeanPSFMagErr, rMeanPSFMag, rMeanPSFMagErr, iMeanPSFMag, iMeanPSFMagErr, zMeanPSFMag, zMeanPSFMagErr, yMeanPSFMag, yMeanPSFMagErr
FROM ObjectThin
INNER JOIN MeanObject ON ObjectThin.objID = MeanObject.objID
WHERE
raMean > 100.0
AND raMean < 100.1
AND decMean > 0.0
AND decMean < 0.1
```

This returns 3869 objects. The majority of these objects have only been detected once.

## 3. Make a simple text histogram of ObjectThin.nDetections for a rectangular patch of sky

It is possible to save queries into your own personal MyDB, as well as to make queries on your MyDB. Do the query from above, but save it to your MyDB as 'MyDBtest'. Run the following query on your MyDB to make a histogram of nDetections.

SELECT nDetections, COUNT(nDetections) FROM MyDBtest GROUP BY nDetections ORDER BY nDetections

The results are ordered by ndetections, and it is apparent that most of the objects have 0-2 detections. The ndetections column refers to the number of times something is detected from the the individual exposures. Objects that have 0 detections are so faint that they are not visible in the individual exposures but are detected in the stacks. Objects with 1-2 (or a few detections), might be spurious detections, moving objects, or faint objects. If the user is interested in objects that are more likely to be well measured in several epochs and also of astrophysical nature, it is best to add a restriction on ndetections. If the user is interested in the static sky, and in stack photometry, it is best to do a JOIN on StackObjectThin. See the next 2 queries for examples of each of those types of queries.

# 4. Select mean PSF magnitudes and errors for filters griyz and for a rectangular patch of sky, with a restriction of > 10 nDetections

This is an example of a query to get mean PSF magnitudes and errors for all filters in a rectangular patch of sky, for objects with > 10 nDetections. The reason we chose 10 detections is somewhat arbitrary, and can be adjusted, but is used primarily to cut out objects for which there are only a few detections. Objects with very few detections might not be astrophysical, or they might be too faint to be seen multiple times.

```
SELECT ObjectThin.objID, raMean,decMean,
gMeanPSFMag, gMeanPSFMagErr, rMeanPSFMag, rMeanPSFMagErr,
iMeanPSFMag, iMeanPSFMagErr, zMeanPSFMag, zMeanPSFMagErr,
yMeanPSFMag, yMeanPSFMagErr
FROM ObjectThin
INNER JOIN MeanObject ON ObjectThin.objID = MeanObject.objID
WHERE
nDetections > 10
AND raMean > 100.0
AND raMean < 100.1
AND decMean > 0.0
AND decMean < 0.1
```

This returns 748 objects, a significant reduction from the 3869 on the previous query.

#### 5. Select stack PSF magnitudes for all filters for a rectangular patch of sky

This is an example of a query to get *stack* PSF magnitudes for the same rectangular patch of sky. No restrictions on nDetections is necessary, the expectation is that sources on *stacks* are more likely to be astrophysical.

```
SELECT ObjectThin.objID, raStack, decStack, gPSFMag, gPSFMagErr, rPSFMag, rPSFMagErr,iPSFMag, iPSFMagErr, zPSFMag, zPSFMagErr, yPSFMag, yPSFMagErr
FROM ObjectThin
INNER JOIN StackObjectThin ON ObjectThin.objID = StackObjectThin.objID
WHERE raMean >100.0
AND raMean < 100.1
AND decMean > 0.0
```

AND decMean < 0.1

This returns 1808 objects.

## 6. An example of finding rows with NULL values, using TOP to limit results

The PSPS uses -999 to denote NULL values. The following query returns some objects that are detected in single exposures but not in the stacks. The numbers are limited by TOP to return the first 10 rows.

```
SELECT TOP 10
objectThin.objID, raMean, decMean, raStack, decStack,
nDetections, ng, nr, ni, nz, ny, imeanpsfmag
FROM objectThin
JOIN MeanObject on objectThin.objID = meanObject.objid
WHERE raStack = -999
```

## 7. Basic search using BETWEEN to limit ranges

Similar to the query above, except uses BETWEEN to limit RA and Dec ranges as well as iPSFMag ranges.

```
SELECT ObjectThin.objID, raStack, decStack, gPSFMag, gPSFMagErr, rPSFMag, rPSFMagErr,iPSFMag, iPSFMagErr, zPSFMag, zPSFMagErr, yPSFMag, yPSFMagErr FROM ObjectThin
INNER JOIN StackObjectThin ON ObjectThin.objID = StackObjectThin.objID WHERE raMean BETWEEN 100.0 AND 100.1
AND decMean BETWEEN 0.0 AND 0.1
AND iPSFMag BETWEEN 18.0 AND 21.0
```

### 8. Using built in functions to do a box search

ObjectThin contains Hierarchical triangular mesh information, making it possible to use the built in function dbo.fGetObjFromRectEq(minra, mindec, maxra, maxdec) to do a rectangular search. Tables which have htm, cx,cy, cz can use this built in function.

```
SELECT o.objID, o.raMean, o.decMean FROM ObjectThin o, dbo.fGetObjFromRectEq(56.65, 23.92, 57.05, 24.32) r WHERE p.objID = r.objID
```

#### 9. Using built in functions to do a cone search

ObjectThin contains Hierarchical triangular mesh information, making it possible to use the built in function dbo.fGetNearbyObjEq(ra, dec, conesize(deg)) to do a radial search for objects near a given ra and dec (cone search). Tables which have htm, cx,cy, cz can use this built in function.

```
SELECT o.objID, raMean, decMean, gPSFMag, gPSFMagErr FROM ObjectThin o, dbo.fGetNearbyObjEq(56.85 , 24.12, 0.2) n WHERE o.objID = n.objID
```

#### 10. Cone search of high fidelity stellar-like objects

We want to get all objects with R degrees of a given position that are high fidelity stellar-like objects. We get all objects within 0.2 degree of RA=334.0 and Dec=0.0 which have mean magnitudes in griz (i.e. at least 1 detection in each band that can be used for the mean mag). In addition, we require QfPerfect; 0.85 in all bands. We select stars with small (< 0.05) difference between Kron and PSF magnitudes.

```
SELECT o.objID, o.raMean, o.decMean, o.raMeanErr, o.decMeanErr, o.qualityFlag, o.gMeanPSFMag, o.gMeanPSFMagErr, o.gMeanPSFMagNpt, o.rMeanPSFMag, o.rMeanPSFMagErr, o.rMeanPSFMagNpt, o.iMeanPSFMag, o.iMeanPSFMagErr, o.iMeanPSFMagNpt, o.zMeanPSFMagNpt, o.zMeanPSFMagNpt, o.yMeanPSFMag, o.yMeanPSFMagErr, o.yMeanPSFMagNpt, o.rMeanKronMag, o.rMeanKronMagErr, o.nDetections, o.ng, o.nr, o.ni, o.nz,o.ny, o.gFlags, o.gQfPerfect, o.rFlags, o.rQfPerfect, o.iFlags, o.iQfPerfect, o.zFlags, o.zQfPerfect, o.yFlags, o.yQfPerfect, soa.primaryDetection, soa.bestDetection INTO mydb.[HighFidelityStarsDR2] FROM dbo.fGetNearbyObjEq(334, 0.0, 0.2*60.0) as x JOIN MeanObjectView o on o.ObjID=x.ObjId LEFT JOIN StackObjectAttributes AS soa ON soa.objID = x.objID WHERE o.nDetections>5 AND soa.primaryDetection>O AND o.gQfPerfect>0.85 and o.rQfPerfect>0.85 and o.rQfPerfect>0.85 AND (o.rmeanpsfmag - o.rmeankronmag < 0.05)
```

## 11. Galaxy Candidates for K2 SN Search

The Kepler Extra-Galactic Survey (KEGS) is a program using the Kepler telescope to search for supernovae, active galactic nuclei, and other transients in galaxies. We have to identify galaxies in a suitable redshift range  $(z_i=0.12)$  a priori, which will be monitored by K2. Here is an example to get galaxies for Campaign 14. We only select objects with  $r_i=19.5$ , and we make a cut on (rmeanpsfmag - rmeankronmag);=0.05 in order to remove stars. We only want to use objects for which the majority of pixels were not masked, thus the cut on QFperfect;=0.95. We also obtain the petrosian radii in order to be able to select galaxies by size.

```
SELECT o.objID, ot.raStack, ot.decStack, ot.raMean, ot.decMean, ot.ng,
o.gMeanPSFMag,o.gMeanPSFMagErr,o.gMeanKronMag,o.gMeanKronMagErr, ot.nr,
o.rMeanPSFMag,o.rMeanPSFMagErr,o.rMeanKronMag,o.rMeanKronMagErr, ot.ni,
o.iMeanPSFMag,o.iMeanPSFMagErr,o.iMeanKronMag,o.iMeanKronMagErr, ot.nz,
o.zMeanPSFMag,o.zMeanPSFMagErr,o.zMeanKronMag,o.zMeanKronMagErr, ot.ny,
o.yMeanPSFMag,o.yMeanPSFMagErr,o.yMeanKronMag,o.yMeanKronMagErr, o.gQfPerfect,
o.rQfPerfect, o.iQfPerfect, o.yQfPerfect, ot.qualityFlag, ot.objInfoFlag,
sp.gpetRadius, sp.rpetRadius, sp.ipetRadius, sp.zpetRadius, sp.ypetRadius,
sp.gpetR50,sp.rpetR50,sp.ipetR50,sp.zpetR50,sp.ypetR50, soa.primaryDetection,
soa.bestDetection INTO mydb.[C14] FROM MeanObject AS o JOIN fgetNearbyObjEq(160.68333,
6.85167, 8.5*60.0) cone ON cone.objid = o.objID JOIN ObjectThin AS ot ON ot.objID =
o.objID LEFT JOIN StackPetrosian AS sp ON sp.objID = o.objID LEFT JOIN StackObjectAttributes
AS soa ON soa.objID = o.objID WHERE ot.ni >= 3 AND ot.ng >= 3 AND ot.nr >= 3 AND
soa.primaryDetection>0 AND (o.rMeanKronMag > 0 AND o.rMeanKronMag <= 19.5 ) AND</pre>
(o.gQfPerfect >= 0.95) AND (o.rQfPerfect >= 0.95) AND (o.iQfPerfect >= 0.95) AND
(o.zQfPerfect >= 0.95) AND (o.rmeanpsfmag - o.rmeankronmag > 0.05)
```

#### 12. Find the objID of a single object

Star CSS J030521.9+013231 (Catalina Sky Survey), 584630948352256 (GAIA) is an RR Lyrae with period = 0.55547 days and coordinates RA = 46.341468915923 and DEC = 1.54199810825252 (ref. GAIA DR2, 2018yCat.1345....0G). In the following, we obtain the PSF and aperture photometry light-curves, both forced and unforced, for this star.

```
SELECT d.ID_GAIA,d.RA_GAIA as GAIARA, d.DEC_GAIA as GAIADec, d.Gmag, d.period, o.objID, o.raMean, o.decMean, o.raMeanErr, o.decMeanErr, o.qualityFlag, o.gMeanPSFMag, o.gMeanPSFMag, o.rMeanPSFMagErr, o.rMeanPSFMagNpt, o.rMeanPSFMagErr, o.rMeanPSFMagNpt, o.zMeanPSFMagErr, o.zMeanPSFMagNpt, o.zMeanPSFMagNpt, o.zMeanPSFMagErr, o.zMeanPSFMagNpt, o.rMeanKronMag, o.rMeanKronMag, o.rMeanKronMagErr, o.nDetections, o.ng, o.nr, o.ni, o.nz, o.ny, o.gFlags, o.gQfPerfect, o.rFlags, o.rQfPerfect, o.iFlags, o.iQfPerfect, o.zFlags, o.zQfPerfect, o.yFlags, o.yQfPerfect, soa.primaryDetection, soa.bestDetection INTO mydb.[RRL_584630948352256_PS1] FROM mydb.[rrl_584630948352256] d CROSS APPLY dbo.fGetNearbyObjEq(46.341468915923, 1.54199810825252, 1.0/60.0) as x JOIN MeanObjectView o on o.ObjID=x.ObjId LEFT JOIN StackObjectAttributes AS soa ON soa.objID = x.objID WHERE o.nDetections>8 AND soa.primaryDetection>0 AND o.gQfPerfect>0.85 and o.rQfPerfect>0.85 and o.zQfPerfect>0.85 AND (o.rmeanpsfmag - o.rmeankronmag < 0.05)
```

## 13. Obtain lightcurve for a given object (Detections)

The query above gives an ObjID of 109850463414820867 for that RRLyrae star. Knowing the objID it is possible to query to get the lightcurve.

```
SELECT o.ID_GAIA,o.GAIARA, o.GAIADec, o.Gmag, o.period, o.objID, o.raMean, o.decMean, d.ra, d.dec, d.raErr, d.decErr, d.detectID, d.obstime, d.exptime, d.airmass, d.psfflux, d.psffluxErr, d.psfQf, d.psfQfPerfect, d.psfLikelihood, d.psfChiSq, d.extNSigma, d.zp, d.apFlux, d.apFluxErr, d.imageID, d.filterID, d.sky, d.skyerr, d.infoflag, d.infoflag2, d.infoflag3, o.qualityFlag, o.gMeanPSFMag, o.gMeanPSFMagErr, o.gMeanPSFMagNpt, o.rMeanPSFMagErr, o.rMeanPSFMagNpt, o.iMeanPSFMagErr, o.iMeanPSFMagErr, o.zMeanPSFMagErr, o.zMeanPSFMagErr, o.zMeanPSFMagNpt, o.yMeanPSFMagNpt, o.yMeanPSFMagNpt, o.yMeanPSFMagNpt, o.rMeanKronMag, o.rMeanKronMagErr, o.nDetections, o.ng, o.nr, o.ni, o.nz,o.ny, o.gFlags, o.gQfPerfect, o.rFlags, o.rQfPerfect, o.iFlags, o.iQfPerfect, o.zFlags, o.zQfPerfect, o.yFlags, o.yQfPerfect, o.primaryDetection, o.bestDetection INTO mydb.[RRL_584630948352256_PS1] o JOIN Detection d on d.ObjID = o.ObjID
```

## 14. Obtain lightcurve for a given object (Forced photometry)

Similar to the query above, except this one provides the forced photometry for the star with ObjID = 109850463414820867.

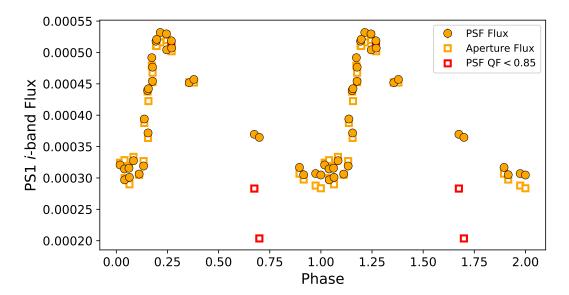


Fig. 16.— A key feature of this data release is the inclusion of the individual detections, allowing time-resolved studies, illustrated by the i-band phase curve of one of the PS1 RR Lyrae. The IPP aperture and PSF fluxes are in good agreement, and either can be used for studies of the hundreds of thousands of variable and transient sources within PS1. Users are encouraged to check the provided flags for various bits documented in this work, as these may indicate sub-optimal photometry. We highlight two such measurements in red. Uncertainties are typically smaller than the marker size.

SELECT o.ID\_GAIA,o.GAIARA, o.GAIADec, o.Gmag, o.period, o.objID, o.raMean, o.decMean, fwm.detectID, fwm.obstime, fwm.exptime, fwm.airmass, fwm.Fpsfflux, fwm.FpsffluxErr, fwm.FpsfQf, fwm.FpsfQfPerfect, fwm.FpsfChiSq, fwm.zp, fwm.FapFlux, fwm.FapFluxErr, fwm.forcedWarpID, fwm.filterID, fwm.Fsky, fwm.Fskyerr, fwm.Finfoflag, fwm.Finfoflag2, fwm.Finfoflag3, o.qualityFlag, o.gMeanPSFMag, o.gMeanPSFMagErr, o.gMeanPSFMagNpt, o.rMeanPSFMagNpt, o.iMeanPSFMagNpt, o.iMeanPSFMagErr, o.iMeanPSFMagNpt, o.zMeanPSFMagErr, o.zMeanPSFMagNpt, o.yMeanPSFMagErr, o.yMeanPSFMagNpt, o.rMeanKronMag, o.rMeanKronMagErr, o.nDetections, o.ng, o.nr, o.ni, o.nz,o.ny, o.gFlags, o.gQfPerfect, o.rFlags, o.rQfPerfect, o.iFlags, o.iQfPerfect, o.zFlags, o.zQfPerfect, o.yFlags, o.yQfPerfect, o.primaryDetection, o.bestDetection FROM mydb.[RRL\_584630948352256\_PS1] o JOIN ForcedWarpMeasurement fwm on fwm.ObjID = o.ObjID

#### ABBREVIATIONS AND ACRONYMS

**3pi or 3π:** Three Pi Survey. This survey covers 3 pi steradians of the sky (3/4 of the sky), everything with declination greater than -30 degrees.

**DR1:** Data Release 1. Covers  $3\pi$  data release for ObjectThin, MeanObject, Stack\*, ForcedMean\* and related metadata tables. Covers the static sky.

**DR2:** Data Release 2.  $3\pi$  data release of time domain tables, including Detection, ForcedWarp\*, Diff\* and related metadata.

**DVO:** Desktop Virtual Observatory - written by Eugene Mangier, IPP uses this to store and manipulate catalog data.

**GPC1:** Giga Pixel Camera 1. This is the name of the camera that is part of the Pan-STARRS1 telescope. 1.4 gigapixels, and sees 7 square degrees per exposure. It is made up of 60 orthogonal transfer arrays (OTA), each with 64 cells per OTA.

**IPP:** Image Processing Pipeline. Code developed to process and manage all aspects of Pan-STARRS1processing, starting from downloading the images to the summit to generating data in the final database schema form.

**MD:** Short for Medium Deep fields. A set of 10 fields, each of which is 7 square degrees, observed at a high cadence primarily to be used for searches for transient objects. These will be released at a later time.

**MOPS:** Short for Medium Deep fields. A set of 10 fields, each of which is 7 square degrees, observed at a high cadence primarily to be used for searches for transient objects. These will be released at a later time.

**OTA:** orthogonal transfer array, the name of the devices that make up the GPC1 camera

- **PSI:** Pan-STARRS1 Science interface. The interface used by consortium members to access earlier versions of the data.
- PSPS: Published Science Products Subsystem the Pan-STARRS1 databases
- **PV3:** Processing Version 3, refers to the processing / code iteration, this is the processing version of the first public Pan-STARRS1data release (covers DR1-DR2).

#### FLAG TABLES

There are 8 different classes of Flag tables for the database schema. This section lists the different flags as well as their descriptions. See 7.2.1 for more details on flags and bitmasks, and A for some example queries.

- ObjectInfoFlags: Describes the flag bits used for: ObjectThin.objectInfoFlag, GaiaFrameCoordinate.gaiaFlag, DiffDetObject.objectInfoFlag, ForcedMeanObject.gFlag, ForcedMeanObject.iFlag, ForcedMeanObject.iFlag, ForcedMeanObject.yFlag. See Table 13
- ObjectQualityFlags: Describes the flags used for: ObjectThin.qualityFlag, DiffDetObject.qualityFlag. See Table 14
- ObjectFilterFlags: Describes the flags used for: MeanObject.gFlags, MeanObject.rFlags, MeanObject.iFlags, MeanObject.yFlags, StackObjectThin.gInfoFlag4, StackObjectThin.rInfoFlag4, StackObjectThin.iInfoFlag4, StackObjectThin.yInfoFlag4, See Table 15
- ImageFlags: Describes the flags used for: ImageMeta.qaFlags. See Table 16
- DetectionFlags: Describes the flags used for: Detection.infoFlag, StackObjectThin.ginfoFlag, StackObjectThin.rinfoFlag, StackObjectThin.zinfoFlag, StackObjectThin.zinfoFlag, StackObjectThin.yinfoFlag, DiffDetection.DinfoFlag, ForcedWarpMeasurement.FinfoFlag. See Table 18
- **DetectionFlags2:** Describes the flags used for: Detection.infoFlag2, StackObjectThin.ginfoFlag2, StackObjectThin.rinfoFlag2, StackObjectThin.iinfoFlag2, StackObjectThin.zinfoFlag2, StackObjectThin.yinfoFlag2, DiffDetection.DinfoFlag2,ForcedWarpMeasurement.FinfoFlag2. See Table 19
- **DetectionFlags3:** Describes the flags used for: Detection.infoFlag3, StackObjectThin.ginfoFlag3, StackObjectThin.rinfoFlag3, StackObjectThin.zinfoFlag3, StackObjectThin.zinfoFlag3, StackObjectThin.zinfoFlag3, DiffDetection.DinfoFlag3,ForcedWarpMeasurement.FinfoFlag3. See Table 20
- ForcedGalaxyShapeFlags: Describes the flags used for: ForcedGalaxyShape.gGalFlags, ForcedGalaxyShape.rGalFlags, ForcedGalaxyShape.iGalFlags, ForcedGalaxyShape.yGalFlags. See Table 17

## TABLE 13 ObjectInfoFlags

Name	Hexadecimal	Value	Description
DEFAULT	0x000000000	0	Initial value; resets all bits.
FEW	0x00000001	1	Used within relphot; skip star.
POOR	0x00000002	2	Used within relphot; skip star.
ICRF_QSO	0x00000004	4	Object IDed with known ICRF quasar
			(may have ICRF position measurement)
HERN_QSO_P60	0x00000008	8	Identified as likely QSO (Hernitschek et al 2015);
			$P_{-}QSO >= 0.60$
HERN_QSO_P05	0x00000010	16	Identified as possible QSO (Hernitschek et al 2015), $P_{-}QSO >= 0.05$
HERN_RRL_P60	0x00000020	32	Identified as likely RR Lyra (Hernitschek et al 2015), P_RRLyra >= 0.60
HERN_RRL_P05	0x00000040	64	Identified as possible RR Lyra (Hernitschek et al 2015), P_RRLyra >= 0.05
$HERN_VARIABLE$	$0 \times 000000080$	128	Identified as a variable based on ChiSq? (Hernitschek et al 2015)
TRANSIENT	0x00000100	256	Identified as a non-periodic (stationary) transient
HAS_SOLSYS_DET	0x00000200	512	At least one detection identified with a known solar-system object (asteroid or other).
$MOST\_SOLSYS\_DET$	0x00000400	1024	Most detections identified with a known solar-system object (asteroid or other).
$LARGE\_PM$	0x00000800	2048	Star with large proper motion
$RAW\_AVE$	0x00001000	4096	Simple weighted average position was used (no IRLS fitting)
$FIT\_AVE$	0x00002000	8192	Average position was fitted
$FIT_PM$	$0 \times 00004000$	16384	Proper motion model was fitted
FIT_PAR	0x00008000	32768	Parallax model was fitted
$USE\_AVE$	0x00010000	65536	Average position used (not PM or PAR)
$USE\_PM$	0x00020000	131072	Proper motion used (not AVE or PAR)
$USE\_PAR$	0x00040000	262144	Parallax used (not AVE or PM)
NO_MEAN_ASTROM	0x00080000	524288	Mean astrometry could not be measured
STACK_FOR_MEAN	$0 \times 00100000$	1048576	Stack position used for mean astrometry
MEAN_FOR_STACK	$0 \times 00200000$	2097152	Mean astrometry used for <i>stack</i> position
$BAD\_PM$	0x00400000	4194304	Failure to measure proper-motion model
EXT	0x00800000	8388608	Extended in our data (eg; PS)
EXTALT	0x01000000	16777216	Extended in external data (eg; 2MASS)
GOOD	0x02000000	33554432	Good-quality measurement in our data (eg; PS)
$GOOD\_ALT$	0x04000000	67108864	Good-quality measurement in external data (eg; 2MASS)
$GOOD\_STACK$	0x08000000	134217728	Good-quality object in the $stack (> 1 \text{ good stack measurement})$
$BEST\_STACK$	0x10000000	268435456	The primary <i>stack</i> measurements are the best measurements
SUSPECT_STACK	0x20000000	536870912	Suspect object in the stack
			(no more than 1 good measurement, 2 or more suspect or good stack measurement)
BAD_STACK	0x40000000	1073741824	Poor-quality stack object (no more than 1 good or suspect measurement)

## TABLE 14 ObjectQualityFlags

Name	Hexadecimal	Value	Description
DEFAULT	0x000000000	0	Initial value; resets all bits.
$QF\_OBJ\_EXT$	0x00000001	1	Extended in our data (eg; PS).
$QF\_OBJ\_EXT\_ALT$	0x00000002	2	Extended in external data (eg; 2MASS).
QF_OBJ_GOOD	0x00000004	4	Good-quality measurement in our data (eg; PS).
QF_OBJ_GOOD_ALT	0x00000008	8	Good-quality measurement in external data (eg. 2MASS).
QF_OBJ_GOOD_STACK	0x00000010	16	Good-quality object in the $stack$ (> 1 good stack measurement).
QF_OBJ_BEST_STACK	0x00000020	32	The primary stack measurements are the best measurements.
QF_OBJ_SUSPECT_STACK	0x00000040	64	Suspect object in the stack
			(no more than 1 good measurement, 2 or more suspect or good stack measurement).
QF_OBJ_BAD_STACK	0x00000080	128	Poor-quality stack object (no more than 1 good or suspect measurement).

## SCHEMA

 $Object\ /\ Mean\ Object\ Tables$ 

TABLE 15 ObjectFilterFlags

Name	Hexadecimal	Value	Description
DEFAULT	0x000000000	0	Initial value; resets all bits.
$SECF\_STAR\_FEW$	0x00000001	1	Used within relphot: skip star.
SECF_STAR_POOR	0x00000002	2	Used within relphot: skip star.
SECF_USE_SYNTH	0x00000004	4	Synthetic photometry used in average measurement.
SECF_USE_UBERCAL	0x000000008	8	Ubercal photometry used in average measurement.
SECF_HAS_PS1	0x00000010	16	PS1 photometry used in average measurement.
SECF_HAS_PS1_STACK	0x00000020	32	PS1 stack photometry exists.
SECF_HAS_TYCHO	0x00000040	64	Tycho photometry used for synthetic magnitudes.
SECF_FIX_SYNTH	$0 \times 000000080$	128	Synthetic magnitudes repaired with zeropoint map.
$SECF_RANK_0$	0x00000100	256	Average magnitude calculated in 0th pass.
SECF_RANK_1	0x00000200	512	Average magnitude calculated in 1st pass.
SECF_RANK_2	0x00000400	1024	Average magnitude calculated in 2nd pass.
SECF_RANK_3	0x00000800	2048	Average magnitude calculated in 3rd pass.
SECF_RANK_4	0x00001000	4096	Average magnitude calculated in 4th pass.
SECF_STACK_PRIMARY	0x00004000	16384	PS1 stack photometry comes from primary skycell.
SECF_STACK_BESTDET	0x00008000	32768	PS1 stack best measurement is a detection (not forced).
SECF_STACK_PRIMDET	0x00010000	65536	PS1 stack primary measurement is a detection (not forced).
SECF_HAS_SDSS	0x00100000	1048576	This photcode has SDSS photometry.
SECF_HAS_HSC	0x00200000	2097152	This photcode has HSC photometry.
SECF_HAS_CFH	0x00400000	4194304	This photcode has CFH photometry (mostly megacam).
SECF_HAS_DES	0x00800000	8388608	This photcode has DES photometry.
SECF_OBJ_EXT	0x01000000	16777216	Extended in this band.

TABLE 16 IMAGEFLAGS

Name	Hexadecimal	Value	Description
NEW	0x000000000	0	No relphot / relastro attempted.
PHOTOM_NOCAL	0x00000001	1	Used within relphot to mean 'don't apply fit'.
PHOTOM_POOR	0x00000002	2	Relphot says image is bad (dMcal > limit).
PHOTOM_SKIP	0x00000004	4	External information image has bad photometry.
PHOTOM_FEW	0x00000008	8	Currently too few measurements for good value for photometry.
ASTROM_NOCAL	0x00000010	16	User-set value used within relastro: ignore.
ASTROM_POOR	0x00000020	32	Relastro says image is bad $(dR,dD > limit)$ .
$ASTROM\_FAIL$	0x00000040	64	Relastro fit diverged, fit not applied.
$ASTROM\_SKIP$	$0 \times 000000080$	128	External information image has bad astrometry.
$ASTROM\_FEW$	0x00000100	256	Currently too few measurements for good value for astrometry.
PHOTOM_UBERCAL	0x00000200	512	Externally-supplied photometry zero point from ubercal analysis.
$ASTROM\_GMM$	$0 \times 000000400$	1024	Image was fitted to positions corrected by the galaxy motion model.

TABLE 17 FORCEDGALAXYSHAPEFLAGS

Name	Hexadecimal	Value	Description
NO_ERROR	0x000000000	0	No error condition raised.
$FAIL\_FIT$	0x00000001	1	Fit failed to converge or was degenerate
$TOO\_FEW$	0x00000002	2	Not enough points to fit the model
OUT_OF_RANGE	0x00000004	4	Fit minimum too far outside data range
BAD_ERROR	0x00000008	8	Invalid size error (nan or inf)

TABLE 18 DETECTIONFLAGS

Name	Hexadecimal	Value	Description
DEFAULT	0x000000000	0	Initial value; resets all bits.
PSFMODEL	$0 \times 000000001$	1	Source fitted with a psf model (linear or non-linear).
EXTMODEL	$0 \times 000000002$	2	Source fitted with an extended-source model.
FITTED	0x00000004	4	Source fitted with non-linear model (PSF or EXT; good or bad).
FAIL	0x00000008	8	Fit (non-linear) failed (non-converge; off-edge; run to zero).
POOR	0x00000010	16	Fit succeeds; but low-S/N; high-Chisq; or large (for PSF – drop?).
PAIR	0x00000020	32	Source fitted with a double PSF.
PSFSTAR	0x00000040	64	Source used to define PSF model.
SATSTAR	$0 \times 000000080$	128	Source model peak is above saturation.
BLEND	0x00000100	256	Source is a blend with other sources.
EXTERNAL	0x00000200	512	Source based on supplied input position.
BADPSF	0x00000400	1024	Failed to get good estimate of object's PSF.
DEFECT	0x00000800	2048	Source is thought to be a defect.
SATURATED	0x00001000	4096	Source is thought to be saturated pixels (bleed trail).
CR_LIMIT	0x00002000	8192	Source has crNsigma above limit.
EXT_LIMIT	0x00004000	16384	Source has extNsigma above limit.
MOMENTS_FAILURE	0x00008000	32768	Could not measure the moments.
SKY_FAILURE	0x00010000	65536	Could not measure the local sky.
SKYVAR_FAILURE	$0 \times 00020000$	131072	Could not measure the local sky variance.
BELOW_MOMENTS_SN	0x00040000	262144	Moments not measured due to low S/N.
UNDEF_1	0x00080000	524288	Unused bit value.
BIG_RADIUS	0x00100000	1048576	Poor moments for small radius; try large radius.
$AP\_MAGS$	$0 \times 00200000$	2097152	Source has an aperture magnitude.
BLEND_FIT	0x00400000	4194304	Source was fitted as a blend.
EXTENDED_FIT	0x00800000	8388608	Full extended fit was used.
EXTENDED_STATS	0x01000000	16777216	Extended aperture stats calculated.
LINEAR_FIT	0x02000000	33554432	Source fitted with the linear fit.
NONLINEAR_FIT	0x04000000	67108864	Source fitted with the non-linear fit.
$RADIAL\_FLUX$	0x08000000	134217728	Radial flux measurements calculated.
$SIZE\_SKIPPED$	0x10000000	268435456	Size could not be determined.
PEAK_ON_SPIKE	0x20000000	536870912	Peak lands on diffraction spike.
PEAK_ON_GHOST	0x40000000	1073741824	Peak lands on ghost or glint.
PEAK_OFF_CHIP	0x80000000	2147483648	Peak lands off edge of chip.

TABLE 19 DETECTIONFLAGS2

	Hexadecimal	Value	Description
	0x00000000	0	Initial value; resets all bits.
	0x00000001	1	Difference source matched to a single positive detection.
DIFF_WITH_DOUBLE 0	0x000000002	2	Difference source matched to positive detections in both images.
MATCHED 0	0x00000004	4	Source generated based on another image (forced photometry
			at source location).
ON_SPIKE 0	0x00000008	8	More than 25% of (PSF-weighted) pixels land on diffraction spike.
ON_STARCORE 0	0x00000010	16	More than 25% of (PSF-weighted) pixels land on starcore.
ON_BURNTOOL 0	0x00000020	32	More than 25% of (PSF-weighted) pixels land on burntool.
ON_CONVPOOR 0	0x00000040	64	More than 25% of (PSF-weighted) pixels land on convision.
PASS1_SRC 0	0800000080	128	Source detected in first pass analysis
HAS_BRIGHTER_NEIGHBOR 0	0x00000100	256	Peak is not the brightest in its footprint
BRIGHT_NEIGHBOR_1 0	0x00000200	512	Flux_negative / $(r^2 \text{ flux_positive}) > 1$ .
BRIGHT_NEIGHBOR_10 0	0x00000400	1024	Flux_negative / $(r^2 \text{ flux_positive}) > 10$ .
DIFF_SELF_MATCH 0	0x00000800	2048	Positive detection match is probably this source.
SATSTAR_PROFILE 0	0x00001000	4096	Saturated source is modeled with a radial profile.
ECONTOUR_FEW_PTS 0	0x00002000	8192	Too few points to measure the elliptical contour.
RADBIN_NAN_CENTER 0	0x00004000	16384	Radial bins failed with too many NaN center bin.
PETRO_NAN_CENTER 0	0x00008000	32768	Petrosian (1976) radial bins failed with too many NaN center bin.
PETRO_NO_PROFILE 0	0x00010000	65536	Petrosian (1976) not built becaues radial bins missing.
PETRO_INSIG_RATIO 0	0x00020000	131072	Insignificant measurement of Petrosian (1976) ratio.
PETRO_RATIO_ZEROBIN 0	0x00040000	262144	Petrosian (1976) ratio in the 0th bin (likely bad).
EXT_FITS_RUN 0	0x00080000	524288	Attempted to run extended fits on this source.
EXT_FITS_FAIL 0	0x00100000	1048576	At least one of the model fits failed.
	0x00200000	2097152	One of the model fits was retried with new window.
EXT_FITS_NONE 0	0x00400000	4194304	All of the model fits failed.

## TABLE 20 DETECTIONFLAGS3

DEFAULT	Name	Hexadecimal	Value	Description	
PÓÖR_PHOTOM 0x00000002 2 Detection is photometry outlier.  SKIP_PHOTOM 0x00000004 4 Detection was ignored for photometry measurement.  AREA 0x00000010 16 Detection is astrometry outlier.  SKIP_ASTROM 0x000000003 32 Detection was ignored for photometry measurement.  USED_OBJ 0x00000000 32 Detection was ignored for astrometry measurement.  USED_OBJ 0x00000000 128 Detection was used during update objects  BLEND_MEAS 0x00000100 256 Detection is within radius of multiple objects.  BLEND_OBJ 0x00000000 512 Multiple detection was used during update chips to measure astrometry with IRLS fit.  Detection is within radius of object.  Multiple detection was unawapp hotometry.  UNMASKED_ASTRO 0x00000000 2048 Detection was unmasked in update chips to determine astrometry parameter errors.  Detection is within radius of multiple objects.  Multiple detection was unmasked in update chips to determine astrometry parameter errors.  Detection is within radius of multiple objects.  Magnitude is synthetic.  Externally-supplied zero point from ubercal analysis.  STACK_PRIMARY 0x00010000 1262144  IMAGE_EPOCH 0x00000000 262144  IMAGE_EPOCH 0x00000000 262145  IMAGE_EPOCH 0x00000000 262145  IMAGE_EPOCH 0x0000000 262146  IMAGE_EPOCH 0x0000000 1048576  PHOTOM_APER 0x0000000 267152  PHOTOM_APER 0x0000000 3354432  MASKED_APER 0x02000000 3354432  MASKED_APER 0x02000000 3354432  MASKED_APER 0x02000000 3354432  MASKED_APER 0x02000000 67108864  OBJECT_HAS_2MASS  OBJECT_HAS_AGAIA 0x20000000 536873612  This measurement is masked based on IRLS weights for the mean Aperture magnitude.  This measurement is masked based on IRLS weights for the mean Aperture magnitude.  This measurement is masked based on IRLS weights for the mean Aperture magnitude.  This measurement is masked based on IRLS weights for the mean Aperture magnitude.  This measurement is masked based on IRLS weights for the mean Aperture magnitude.  This measurement is masked based on IRLS weights for the mean Aperture magnitude.  This measurement comes from an object with 2MASS data.	DEFAULT	0x000000000	0	Initial value; resets all bits.	
POOR_PHOTOM 0x00000002 2 Detection is photometry outlier.  SKIP_PHOTOM 0x000000004 4 Detection was ignored for photometry measurement.  AREA 0x00000010 16 Detection was ignored for photometry measurement.  SKIP_ASTROM 0x00000010 16 Detection is astrometry outlier.  SKIP_ASTROM 0x000000000 32 Detection was ignored for astrometry measurement.  USED_OBJ 0x00000000 128 Detection was used during update objects  BLEND_MEAS 0x00000100 256 Detection was used during update chips to measure astrometry with IRLS fit.  Detection is within radius of multiple objects.  Multiple detections within radius of object.  WARP_USED 0x000000000 1024 Measurement used for mean warp photometry.  UNMASKED_ASTRO 0x00000000 2048 Detection was unmasked in update chips to determine astrometry parameter errors.  Detection is within radius of multiple objects across catalogs.  ARTIFACT 0x00002000 8192 Detection is within radius of multiple objects across catalogs.  ARTIFACT 0x00002000 8192 Detection is within radius of multiple objects across catalogs.  ARTIFACT 0x00002000 8192 Detection is within radius of multiple objects across catalogs.  ARTIFACT 0x00002000 8192 Detection is within radius of multiple objects across catalogs.  ARTIFACT 0x00002000 8192 Detection is within radius of multiple objects across catalogs.  ARTIFACT 0x00002000 8192 Detection is within radius of multiple objects across catalogs.  ARTIFACT 0x00002000 8192 Detection is within radius of multiple objects across catalogs.  ARTIFACT 0x00000000 8192 Detection is within radius of multiple objects across catalogs.  Againtude is synthetic.  Externally-supplied zero point from ubercal analysis.  This measurement is in the primary skycell.  This measurement is in the primary skycell.  This measurement is in ICRF reference position.  This measurement is used for the mean PSF magnitude.  This measurement is used for the mean PSF magnitude.  This measurement is used for the mean AFCN (1980) magnitude.  This measurement is masked based on IRLS weights for the mean PSF magnitude.  Th	NOCAL	0x00000001	1	Detection ignored for this analysis (photcode; time range) – internal only.	
AREA 0x000000018 8 Detection near image edge. POOR_ASTROM 0x00000010 16 Detection is astrometry outlier.  SKIP_ASTROM 0x00000040 64 Detection was used during update objects USED_OBJ 0x00000080 128 Detection was used during update chips to measure astrometry with IRLS fit. BLEND_MEAS 0x00000100 256 Detection is within radius of multiple objects. BLEND_OBJ 0x00000200 512 Multiple detections within radius of object. WARP_USED 0x00000400 1024 Measurement used to find mean warp photometry. UNMASKED_ASTRO 0x00000000 2048 Detection is within radius of multiple objects across catalogs. ARTIFACT 0x0002000 4096 Detection was umasked in update chips to determine astrometry parameter errors. BLEND_MEAS_X 0x00001000 4096 Detection was umasked in update chips to determine astrometry parameter errors. Detection is within radius of multiple objects across catalogs. ARTIFACT 0x0002000 8192 Detection is within radius of multiple objects across catalogs.  SYNTH_MAG 0x00004000 16384 Magnitude is synthetic. PHOTOM_UBERCAL 5x1ACK_PHOMEN 0x00010000 1524288 Externally-supplied zero point from ubercal analysis.  This measurement is update chips to measure astrometry with IRLS fit. Detection was used during update chips to measure astrometry with IRLS fit. Detection was used during update chips to measure astrometry with IRLS fit. Detection was used during update chips to measure astrometry with IRLS fit. Detection was used during update chips to measure astrometry with IRLS fit. Detection was used during update chips to measure astrometry with IRLS fit. Detection was used during update chips to measure astrometry with IRLS fit. Detection was used during update chips to measure astrometry with IRLS fit. Detection is within radius of multiple objects.  Magnitude objects.  Magnitude is synthetic. This measurement is properties across catalogs. This measurement is used for the mean PSF magnitude. This measurement is used for the mean Aperture magnitude. This measurement is masked based on IRLS weights for the mean aperture magnitude. This	POOR_PHOTOM	0x00000002	2		
POOR_ASTROM SKIP_ASTROM USED_OBJ USED_O	SKIP_PHOTOM	0x00000004	4	Detection was ignored for photometry measurement.	
SKIP_ASTROM USED_OBJ USED_OBJ USED_CHIP 0x00000080 128 BLEND_MEAS BLEND_MEAS BLEND_MEAS BLEND_OBJ WARP_USED 0x00000080 1024 WARP_USED UNMASKED_ASTRO BLEND_MEAS.X ARTIFACT 0x00002000 S12 WARP_LORD WARP_USED UNMASKED_ASTRO BLEND_MEAS.X ARTIFACT 0x00002000 S12 Detection is within radius of multiple objects. Waltiple detections within radius of object. Waltiple detections within radius of multiple objects. Waltiple detections within radius of multiple objects. Detection is within radius of multiple objects. Waltiple detections within radius of multiple objects. Detection was unmasked in update chips to determine astrometry parameter errors. Detection is within radius of multiple objects across catalogs. Detection is within radius of multiple objects. Waltiple detections within radius of multiple objec		0x000000008	8		
USED_OBJ USED_OBJ USED_CHIP 0x00000080 128 Detection was used during update objects Detection was used during update chips to measure astrometry with IRLS fit.  Detection was used during update chips to measure astrometry with IRLS fit.  Detection was used during update chips to measure astrometry with IRLS fit.  Detection was used during update chips to measure astrometry with IRLS fit.  Detection was used during update chips to measure astrometry with IRLS fit.  Detection was used during update chips to measure astrometry with IRLS fit.  Detection was used during update chips to measure astrometry with IRLS fit.  Detection was used during update chips to measure astrometry with IRLS fit.  Detection was used during update chips to measure astrometry with IRLS fit.  Detection was used during update chips to measure astrometry with IRLS fit.  Detection was used during update chips to measure astrometry with IRLS fit.  Detection was used during update chips to measure astrometry with IRLS fit.  Detection was used during update chips to measure astrometry with IRLS fit.  Detection was used during update chips to measure astrometry with IRLS fit.  Detection was used during update chips to measure astrometry with IRLS fit.  Detection is within radius of object.  Measurement used to find mean warp photometry.  Detection is within radius of multiple objects.  Magnitude is synthetic.  Phorom.UBERCAL Detection was used during update chips to feature as the primary with IRLS fit.  Detection was used during update chips to place to the impact of object.  Measurement used to find mean warp photometry.  Detection is within radius of multiple objects.  Magnitude is synthetic.  Phorom.UBERCAL Detection is within radius of multiple objects.  Magnitude is synthetic.  Phorom.UBERCAL Detection is within radius of multiple objects.  Magnitude is synthetic.  This measurement is in the primary skycell.  This measurement is in the primary skycell.  This measurement is in the primary skycell.  This measurement is in the primary skycel	POOR_ASTROM	0x00000010	16	Detection is astrometry outlier.	
USED_CHIP         0x00000080         128         Detection was used during update chips to measure astrometry with IRLS fit.           BLEND_MEAS         0x00000100         256         Detection is within radius of multiple objects.           WARP_USED         0x00000400         1024         Measurement used to find mean warp photometry.           UNMASKED_ASTRO         0x000000000         4096         Detection is within radius of multiple objects.           BLEND_MEAS_X         0x00001000         4096         Detection is within radius of multiple objects.           ARTIFACT         0x00002000         8192         Detection is within radius of multiple objects.           SYNTH_MAG         0x00004000         16384         Magnitude is synthetic.           STACK_PRIMARY         0x00004000         16384         Magnitude is synthetic.           STACK_PHOT_SRC         0x00020000         32768         Steternally-supplied zero point from ubercal analysis.           STACK_PRIMARY         0x0000000         262144         This measurement is in the primary skycell.           STACK_PRIMARY         0x0000000         262144         This measurement is in the primary skycell.           STACK_PRIMARY         0x0000000         262144         This measurement is in the primary skycell.           STACK_PRIMARY         0x0000000         262144         T	$SKIP\_ASTROM$	0x00000020	32	Detection was ignored for astrometry measurement.	
BLEND_MEAS BLEND_OBJ WARP_USED UNMASKED_ASTRO BLEND_MEAS_X ARTIFACT SYNTH_MAG PHOTOM_UBERCAL STACK_PRIOTSRO IMAGE_EPOCH UNMOSKED_ASO No0000000 1048576 PHOTOM_APSF PHOTOM_APSF PHOTOM_APSF PHOTOM_APSF PHOTOM_KRON MASKED_APSF MASKED_APSF MASKED_APSF MASKED_APSF MASKED_APSF MASKED_APSF MASKED_APSF MASKED_APER MASKED_APER MASKED_APER MASKED_APER MASKED_APSR BLEND_MEAS_X Ox00000000 0x00000000 1024 Measurement used to find mean warp photometry. Detection is within radius of multiple objects across catalogs. Detection is within radius of multiple objects across catalogs. Detection is within radius of multiple objects across catalogs. Detection is within radius of multiple objects across catalogs. Detection is within radius of multiple objects across catalogs. Detection is within radius of multiple objects across catalogs. Detection is within radius of multiple objects. Massurement used to find mean warp photometry. Detection is within radius of multiple objects. Massurement used to find mean warp photometry. Detection is within radius of multiple objects. Massurement is thought to be non-astronomical. Magnitude is synthetic.  Externally-supplied zero point from ubercal analysis. This measurement is in the primary skycell. This measurement is numbered to the image epoch (not tied to the reference catalog epoch). This measurement is used for the mean PSF magnitude. This measurement is used for the mean Agron (1980) magnitude. This measurement is masked based on IRLS weights for the mean Agron (1980) magnitude. This measurement is masked based on IRLS weights for the mean Kron (1980) magnitude. This measurement is masked based on IRLS weights for the mean Kron (1980) magnitude. This measurement comes from an object with Gaia data.	USED_OBJ	0x00000040	64	Detection was used during update objects	
BLEND_OBJ 0x00000200 512 Multiple detections within radius of object.  WARP_USED 0x00000400 1024 Measurement used to find mean warp photometry.  UNMASKED_ASTRO 0x00001000 4096 Detection is within radius of multiple objects across catalogs.  ARTIFACT 0x00002000 8192 Detection is within radius of multiple objects across catalogs.  ARTIFACT 0x00004000 16384 Magnitude is synthetic.  PHOTOM_UBERCAL 0x00008000 32768 Externally-supplied zero point from ubercal analysis.  STACK_PRIMARY 0x00010000 65536 This stack measurement is in the primary skycell.  STACK_PHOT_SRC 0x00020000 131072 This measurement is an ICRF reference position.  IMAGE_EPOCH 0x00080000 524288 This measurement is used for the mean PSF magnitude.  PHOTOM_APER 0x00020000 1048576 This measurement is used for the mean aperture magnitude.  MASKED_APER 0x00200000 16777216 This measurement is masked based on IRLS weights for the mean PSF magnitude.  This measurement is masked based on IRLS weights for the mean Afron (1980) magnitude.  This measurement is masked based on IRLS weights for the mean Kron (1980) magnitude.  This measurement is masked based on IRLS weights for the mean Afron (1980) magnitude.  This measurement is masked based on IRLS weights for the mean Kron (1980) magnitude.  This measurement is masked based on IRLS weights for the mean Kron (1980) magnitude.  This measurement is masked based on IRLS weights for the mean Kron (1980) magnitude.  This measurement comes from an object with 2MASS data.	USED_CHIP	$0 \times 000000080$	128	Detection was used during update chips to measure astrometry with IRLS fit.	
WARP_USED UNMASKED_ASTRO UNMASKED_AS	BLEND_MEAS	0x00000100	256		
UNMASKED_ASTRO BLEND_MEAS_X ARTIFACT SYNTH_MAG PHOTOM_UBERCAL STACK_PRIMARY CICRF_QSO IMAGE_EPOCH PHOTOM_AFER PHOTOM_APER ARSKED_APER MASKED_APER MASKED_APER MASKED_APER MASKED_APER OBJECT_HAS_GAIA  Detection was unmasked in update chips to determine astrometry parameter errors. Detection is within radius of multiple objects across catalogs. Detection is within radius of multiple objects acros actalogs. Detection is though to be non-astronomical. Stagnish and it is the primary skycell. This measurement is in the primary skycell. This measurement is usplied the sack photometry. This measurement is usplied to the reference position. This measurement is used for the mean PSF magnitude. This m	BLEND_OBJ	0x00000200	512	Multiple detections within radius of object.	
BLEND_MEAS_X ARTIFACT 0x00001000 4096 Detection is within radius of multiple objects across catalogs.  Detection is within radius of multiple objects across catalogs.  Detection is within radius of multiple objects across catalogs.  Detection is within radius of multiple objects across catalogs.  Detection is within radius of multiple objects across catalogs.  Detection is within radius of multiple objects across catalogs.  Detection is within radius of multiple objects across catalogs.  Detection is within radius of multiple objects across catalogs.  Detection is within radius of multiple objects across catalogs.  Detection is within radius of multiple objects across catalogs.  Detection is within radius of multiple objects across catalogs.  Detection is within radius of multiple objects across catalogs.  Detection is within radius of multiple objects across catalogs.  Detection is within radius of multiple objects across catalogs.  Detection is within radius of multiple objects across catalogs.  Detection is within radius of multiple objects across catalogs.  Detection is within radius of multiple objects across catalogs.  Detection is within radius of multiple objects across catalogs.  Detection is within radius of multiple objects across catalogs.  Detection is within radius of multiple objects across catalogs.  Detection is within radius of multiple objects across catalogs.  Detection is vith across catalogs.  Detection is houted in the primary skycell.  Externally-supplied zero point from ubercal analysis.  Externally-supplied zero point from ubercal analysis.  Externally-supplied zero point from ubercal analysis.  This measurement is in the primary skycell.  This measurement is uncleased, photometry.  This measurement is used for the mean PSF magnitude.  This measurement is used for the mean Kron (1980) magnitude.  This measurement is masked based on IRLS weights for the mean Aperture magnitude.  This measurement is masked based on IRLS weights for the mean Kron (1980) magnitude.  This measurement is mas		0x00000400	1024	Measurement used to find mean warp photometry.	
ARTIFACT 0x00002000 8192 Detection is thought to be non-astronomical.  SYNTH_MAG 0x00004000 16384 Magnitude is synthetic.  PHOTOM_UBERCAL 0x00008000 32768 Externally-supplied zero point from ubercal analysis.  STACK_PRIMARY 0x00010000 65536 This stack measurement is in the primary skycell.  STACK_PHOT_SRC 0x00020000 131072 This measurement is an ICRF reference position.  IMAGE_EPOCH 0x00080000 524288 This measurement is registered to the image epoch (not tied to the reference catalog epoch).  PHOTOM_PSF 0x00100000 1048576 This measurement is used for the mean PSF magnitude.  PHOTOM_APER 0x00200000 2097152 This measurement is used for the mean aperture magnitude.  PHOTOM_KRON 0x00400000 4194304 This measurement is used for the mean Kron (1980) magnitude.  MASKED_APER 0x00000000 33554432 This measurement is masked based on IRLS weights for the mean aperture magnitude.  MASKED_KRON 0x04000000 16777216 This measurement is masked based on IRLS weights for the mean aperture magnitude.  This measurement is masked based on IRLS weights for the mean Aperture magnitude.  This measurement is masked based on IRLS weights for the mean Aperture magnitude.  This measurement is masked based on IRLS weights for the mean Aperture magnitude.  This measurement is masked based on IRLS weights for the mean Aperture magnitude.  This measurement is masked based on IRLS weights for the mean Aperture magnitude.  This measurement is masked based on IRLS weights for the mean Kron (1980) magnitude.  This measurement comes from an object with 2MASS data.  OBJECT_HAS_GAIA 0x20000000 536870912 This measurement comes from an object with Gaia data.	UNMASKED_ASTRO	0x00000800	2048	Detection was unmasked in update chips to determine astrometry parameter errors.	
SYNTH_MAG PHOTOM_UBERCAL STACK_PRIMARY STACK_PRIMARY STACK_PHOT_SRC ICRF_QSO IMAGE_EPOCH PHOTOM_APER PHOTOM_KRON MASKED_BF MASKED_APER MASKED_APER MASKED_APER MASKED_APER MASKED_APER MASKED_APER MASKED_KRON OBJECT_HAS_2MASS OBJECT_HAS_GAIA  Ox20000000  16384 Magnitude is synthetic. Externally-supplied zero point from ubercal analysis. This measurement is in the primary skycell. This measurement is usuffer reference position. This measurement is registered to the image epoch (not tied to the reference catalog epoch). This measurement is used for the mean PSF magnitude. This measurement is used for the mean aperture magnitude. This measurement is used for the mean Kron (1980) magnitude. This measurement is masked based on IRLS weights for the mean Aron (1980) magnitude. This measurement is masked based on IRLS weights for the mean Kron (1980) magnitude. This measurement is masked based on IRLS weights for the mean Kron (1980) magnitude. This measurement is masked based on IRLS weights for the mean Kron (1980) magnitude. This measurement comes from an object with Gaia data.  This measurement comes from an object with Gaia data.		0x00001000			
PHOTOM_UBERCAL STACK_PRIMARY 0x00010000 65536 This stack measurement is in the primary skycell.  STACK_PHOT_SRC 0x00020000 131072 This measurement is an ICRF reference position.  IMAGE_POCH 0x00080000 524288 This measurement is an ICRF reference position.  PHOTOM_PSF 0x00100000 1048576 This measurement is used for the mean PSF magnitude.  PHOTOM_APER 0x00200000 2097152 This measurement is used for the mean aperture magnitude.  PHOTOM_KRON 0x00400000 4194304 This measurement is used for the mean Kron (1980) magnitude.  MASKED_APER 0x00200000 33554432 This measurement is masked based on IRLS weights for the mean aperture magnitude.  MASKED_ARER 0x0000000 33554432 This measurement is masked based on IRLS weights for the mean aperture magnitude.  OBJECT_HAS_2MASS 0x10000000 536870912 This measurement comes from an object with Gaia data.	ARTIFACT	$0 \times 00002000$	8192	Detection is thought to be non-astronomical.	
STACK_PRIMARY STACK_PHOT_SRC Ox00020000 STACK_PHOT_SRC Ox00020000 STACK_PHOT_SRC Ox00020000 STACK_PHOT_SRC Ox00040000 STACK_PHOT_SRC Ox000400000 STACK_PHOT_SRC This measurement is in the primary skycell. This measurement is natice. Fereference position. This measurement is registered to the image epoch (not tied to the reference catalog epoch). This measurement is used for the mean PSF magnitude. This measurement is used for the mean Aron (1980) magnitude. This measurement is masked based on IRLS weights for the mean Aperture magnitude. This measurement is masked based on IRLS weights for the mean Aperture magnitude. This measurement is masked based on IRLS weights for the mean Aperture magnitude. This measurement is masked based on IRLS weights for the mean Aperture magnitude. This measurement is masked based on IRLS weights for the mean Aperture magnitude. This measurement is masked based on IRLS weights for the mean Aperture magnitude. This measurement is masked based on IRLS weights for the mean Aperture magnitude. This measurement is masked based on IRLS weights for the mean Aperture magnitud	$SYNTH\_MAG$	0x00004000	16384		
STACK_PHOT_SRC ICRF_QSO		0x00008000			
ICRF_QSO		0x00010000	65536		
IMAGE_EPOCH  0x00080000  524288  This measurement is registered to the image epoch (not tied to the reference catalog epoch).  PHOTOM_PSF  0x00100000  1048576  PHOTOM_APER  0x00200000  2097152  This measurement is used for the mean PSF magnitude.  PHOTOM_KRON  0x00400000  4194304  This measurement is used for the mean aperture magnitude.  This measurement is used for the mean Kron (1980) magnitude.  This measurement is masked based on IRLS weights for the mean PSF magnitude.  This measurement is masked based on IRLS weights for the mean aperture magnitude.  This measurement is masked based on IRLS weights for the mean Aperture magnitude.  This measurement is masked based on IRLS weights for the mean Aperture magnitude.  This measurement is masked based on IRLS weights for the mean Aperture magnitude.  This measurement comes from an object with 2MASS data.  OBJECT_HAS_GAIA  0x20000000  536870912  This measurement comes from an object with Gaia data.		0x00020000		This measurement supplied the <i>stack</i> photometry.	
PHOTOM_PSF 0x00100000 1048576 This measurement is used for the mean PSF magnitude. PHOTOM_APER 0x00200000 2097152 This measurement is used for the mean aperture magnitude. PHOTOM_KRON 0x00400000 4194304 This measurement is used for the mean Kron (1980) magnitude.  MASKED_PSF 0x01000000 16777216 This measurement is used for the mean Kron (1980) magnitude.  MASKED_APER 0x02000000 33554432 This measurement is masked based on IRLS weights for the mean PSF magnitude.  MASKED_KRON 0x04000000 67108864 This measurement is masked based on IRLS weights for the mean aperture magnitude.  This measurement is masked based on IRLS weights for the mean Agriculture magnitude.  This measurement is masked based on IRLS weights for the mean Agriculture magnitude.  This measurement is masked based on IRLS weights for the mean Agriculture magnitude.  This measurement is masked based on IRLS weights for the mean Agriculture magnitude.  This measurement is masked based on IRLS weights for the mean Agriculture magnitude.  This measurement comes from an object with 2MASS data.  This measurement comes from an object with Gaia data.		0x00040000		This measurement is an ICRF reference position.	
PHOTOM_PSF 0x00100000 1048576 This measurement is used for the mean PSF magnitude.  PHOTOM_KRON 0x00400000 4194304 This measurement is used for the mean aperture magnitude.  PHOTOM_KRON 0x00400000 4194304 This measurement is used for the mean Kron (1980) magnitude.  MASKED_PSF 0x01000000 16777216 This measurement is used for the mean PSF magnitude.  This measurement is masked based on IRLS weights for the mean PSF magnitude.  This measurement is masked based on IRLS weights for the mean aperture magnitude.  This measurement is masked based on IRLS weights for the mean Aperture magnitude.  This measurement is masked based on IRLS weights for the mean Aperture magnitude.  This measurement is masked based on IRLS weights for the mean Aperture magnitude.  This measurement is masked based on IRLS weights for the mean Aperture magnitude.  This measurement is masked based on IRLS weights for the mean Aperture magnitude.  This measurement is masked based on IRLS weights for the mean Aperture magnitude.  This measurement is masked based on IRLS weights for the mean Aperture magnitude.  This measurement is masked based on IRLS weights for the mean Aperture magnitude.  This measurement is masked based on IRLS weights for the mean Aperture magnitude.  This measurement is masked based on IRLS weights for the mean Aperture magnitude.  This measurement is masked based on IRLS weights for the mean Aperture magnitude.  This measurement is masked based on IRLS weights for the mean Aperture magnitude.  This measurement is masked based on IRLS weights for the mean Aperture magnitude.  This measurement is masked based on IRLS weights for the mean Aperture magnitude.  This measurement is masked based on IRLS weights for the mean Aperture magnitude.  This measurement is masked based on IRLS weights for the mean Aperture magnitude.  This measurement is masked based on IRLS weights for the mean Aperture magnitude.  This measurement is masked based on IRLS weights for the mean Aperture magnitude.  This measurement is masked based on IRL	IMAGE_EPOCH	0x00080000	524288		
PHOTOM_APER PHOTOM_KRON 0x00200000 2097152 This measurement is used for the mean aperture magnitude.  MASKED_PSF 0x010000000 1677216 This measurement is used for the mean Kron (1980) magnitude.  MASKED_APER 0x02000000 33554432 This measurement is masked based on IRLS weights for the mean PSF magnitude.  MASKED_KRON 0x04000000 67108864 This measurement is masked based on IRLS weights for the mean aperture magnitude.  This measurement is masked based on IRLS weights for the mean aperture magnitude.  This measurement is masked based on IRLS weights for the mean Aperture magnitude.  This measurement is masked based on IRLS weights for the mean Aperture magnitude.  This measurement is masked based on IRLS weights for the mean Aperture magnitude.  This measurement is masked based on IRLS weights for the mean Aperture magnitude.  This measurement is masked based on IRLS weights for the mean Aperture magnitude.  This measurement is masked based on IRLS weights for the mean Aperture magnitude.  This measurement is masked based on IRLS weights for the mean Aperture magnitude.  This measurement is masked based on IRLS weights for the mean Aperture magnitude.  This measurement is masked based on IRLS weights for the mean Aperture magnitude.  This measurement is masked based on IRLS weights for the mean Aperture magnitude.  This measurement is masked based on IRLS weights for the mean Aperture magnitude.  This measurement is masked based on IRLS weights for the mean Aperture magnitude.  This measurement is masked based on IRLS weights for the mean Aperture magnitude.  This measurement is masked based on IRLS weights for the mean Aperture magnitude.  This measurement is masked based on IRLS weights for the mean Aperture magnitude.  This measurement is masked based on IRLS weights for the mean Aperture magnitude.  This measurement is masked based on IRLS weights for the mean Aperture magnitude.  This measurement is masked based on IRLS weights for the mean Aperture magnitude.  This measurement is masked based on IRLS weights				(not tied to the reference catalog epoch).	
PHOTOM_KRON 0x00400000 4194304 This measurement is used for the mean Kron (1980) magnitude.  MASKED_APER 0x020000000 33554432 This measurement is masked based on IRLS weights for the mean PSF magnitude.  MASKED_KRON 0x04000000 67108864 This measurement is masked based on IRLS weights for the mean aperture magnitude.  This measurement is masked based on IRLS weights for the mean Aron (1980) magnitude.  This measurement is masked based on IRLS weights for the mean Kron (1980) magnitude.  This measurement is masked based on IRLS weights for the mean Kron (1980) magnitude.  This measurement is masked based on IRLS weights for the mean Kron (1980) magnitude.  This measurement is masked based on IRLS weights for the mean Aron (1980) magnitude.  This measurement is masked based on IRLS weights for the mean Aron (1980) magnitude.  This measurement is masked based on IRLS weights for the mean Aron (1980) magnitude.  This measurement is masked based on IRLS weights for the mean Aron (1980) magnitude.  This measurement is masked based on IRLS weights for the mean Aron (1980) magnitude.  This measurement is masked based on IRLS weights for the mean Aron (1980) magnitude.  This measurement is masked based on IRLS weights for the mean Aron (1980) magnitude.  This measurement is masked based on IRLS weights for the mean Aron (1980) magnitude.  This measurement is used for the mean Kron (1980) magnitude.  This measurement is masked based on IRLS weights for the mean Aron (1980) magnitude.  This measurement is masked based on IRLS weights for the mean Aron (1980) magnitude.  This measurement is masked based on IRLS weights for the mean Aron (1980) magnitude.  This measurement is masked based on IRLS weights for the mean Aron (1980) magnitude.  This measurement is masked based on IRLS weights for the mean Aron (1980) magnitude.		$0 \times 00100000$			
MASKED_PSF 0x01000000 16777216 This measurement is masked based on IRLS weights for the mean PSF magnitude.  MASKED_APER 0x02000000 33554432 This measurement is masked based on IRLS weights for the mean aperture magnitude.  MASKED_KRON 0x04000000 67108864 This measurement is masked based on IRLS weights for the mean Aperture magnitude.  This measurement is masked based on IRLS weights for the mean Aperture magnitude.  This measurement is masked based on IRLS weights for the mean Aperture magnitude.  This measurement is masked based on IRLS weights for the mean Aperture magnitude.  This measurement is masked based on IRLS weights for the mean Aperture magnitude.  This measurement is masked based on IRLS weights for the mean Aperture magnitude.  This measurement comes from an object with 2MASS data.  This measurement comes from an object with Gaia data.	PHOTOM_APER	$0 \times 00200000$	2097152		
MASKED_APER 0x02000000 33554432 This measurement is masked based on IRLS weights for the mean aperture magnitude.  MASKED_KRON 0x04000000 67108864 This measurement is masked based on IRLS weights for the mean Aperture magnitude.  This measurement is masked based on IRLS weights for the mean Aperture magnitude.  This measurement comes from an object with 2MASS data.  This measurement comes from an object with Gaia data.					
MASKED_KRON 0x04000000 67108864 This measurement is masked based on IRLS weights for the mean Kron (1980) magnitude.  OBJECT_HAS_GAIA 0x20000000 536870912 This measurement comes from an object with Gaia data.					
OBJECT_HAS_2MASS 0x10000000 268435456 This measurement comes from an object with 2MASS data. OBJECT_HAS_GAIA 0x20000000 536870912 This measurement comes from an object with Gaia data.					
OBJECT_HAS_GAIA 0x20000000 536870912 This measurement comes from an object with Gaia data.					
OBJECT_HAS_TYCHO 0x40000000 1073741824 This measurement comes from an object with Tycho data.					
	OBJECT_HAS_TYCHO	0x40000000	1073741824	This measurement comes from an object with Tycho data.	

TABLE 21 Filter

FilterID	Filter
1	g
2	r
3	i
4	$\mathbf{z}$
5	У

#### TABLE 22

OBJECTTHIN: CONTAINS THE POSITIONAL INFORMATION FOR OBJECTS IN A NUMBER OF COORDINATE SYSTEMS. THE OBJECTS ASSOCIATE SINGLE EPOCH DETECTIONS AND THE STACKED DETECTIONS WITHIN A ONE ARCSECOND RADIUS. THE MEAN POSITION FROM THE SINGLE EPOCH DATA IS USED AS THE BASIS FOR COORDINATES WHEN AVAILABLE, OR THE POSITION OF AN OBJECT IN THE stack when it is not. The RIGHT ASCENSION AND DECLINATION FOR BOTH THE stack and single epoch mean is provided. The number of detections in each filter from single epoch data is listed, along with which filters the object has a stack detection (Szalay et al. 2007, see).

column name	units	data type	default	description
objName	-	VARCHAR(32)	NA	IAU name for this object.
objNameHMS	_	VARCHAR(32)	NA	Alternate sexigesimal name for this object (DR2 only).
objPSOName	_	VARCHAR(32)	NA	Alternate Pan-STARRS name for this object (DR1 only).
objAltName1	_	VARCHAR(32)	NA	Alternate name for this object.
objAltName2	_	VARCHAR(32)	1111	Altername name for this object.
objAltName3	_	VARCHAR(32)		Altername name for this object.
objPopularName	_	VARCHAR(140)		Well known name for this object.
objFopularName	_		NA	
		BIGINT		Unique object identifier.
uniquePspsOBid	-	BIGINT	NA	Unique internal PSPS object identifier.
ippObjID	-	BIGINT	NA	IPP internal object identifier.
surveyID	-	TINYINT	NA	Survey identifier. Details in the Survey table.
htmID	-	BIGINT	NA	Hierarchical triangular mesh (Szalay 2007) index.
zoneID	-	INT	NA	Local zone index, found by dividing the sky into bands of declination $1/2$
				arcminute in height: $zoneID=floor((90+Dec)/0.0083333)$ .
tessID	-	TINYINT	0	Tessellation identifier. Details in the TessellationType table.
projectionID	-	SMALLINT	-1	Projection cell identifier.
skyCellID	-	TINYINT	255	Skycell region identifier.
randomID	_	FLOAT	NA	Random value drawn from the interval between zero and one.
batchID	_	BIGINT	NA	Internal database batch identifier.
dvoRegionID	_	INT	-1	Internal DVO region identifier.
processingVersion	_	TINYINT	ŇA	Data release version.
objInfoFlag	_	INT	0	Information flag bitmask indicating details of the photometry. Values
objinioi iag		1111	Ü	listed in ObjectInfoFlags.
qualityFlag		TINYINT	0	Subset of objInfoFlag denoting whether this object is real or a likely
quantyriag	-	IIIVIIIVI	U	false positive. Values listed in ObjectQualityFlags.
C+1-	1	EL OAT	000	
raStack	degrees	FLOAT	-999	Right ascension from <i>stack</i> detections, weighted mean value across
1 6 1	,	DI OAT	000	filters, in equinox J2000. See StackObjectThin for <i>stack</i> epoch information.
decStack	degrees	FLOAT	-999	Declination from <i>stack</i> detections, weighted mean value across
				filters, in equinox J2000. See StackObjectThin for <i>stack</i> epoch information.
raStackErr	arcsec	REAL	-999	Right ascension standard deviation from <i>stack</i> detections.
decStackErr	arcsec	REAL	-999	Declination standard deviation from <i>stack</i> detections.
raMean	$_{\rm degrees}$	FLOAT	-999	Right ascension from single epoch detections (weighted mean) in
				equinox J2000 at the mean epoch given by epochMean.
decMean	degrees	FLOAT	-999	Declination from single epoch detections (weighted mean) in equinox
				J2000 at the mean epoch given by epochMean.
raMeanErr	arcsec	REAL	-999	Right ascension standard deviation from single epoch detections.
decMeanErr	arcsec	REAL	-999	Declination standard deviation from single epoch detections.
epochMean	days	FLOAT	-999	Modified Julian Date of the mean epoch corresponding to raMean,
· F · · · · · · · · · · · · · · · · · ·				decMean (equinox J2000).
posMeanChisq	_	REAL	-999	Reduced chi squared value of mean position.
cx	_	FLOAT	NA	Cartesian x on a unit sphere.
	_	FLOAT	NA	Cartesian v on a unit sphere.
cy cz	-	FLOAT	NA NA	Cartesian y on a unit sphere.
lambda	-	FLOAT	-999	Ecliptic longitude.
	degrees			
beta	degrees	FLOAT	-999	Ecliptic latitude.
1	degrees	FLOAT	-999	Galactic longitude.
b	degrees	FLOAT	-999	Galactic latitude.
nStackObjectRows	-	SMALLINT	-999	Nr. of independent StackObjectThin rows associated with this object.
nStackDetections	-	SMALLINT	-999	Number of <i>stack</i> detections.
nDetections	-	SMALLINT	-999	Number of single epoch detections in all filters.
ng	-	SMALLINT	-999	Number of single epoch detections in g filter.
nr	-	SMALLINT	-999	Number of single epoch detections in r filter.
ni	-	SMALLINT	-999	Number of single epoch detections in i filter.
nz	-	SMALLINT	-999	Number of single epoch detections in z filter.
ny	_	SMALLINT	-999	Number of single epoch detections in y filter.
				0 · 1 · · · · · · · · · · · · · · · · ·

TABLE 23

MeanObject: Contains the mean photometric information for objects based on the single epoch data, calculated as described in Magnier et al. (2013). To be included in this table, an object must be bright enough to have been detected at least once in an individual exposure. PSF, Kron (1980), and aperture magnitudes and statistics are listed for all filters.

column name	units	data type	default	description
objID	-	BIGIÑT	NA	Unique object identifier.
uniquePspsOBid	-	BIGINT	NA	Unique internal PSPS object identifier.
gQfPerfect	-	REAL	-999	Maximum PSF weighted fraction of pixels totally unmasked
J •				from g filter detections.
gMeanPSFMag	AB	REAL	-999	Mean PSF magnitude from g filter detections.
gMeanPSFMagErr	AB	REAL	-999	Error in mean PSF magnitude from g filter
0				detections.
gMeanPSFMagStd	AB	REAL	-999	Standard deviation of PSF magnitudes from g filter
9				detections.
gMeanPSFMagNpt	-	SMALLINT	-999	Number of measurements included in mean PSF
0 0 1				magnitude from g filter detections.
gMeanPSFMagMin	AB	REAL	-999	Minimum PSF magnitude from g filter detections.
gMeanPSFMagMax	AB	REAL	-999	Maximum PSF magnitude from g filter detections.
gMeanKronMag	AB	REAL	-999	Mean Kron (1980) magnitude from g filter detections.
gMeanKronMagErr	AB	REAL	-999	Error in mean Kron (1980) magnitude from g filter
3				detections.
gMeanKronMagStd	AB	REAL	-999	Standard deviation of Kron (1980) magnitudes from
9				g filter detections.
gMeanKronMagNpt	-	SMALLINT	-999	Number of measurements included in mean Kron
0 0 1				(1980) magnitude from g filter detections.
gMeanApMag	AB	REAL	-999	Mean aperture magnitude from g filter detections.
gMeanApMagErr	AB	REAL	-999	Error in mean aperture magnitude from g filter
3 1 3				detections.
gMeanApMagStd	AB	REAL	-999	Standard deviation of aperture magnitudes from g
				filter detections.
gMeanApMagNpt	-	SMALLINT	-999	Number of measurements included in mean aperture
0 1 0 1				magnitude from g filter detections.
gFlags	-	INT	0	Information flag bitmask for mean object from g filter
				detections. Values listed in ObjectFilterFlags.
rQfPerfect				ů
•••				same entries repeated for r, i, z, and y filters
yFlags				

 ${\bf TABLE~24}$  GaiaFrameCoordinate: PSPS objects calibrated against Gaia astrometry

column name	units	data type	default	description
objID	-	BIGINT	NA	Unique object identifier.
uniquePspsGOid	-	BIGINT	NA	Unique internal PSPS object identifier.
ippObjID	-	BIGINT	NA	IPP internal object identifier.
batchID	-	BIGINT	NA	Internal database batch identifier.
gaiaFlag	-	INT		Information flag bitmask.
ra	degrees	FLOAT	-999	Right ascension from single epoch detections (weighted mean) in
	Ü			equinox J2000 at the mean epoch given by epochMean and calibrated against Gaia.
$\operatorname{dec}$	degrees	FLOAT	-999	Declination from single epoch detections (weighted mean) in equinox
	Ü			J2000 at the mean epoch given by epochMean and calibrated against Gaia.
raErr	arcsec	REAL	-999	Right ascension standard deviation from single epoch detections.
$\operatorname{decErr}$	arcsec	REAL	-999	Declination standard deviation from single epoch detections.

GaiaFrameCoordinate $Stack\ Tables$ 

TABLE 25 STACKMETA: CONTAINS THE METADATA DESCRIBING THE STACKED IMAGE PRODUCED FROM THE COMBINATION OF A SET OF SINGLE EPOCH EXPOSURES. THE NATURE OF THE stack is given by the STACKED IMAGE ARE LISTED.

column name	units	data type	default	description
stackImageID	-	BIGINT	NA	Unique stack identifier.
batchID	_	BIGINT	NA	Internal database batch identifier.
surveyID	_	TINYINT	NA	Survey identifier. Details in the Survey table.
filterÍD	_	TINYINT	NA	Filter identifier. Details in the Filter table.
stackTypeID	_	TINYINT	0	Stack type identifier. Details in the StackType table.
tessID	_	TINYINT	Ö	Tessellation identifier. Details in the TessellationType table.
projectionID	_	SMALLINT	-1	Projection cell identifier.
skyCellID	_	TINYINT	255	Skycell region identifier.
photoCalID	_	INT	NA	Photometric calibration identifier. Details in the PhotoCal table.
analysisVer		VARCHAR(100)	1111	IPP software analysis release version.
md5sum		VARCHAR(100)		IPP MD5 Checksum.
expTime	seconds	REAL	-999	Exposure time of the stack. Necessary for converting listed
expinne	seconds	REAL	-999	fluxes and magnitudes back to measured ADU counts.
DoI		SMALLINT	000	
nP2Images			-999	Number of input exposures/frames contributing to this stack.
detectionThreshold	magnitudes	REAL	-999	Reference magnitude for detection efficiency calculation.
astroScat	-	REAL	-999	Measurement of the calibration (not astrometric error) defined to
				be the sum in quadrature of the standard deviations in the X and Y directions.
photoScat	_	REAL	-999	Photometric scatter relative to reference catalog.
nAstroRef	_	INT	-999	Number of astrometric reference sources.
nPhotoRef	_	INT	-999	Number of photometric reference sources.
recalAstroScatX	arcsec	REAL	-999 -999	Measurement of the re-calibration (not astrometric error)
TecalAstroscatA	arcsec	REAL	-999	in the X direction.
recalAstroScatY		REAL	-999	Measurement of the re-calibration (not astrometric error)
recarAstroscati	arcsec	REAL	-999	
		INT	-999	in the Y direction.  Number of astrometric reference sources used in
recalNAstroStars	-	11N 1	-999	
11.00		DEAL	000	recalibration.
recalphotoScat	magnitudes	REAL	-999	Photometric scatter relative to reference catalog.
recalNPhotoStars	-	INT	-999	Number of astrometric reference sources used in
0.4 1 HD		TATE	000	recalibration.
psfModelID	-	INT	-999	PSF model identifier.
psfFWHM	arcsec	REAL	-999	Mean PSF full width at half maximum at image center.
psfWidMajor	arcsec	$\operatorname{REAL}$	-999	PSF major axis FWHM at image center.
psfWidMinor	arcsec	REAL	-999	PSF minor axis FWHM at image center.
psfTheta	degrees	REAL	-999	PSF major axis orientation at image center.
photoZero	$_{ m magnitudes}$	REAL	-999	Locally derived photometric zero point for this stack.
photoZeroAperture	magnitudes	REAL	-999	Locally derived photometric zero point for this stack
				(Aperture-like measurements only) (DR2).
ctype1	-	VARCHAR(100)		Name of astrometric projection in right ascension.
ctype2	-	VARCHAR(100)		Name of astrometric projection in declination.
crval1	degrees	FLOAT	-999	Right ascension corresponding to reference pixel.
crval2	degrees	FLOAT	-999	Declination corresponding to reference pixel.
crpix1	sky pixels	FLOAT	-999	Reference pixel for right ascension.
crpix2	sky pixels	FLOAT	-999	Reference pixel for declination.
cdelt1	degrees/pixel	FLOAT	-999	Pixel scale in right ascension.
cdelt2	degrees/pixel	FLOAT	-999	Pixel scale in declination.
pc001001	-	FLOAT	-999 -999	Linear transformation matrix element between image pixel x and
pcoorour	_	LOAI	-333	right ascension.
pc001002	-	FLOAT	-999	Linear transformation matrix element between image pixel y and
_				right ascension.
pc002001	_	FLOAT	-999	Linear transformation matrix element between image pixel x and
-				declination.
pc002002		DIOATE	-999	
pc002002	-	FLOAT	-999	Linear transformation matrix element between image pixel v and
pc002002	-	FLOAT	-999	Linear transformation matrix element between image pixel y and declination.

STACKOBJECTTHIN: CONTAINS THE POSITIONAL AND PHOTOMETRIC INFORMATION FOR POINT-SOURCE PHOTOMETRY OF stack DETECTIONS. THE INFORMATION FOR ALL FILTERS ARE JOINED INTO A SINGLE ROW, WITH METADATA INDICATING IF THIS stack OBJECT REPRESENTS THE PRIMARY DETECTION. DUE TO OVERLAPS IN THE stack TESSELLATIONS, AN OBJECT MAY APPEAR IN MULTIPLE stack IMAGES. THE PRIMARY DETECTION IS THE UNIQUE DETECTION FROM THE stack IMAGE THAT PROVIDES THE BEST COVERAGE WITH MINIMAL PROJECTION STRETCHING. ALL OTHER DETECTIONS OF THE OBJECT IN THAT FILTER ARE SECONDARY, REGARDLESS OF THEIR PROPERTIES. THE DETECTION FLAGGED AS BEST IS THE PRIMARY DETECTION IF THAT DETECTION HAS A PSFQF VALUE GREATER THAN 0.98; IF THAT IS NOT MET, THEN ANY OF THE PRIMARY OR SECONDARY DETECTIONS WITH THE HIGHEST PSFQF VALUE IS FLAGGED AS BEST.

column name	units	data type	default	description
objID	=	BIGINT	NA	Unique object identifier.
uniquePspsSTid	-	BIGINT	NA	Unique internal PSPS stack identifier.
ippObjID	-	BIGINT	NA	IPP internal object identifier.
surveyID	-	TINYINT	NA	Survey identifier. Details in the Survey table.
tessID	-	TINYINT	0	Tessellation identifier. Details in the TessellationType table.
projectionID	-	SMALLINT	-1	Projection cell identifier.
skyCellID	-	TINYINT	255	Skycell region identifier.
randomStackObjID	-	FLOAT	NA	Random value drawn from the interval between zero and one.
primaryDetection	-	TINYINT	255	Identifies if this row is the primary stack detection.
bestDetection	_	TINYINT	255	Identifies if this row is the best detection.
dvoRegionID	_	INT	-1	Internal DVO region identifier.
processingVersion	_	TINYINT	NA	Data release version.
gippDetectID	_	BIGINT	NA	IPP internal detection identifier.
gstackDetectID	_	BIGINT	NA	Unique stack detection identifier.
gstackImageID	_	BIGINT	NA	Unique stack identifier for g filter detection.
gra	degrees	FLOAT	-999	Right ascension from g filter stack detection.
gdec	degrees	FLOAT	-999	Declination from g filter stack detection.
graErr	arcsec	REAL	-999	Right ascension error from g filter stack detection.
gdecErr	arcsec	REAL	-999	Declination error from g filter stack detection.
gEpoch	days	FLOAT	-999	Modified Julian Date of the mean epoch of images contributing to the
82pccn	aajs	1 20111	000	g-band stack (equinox J2000).
gPSFMag	$^{\mathrm{AB}}$	REAL	-999	PSF magnitude from g filter stack detection.
gPSFMagErr	AB	REAL	-999	Error in PSF magnitude from g filter stack detection.
gApMag	AB	REAL	-999	Aperture magnitude from g filter stack detection.
gApMagErr	AB	REAL	-999	Error in aperture magnitude from g filter stack detection.
gKronMag	AB	REAL	-999	Kron (1980) magnitude from g filter stack detection.
gKronMagErr	AB	REAL	-999	Error in Kron (1980) magnitude from g filter stack detection.
ginfoFlag	-	BIGINT	0	Information flag bitmask indicating details of the g filter stack
gillior lag		DIGITO	O	photometry. Values listed in DetectionFlags.
ginfoFlag2	_	INT	0	Information flag bitmask indicating details of the g filter stack
giiioi iag2		1111	O	photometry. Values listed in DetectionFlags2.
ginfoFlag3	_	INT	0	Information flag bitmask indicating details of the g filter stack
9111101 1020		1111	9	photometry. Values listed in DetectionFlags3.
ginfoFlag4	_	INT	0	Information flag bitmask indicating details of the g filter stack photometry.
gillior lag4	-	111 1	U	Values listed in ObjectFilterFlags. (DR2)
gnFrames		INT	-999	Number of input frames/exposures contributing to the g filter stack
gmrames	-	11/1	-999	detection.
rippDetectID				defection.
прроенесно				same entries reported for n i z and willtons
 ynFrames				same entries repeated for r, i, z, and y filters
ynrrames				

TABLE 27 STACKOBJECTATTRIBUTES: CONTAINS THE PSF, KRON (1980), AND APERTURE FLUXES FOR ALL FILTERS IN A SINGLE ROW, ALONG WITH POINT-SOURCE OBJECT SHAPE PARAMETERS. SEE StackObjectThin Table for discussion of primary, secondary, and best detections.

objID - BIGINT NA Unique object identifier.  uniquePspsSTid - BIGINT NA Unique internal PSPS stack identifier.  ippObjID - BIGINT NA IPP internal object identifier.  Identifies if this row is the best detection.  IPP internal detection identifier.  Unique stack detection identifier.  Unique stack identifier.  IPP internal object identifier.  Identifies if this row is the primary stack detection.  Identifies if this row is the primary stack detection.  Identifies if this row is the primary stack detection.  IPP internal object identifier.  Identifies if this row is the primary stack detection.  Identifies if this row is the primary stack detection.  Identifies if this row is the primary stack detection.  Identifies if this row is the primary stack detection.  Identifies if this row is the primary stack detection.	
ippObjID - BIGINT NA IPP internal object identifier.  randomStackObjID - FLOAT NA Random value drawn from the interval between zero and one.  primaryDetection - TINYINT 255 Identifies if this row is the primary stack detection.  sexDetection - TINYINT 255 Identifies if this row is the primary stack detection.  gippDetectID - BIGINT NA IPP internal detection identifier.  gstackDetectID - BIGINT NA Unique stack detection identifier.  gstackImageID - BIGINT NA Unique stack identifier for g filter detection.  gxPos sky pixels REAL -999 PSF x center location from g filter stack detection.  gxPosErr sky pixels REAL -999 Error in PSF x center location from g filter stack detection.  gyPosErr sky pixels REAL -999 Error in PSF x center location from g filter stack detection.  gyPosTry sky pixels REAL -999 Error in PSF x center location from g filter stack detection.  gyPosTry sky pixels REAL -999 Error in PSF x center location from g filter stack detection.  gyPosTry sky pixels REAL -999 PSF major axis FWHM from g filter stack detection.  gyPosTry sky pixels REAL -999 PSF major axis FWHM from g filter stack detection.	
randomStackObjID - FLOAT NA Random value drawn from the interval between zero and one.  primaryDetection - TINYINT 255 Identifies if this row is the primary stack detection.  primaryDetection - TINYINT 255 Identifies if this row is the best detection.  gippDetectID - BIGINT NA IPP internal detection identifier.  gstackDetectID - BIGINT NA Unique stack detection identifier.  gxPos sky pixels REAL -999 PSF x center location from g filter stack detection.  gxPos gxPosErr sky pixels REAL -999 Error in PSF x center location from g filter stack detection.  gyPosErr sky pixels REAL -999 Error in PSF x center location from g filter stack detection.  gyPosErr sky pixels REAL -999 Error in PSF x center location from g filter stack detection.  gyPosTry sky pixels REAL -999 Error in PSF x center location from g filter stack detection.  gyPosTry sky pixels REAL -999 Error in PSF x center location from g filter stack detection.  gyPosTry sky pixels REAL -999 PSF major axis FWHM from g filter stack detection.  gyPosTry sky pixels REAL -999 PSF minor axis FWHM from g filter stack detection.	
primaryDetection bestDetection - TINYINT 255 Identifies if this row is the primary stack detection.  Identifies if this row is the best detection.  Identifies if this row is the best detection.  Identifies if this row is the best detection.  Identifies if this row is the primary stack detection.  Identifies if this row is the best detection.  Identifies if this row is the best detection identifier.  Unique stack detection identifier.  Unique stack detection identifier.  Identifies if this row is the best detection identifier.  Identifies if this row is the primary stack detection identifier.  Identifies if this row is the best detection identifier.  Identifies if this row is the primary stack detection identifier.  Identifies if this row is the primary stack detection.  Identifies if this row is the pri	
bestDetection - TINYINT 255 Identifies if this row is the best detection.  gippDetectID - BIGINT NA IPP internal detection identifier.  gstackDetectID - BIGINT NA Unique stack detection identifier.  gstackImageID - BIGINT NA Unique stack identifier for g filter detection.  gxPos sky pixels REAL -999 PSF x center location from g filter stack detection.  gxPosErr sky pixels REAL -999 PSF y center location from g filter stack detection.  gxPosErr sky pixels REAL -999 Error in PSF x center location from g filter stack detection.  gyPosErr sky pixels REAL -999 Error in PSF y center location from g filter stack detection.  gpsfMajorFWHM arcsec REAL -999 PSF major axis FWHM from g filter stack detection.  gpsfMinorFWHM arcsec REAL -999 PSF minor axis FWHM from g filter stack detection.	
gippDetectID - BIGINT NA Unique stack detection identifier. gstackDetectID - BIGINT NA Unique stack detection identifier. gstackImageID - BIGINT NA Unique stack identifier for g filter detection. gxPos sky pixels REAL -999 PSF x center location from g filter stack detection. gxPosErr sky pixels REAL -999 Error in PSF x center location from g filter stack detection. gyPosErr sky pixels REAL -999 Error in PSF x center location from g filter stack detection. gyPosErr sky pixels REAL -999 Error in PSF x center location from g filter stack detection. gpsfMajorFWHM arcsec REAL -999 PSF major axis FWHM from g filter stack detection. gpsfMinorFWHM arcsec REAL -999 PSF minor axis FWHM from g filter stack detection.	
gstackDetectID - BIGINT NA Unique stack detection identifier.  gstackImageID - BIGINT NA Unique stack detection identifier for g filter detection.  gxPos sky pixels REAL -999 PSF x center location from g filter stack detection.  gxPosErr sky pixels REAL -999 PSF y center location from g filter stack detection.  gxPosErr sky pixels REAL -999 Error in PSF x center location from g filter stack detection.  gyPosErr sky pixels REAL -999 Error in PSF y center location from g filter stack detection.  gyPosErr sky pixels REAL -999 PSF major axis FWHM from g filter stack detection.  gpsfMajorFWHM arcsec REAL -999 PSF minor axis FWHM from g filter stack detection.	
gstackImageID - BIGINT NA Unique stack identifier for g filter detection. gxPos sky pixels REAL -999 PSF x center location from g filter stack detection. gxPosErr sky pixels REAL -999 Error in PSF x center location from g filter stack detection. gyPosErr sky pixels REAL -999 Error in PSF x center location from g filter stack detection. gyPosErr sky pixels REAL -999 Error in PSF y center location from g filter stack detection. gpsfMajorFWHM arcsec REAL -999 PSF major axis FWHM from g filter stack detection. gpsfMinorFWHM arcsec REAL -999 PSF minor axis FWHM from g filter stack detection.	
gxPos sky pixels gEAL -999 PSF x center location from g filter stack detection. gxPosErr sky pixels gFAL -999 PSF y center location from g filter stack detection. gxPosErr sky pixels gFAL -999 Error in PSF x center location from g filter stack detection. gyPosErr sky pixels gFAL -999 Error in PSF x center location from g filter stack detection. gyFosErr sky pixels gFAL -999 PSF major axis FWHM from g filter stack detection. gpsfMinorFWHM arcsec REAL -999 PSF minor axis FWHM from g filter stack detection.	
gxPos sky pixels gEAL -999 PSF x center location from g filter stack detection. gxPosErr sky pixels gFAL -999 PSF y center location from g filter stack detection. gxPosErr sky pixels gFAL -999 Error in PSF x center location from g filter stack detection. gyPosErr sky pixels gFAL -999 Error in PSF x center location from g filter stack detection. gyFosErr sky pixels gFAL -999 PSF major axis FWHM from g filter stack detection. gpsfMinorFWHM arcsec REAL -999 PSF minor axis FWHM from g filter stack detection.	
gxPosErr sky pixels REAL -999 Error in PSF x center location from g filter stack detection. gyPosErr sky pixels REAL -999 Error in PSF y center location from g filter stack detection. gpsfMajorFWHM arcsec REAL -999 PSF major axis FWHM from g filter stack detection. gpsfMinorFWHM arcsec REAL -999 PSF minor axis FWHM from g filter stack detection.	
gyPosErr sky pixels REAL -999 Error in PSF y center location from g filter stack detection. gpsfMajorFWHM arcsec REAL -999 PSF major axis FWHM from g filter stack detection. gpsfMinorFWHM arcsec REAL -999 PSF minor axis FWHM from g filter stack detection.	
gyPosErr sky pixels REAL -999 Error in PSF y center location from g filter stack detection. gpsfMajorFWHM arcsec REAL -999 PSF major axis FWHM from g filter stack detection. gpsfMinorFWHM arcsec REAL -999 PSF minor axis FWHM from g filter stack detection.	
gpsfMinorFWHM arcsec REAL -999 PSF minor axis FWHM from g filter stack detection.	
gpsfMinorFWHM arcsec REAL -999 PSF minor axis FWHM from g filter stack detection.	
gpsfCore - REAL -999 PSF core parameter k from g filter stack detection, where	
$F = F0/(1 + kr^2 + r^{3.33})$ .	
gpsfLikelihood - REAL -999 Likelihood that this g filter stack detection is best fit	
by a PSF.	
gpsfQf - REAL -999 PSF coverage factor for g filter stack detection.	
gpsfQfPerfect - REAL -999 PSF-weighted fraction of pixels totally unmasked for g filter stack detection.	ection
gpsfChiSq - REAL -999 Reduced chi squared value of the PSF model fit for g filter stack detec	
	tion.
gmomentXY $arcsec^2$ REAL -999 Second moment $M_{xy}$ for g filter $stack$ detection.	
gmomentYY $arcsec^2$ REAL -999 Second moment $M_{yy}$ for g filter $stack$ detection.	
gmomentR1 arcsec REAL -999 First radial moment for g filter stack detection.	
gmomentRH $arcsec^{0.5}$ REAL -999 Half radial moment ( $r^{0.5}$ weighting) for g filter $stack$ detection.	
gPSFFlux Jy REAL -999 PSF flux from g filter stack detection.	
gPSFFluxErr Jy REAL -999 Error in PSF flux from g filter stack detection.	
gApFlux Jy REAL -999 Aperture flux from g filter stack detection.	
gApFluxErr Jy REAL -999 Error in aperture flux from g filter stack detection.	
gApFillFac - REAL -999 Aperture fill factor from g filter stack detection.	
gApRadius arcsec REAL -999 Aperture radius for g filter stack detection.	
gKronFlux Jy REAL -999 Kron (1980) flux from g filter stack detection.	
gKronFluxErr Jy REAL -999 Error in Kron (1980) flux from g filter stack detection.	
gKronRad arcsec REAL -999 Kron (1980) radius from g filter stack detection.	
gexpTime seconds REAL -999 Exposure time of the g filter stack. Necessary for converting	
listed fluxes and magnitudes back to measured ADU counts.	
gExtNSigma - REAL -999 An extendedness measure for the g filter stack detection based on	
the deviation between PSF and Kron (1980) magnitudes, normalized	
by the PSF magnitude uncertainty.	
gsky $Jy/arcsec^2$ REAL -999 Residual background sky level at the g filter $stack$ detection.	
listed fluxes and magnitudes back to measured ADU counts.	
gzpAPER magnitudes REAL 0 Photometric zeropoint for the g filter stack (APERTURE-like magnitudes Needed to convert fluxes or magnitudes back to measured ADU counts	,
gPlateScale arcsec/pixel REAL 0 Local plate scale for the g filter stack.	()
rippDetectID	
same entries repeated for r, i, z, and y filters	
yPlateScale	
, 1 MOODOMO	

STACKAPFLX: Contains the unconvolved fluxes within the SDSS R5 (R = 3.00 arcsec), R6 (R = 4.63 arcsec), and R7 (R = 7.43 arcsec) apertures (Stoughton et al. 2002). Convolved fluxes within these same apertures are also provided for images convolved to 6 sky pixels (1.5 arcsec) and 8 sky pixels (2.0 arcsec). All filters are matched into a single row. See StackObjectThin table for discussion of primary, secondary, and best detections.

uniquePspsSTid         -           ippObjID         -           randomStackObjID         -           primaryDetection         -           bestDetection         -           gstackDetectID         -           gstackImageID         -           gippDetectID         -           gflxR5         Jy           gflxR5         Jy           gflxR5Err         Jy           gflxR6Fill         -           gflxR6         Jy           gflxR6Err         Jy           gflxR6Fill         -           gflxR7Frr         Jy           gflxR7Std         Jy           gc6flxR7Fill         -           gc6flxR5Err         Jy           gc6flxR5Std         Jy           gc6flxR6Fill         -           gc6flxR6Err         Jy           gc6flxR6Fill         -           gc6flxR6Fill         -	BIGINT BIGINT BIGINT FLOAT TINYINT TINYINT BIGINT BIGINT BIGINT REAL REAL REAL REAL REAL REAL REAL REAL	NA NA NA 255 255 NA NA NA -999 -999 -999 -999 -999 -999	Unique object identifier. Unique internal PSPS $stack$ identifier. IPP internal object identifier. Random value drawn from the interval between zero and one. Identifies if this row is the primary $stack$ detection. Identifies if this row is the best detection. Unique $stack$ detection identifier. Unique $stack$ identifier for g filter detection. IPP internal detection identifier. Flux from g filter detection within an aperture of radius $r=3.00$ arcsec. Error in flux from g filter detection within an aperture of radius $r=3.00$ arcsec. Standard deviation of g filter flux within an aperture of radius $r=3.00$ arcsec. Aperture fill factor for g filter detection within an aperture of radius $r=3.00$ arcsec. Flux from g filter detection within an aperture of radius $r=3.00$ arcsec. Error in flux from g filter detection within an aperture of radius $r=3.00$ arcsec.
ippObjID         -           randomStackObjID         -           primaryDetection         -           bestDetection         -           gstackDetectID         -           gstackImageID         -           gippDetectID         -           gflxR5         Jy           gflxR5Err         Jy           gflxR5Fill         -           gflxR6         Jy           gflxR6Err         Jy           gflxR6Fill         -           gflxR7         Jy           gflxR7Frr         Jy           gflxR7Fill         -           gc6flxR5         Jy           gc6flxR5Fill         -           gc6flxR6Fill         -           gc6flxR6Fill         -           gc6flxR6Fill         -           gc6flxR6Fill         -	BIGINT FLOAT TINYINT TINYINT BIGINT BIGINT REAL REAL REAL REAL REAL REAL REAL REAL	NA NA 255 255 NA NA NA -999 -999 -999 -999 -999 -999	IPP internal object identifier. Random value drawn from the interval between zero and one. Identifies if this row is the primary $stack$ detection. Identifies if this row is the best detection. Unique $stack$ detection identifier. Unique $stack$ identifier for g filter detection. IPP internal detection identifier. Flux from g filter detection within an aperture of radius $r=3.00$ arcsec. Error in flux from g filter detection within an aperture of radius $r=3.00$ arcsec. Standard deviation of g filter flux within an aperture of radius $r=3.00$ arcsec. Aperture fill factor for g filter detection within an aperture of radius $r=3.00$ arcsec. Flux from g filter detection within an aperture of radius $r=3.00$ arcsec.
randomStackObjID - primaryDetection - bestDetection - gstackDetectID - gstackImageID - gippDetectID - gippRaf - gipxR5 - gflxR5Err - gflxR5Fill - gflxR6 - gflxR6Err - gflxR6Fill - gflxR7Fr - gflxR7Fill - gc6flxR5 - gc6flxR5Err - gc6flxR5Err - gc6flxR5Fill - gc6flxR6Fill - gc6flxR6Fill - gc6flxR6Fr -	FLOAT TINYINT TINYINT BIGINT BIGINT REAL REAL REAL REAL REAL REAL REAL REAL	NA 255 255 255 NA NA NA -999 -999 -999 -999 -999 -999	Random value drawn from the interval between zero and one. Identifies if this row is the primary $stack$ detection. Identifies if this row is the best detection. Unique $stack$ detection identifier. Unique $stack$ detection identifier. Unique $stack$ identifier for g filter detection. IPP internal detection identifier. Flux from g filter detection within an aperture of radius $r=3.00$ arcsec. Error in flux from g filter detection within an aperture of radius $r=3.00$ arcsec. Standard deviation of g filter flux within an aperture of radius $r=3.00$ arcsec. Aperture fill factor for g filter detection within an aperture of radius $r=3.00$ arcsec. Flux from g filter detection within an aperture of radius $r=3.00$ arcsec.
primaryDetection         -           bestDetection         -           gstackDetectID         -           gstackImageID         -           gippDetectID         -           gflxR5         Jy           gflxR5Err         Jy           gflxR5Err         Jy           gflxR5Fill         -           gflxR6Err         Jy           gflxR6Std         Jy           gflxR6Fill         -           gflxR7Frr         Jy           gflxR7Ftll         -           gc6flxR5         Jy           gc6flxR5Err         Jy           gc6flxR5Fill         -           gc6flxR6Err         Jy           gc6flxR6Err         Jy           gc6flxR6Fill         -           gc6flxR6Fr         Jy           gc6flxR6Fr         Jy           gc6flxR6Fr         Jy           gc6flxR6Fr         Jy	TINYINT TINYINT BIGINT BIGINT BIGINT REAL REAL REAL REAL REAL REAL REAL REAL	255 255 NA NA NA -999 -999 -999 -999 -999 -999	Identifies if this row is the primary $stack$ detection. Identifies if this row is the best detection. Unique $stack$ detection identifier. Unique $stack$ identifier for g filter detection. IPP internal detection identifier. Flux from g filter detection within an aperture of radius $r=3.00$ arcsec. Error in flux from g filter detection within an aperture of radius $r=3.00$ arcsec. Standard deviation of g filter flux within an aperture of radius $r=3.00$ arcsec. Aperture fill factor for g filter detection within an aperture of radius $r=3.00$ arcsec. Flux from g filter detection within an aperture of radius $r=3.00$ arcsec.
bestDetection gstackDetectID gstackImageID gippDetectID gippDetectID gflxR5 gflxR5 gflxR5Err gflxR5Std gflxR6Err gflxR6 gflxR6Err gflxR6Fill gflxR7 gflxR7Std Jy gc6flxR6Err Jy gc6flxR6Std Jy gc6flxR6Fill - gc6flxR6Std Jy gc6flxR6Std Jy	TINYINT BIGINT BIGINT REAL REAL REAL REAL REAL REAL REAL REAL	255 NA NA NA -999 -999 -999 -999 -999 -999	Identifies if this row is the best detection. Unique $stack$ detection identifier. Unique $stack$ identifier for g filter detection. IPP internal detection identifier. Flux from g filter detection within an aperture of radius $r=3.00$ arcsec. Error in flux from g filter detection within an aperture of radius $r=3.00$ arcsec. Standard deviation of g filter flux within an aperture of radius $r=3.00$ arcsec. Aperture fill factor for g filter detection within an aperture of radius $r=3.00$ arcsec. Flux from g filter detection within an aperture of radius $r=3.00$ arcsec.
gstackDetectID         -           gstackImageID         -           gippDetectID         -           gflxR5         Jy           gflxR5Err         Jy           gflxR5Std         Jy           gflxR6Fill         -           gflxR6Err         Jy           gflxR6Std         Jy           gflxR6Fill         -           gflxR7         Jy           gflxR7Frr         Jy           gflxR7Fill         -           gc6flxR5         Jy           gc6flxR5Err         Jy           gc6flxR5Fill         -           gc6flxR6         Jy           gc6flxR6Err         Jy           gc6flxR6Fill         -	BIGINT BIGINT REAL REAL REAL REAL REAL REAL REAL REAL	NA NA -999 -999 -999 -999 -999 -999	Unique $stack$ detection identifier. Unique $stack$ identifier for g filter detection. IPP internal detection identifier. Flux from g filter detection within an aperture of radius $r=3.00$ arcsec. Error in flux from g filter detection within an aperture of radius $r=3.00$ arcsec. Standard deviation of g filter flux within an aperture of radius $r=3.00$ arcsec. Aperture fill factor for g filter detection within an aperture of radius $r=3.00$ arcsec. Flux from g filter detection within an aperture of radius $r=3.00$ arcsec.
gstackImageID         -           gippDetectID         -           gflxR5         Jy           gflxR5Err         Jy           gflxR5Std         Jy           gflxR6         Jy           gflxR6Err         Jy           gflxR6Fill         -           gflxR7         Jy           gflxR7Err         Jy           gflxR7Fill         -           gc6flxR5         Jy           gc6flxR5Fill         -           gc6flxR5Fill         -           gc6flxR6         Jy           gc6flxR6Err         Jy           gc6flxR6Fill         -           gc6flxR6Fill         -	BIGINT BIGINT REAL REAL REAL REAL REAL REAL REAL REAL	NA NA -999 -999 -999 -999 -999	Unique $stack$ identifier for g filter detection. IPP internal detection identifier. Flux from g filter detection within an aperture of radius $r=3.00$ arcsec. Error in flux from g filter detection within an aperture of radius $r=3.00$ arcsec. Standard deviation of g filter flux within an aperture of radius $r=3.00$ arcsec. Aperture fill factor for g filter detection within an aperture of radius $r=3.00$ arcsec. Flux from g filter detection within an aperture of radius $r=3.00$ arcsec.
gippDetectID gflxR5 gflxR5 Jy gflxR5Err gflxR5Std Jy gflxR5Std Jy gflxR6Fill - gflxR6 Jy gflxR6Err Jy gflxR6Fill - gflxR7 Jy gflxR7 Jy gflxR7Frr Jy gflxR7Frr Jy gflxR7Std Jy gflxR7Fill - gc6flxR5 Jy gc6flxR5Err Jy gc6flxR5Err Jy gc6flxR5Fill - Jy gc6flxR5Fill - Jy gc6flxR5Fill - Jy gc6flxR5Fill - Jy gc6flxR6Fill - Jy gc6flxR6Fill - Jy gc6flxR6Fill - Jy gc6flxR6Fill - Jy	REAL REAL REAL REAL REAL REAL REAL REAL	-999 -999 -999 -999 -999 -999	IPP internal detection identifier. Flux from g filter detection within an aperture of radius $r=3.00~\rm arcsec$ . Error in flux from g filter detection within an aperture of radius $r=3.00~\rm arcsec$ . Standard deviation of g filter flux within an aperture of radius $r=3.00~\rm arcsec$ . Aperture fill factor for g filter detection within an aperture of radius $r=3.00~\rm arcsec$ . Flux from g filter detection within an aperture of radius $r=4.63~\rm arcsec$ .
gflxR5Err         Jy           gflxR5Std         Jy           gflxR5Fill         -           gflxR6         Jy           gflxR6Err         Jy           gflxR6Std         Jy           gflxR6Fill         -           gflxR7         Jy           gflxR7Err         Jy           gflxR7Fill         -           gc6flxR5         Jy           gc6flxR5Err         Jy           gc6flxR5Fill         -           gc6flxR6         Jy           gc6flxR6Err         Jy           gc6flxR6Std         Jy           gc6flxR6Fill         -	REAL REAL REAL REAL REAL REAL REAL REAL	-999 -999 -999 -999 -999	Error in flux from g filter detection within an aperture of radius $r=3.00$ arcsec. Standard deviation of g filter flux within an aperture of radius $r=3.00$ arcsec. Aperture fill factor for g filter detection within an aperture of radius $r=3.00$ arcsec. Flux from g filter detection within an aperture of radius $r=4.63$ arcsec.
gflxR5Std         Jy           gflxR5Fill         -           gflxR6         Jy           gflxR6Err         Jy           gflxR6Err         Jy           gflxR6Std         Jy           gflxR7         Jy           gflxR7Frr         Jy           gflxR7Std         Jy           gflxR7Fill         -           gc6flxR5         Jy           gc6flxR5Std         Jy           gc6flxR5Fill         -           gc6flxR6         Jy           gc6flxR6Err         Jy           gc6flxR6Std         Jy           gc6flxR6Fill         -	REAL REAL REAL REAL REAL REAL REAL REAL	-999 -999 -999 -999	Standard deviation of g filter flux within an aperture of radius $r=3.00$ arcsec. Aperture fill factor for g filter detection within an aperture of radius $r=3.00$ arcsec. Flux from g filter detection within an aperture of radius $r=4.63$ arcsec.
gflxR5Fill         -           gflxR6         Jy           gflxR6Err         Jy           gflxR6Err         Jy           gflxR6Fill         -           gflxR7         Jy           gflxR7Err         Jy           gflxR7Std         Jy           gc6flxR5         Jy           gc6flxR5Err         Jy           gc6flxR5Std         Jy           gc6flxR6Fill         -           gc6flxR6Err         Jy           gc6flxR6Std         Jy           gc6flxR6Fill         -	REAL REAL REAL REAL REAL REAL REAL REAL	-999 -999 -999	Aperture fill factor for g filter detection within an aperture of radius $r=3.00$ arcsec. Flux from g filter detection within an aperture of radius $r=4.63$ arcsec.
gflxR6         Jy           gflxR6Err         Jy           gflxR6Std         Jy           gflxR6Std         Jy           gflxR6Fill         -           gflxR7         Jy           gflxR7Err         Jy           gflxR7Std         Jy           gc6flxR5         Jy           gc6flxR5Err         Jy           gc6flxR5Std         Jy           gc6flxR6Fill         -           gc6flxR6Err         Jy           gc6flxR6Std         Jy           gc6flxR6Fill         -	REAL REAL REAL REAL REAL REAL REAL	-999 -999 -999	Flux from g filter detection within an aperture of radius $r = 4.63$ arcsec.
gflxR6Err         Jy           gflxR6Std         Jy           gflxR6Fill         -           gflxR7         Jy           gflxR7Err         Jy           gflxR7Std         Jy           gflxR7Fill         -           gc6flxR5         Jy           gc6flxR5Err         Jy           gc6flxR5Fill         -           gc6flxR6         Jy           gc6flxR6Err         Jy           gc6flxR6Std         Jy           gc6flxR6Fill         -	REAL REAL REAL REAL REAL REAL	-999 -999	
gflxR6Std         Jy           gflxR6Fill         -           gflxR7         Jy           gflxR7Err         Jy           gflxR7Std         Jy           gflxR7Fill         -           gc6flxR5         Jy           gc6flxR5Err         Jy           gc6flxR5Std         Jy           gc6flxR6Fill         -           gc6flxR6Err         Jy           gc6flxR6Std         Jy           gc6flxR6Fill         -	REAL REAL REAL REAL REAL	-999	Error in that from g inter detection within an aperture of radius $i = 4.05$ arcsec.
gflxR6Fill         -           gflxR7         Jy           gflxR7Err         Jy           gflxR7Std         Jy           gflxR7Stl         -           gc6flxR5         Jy           gc6flxR5Err         Jy           gc6flxR5Std         Jy           gc6flxR6Fill         -           gc6flxR6Err         Jy           gc6flxR6Std         Jy           gc6flxR6Fill         -	REAL REAL REAL REAL		Standard deviation of g filter flux within an aperture of radius $r = 4.63$ arcsec.
gflxR7         Jy           gflxR7Err         Jy           gflxR7Std         Jy           gflxR7Fill         -           gc6flxR5         Jy           gc6flxR5Err         Jy           gc6flxR5Fill         -           gc6flxR6         Jy           gc6flxR6Err         Jy           gc6flxR6Std         Jy           gc6flxR6Fill         -	REAL REAL REAL	-999	Aperture fill factor for g filter detection within an aperture of radius $r = 4.63$ arcsec.
gflxR7Err         Jy           gflxR75td         Jy           gflxR7Fill         -           gc6flxR5         Jy           gc6flxR5Err         Jy           gc6flxR5Std         Jy           gc6flxR5Fill         -           gc6flxR6         Jy           gc6flxR6Err         Jy           gc6flxR6Std         Jy           gc6flxR6Fill         -	REAL REAL	-999	Flux from g filter detection within an aperture of radius $r = 7.43$ arcsec.
gflxR7Std         Jy           gflxR7Fill         -           gc6flxR5         Jy           gc6flxR5Err         Jy           gc6flxR5Std         Jy           gc6flxR5Fill         -           gc6flxR6         Jy           gc6flxR6Err         Jy           gc6flxR6Std         Jy           gc6flxR6Fill         -		-999	Error in flux from g filter detection within an aperture of radius $r = 7.43$ arcsec.
gc6flxR5         Jy           gc6flxR5Err         Jy           gc6flxR5Std         Jy           gc6flxR5Fill         -           gc6flxR6         Jy           gc6flxR6Err         Jy           gc6flxR6Std         Jy           gc6flxR6Fill         -	REAL	-999	Standard deviation of g filter flux within an aperture of radius $r = 7.43$ arcsec.
gc6flxR5Err         Jy           gc6flxR5Std         Jy           gc6flxR5Fill         -           gc6flxR6         Jy           gc6flxR6Err         Jy           gc6flxR6Std         Jy           gc6flxR6Fill         -		-999	Aperture fill factor for g filter detection within an aperture of radius $r = 7.43$ arcsec.
gc6flxR5Std         Jy           gc6flxR5Fill         -           gc6flxR6         Jy           gc6flxR6Err         Jy           gc6flxR6Std         Jy           gc6flxR6Fill         -	REAL	-999	Flux from g filter detection convolved to a target of 6 sky pixels
gc6flxR5Std         Jy           gc6flxR5Fill         -           gc6flxR6         Jy           gc6flxR6Err         Jy           gc6flxR6Std         Jy           gc6flxR6Fill         -	DEAL	000	(1.5 arcsec) within an aperture of radius $r = 3.00$ arcsec.
gc6flxR5Fill       -         gc6flxR6       Jy         gc6flxR6Err       Jy         gc6flxR6Std       Jy         gc6flxR6Fill       -	REAL	-999	Error in flux from g filter detection convolved to a target of
gc6flxR5Fill       -         gc6flxR6       Jy         gc6flxR6Err       Jy         gc6flxR6Std       Jy         gc6flxR6Fill       -	REAL	-999	6 sky pixels (1.5 arcsec) within an aperture of radius r = 3.00 arcsec. Standard deviation of flux from g filter detection convolved to
gc6flxR6 Jy gc6flxR6Err Jy gc6flxR6Std Jy gc6flxR6Fill -	HEAL	-333	a target of 6 sky pixels $(1.5 \text{ arcsec})$ within an aperture of radius $r = 3.00 \text{ arcsec}$ .
gc6flxR6         Jy           gc6flxR6Err         Jy           gc6flxR6Std         Jy           gc6flxR6Fill         -	REAL	-999	Aperture fill factor for g filter detection convolved to a
gc6flxR6Err Jy gc6flxR6Std Jy gc6flxR6Fill -	102112	000	target of 6 sky pixels (1.5 arcsec) within an aperture of radius $r = 3.00$ arcsec.
gc6flxR6Std Jy gc6flxR6Fill -	REAL	-999	Flux from g filter detection convolved to a target of 6 sky pixels
gc6flxR6Std Jy gc6flxR6Fill -			(1.5  arcsec) within an aperture of radius $r = 4.63  arcsec$ .
gc6flxR6Fill -	REAL	-999	Error in flux from g filter detection convolved to a target of
gc6flxR6Fill -	DELL		6 sky pixels (1.5 arcsec) within an aperture of radius $r = 4.63$ arcsec.
	REAL	-999	Standard deviation of flux from g filter detection convolved to
	DEAL	000	a target of 6 sky pixels (1.5 arcsec) within an aperture of radius $r = 4.63$ arcsec.
gc6flxR7 Jy	REAL	-999	Aperture fill factor for g filter detection convolved to a target of 6 sky pixels $(1.5 \text{ arcsec})$ within an aperture of radius $r = 4.63 \text{ arcsec}$ .
geomati	REAL	-999	Flux from g filter detection convolved to a target of 6 sky pixels
	TUELTE	000	(1.5 arcsec) within an aperture of radius $r = 7.43$ arcsec.
gc6flxR7Err Jy	REAL	-999	Error in flux from g filter detection convolved to a target of
			6 sky pixels (1.5 arcsec) within an aperture of radius $r = 7.43$ arcsec.
gc6flxR7Std Jy	REAL	-999	Standard deviation of flux from g filter detection convolved to a target of
			6 sky pixels (1.5 arcsec) within an aperture of radius $r = 7.43$ arcsec.
gc6flxR7Fill -	REAL	-999	Aperture fill factor for g filter detection convolved to a target of 6 sky
ma94D5 I	REAL	000	pixels (1.5 arcsec) within an aperture of radius r = 7.43 arcsec.
gc8flxR5 Jy	REAL	-999	Flux from g filter detection convolved to a target of 8 sky pixels (2.0 arcsec) within an aperture of radius r = 3.00 arcsec.
gc8flxR5Err Jy	REAL	-999	Error in flux from g filter detection convolved to a target of 8 sky pixels
gconxitoEn 5y	ILEAL	-333	(2.0 arcsec) within an aperture of radius $r = 3.00$ arcsec.
gc8flxR5Std Jy	REAL	-999	Standard deviation of flux from g filter detection convolved to a target of 8 sky
<u> </u>			pixels (2.0 arcsec) within an aperture of radius $r = 3.00$ arcsec.
gc8flxR5Fill -	REAL	-999	Aperture fill factor for g filter detection convolved to a target of 8 sky
- a - B -			pixels (2.0 arcsec) within an aperture of radius $r = 3.00$ arcsec.
gc8flxR6 Jy	REAL	-999	Flux from g filter detection convolved to a target of 8 sky pixels
od Dan	DEAL	000	(2.0 arcsec) within an aperture of radius $r = 4.63$ arcsec.
gc8flxR6Err Jy	REAL	-999	Error in flux from g filter detection convolved to a target of 8 sky pixels
gc8flxR6Std Jy	REAL	-999	(2.0 arcsec) within an aperture of radius r = 4.63 arcsec.  Standard deviation of flux from g filter detection convolved to a target of
gc8flxR6Std Jy	REAL	-999	8 sky pixels (2.0 arcsec) within an aperture of radius $r = 4.63$ arcsec.
gc8flxR6Fill -	REAL	-999	Aperture fill factor for g filter detection convolved to a target of 8 sky pixels
geonxitoi iii	TULLITE	-000	(2.0 arcsec) within an aperture of radius $r = 4.63$ arcsec.
gc8flxR7 Jy	REAL	-999	Flux from g filter detection convolved to a target of 8 sky pixels (2.0 arcsec)
G			within an aperture of radius $r = 7.43$ arcsec.
gc8flxR7Err Jy	REAL	-999	Error in flux from g filter detection convolved to a target 8 sky pixels
v			(2.0 arcsec) within an aperture of radius $r = 7.43$ arcsec.
gc8flxR7Std Jy	REAL	-999	Standard deviation of flux from g filter detection convolved to a target of
od Danin	DEAT	000	8 sky pixels (2.0 arcsec) within an aperture of radius $r = 7.43$ arcsec.
gc8flxR7Fill -	REAL	-999	Aperture fill factor for g filter detection convolved to a target of 8 sky pixels
rstackDetectID			(2.0  arcsec) within an aperture of radius $r = 7.43  arcsec$ .
15taCKDCtCCtID			
yc8flxR7Fill			same entries repeated for r, i, z, and y filters

TABLE 29

STACKMODELFITEXP: CONTAINS THE EXPONENTIAL FIT PARAMETERS TO EXTENDED SOURCES. SEE StackObjectThin Table for discussion of primary, secondary, and best detections.

column name	units	data type	default	description
objID	_	BIGINT	NA	Unique object identifier.
uniquePspsSTid	-	BIGINT	NA	Unique internal PSPS stack identifier.
ippŌbjID	-	BIGINT	NA	IPP internal object identifier.
randomStackObjID	-	FLOAT	NA	Random value drawn from the interval between zero and one.
primaryDetection	-	TINYINT	255	Identifies if this row is the primary <i>stack</i> detection.
bestDetection	-	TINYINT	255	Identifies if this row is the best detection.
gippDetectID	-	BIGINT	NA	IPP internal detection identifier.
gstackDetectID	-	BIGINT	NA	Unique stack detection identifier.
gstackImageID	-	BIGINT	NA	Unique stack identifier for g filter detection.
gExpRadius	arcsec	REAL	-999	Exponential fit radius for g filter stack detection.
gExpRadiusErr	arcsec	REAL	-999	Error in exponential fit radius for g filter stack detection.
gExpMag	AB	REAL	-999	Exponential fit magnitude for g filter stack detection.
gExpMagErr	AB	REAL	-999	Error in exponential fit magnitude for g filter <i>stack</i> detection.
gExpAb	-	REAL	-999	Exponential fit axis ratio for g filter stack detection.
gExpAbErr	-	REAL	-999	Error in exponential fit axis ratio for g filter stack detection.
gExpPhi	degrees	REAL	-999	Major axis position angle, phi, of exponential fit for g
-	_			filter stack detection.
gExpPhiErr	degrees	REAL	-999	Error in major axis position angle of exponential fit for g
				filter stack detection.
gExpRa	degrees	FLOAT	-999	Right ascension of exponential fit center for g filter
-	_			stack detection.
gExpDec	degrees	FLOAT	-999	Declination of exponential fit center for g filter
				stack detection.
gExpRaErr	arcsec	REAL	-999	Error in right ascension of exponential fit center for g
				filter stack detection.
gExpDecErr	arcsec	REAL	-999	Error in declination of exponential fit center for g
				filter stack detection.
gExpChisq	-	REAL	-999	Exponential fit reduced chi squared for g filter stack detection.
rippDetectID				
•••				same entries repeated for r, i, z, and y filters
yExpChisq				•

TABLE 30

STACKMODELFITDEV: CONTAINS THE DE VAUCOULEURS (1948) FIT PARAMETERS TO EXTENDED SOURCES. SEE StackObjectThin Table for Discussion of Primary, Secondary, and Best Detections.

column name	units	data type	default	description	
obiID	umus	BIGINT	NA	Unique object identifier.	
uniquePspsSTid	-	BIGINT	NA NA	Unique internal PSPS stack identifier.	
	-	BIGINT	NA NA	IPP internal object identifier.	
ippObjID	-	FLOAT	NA NA	Random value drawn from the interval between zero and one.	
randomStackObjID	-	-			
primaryDetection	-	TINYINT	255	Identifies if this row is the primary stack detection.	
bestDetection	-	TINYINT	255	Identifies if this row is the best detection.	
gippDetectID	-	BIGINT	NA	IPP internal detection identifier.	
gstackDetectID	-	BIGINT	NA	Unique stack detection identifier.	
gstackImageID	-	BIGINT	NA	Unique stack identifier for g filter detection.	
gDeVRadius	arcsec	REAL	-999	de Vaucouleurs (1948) fit radius for g filter stack detection.	
gDeVRadiusErr	arcsec	REAL	-999	Error in de Vaucouleurs (1948) fit radius for g filter <i>stack</i> detection.	
gDeVMag	AB	REAL	-999	de Vaucouleurs (1948) fit magnitude for g filter stack detection.	
${ m gDeVMagErr}$	$^{\mathrm{AB}}$	REAL	-999	Error in de Vaucouleurs (1948) fit magnitude for g filter stack detection.	
${ m gDeVAb}$	-	REAL	-999	de Vaucouleurs (1948) fit axis ratio for g filter stack detection.	
${ m gDeVAbErr}$	-	REAL	-999	Error in de Vaucouleurs (1948) fit axis ratio for g filter stack detection.	
gDeVPhi	degrees	REAL	-999	Major axis position angle, phi, of de Vaucouleurs (1948) fit for g filter	
9	Ü			stack detection.	
gDeVPhiErr	degrees	REAL	-999	Error in major axis position angle of de Vaucouleurs (1948) fit for g filter	
9	Ü			stack detection.	
gDeVRa	degrees	FLOAT	-999	Right ascension of de Vaucouleurs (1948) fit center for g filter stack	
8		_		detection.	
gDeVDec	degrees	FLOAT	-999	Declination of de Vaucouleurs (1948) fit center for g filter	
8	0			stack detection.	
gDeVRaErr	arcsec	REAL	-999	Error in right ascension of de Vaucouleurs (1948) fit center for g filter stack	
gbevitabii	aresee	TULLILL	000	detection.	
gDeVDecErr	arcsec	REAL	-999	Error in declination of de Vaucouleurs (1948) fit center for g filter <i>stack</i> detection.	
gDeVChisq	-	REAL	-999	de Vaucouleurs (1948) fit reduced chi squared for g filter stack detection.	
rippDetectID		101111	-555	ac vaccounts (1940) in reduced oil squared for g litter state, detection.	
прроссесио				same entries repeated for r, i, z, and y filters	
yDeVChisq				same entries repeated for 1, 1, z, and y inters	
y De v Cilisq					

TABLE 31

STACKMODELFITSER: CONTAINS THE SÉRSIC (1963) FIT PARAMETERS TO EXTENDED SOURCES. SEE *StackObjectThin* Table for discussion of primary, secondary, and best detections (Sérsic 1963).

column name units data type default description  objID - BIGINT NA Unique object identifier.  uniquePspsSTid - BIGINT NA Unique internal PSPS stack identifier.  ippObjID - BIGINT NA IPP internal object identifier.  randomStackObjID - FLOAT NA Random value drawn from the interval between zero and one.  primaryDetection - TINYINT 255 Identifies if this row is the primary stack detection.  bestDetection - TINYINT 255 Identifies if this row is the best detection.  gippDetectID - BIGINT NA IPP internal detection identifier.  gstackDetectID - BIGINT NA Unique stack detection identifier.  gstackImageID - BIGINT NA Unique stack identifier for g filter stack detection.  gSerRadius arcsec REAL -999 Sérsic (1963) fit radius for g filter stack detection.  gSerRadge AB REAL -999 Sérsic (1963) fit magnitude for g filter stack detection.	1	•,	1	1 C 1	
uniquePspsSTid ippObjID - BIGINT NA Unique internal PSPS stack identifier. randomStackObjID - FLOAT NA Random value drawn from the interval between zero and one. primaryDetection - TINYINT 255 Identifies if this row is the primary stack detection. bestDetection - TINYINT 255 Identifies if this row is the best detection. gippDetectID - BIGINT NA Unique stack detection identifier. gstackDetectID - BIGINT NA Unique stack detection identifier. gstackImageID - BIGINT NA Unique stack identifier for g filter detection. gSerRadius arcsec REAL -999 Sérsic (1963) fit radius for g filter stack detection. gSerRadius Frr arcsec REAL -999 Error in Sérsic (1963) fit radius for g filter stack detection.					
ippÔbjID - BIGINT NA IPP internal object identifier. randomStackObjID - FLOAT NA Random value drawn from the interval between zero and one. primaryDetection - TINYINT 255 Identifies if this row is the primary stack detection. bestDetection - TINYINT 255 Identifies if this row is the best detection. gippDetectID - BIGINT NA IPP internal detection identifier. gstackDetectID - BIGINT NA Unique stack detection identifier. gstackImageID - BIGINT NA Unique stack identifier for g filter detection. gSerRadius arcsec REAL -999 Sérsic (1963) fit radius for g filter stack detection. gSerRadiusErr arcsec REAL -999 Error in Sérsic (1963) fit radius for g filter stack detection.					
randomStackObjID - FLOAT NA Random value drawn from the interval between zero and one.  primaryDetection - TINYINT 255 Identifies if this row is the primary stack detection.  pestDetectID - BIGINT NA IPP internal detection identifier.  gstackDetectID - BIGINT NA Unique stack detection identifier.  gstackImageID - BIGINT NA Unique stack identifier for g filter detection.  gSerRadius arcsec REAL -999 Sérsic (1963) fit radius for g filter stack detection.  gSerRadiusErr arcsec REAL -999 Error in Sérsic (1963) fit radius for g filter stack detection.		-			
primaryDetection - TINYINT 255 Identifies if this row is the primary stack detection.  bestDetection - TINYINT 255 Identifies if this row is the primary stack detection.  gippDetectID - BIGINT NA IPP internal detection identifier.  gstackDetectID - BIGINT NA Unique stack detection identifier.  gstackImageID - BIGINT NA Unique stack identifier for g filter detection.  gSerRadius arcsec REAL -999 Sérsic (1963) fit radius for g filter stack detection.  gSerRadiusErr arcsec REAL -999 Error in Sérsic (1963) fit radius for g filter stack detection.		-			
best Detection - TINYINT 255 Identifies if this row is the best detection.  gipp DetectID - BIGINT NA IPP internal detection identifier.  gstackDetectID - BIGINT NA Unique stack detection identifier.  gstackImageID - BIGINT NA Unique stack identifier for g filter detection.  gSerRadius arcsec REAL -999 Sérsic (1963) fit radius for g filter stack detection.  gSerRadiusErr arcsec REAL -999 Error in Sérsic (1963) fit radius for g filter stack detection.		-			
gippDetectID - BIGINT NA IPP internal detection identifier. gstackDetectID - BIGINT NA Unique stack detection identifier. gstackImageID - BIGINT NA Unique stack identifier for g filter detection. gSerRadius arcsec REAL -999 Sérsic (1963) fit radius for g filter stack detection. gSerRadiusErr arcsec REAL -999 Error in Sérsic (1963) fit radius for g filter stack detection.	primaryDetection	-	TINYINT	255	Identifies if this row is the primary <i>stack</i> detection.
gstackDetectID - BIGINT NA Unique stack detection identifier. gstackImageID - BIGINT NA Unique stack identifier for g filter detection. gSerRadius arcsec REAL -999 Sérsic (1963) fit radius for g filter stack detection. gSerRadiusErr arcsec REAL -999 Error in Sérsic (1963) fit radius for g filter stack detection.	bestDetection	-	TINYINT	255	Identifies if this row is the best detection.
gstackImageID - BIGINT NA Unique stack identifier for g filter detection. gSerRadius arcsec REAL -999 Sérsic (1963) fit radius for g filter stack detection. gSerRadiusErr arcsec REAL -999 Error in Sérsic (1963) fit radius for g filter stack detection.	gippDetectID	-	BIGINT	NA	IPP internal detection identifier.
gSerRadius arcsec REAL -999 Sérsic (1963) fit radius for g filter stack detection. gSerRadiusErr arcsec REAL -999 Error in Sérsic (1963) fit radius for g filter stack detection.	gstackDetectID	-	BIGINT	NA	Unique stack detection identifier.
gSerRadiusErr arcsec REAL -999 Error in Sérsic (1963) fit radius for g filter stack detection.	gstackImageID	-	BIGINT	NA	Unique stack identifier for g filter detection.
	gSerRadius	arcsec	REAL	-999	Sérsic (1963) fit radius for g filter stack detection.
	gSerRadiusErr	arcsec	REAL	-999	Error in Sérsic (1963) fit radius for g filter stack detection.
	gSerMag	AB	REAL	-999	Sérsic (1963) fit magnitude for g filter stack detection.
gSerMagErr AB REAL -999 Error in Sérsic (1963) fit magnitude for g filter stack detection.	gSerMagErr	AB	REAL	-999	
gSerAb - REAL -999 Sérsic (1963) fit axis ratio for g filter stack detection.		_	REAL	-999	
gSerAbErr - REAL -999 Error in Sérsic (1963) fit axis ratio for g filter stack detection.		_			Error in Sérsic (1963) fit axis ratio for g filter stack detection.
gSerNu - REAL -999 Sérsic (1963) fit index for g filter stack detection.	gSerNu	_	REAL	-999	
gSerNuErr - REAL -999 Error in Sérsic (1963) fit index for g filter stack detection.		_			
gSerPhi degrees REAL -999 Major axis position angle, phi, of Sérsic (1963) fit for g filter stack detection.		degrees	REAL	-999	
					Error in major axis position angle of Sérsic (1963) fit for g filter stack detection.
gSerRa degrees FLOAT -999 Right ascension of Sérsic (1963) fit center for g filter stack detection.					
gSerDec degrees FLOAT -999 Declination of Sérsic (1963) fit center for g filter stack detection.					
gSerRaErr arcsec REAL -999 Error in right ascension of Sérsic (1963) fit center for g filter stack detection.					
gSerDecErr arcsec REAL -999 Error in declination of Sérsic (1963) fit center for g filter stack detection.					
gSerChisq - REAL -999 Sérsic (1963) fit reduced chi squared for g filter stack detection.		-			
rippDetectID			102711	000	beine (1000) in reduced oil squared for 8 inter states detection.
same entries repeated for r, i, z, and y filters	пррессень				same entries repeated for r i z and v filters
ySerChisq	vSerChisa				builto offerior repeated for 1, 1, 2, and y mitted

STACKAPFLXEXGALUNC: CONTAINS THE UNCONVOLVED FLUXES WITHIN THE SDSS R3 (R = 1.03 ARCSEC), R4 (R = 1.76 ARCSEC), R5 (R = 3.00 ARCSEC), R6 (R = 4.63 ARCSEC), R7 (R = 7.43 ARCSEC), R8 (R = 11.42 ARCSEC), R9 (R = 18.20 ARCSEC), R10 (R = 28.20 ARCSEC), AND R11 (R = 44.21 ARCSEC) APERTURES (STOUGHTON ET AL. 2002) FOR EXTENDED SOURCES. THESE MEASUREMENTS ARE ONLY PROVIDED FOR OBJECTS IN THE EXTRAGALACTIC SKY, I.E., THEY ARE NOT PROVIDED FOR OBJECTS IN THE GALACTIC PLANE BECAUSE THEY ARE NOT USEFUL IN CROWDED AREAS. SEE StackObjectThin Table for discussion of primary, secondary, and best detections.

column name	units	data type	default	description
objID	-	BIGINT	NA	Unique object identifier.
uniquePspsSTid	-	BIGINT	NA	Unique internal PSPS stack identifier.
ippObjID	-	BIGINT	NA	IPP internal object identifier.
randomStackObjID	-	FLOAT	NA	Random value drawn from the interval between zero and one.
primaryDetection	-	TINYINT	255	Identifies if this row is the primary $stack$ detection.
bestDetection	-	TINYINT	255	Identifies if this row is the best detection.
gippDetectID	-	BIGINT	NA	IPP internal detection identifier.
gstackDetectID	-	BIGINT	NA	Unique stack detection identifier.
gstackImageID	-	BIGINT	NA	Unique stack identifier for g filter detection.
gflxR3	Jу	REAL	-999	Flux from g filter detection within an aperture of radius $r = 1.03$ arcsec.
gflxR3Err	$_{\mathbf{J}}\mathbf{y}$	REAL	-999	Error in flux from g filter detection within an aperture of radius $r = 1.03$ arcsec.
gflxR3Std	Jy	REAL	-999	Standard deviation of flux from g filter detection within an aperture of radius $r = 1.03$ arcsec.
~AD2E:11		REAL	-999	
gflxR3Fill	- T		-999 -999	Aperture fill factor for g filter detection within an aperture of radius $r = 1.03$ arcsec. Flux from g filter detection within an aperture of radius $r = 1.76$ arcsec.
gflxR4 gflxR4Err	Jу	$egin{array}{c}  ext{REAL} \  ext{REAL} \end{array}$	-999 -999	
gflxR4Std	$_{ m Jy}^{ m Jy}$	REAL	-999 -999	Error in flux from g filter detection within an aperture of radius $r = 1.76$ arcsec. Standard deviation of flux from g filter detection within an aperture of radius
giixiv45tu	JУ	REAL	-999	r = 1.76 arcsec.
gflxR4Fill	_	REAL	-999	Aperture fill factor for g filter detection within an aperture of radius $r = 1.76$ arcsec.
gflxR5	$J_{\mathbf{y}}$	REAL	-999 -999	Flux from g filter detection within an aperture of radius $r = 3.00$ arcsec.
gflxR5Err	$_{ m Jy}$	REAL	-999 -999	Error in flux from g filter detection within an aperture of radius $r = 3.00$ arcsec.
gflxR5Std	$J_{\mathbf{y}}$	REAL	-999	Standard deviation of flux from g filter detection within an aperture of radius
giixitoota	бу	TUDITE	-555	r = 3.00 arcsec.
gflxR5Fill	_	REAL	-999	Aperture fill factor for g filter detection within an aperture of radius $r = 3.00$ arcsec.
gflxR6	Jy	REAL	-999	Flux from g filter detection within an aperture of radius $r = 4.63$ arcsec.
gflxR6Err	$J_{y}$	REAL	-999	Error in flux from g filter detection within an aperture of radius $r = 4.63$ arcsec.
gflxR6Std	$J_{\rm V}$	REAL	-999	Standard deviation of flux from g filter detection within an aperture of radius
giiiitosta	0,5	102112	000	r = 4.63 arcsec.
gflxR6Fill	_	REAL	-999	Aperture fill factor for g filter detection within an aperture of radius $r = 4.63$ arcsec.
gflxR7	Jy	REAL	-999	Flux from g filter detection within an aperture of radius $r = 7.43$ arcsec.
gflxR7Err	$J_{y}$	REAL	-999	Error in flux from g filter detection within an aperture of radius $r = 7.43$ arcsec.
gflxR7Std	$J_{y}$	REAL	-999	Standard deviation of flux from g filter detection within an aperture of radius
S				r = 7.43 arcsec.
gflxR7Fill	_	REAL	-999	Aperture fill factor for g filter detection within an aperture of radius $r = 7.43$ arcsec.
gflxR8	Jy	REAL	-999	Flux from g filter detection within an aperture of radius $r = 11.42$ arcsec.
gflxR8Err	Jy	REAL	-999	Error in flux from g filter detection within an aperture of radius $r = 11.42$ arcsec.
gflxR8Std	Jy	REAL	-999	Standard deviation of flux from g filter detection within an aperture of radius
<u> </u>	•			r = 11.42 arcsec.
gflxR8Fill	-	REAL	-999	Aperture fill factor for g filter detection within an aperture of radius $r = 11.42$ arcsec.
gflxR9	$_{ m Jy}$	REAL	-999	Flux from g filter detection within an aperture of radius $r = 18.20$ arcsec.
gflxR9Err	Jy	REAL	-999	Error in flux from g filter detection within an aperture of radius $r = 18.20$ arcsec.
gflxR9Std	Jy	REAL	-999	Standard deviation of flux from g filter detection within an aperture of radius
				r = 18.20 arcsec.
gflxR9Fill	-	REAL	-999	Aperture fill factor for g filter detection within an aperture of radius $r = 18.20$ arcsec.
gflxR10_	$_{ m Jy}$	REAL	-999	Flux from g filter detection within an aperture of radius $r = 28.20$ arcsec.
gflxR10Err	Jy	REAL	-999	Error in flux from g filter detection within an aperture of radius $r = 28.20$ arcsec.
gflxR10Std	$_{ m Jy}$	REAL	-999	Standard deviation of flux from g filter detection within an aperture of radius
4. D4.0D:''		DD4-	0.0.5	r = 28.20 arcsec.
gflxR10Fill	-	REAL	-999	Aperture fill factor for g filter detection within an aperture of radius $r = 28.20$ arcsec.
gflxR11	Jу	REAL	-999	Flux from g filter detection within an aperture of radius $r = 44.21$ arcsec.
gflxR11Err	Jу	REAL	-999	Error in flux from g filter detection within an aperture of radius $r = 44.21$ arcsec.
gflxR11Std	$_{ m Jy}$	REAL	-999	Standard deviation of flux from g filter detection within an aperture of radius
		DEAL	000	r = 44.21 arcsec.
gflxR11Fill	-	REAL	-999	Aperture fill factor for g filter detection within an aperture of radius $r = 44.21$ arcsec.
rippDetectID				some entries reported for military and military
 vflxR11Fill				same entries repeated for r, i, z, and y filters
уплитги				

StackApFlxExGalCon6: Contains the fluxes within the SDSS R3 (R = 1.03 arcsec), R4 (R = 1.76 arcsec), R5 (R = 3.00 arcsec), R6 (R = 4.63 arcsec), R7 (R = 7.43 arcsec), R8 (R = 11.42 arcsec), R9 (R = 18.20 arcsec), R10 (R = 28.20 arcsec), and R11 (R = 44.21 arcsec) apertures ((Stoughton et al. 2002) for extended sources after the images have been convolved to a target of 6 sky pixels (1.5 arcsec). These measurements are only provided for objects in the extragalactic sky, i.e., they are not provided for objects in the Galactic plane because they are not useful in crowded areas. See StackObjectThin table for discussion of primary, secondary, and best detections.

column name	units	data type	default	description
objID	-	BIGINT	NA	Unique object identifier.
uniquePspsSTid	-	BIGINT	NA	Unique internal PSPS stack identifier.
ippObjID	-	BIGINT	NA	IPP internal object identifier.
randomStackObjID	-	FLOAT	NA	Random value drawn from the interval between zero and one.
primaryDetection	-	TINYINT	255	Identifies if this row is the primary stack detection.
bestDetection	-	TINYINT	255	Identifies if this row is the best detection.
gippDetectID	-	BIGINT	NA	IPP internal detection identifier.
gstackDetectID	-	BIGINT	NA	Unique stack detection identifier.
gstackImageID	-	BIGINT	NA	Unique <i>stack</i> identifier for g filter detection.
gc6flxR3	Jу	REAL	-999	Flux from g filter detection convolved to a target of 6 sky pixels (1.5 arcsec)
				within an aperture of radius $r = 1.03$ arcsec.
gc6flxR3Err	$_{ m Jy}$	REAL	-999	Error in flux from g filter detection convolved to a target of 6 sky pixels
				(1.5  arcsec) within an aperture of radius $r = 1.03  arcsec$ .
gc6flxR3Std	Jу	REAL	-999	Standard deviation of flux from g filter detection convolved to a target of 6
				sky pixels (1.5 arcsec) within an aperture of radius $r = 1.03$ arcsec.
gc6flxR3Fill	-	REAL	-999	Aperture fill factor for g filter detection convolved to a target of 6 sky pixels
				(1.5  arcsec) within an aperture of radius $r = 1.03  arcsec$ .
•••				gc6flxR3 gc6flxR3Fill columns repeated for R4 ( $r = 1.76$ arcsec).
•••				repeated for R5 ( $r = 3.00$ arcsec).
•••				repeated for R6 ( $r = 4.63 \text{ arcsec}$ ).
•••				repeated for R7 ( $r = 7.43 \text{ arcsec}$ ).
•••				repeated for R8 ( $r = 11.42 \text{ arcsec}$ ).
•••				repeated for R9 ( $r = 18.20 \text{ arcsec}$ ).
•••				repeated for R10 ( $r = 28.20$ arcsec).
gc6flxR11	Jy	REAL	-999	Flux from g filter detection convolved to a target of 6 sky pixels (1.5 arcsec)
	v			within an aperture of radius $r = 44.21$ arcsec.
gc6flxR11Err	Jy	REAL	-999	Error in flux from g filter detection convolved to a target of 6 sky pixels
S				(1.5  arcsec) within an aperture of radius $r = 44.21  arcsec$ .
gc6flxR11Std	Jy	REAL	-999	Standard deviation of flux from g filter detection convolved to a target of 6
S				sky pixels (1.5 arcsec) within an aperture of radius $r = 44.21$ arcsec.
gc6flxR11Fill	_	REAL	-999	Aperture fill factor for g filter detection convolved to a target of 6 sky pixels
				(1.5  arcsec) within an aperture of radius $r = 44.21  arcsec$ .
rippDetectID				, ,
				same entries repeated for r, i, z, and y filters
yc6flxR11Fill				•

STACKAPFLXEXGALCON8: CONTAINS THE FLUXES WITHIN THE SDSS R3 (R = 1.03 ARCSEC), R4 (R = 1.76 ARCSEC), R5 (R = 3.00 ARCSEC), R6 (R = 4.63 ARCSEC), R7 (R = 7.43 ARCSEC), R8 (R = 11.42 ARCSEC), R9 (R = 18.20 ARCSEC), R10 (R = 28.20 ARCSEC), AND R11 (R = 44.21 ARCSEC) APERTURES (STOUGHTON ET AL. 2002) FOR EXTENDED SOURCES AFTER THE IMAGES HAVE BEEN CONVOLVED TO A TARGET OF 8 SKY PIXELS (2.0 ARCSEC). THESE MEASUREMENTS ARE ONLY PROVIDED FOR OBJECTS IN THE EXTRAGALACTIC SKY, I.E., THEY ARE NOT PROVIDED FOR OBJECTS IN THE GALACTIC PLANE BECAUSE THEY ARE NOT USEFUL IN CROWDED AREAS. SEE StackObjectThin Table for discussion of Primary, Secondary, and Best detections.

column name	units	data type	default	description
objID	-	BIGINT	NA	Unique object identifier.
uniquePspsSTid	-	BIGINT	NA	Unique internal PSPS stack identifier.
ippObjID	-	BIGINT	NA	IPP internal object identifier.
randomStackObjID	-	FLOAT	NA	Random value drawn from the interval between zero and one.
primaryDetection	-	TINYINT	255	Identifies if this row is the primary <i>stack</i> detection.
bestDetection	-	TINYINT	255	Identifies if this row is the best detection.
gippDetectID	-	BIGINT	NA	IPP internal detection identifier.
gstackDetectID	-	BIGINT	NA	Unique stack detection identifier.
gstackImageID	-	BIGINT	NA	Unique stack identifier for g filter detection.
gc8flxR3	$_{ m Jy}$	REAL	-999	Flux from g filter detection convolved to a target of 8 sky pixels (2.0 arcsec)
				within an aperture of radius $r = 1.03$ arcsec.
gc8flxR3Err	$_{ m Jy}$	REAL	-999	Error in flux from g filter detection convolved to a target of 8 sky pixels
				(2.0  arcsec) within an aperture of radius $r = 1.03  arcsec$ .
gc8flxR3Std	Jy	REAL	-999	Standard deviation of flux from g filter detection convolved to a target of 8
9	·			sky pixels (2.0 arcsec) within an aperture of radius $r = 1.03$ arcsec.
gc8flxR3Fill	_	REAL	-999	Aperture fill factor for g filter detection convolved to a target of 8 sky pixels
9				(2.0  arcsec) within an aperture of radius $r = 1.03  arcsec$ .
				gc8flxR3 gc8flxR3Fill columns repeated for R4 ( $r = 1.76$ arcsec).
				repeated for R5 ( $r = 3.00 \text{ arcsec}$ ).
				repeated for R6 ( $r = 4.63$ arcsec).
				repeated for R7 ( $r = 7.43$ arcsec).
				repeated for R8 ( $r = 11.42$ arcsec).
				repeated for R9 ( $r = 18.20$ arcsec).
				repeated for R10 ( $r = 28.20$ arcsec).
gc8flxR11	Jy	REAL	-999	Flux from g filter detection convolved to a target of 8 sky pixels (2.0 arcsec)
8	9,5			within an aperture of radius $r = 44.21$ arcsec.
gc8flxR11Err	Jy	REAL	-999	Error in flux from g filter detection convolved to a target of 8 sky pixels
geemmerran	0,5	102112	000	(2.0  arcsec) within an aperture of radius $r = 44.21  arcsec$ .
gc8flxR11Std	Jy	REAL	-999	Standard deviation of flux from g filter detection convolved to a target of 8
geomitriota	0,5	102112	000	sky pixels (2.0 arcsec) within an aperture of radius $r = 44.21$ arcsec.
gc8flxR11Fill	_	REAL	-999	Aperture fill factor for g filter detection convolved to a target of 8 sky pixels
goonartiiiii		TUDITE	000	(2.0  arcsec) within an aperture of radius $r = 44.21  arcsec$ .
rippDetectID				(2.0 drobbe) within all aporture of radius I = 44.21 drobbe.
TIPPIDECECTIO				same entries repeated for r, i, z, and y filters
vc8flxR11Fill				builte environ repeated for 1, 1, 2, and y mitters
yconxiciiiiii				

TABLE 35

STACKPETROSIAN: CONTAINS THE PETROSIAN (1976) MAGNITUDES AND RADII FOR EXTENDED SOURCES. SEE StackObjectThin Table for discussion of primary, secondary, and best detections.

column name units data type default description  objID - BIGINT NA Unique object identifier.  uniquePspsSTid ippObjID - BIGINT NA IPP internal object identifier.  randomStackObjID - FLOAT NA IPP internal object identifier.  randomStackObjID - FLOAT NA Random value drawn from the interval between zero and one.  primaryDetection - TINYINT 255 Identifies if this row is the primary stack detection.  bestDetection - TINYINT 255 Identifies if this row is the best detection.  gippDetectID - BIGINT NA IPP internal detection identifier.  gstackDetectID - BIGINT NA Unique stack detection identifier.  gstackImageID - BIGINT NA Unique stack identifier for g filter detection.  gpetRadius arcsec REAL -999 Petrosian (1976) fit radius for g filter stack detection.  Performed APP PEAL -999 Petrosian (1976) mergitude from g filter stack detection.					
uniquePspsSTid - BIGINT NA Unique internal PSPS stack identifier.  randomStackObjID - FLOAT NA IPP internal object identifier.  randomStackObjID - FLOAT NA Random value drawn from the interval between zero and one.  primaryDetection - TINYINT 255 Identifies if this row is the primary stack detection.  bestDetectID - BIGINT NA IPP internal object identifier.  Random value drawn from the interval between zero and one.  Identifies if this row is the best detection.  IPP internal object identifier.  Identifies if this row is the primary stack detection.  IPP internal object identifier.  Identifies if this row is the primary stack detection.  IPP internal object identifier.  Identifies if this row is the primary stack detection.  IPP internal object identifier.  Identifies if this row is the primary stack detection.  IPP internal PSPS stack identifier.  Random value drawn from the interval between zero and one.  Identifies if this row is the primary stack detection.  Ident	column name	units	data type	default	description
ippObjID - BIGINT NA IPP internal object identifier. randomStackObjID - FLOAT NA primaryDetection - TINYINT 255 Identifies if this row is the primary stack detection. bestDetection - TINYINT 255 Identifies if this row is the pest detection. gippDetectID - BIGINT NA IPP internal object identifier. Identifies if this row is the primary stack detection. IPP internal object identifier. Identifies if this row is the best detection. IPP internal object identifier. Identifies if this row is the primary stack detection. IPP internal object identifier. Identifies if this row is the primary stack detection. IPP internal object identifier. Identifies if this row is the primary stack detection. IPP internal object identifier. Identifies if this row is the primary stack detection. IPP internal object identifier. Identifies if this row is the primary stack detection. IPP internal object identifier. Identifies if this row is the primary stack detection. IPP internal object identifier. Identifies if this row is the primary stack detection. IPP internal object identifier. Identifies if this row is the primary stack detection. IPP internal object identifier. Identifies if this row is the primary stack detection. IPP internal object identifier. Identifies if this row is the primary stack detection. IPP internal object identifier. Identifies if this row is the primary stack detection. Identifies if this row is the primary stack detection. Identifies if this row is the primary stack detection. Identifies if this row is the primary stack detection. Identifies if this row is the primary stack detection. Identifies if this row is the primary stack detection. Identifies if this row is the primary stack detection. Identifies if this row is the primary stack detection. Identifies if this row is the primary stack detection. Identifies if this row is the primary stack detection. Identifies if this row is the primary stack detection. Identifies if this row is the primary stack detection. Identifies if this row is the primary stack detection	objID	-	BIGINT	NA	Unique object identifier.
randomStackObjID - FLOAT NA Random value drawn from the interval between zero and one.  primaryDetection - TINYINT 255 Identifies if this row is the primary stack detection.  primaryDetection - TINYINT 255 Identifies if this row is the perimary stack detection.  Identifies if this row is the perimary stack detection.  Identifies if this row is the perimary stack detection.  Identifies if this row is the perimary stack detection.  Identifies if this row is the primary stack	uniquePspsSTid	-	BIGINT	NA	Unique internal PSPS stack identifier.
primaryDetection - TINYINT 255 Identifies if this row is the primary stack detection.  bestDetection - TINYINT 255 Identifies if this row is the primary stack detection.  gippDetectID - BIGINT NA IPP internal detection identifier.  gstackDetectID - BIGINT NA Unique stack detection identifier.  gstackImageID - BIGINT NA Unique stack identifier for g filter detection.  gpetRadius arcsec REAL -999 Petrosian (1976) fit radius for g filter stack detection.  gpetRadiusErr arcsec REAL -999 Error in Petrosian (1976) fit radius for g filter stack detection.	ippObjID	-	BIGINT	NA	IPP internal object identifier.
best Detection - TINYINT 255 Identifies if this row is the best detection.  gippDetectID - BIGINT NA IPP internal detection identifier.  gstackDetectID - BIGINT NA Unique stack detection identifier.  gstackImageID - BIGINT NA Unique stack identifier for g filter detection.  gpetRadius arcsec REAL -999 Petrosian (1976) fit radius for g filter stack detection.  gpetRadiusErr arcsec REAL -999 Error in Petrosian (1976) fit radius for g filter stack detection.	randomStackObjID	-	FLOAT	NA	Random value drawn from the interval between zero and one.
gippDetectID - BIGINT NA IPP internal detection identifier. gstackDetectID - BIGINT NA Unique stack detection identifier. gstackImageID - BIGINT NA Unique stack identifier for g filter detection. gpetRadius arcsec REAL -999 Petrosian (1976) fit radius for g filter stack detection. gpetRadiusErr arcsec REAL -999 Error in Petrosian (1976) fit radius for g filter stack detection.	primaryDetection	-	TINYINT	255	Identifies if this row is the primary stack detection.
gstackDetectID - BIGINT NA Unique stack detection identifier. gstackImageID - BIGINT NA Unique stack identifier for g filter detection. gpetRadius arcsec REAL -999 Petrosian (1976) fit radius for g filter stack detection. gpetRadiusErr arcsec REAL -999 Error in Petrosian (1976) fit radius for g filter stack detection.	bestDetection	-	TINYINT	255	
gstackImageID - BIGINT NA Unique stack identifier for g filter detection. gpetRadius arcsec REAL -999 Petrosian (1976) fit radius for g filter stack detection. gpetRadiusErr arcsec REAL -999 Error in Petrosian (1976) fit radius for g filter stack detection.	gippDetectID	-	BIGINT	NA	IPP internal detection identifier.
gpetRadius arcsec REAL -999 Petrosian (1976) fit radius for g filter stack detection. gpetRadiusErr arcsec REAL -999 Error in Petrosian (1976) fit radius for g filter stack detection.		-	BIGINT	NA	
gpetRadiusErr arcsec REAL -999 Error in Petrosian (1976) fit radius for g filter stack detection.	gstackImageID	-	BIGINT	NA	
	gpetRadius	arcsec	REAL	-999	Petrosian (1976) fit radius for g filter stack detection.
great Mag. A.P. PEAT 000 Petrosian (1076) magnitude from a filter steel detection	gpetRadiusErr	arcsec	REAL	-999	
gpetwag Ab REAL -999 Fetrosian (1970) magnitude from g inter stack detection.	gpetMag	AB	REAL	-999	Petrosian (1976) magnitude from g filter stack detection.
gpetMagErr AB REAL -999 Error in Petrosian (1976) magnitude from g filter stack detection.	gpetMagErr	AB	REAL	-999	Error in Petrosian (1976) magnitude from g filter stack detection.
gpetR50 arcsec REAL -999 Petrosian (1976) fit radius for g filter stack detection. at 50% light	gpetR50	arcsec	REAL	-999	Petrosian (1976) fit radius for g filter stack detection. at 50% light
gpetR50Err arcsec REAL -999 Error in Petrosian (1976) fit radius for g filter stack detection. at 50% ligh	gpetR50Err	arcsec	REAL	-999	Error in Petrosian (1976) fit radius for g filter stack detection. at 50% light
gpetR90 arcsec REAL -999 Petrosian (1976) fit radius for g filter stack detection. at 90% light	gpetR90	arcsec	REAL	-999	
	gpetR90Err	arcsec	REAL	-999	Error in Petrosian (1976) fit radius for g filter stack detection. at 90% light
gpetCf - REAL -999 Petrosian (1976) fit coverage factor for g filter stack detection.	gpetCf	_	REAL	-999	Petrosian (1976) fit coverage factor for g filter stack detection.
rippDetectID					. , , , , , , , , , , , , , , , , , , ,
same entries repeated for r, i, z, and y filters					same entries repeated for r, i, z, and y filters
ypetCf	ypetCf				. , , , , ,

TABLE 36

STACKTOIMAGE: CONTAINS THE MAPPING OF WHICH INPUT IMAGES WERE USED TO CONSTRUCT A PARTICULAR STACK.

column name	units	data type	default	description
stackImageID	-	BIGINT	NA	Unique stack identifier.
imageID	-	BIGINT	NA	Unique image identifier. Constructed as $(100 * frameID + ccdID)$ .

TABLE 37

STACKTOFRAME: CONTAINS THE MAPPING OF INPUT FRAMES USED TO CONSTRUCT A PARTICULAR stack ALONG WITH PROCESSING STATS.

column name	units	data type	default	description
stackImageID	-	BIGINT	NA	Unique stack identifier.
frameID	-	INT	NA	Unique frame/exposure identifier.
scaleFactor	-	REAL	0	normalization factor applied to input image before stacking.
zp	magnitudes	REAL	0	Photometric zeropoint. Necessary for converting listed fluxes and magnitudes back to measured ADU counts.
expTime	seconds	REAL	-999	Exposure time of the frame/exposure. Necessary for converting
exprime	seconds	ILEAL	-999	listed fluxes and magnitudes back to measured ADU counts.
airMass	-	REAL	0	Airmass at midpoint of the exposure. Necessary for converting
				listed fluxes and magnitudes back to measured ADU counts.

TABLE 38

STACKDETEFFMETA: CONTAINS THE DETECTION EFFICIENCY INFORMATION FOR A GIVEN STACKED IMAGE. PROVIDES THE NUMBER OF RECOVERED SOURCES OUT OF 500 INJECTED SOURCES FOR EACH MAGNITUDE BIN AND STATISTICS ABOUT THE MAGNITUDES OF THE RECOVERED SOURCES FOR A RANGE OF MAGNITUDE OFFSETS.

column name	units	data type	default	description
stackImageID	-	BIGINT	NA	Unique stack identifier.
magref	$_{ m magnitudes}$	REAL	NA	Detection efficiency reference magnitude.
nInjected	-	INT	NA	Number of fake sources injected in each magnitude bin.
offset01	magnitudes	REAL	NA	Detection efficiency magnitude offset for bin 1.
counts01	-	REAL	NA	Detection efficiency count of recovered sources in bin 1.
diffMean01	magnitudes	REAL	NA	Detection efficiency mean magnitude difference in bin 1.
diffStdev01	magnitudes	REAL	NA	Detection efficiency standard deviation of magnitude differences in bin 1.
errMean01	magnitudes	REAL	NA	Detection efficiency mean magnitude error in bin 1.
offset02	magnitudes	REAL	NA	Detection efficiency magnitude offset for bin 2.
counts02	-	REAL	NA	Detection efficiency count of recovered sources in bin 2.
diffMean02	magnitudes	REAL	NA	Detection efficiency mean magnitude difference in bin 2.
diffStdev02	magnitudes	REAL	NA	Detection efficiency standard deviation of magnitude differences in bin 2.
errMean02	magnitudes	REAL	NA	Detection efficiency mean magnitude error in bin 2.
offset 03	magnitudes	REAL	NA	Detection efficiency magnitude offset for bin 3.
counts03	-	REAL	NA	Detection efficiency count of recovered sources in bin 3.
diffMean03	magnitudes	REAL	NA	Detection efficiency mean magnitude difference in bin 3.
diffStdev03	magnitudes	REAL	NA	Detection efficiency standard deviation of magnitude differences in bin 3.
errMean03	magnitudes	REAL	NA	Detection efficiency mean magnitude error in bin 3.
	Ü			·
offset 13	magnitudes	REAL	NA	Detection efficiency magnitude offset for bin 13.
counts13	-	REAL	NA	Detection efficiency count of recovered sources in bin 13.
diffMean13	magnitudes	REAL	NA	Detection efficiency mean magnitude difference in bin 13.
diffStdev13	magnitudes	REAL	NA	Detection efficiency standard deviation of magnitude differences in bin 13.
errMean13	magnitudes	REAL	NA	Detection efficiency mean magnitude error in bin 13.

TABLE 39

FrameMeta: Contains metadata related to an individual exposure. A "Frame" refers to the collection of all images obtained by the 60 OTA devices in the camera in a single exposure. The camera configuration, telescope pointing, observation time, and astrometric solution from the detector focal plane (L,M) to the sky (RA,Dec) is provided.

column name	units	data type	default	description
frameID	-	INT	NA	Unique frame/exposure identifier.
frameName	_	VARCHAR(32)	NA	Frame/exposure name provided by the camera software.
surveyID	_	TINYINT `	NA	Survey identifier. Details in the Survey table.
filterľD	_	TINYINT	NA	Filter identifier. Details in the Filter table.
ippChipID	_	INT	NA	IPP chipRun identifier.
ippCamID	_	INT	NA	IPP camRun identifier.
ippWarpID	_	INT	NA	IPP warpRun identifier.
cameraID	_	SMALLINT	NA	Camera identifier. Details in the CameraConfig table.
cameraConfigID	_	SMALLINT	NA	Camera configuration identifier. Details in the CameraConfig table.
telescopeID	_	SMALLINT	NA	Telescope identifier.
analysisVer	_	VARCHAR(100)		IPP software analysis release version.
md5sum	_	VARCHAR(100)		IPP MD5 Checksum.
nOTA	_	SMALLINT	-999	Number of valid OTA images in this frame/exposure.
photoScat	magnitudes	REAL	-999	Photometric scatter relative to reference catalog across the full FOV.
nPhotoRef	-	INT	-999	Number of photometric reference sources.
expStart	days	FLOAT	-999	Modified Julian Date at the start of the exposure.
expTime	seconds	REAL	-999	Exposure time of the frame/exposure. Necessary for converting listed
1				fluxes and magnitudes back to measured ADU counts.
airmass	_	REAL	0	Airmass at midpoint of the exposure. Necessary for converting listed
				fluxes and magnitudes back to measured ADU counts.
raBore	degrees	FLOAT	-999	Right ascension of telescope boresight.
decBore	degrees	FLOAT	-999	Declination of telescope boresight.
ctype1	-	VARCHAR(100)		Name of astrometric projection in RA.
ctype2	_	VARCHAR(100)		Name of astrometric projection in Dec.
crval1	degrees	FLOAT	-999	Right ascension corresponding to reference pixel.
crval2	degrees	FLOAT	-999	Declination corresponding to reference pixel.
crpix1	pixels	FLOAT	-999	Reference pixel for RA.
crpix2	pixels	FLOAT	-999	Reference pixel for Dec.
cdelt1	degrees/pixel	FLOAT	-999	Pixel scale in RA.
cdelt2	degrees/pixel	FLOAT	-999	Pixel scale in Dec.
pc001001	- 71	FLOAT	-999	Linear transformation matrix element between focal plane pixel L and RA.
pc001002	_	FLOAT	-999	Linear transformation matrix element between focal plane pixel M and RA.
pc002001	-	FLOAT	-999	Linear transformation matrix element between focal plane pixel L and Dec.
pc002002	_	FLOAT	-999	Linear transformation matrix element between focal plane pixel M and Dec.
polyOrder	-	TINYINT	255	Polynomial order of astrometric fit between detector focal plane and sky.
pca1x3v0	_	FLOAT	-999	Polynomial coefficient for the astrometric fit component $(x^3 y^0)$ for RA.
pca1x2v1	_	FLOAT	-999	Polynomial coefficient for the astrometric fit component $(x^2 y^1)$ for RA.
pca1x1y2	_	FLOAT	-999	Polynomial coefficient for the astrometric fit component $(x^1 \ y^2)$ for RA.
pca1x0v3	_	FLOAT	-999	Polynomial coefficient for the astrometric fit component $(x^0 \ y^3)$ for RA.
pca1x0y9 pca1x2v0		FLOAT	-999	Polynomial coefficient for the astrometric fit component $(x^2 y^0)$ for RA.
pca1x1y1	-	FLOAT	-999	Polynomial coefficient for the astrometric fit component $(x^1 y^1)$ for RA.
1 0	-			
pca1x0y2	-	FLOAT	-999	Polynomial coefficient for the astrometric fit component $(x^0 \ y^2)$ for RA.
pca2x3y0	-	FLOAT	-999	Polynomial coefficient for the astrometric fit component $(x^3 y^0)$ for Dec.
pca2x2y1	-	FLOAT	-999	Polynomial coefficient for the astrometric fit component $(x^2 \ y^1)$ for Dec.
pca2x1y2	-	FLOAT	-999	Polynomial coefficient for the astrometric fit component $(x^1, y^2)$ for Dec.
pca2x0y3	-	FLOAT	-999	Polynomial coefficient for the astrometric fit component $(x^0 \ y^3)$ for Dec.
pca2x2y0	-	FLOAT	-999	Polynomial coefficient for the astrometric fit component $(x^2 y^0)$ for Dec.
pca2x1y1	-	FLOAT	-999	Polynomial coefficient for the astrometric fit component $(x^1 \ y^1)$ for Dec.
pca2x0y2	-	FLOAT	-999	Polynomial coefficient for the astrometric fit component $(x^0 y^2)$ for Dec.
batchIĎ	-	BIGINT	NA	Internal database batch identifier.
processingVersion	-	TINYINT	NA	Data release version.

Single Exposure Detection Tables

TABLE 40 ImageMeta: Contains metadata related to an individual OTA image that comprises a portion of the full exposure. The characterization of the image quality, the detrends applied, and the astrometric solution from the raw pixels (X,Y) to the detector focal plane (L,M) is provided.

column name	units	data type	default	description
imageID	=	BIGINT	NA	Unique image identifier. Constructed as (100 * frameID + ccdID).
frameID	=	INT	NA	Unique frame/exposure identifier.
ccdID	=	SMALLINT	NA	OTA identifier based on location in the focal plane, specific to an individual device.
photoCalID	=	INT	NA	Photometric calibration identifier. Details in the PhotoCal table.
filterID	-	TINYINT	NA	Filter identifier. Details in the Filter table.
bias	adu	REAL	-999	OTA bias level.
biasScat	adu	REAL	-999	Scatter in bias level.
sky	$Jy/arcsec^2$	REAL	-999	Mean sky brightness.
skyScat	$Jy/arcsec^2$	REAL	-999	Scatter in mean sky brightness.
nDetect	=	INT	-999	Number of detections in this image.
detectionThreshold	magnitudes	REAL	-999	Reference magnitude for detection efficiency calculation.
astroScat	arcsec	REAL	-999	Measurement of the calibration (not astrometric error) defined to be the sum in quadrature of the standard deviations in the X and Y directions.
photoScat	magnitudes	REAL	-999	Photometric scatter relative to reference catalog.
nAstroRef	-	INT	-999	Number of astrometric reference sources.
nPhotoRef	=	INT	-999	Number of photometric reference sources.
recalAstroScatX	arcsec	REAL	-999	Measurement of the re-calibration (not astrometric error) in the X direction.
recalAstroScatY	arcsec	REAL	-999	Measurement of the re-calibration (not astrometric error) in the Y direction.
recalNAstroStars	=	INT	-999	Number of astrometric reference sources used in recalibration.
recalphotoScat	magnitudes	REAL	-999	Photometric scatter relative to reference catalog.
recalNPhotoStars	= ~	INT	-999	Number of astrometric reference sources used in recalibration.
nAxis1	pixels	SMALLINT	-999	Image dimension in x.
nAxis2	pixels	SMALLINT	-999	Image dimension in y.
psfModelID	=	INT	-999	PSF model identifier.
psfFWHM	arcsec	REAL	-999	Mean PSF full width at half maximum at image center.
psfWidMajor	arcsec	REAL	-999	PSF major axis FWHM at image center.
psfWidMinor	arcsec	REAL	-999	PSF minor axis FWHM at image center.
psfTheta	degrees	REAL	-999	PSF major axis orientation at image center.
momentMajor	arcsec	REAL	-999	PSF major axis second moment.
momentMinor	arcsec	REAL	-999	PSF minor axis second moment.
momentM2C	$arcsec^2$	REAL	-999	$Moment M2C = M_{xx} - M_{yy}.$
momentM2S	$arcsec^2$	REAL	-999	Moment $M2S = 2 * M_{xy}$ .
momentM3	$arcsec^2$	REAL	-999	treful second moment = $sart((M - 3*M)^2 + (3*M - M)^2)$
momentM4	$arcsec^2$	REAL	-999	trefoil second moment = $sqrt((M_{xxx}-3*M_{xyy})^2+(3*M_{xxy}-M_{yyy})^2)$ . quadrupole second moment = $sqrt((M_{xxxx}-6*M_{xxyy}+M_{yyyy})^2+(4*M_{xxxy}-4*M_{xyyy})^2)$ .
		REAL	-999 -999	quadrupole second moment = $sqrt((M_{xxxx} - 6*M_{xxyy} + M_{yyyy}) + (4*M_{xxxy} - 4*M_{xyyy}))$ . Residual of aperture corrections.
apResid	magnitudes			
dapResid	magnitudes	REAL	-999	Scatter of aperture corrections.
detectorID	-	VARCHAR(100)	000	Identifier for each individual OTA detector device.
qaFlags	-	BIGINT	-999	Q/A flags for this image. Values listed in ImageFlags.
detrend1	-	VARCHAR(100)		Identifier for detrend image 1, the static mask.
detrend2	-	VARCHAR(100)		Identifier for detrend image 2, the dark model.
detrend3	-	VARCHAR(100)		Identifier for detrend image 3, the flat.
detrend4	=	VARCHAR(100)		Identifier for detrend image 4, the fringe.
detrend5	=	VARCHAR(100)		Identifier for detrend image 5, the noisemap.
detrend6	=	VARCHAR(100)		Identifier for detrend image 6, the non-linearity correction.
detrend7	=	VARCHAR(100)		Identifier for detrend image 7, the video dark model.
detrend8	=	VARCHAR(100)		Identifier for detrend image 8.
photoZero	magnitudes	REAL	-999	Locally derived photometric zero point for this image.
ctype1	-	VARCHAR(100)		Name of astrometric projection in focal plane L.
ctype2	-	VARCHAR(100)		Name of astrometric projection in focal plane M.
crval1	focal plane pixels	FLOAT	-999	Focal plane L corresponding to reference pixel.
crval2	focal plane pixels	FLOAT	-999	Focal plane M corresponding to reference pixel.
crpix1	raw pixels	FLOAT	-999	Reference pixel for focal plane L.
crpix2	raw pixels	FLOAT	-999	Reference pixel for focal plane M.;
cdelt1	focal plane pixels/raw pixel	FLOAT	-999	Pixel scale in focal plane x.
cdelt2	focal plane pixels/raw pixel	FLOAT	-999	Pixel scale in focal plane y.
pc001001	-	FLOAT	-999	Linear transformation matrix element between image pixel x and focal plane pixel L.
pc001002	-	FLOAT	-999	Linear transformation matrix element between image pixel y and focal plane pixel L.
pc002001	=	FLOAT	-999	Linear transformation matrix element between image pixel x and focal plane pixel M.
pc002002	-	FLOAT	-999	Linear transformation matrix element between image pixel y and focal plane pixel M.
polyOrder	-	TINYINT	255	Polynomial order of astrometric fit between the image pixels and the detector focal plane.
pca1x3y0	-	FLOAT	-999	Polynomial coefficient for the astrometric fit component $(x^3 y^0)$ for focal plane L.
pca1x2y1	-	FLOAT	-999	Polynomial coefficient for the astrometric fit component $(x^2 y^1)$ for focal plane L.
pca1x1y2	-	FLOAT	-999	Polynomial coefficient for the astrometric fit component $(x^1 \ y^2)$ for focal plane L.
pca1x0y3	=	FLOAT	-999	Polynomial coefficient for the astrometric fit component $(x^0 y^3)$ for focal plane L.
pca1x2y0	_	FLOAT	-999	Polynomial coefficient for the astrometric fit component $(x^2 y^0)$ for focal plane L.
pca1x1y1		FLOAT	-999	Polynomial coefficient for the astrometric fit component $(x^1 y^1)$ for focal plane L.
	=			
pca1x0y2	-	FLOAT	-999	Polynomial coefficient for the astrometric fit component $(x^0 \ y^2)$ for focal plane L.
pca2x3y0	=	FLOAT	-999	Polynomial coefficient for the astrometric fit component $(x^3 y^0)$ for focal plane M.
pca2x2y1	-	FLOAT	-999	Polynomial coefficient for the astrometric fit component $(x^2 y^1)$ for focal plane M.
pca2x1y2	=	FLOAT	-999	Polynomial coefficient for the astrometric fit component $(x^1 \ y^2)$ for focal plane M.
pca2x0y3	-	FLOAT	-999	Polynomial coefficient for the astrometric fit component $(x^0 \ y^3)$ for focal plane M.
pca2x2y0	-	FLOAT	-999	Polynomial coefficient for the astrometric fit component $(x^2 \ y^0)$ for focal plane M.
pca2x1y1	=	FLOAT	-999	Polynomial coefficient for the astrometric fit component $(x^1 \ y^1)$ for focal plane M.
pca2x1y1 pca2x0y2	_	FLOAT	-999	Polynomial coefficient for the astrometric fit component $(x^0 y^2)$ for focal plane M.
processing Version	_	TINYINT	NA	Data release version.
processing version	_	111/111/1	11/1	Data release version.

TABLE 41

DETECTION: CONTAINS SINGLE EPOCH PHOTOMETRY OF INDIVIDUAL DETECTIONS FROM A SINGLE EXPOSURE. THE IDENTIFIERS CONNECTING THE DETECTION BACK TO THE ORIGINAL IMAGE AND TO THE OBJECT ASSOCIATION ARE PROVIDED. PSF, APERTURE, AND KRON (1980) PHOTOMETRY ARE INCLUDED, ALONG WITH SKY AND DETECTOR COORDINATE POSITIONS.

column name	units	data type	default	description
objID	-	BIGINT	NA	Unique object identifier.
uniquePspsP2id	-	BIGINT	NA	Unique internal PSPS detection identifier.
detectID	-	BIGINT	NA	Unique detection identifier.
ippObjID ippDetectID	-	BIGINT	NA NA	IPP internal object identifier.
filterID	-	BIGINT TINYINT	NA NA	IPP internal detection identifier. Filter identifier. Details in the Filter table.
surveyID	-	TINTINT	NA	Survey identifier. Details in the Survey table.
imageID	_	BIGINT	NA	Unique image identifier. Constructed as (100 * frameID + ccdID).
randomDetID	_	FLOAT	NA	Random value drawn from the interval between zero and one.
dvoRegionID	_	INT	-1	Internal DVO region identifier.
obsTime	days	FLOAT	-999	Modified Julian Date at the midpoint of the observation.
xPos	raw pixels	REAL	-999	PSF x center location.
yPos	raw pixels	REAL	-999	PSF y center location.
xPosErr	raw pixels	REAL	-999	Error in PSF x center location.
yPosErr	raw pixels	REAL	-999	Error in PSF y center location.
pltScale	arcsec/pixel	REAL	-999	Local plate scale at this location.
posAngle	degrees	REAL	-999	Position angle (sky-to-chip) at this location.
ra	degrees	FLOAT	-999	Right ascension.
dec	degrees	FLOAT	-999	Declination.
raErr	arcsec	REAL	-999	Right ascension error.
decErr extNSigma	arcsec	$egin{array}{c}  ext{REAL} \  ext{REAL} \end{array}$	-999 0	Declination error.  An extendedness measure based on the deviation between PSF and Kron
extivoigina	-	ILLAL	U	magnitudes, normalized by the PSF magnitude uncertainty.
zp	magnitudes	REAL	0	Photometric zeropoint. Necessary for converting listed fluxes and
2P	magmiraco	TULLITE	O	magnitudes back to measured ADU counts.
telluricExt	magnitudes	REAL	NA	Estimated Telluric extinction due to non-photometric observing conditions.
	G			Necessary for converting listed fluxes and magnitudes back to measured ADU counts.
expTime	seconds	REAL	-999	Exposure time of the frame/exposure. Necessary for converting listed
•				fluxes and magnitudes back to measured ADU counts.
airMass	-	REAL	0	Airmass at midpoint of the exposure. Necessary for converting listed
	_			fluxes and magnitudes back to measured ADU counts.
psfFlux	Jy	REAL	-999	Flux from PSF fit.
psfFluxErr	Jy	REAL	-999	Error on flux from PSF fit.
psfMajorFWHM	arcsec	REAL	-999	PSF major axis FWHM.
psfMinorFWHM	arcsec	$egin{array}{c}  ext{REAL} \  ext{REAL} \end{array}$	-999	PSF minor axis FWHM.
psfTheta	degrees	REAL	-999	PSF major axis orientation.
psfCore psfQf	-	REAL	-999 -999	PSF core parameter k, where $F = F0/(1 + kr^2 + r^{3.33})$ . PSF coverage factor.
psfQfPerfect	-	REAL	-999	PSF weighted fraction of pixels totally unmasked.
psfChiSq	_	REAL	-999	Reduced chi squared value of the PSF model fit.
psfLikelihood	_	REAL	-999	Likelihood that this detection is best fit by a PSF.
momentXX	$arcsec^2$	REAL	-999	Second moment $M_{xx}$ .
momentXY	$arcsec^2$	REAL	-999	Second moment $M_{xy}$ .
momentYY	$arcsec^2$	REAL	-999	Second moment $M_{uy}$ .
momentR1	arcsec	REAL	-999	First radial moment.
momentRH	$arcsec^{0.5}$	REAL	-999	Half radial moment $(r^{0.5} \text{ weighting})$ .
momentM3C	$arcsec^2$	REAL	-999	Cosine of trefoil second moment term: $r^2 cos(3theta) = M_{xxx} - 3 * M_{xyy}$ .
momentM3S	$arcsec^2$	REAL	-999	Sine of trefoil second moment: $r^2 sin(3theta) = 3 * M_{xxy} - M_{yyy}$ .
momentM4C	$arcsec^2$	REAL	-999	Cosine of quadrupole second moment: $r^2 cos(4theta) = M_{xxxy} - M_{yyy}$ .
momentM4S	$arcsec^2$	REAL	-999	Sine of quadrupole second moment: $r^2 sin(4theta) = 4*M_{xxxy} - 4*M_{xyyy} + M_{yyyy}$ .
apFlux	Jy	REAL	-999	Flux in seeing-dependent aperture.
apFluxErr	Jy	REAL	-999	Error on flux in seeing-dependent aperture.
apFillF	-	REAL	-999	Aperture fill factor.
apRadius	arcsec	REAL	-999	Aperture radius.
kronFlux	Jy	REAL	-999	Kron (1980) flux.
kronFluxErr	Jy	REAL	-999	Error on Kron (1980) flux.
kronRad	arcsec	REAL	-999	Kron (1980) radius.
sky	$Jy/arcsec^2$	REAL	-999	Background sky level.
skyErr	$Jy/arcsec^2$	REAL	-999	Error in background sky level.
infoFlag	-	BIGINT	0	Information flag bitmask indicating details of the photometry.
		n.m		Values listed in DetectionFlags.
infoFlag2	-	INT	0	Information flag bitmask indicating details of the photometry.
:f-E19		INT	0	Values listed in DetectionFlags2.
infoFlag3	-	INT	0	Information flag bitmask indicating details of the photometry. Values listed in DetectionFlags3.
processingVersion	_	TINYINT	NA	Data release version.
Processing version	•	111111111	1111	Dava release version.

TABLE 42 ImageDetEffMeta: Contains the detection efficiency information for a given individual OTA image. Provides the number of recovered sources out of 500 injected fake source and statistics about the magnitudes of the recovered sources for a range of magnitude offsets.

			1 0 1	
column name	units	data type	default	description
imageID	-	BIGINT	NA	Unique image identifier. Constructed as $(100 * frameID + ccdID)$ .
frameID	-	INT	NA	Unique frame/exposure identifier.
$_{ m magref}$	magnitudes	REAL	NA	Detection efficiency reference magnitude.
nInjected	-	INT	NA	Number of fake sources injected in each magnitude bin.
offset01	magnitudes	REAL	NA	Detection efficiency magnitude offset for bin 1.
counts01	-	REAL	NA	Detection efficiency count of recovered sources in bin 1.
diffMean01	magnitudes	REAL	NA	Detection efficiency mean magnitude difference in bin 1.
diffStdev01	magnitudes	REAL	NA	Detection efficiency standard deviation of magnitude differences in bin 1.
errMean01	magnitudes	REAL	NA	Detection efficiency mean magnitude error in bin 1.
offset 02	magnitudes	REAL	NA	Detection efficiency magnitude offset for bin 2.
counts02	-	REAL	NA	Detection efficiency count of recovered sources in bin 2.
diffMean02	magnitudes	REAL	NA	Detection efficiency mean magnitude difference in bin 2.
diffStdev02	magnitudes	REAL	NA	Detection efficiency standard deviation of magnitude differences in bin 2.
errMean02	magnitudes	REAL	NA	Detection efficiency mean magnitude error in bin 2.
offset 03	magnitudes	REAL	NA	Detection efficiency magnitude offset for bin 3.
counts03	-	REAL	NA	Detection efficiency count of recovered sources in bin 3.
diffMean03	magnitudes	REAL	NA	Detection efficiency mean magnitude difference in bin 3.
diffStdev03	magnitudes	REAL	NA	Detection efficiency standard deviation of magnitude differences in bin 3.
errMean03	magnitudes	REAL	NA	Detection efficiency mean magnitude error in bin 3.
•••	O			v o
offset 13	magnitudes	REAL	NA	Detection efficiency magnitude offset for bin 13.
counts13	-	REAL	NA	Detection efficiency count of recovered sources in bin 13.
diffMean 13	magnitudes	REAL	NA	Detection efficiency mean magnitude difference in bin 13.
diffStdev13	magnitudes	REAL	NA	Detection efficiency standard deviation of magnitude differences in bin 13.
errMean13	magnitudes	REAL	NA	Detection efficiency mean magnitude error in bin 13.
	0	,		

ForcedMeanObject: Contains the mean of single-epoch photometric information for sources detected in the stacked data, calculated as described in Magnier et al. (2013). The mean is calculated for detections associated into objects within a one arcsecond correlation radius. PSF, Kron (1980), and SDSS aperture R5 (R = 3.00''), R6 (R = 4.63''), and R7 (R = 7.43'') apertures (Stoughton et al. 2002) magnitudes and statistics are listed for all filters. See also Kaiser et al. (1995).

column name	units	data type	default	description
objID uniquePspsFOid	-	BIGINT BIGINT	NA NA	Unique object identifier. Unique internal PSPS forced object identifier.
ippObjID	-	BIGINT	NA	IPP internal object identifier.
randomForcedObjID	-	FLOAT	NA	Random value drawn from the interval between zero and one.
nDetections	-	SMALLINT	-999	Number of single epoch detections in all filters.
batchID processingVersion	-	BIGINT TINYINT	NA NA	Internal database batch identifier.  Data release version.
gnTotal	_	SMALLINT	-999	Number of forced single epoch detections in g filter.
gnIncPSFFlux	-	SMALLINT	-999	Number of forced single epoch detections in PSF flux mean in g filter.
gnIncKronFlux	-	SMALLINT	-999	Number of forced single epoch detections in Kron (1980) flux mean in g filter.
gnIncApFlux	-	SMALLINT	-999	Number of forced single epoch detections in aperture flux mean in g filter.
gnIncR5 gnIncR6	_	SMALLINT SMALLINT	-999 -999	Number of forced single epoch detections in R5 ( $r = 3.00$ arcsec) aperture flux mean in g filter. Number of forced single epoch detections in R6 ( $r = 4.63$ arcsec) aperture flux mean in g filter.
gnIncR7	_	SMALLINT	-999	Number of forced single epoch detections in $R7$ ( $r = 7.43$ arcsec) aperture flux mean in g filter.
gFPSFFlux	Jу	REAL	-999	Mean PSF flux from forced single epoch g filter detections.
gFPSFFluxErr	Jу	REAL	-999	Error in mean PSF flux from forced single epoch g filter detections.
gFPSFFluxStd	$_{ m AB}^{ m Jy}$	$egin{array}{c}  ext{REAL} \  ext{REAL} \end{array}$	-999 -999	Standard deviation of PSF fluxes from forced single epoch g filter detections.
gFPSFMag gFPSFMagErr	AB	REAL	-999 -999	Magnitude from mean PSF flux from forced single epoch g filter detections.  Error in magnitude from mean PSF flux from forced single epoch g filter detections.
gFKronFlux	Jy	REAL	-999	Mean Kron (1980) flux from forced single epoch g filter detections.
gFKronFluxErr	$J_{\mathbf{y}}$	REAL	-999	Error in mean Kron (1980) flux from forced single epoch g filter detections.
gFKronFluxStd	Jy	REAL	-999	Standard deviation of Kron (198) fluxes from forced single epoch g filter detections.
gFKronMag	AB	REAL	-999 000	Magnitude from mean Kron (1980) flux from forced single epoch g filter detections.
gFKronMagErr gFApFlux	$_{ m Jy}^{ m AB}$	$egin{array}{c}  ext{REAL} \  ext{REAL} \end{array}$	-999 -999	Error in magnitude from mean Kron (1980) flux from forced single epoch g filter detections.  Mean aperture flux from forced single epoch g filter detections.
gFApFluxErr	Jу	REAL	-999	Error in mean aperture flux from forced single epoch g filter detections.
gFApFluxStd	$J_{\mathbf{y}}$	REAL	-999	Standard deviation of aperture fluxes from forced single epoch g filter detections.
gFApMag	AB	REAL	-999	Magnitude from mean aperture flux from forced single epoch g filter detections.
gFApMagErr	AB	$egin{array}{c}  ext{REAL} \  ext{REAL} \end{array}$	-999 -999	Error in magnitude from mean aperture flux from forced single epoch g filter detections.
gFmeanflxR5	Jy	REAL .	-999	Mean flux from forced single epoch g filter detections within an aperture of radius $r = 3.00$ arcsec.
gFmeanflxR5Err	Jy	REAL	-999	Error in mean flux from forced single epoch g filter
	Ü			detections within an aperture of radius $r = 3.00$ arcsec.
gFmeanflxR5Std	Jу	REAL	-999	Standard deviation of forced single epoch g filter
"Emana A. DEE!!!		REAL	-999	detection fluxes within an aperture of radius $r = 3.00$ arcsec.
gFmeanflxR5Fill	-	REAL .	-999	Aperture fill factor for forced single epoch g filter detections within an aperture of radius $r = 3.00$ arcsec.
gFmeanMagR5	AB	REAL	-999	Magnitude from mean flux from forced single epoch g filter
				detections within an aperture of radius $r = 3.00$ arcsec.
gFmeanMagR5Err	AB	REAL	-999	Error in magnitude from mean flux from forced single epoch
gFmeanflxR6	Jy	REAL	-999	g filter detections within an aperture of radius $r = 3.00$ arcsec. Mean flux from forced single epoch g filter
grineamixito	Зу	ILEAL	-333	detections within an aperture of radius $r = 4.63$ arcsec.
gFmeanflxR6Err	Jу	REAL	-999	Error in mean flux from forced single epoch g filter
	_			detections within an aperture of radius $r = 4.63$ arcsec.
gFmeanflxR6Std	Jy	REAL	-999	Standard deviation of forced single epoch g filter
gFmeanflxR6Fill	_	REAL	-999	detection fluxes within an aperture of radius $r = 4.63$ arcsec. Aperture fill factor for forced single epoch g filter
grineamixitorin	-	ILEAL	-333	detections within an aperture of radius $r = 4.63$ arcsec.
gFmeanMagR6	AB	REAL	-999	Magnitude from mean flux from forced single epoch g filter
				detections within an aperture of radius $r = 4.63$ arcsec.
gFmeanMagR6Err	AB	REAL	-999	Error in magnitude from mean flux from forced single epoch
gFmeanflxR7	Jy	REAL	-999	g filter detections within an aperture of radius $r = 4.63$ arcsec. Mean flux from forced single epoch g filter
0	<i>J</i>		000	detections within an aperture of radius $r = 7.43$ arcsec.
gFmeanflxR7Err	Jy	REAL	-999	Error in mean flux from forced single epoch g filter
	т	DEAL	000	detections within an aperture of radius $r = 7.43$ arcsec.
gFmeanflxR7Std	Jy	REAL	-999	Standard deviation of forced single epoch g filter detection fluxes within an aperture of radius $r = 7.43$ arcsec.
gFmeanflxR7Fill	_	REAL	-999	Aperture fill factor for forced single epoch g filter
81 111001111111111111111111111111111111		102112	000	detections within an aperture of radius $r = 7.43$ arcsec.
gFmeanMagR7	AB	REAL	-999	Magnitude from mean flux from forced single epoch g filter
	A D	DEAL	000	detections within an aperture of radius r = 7.43 arcsec.
gFmeanMagR7Err	$^{\mathrm{AB}}$	REAL	-999	Error in magnitude from mean flux from forced single epoch g filter detections within an aperture of radius $r = 7.43$ arcsec.
gFlags	_	INT	0	Information flag bitmask indicating details of the photometry from forced
5 - 5			-	single epoch g filter detections. Values listed in ObjectInfoFlags.
gE1	-	REAL	-999	Kaiser et al. (1995) polarization parameter $e1 = (M_{xx} - M_{yy})/(M_{xx} + M_{yy})$
αF2		REAL	-999	from forced single epoch g filter detections.  Kaiser et al. (1995) polarization parameter $e^2 = (2M_{\odot})/(M_{\odot} + M_{\odot})$
gE2	-	ILLAL	-999	Kaiser et al. (1995) polarization parameter $e2 = (2M_{xy})/(M_{xx} + M_{yy})$ from forced single epoch g filter detections.
rnTotal				
				same entries repeated for r, i, z, and y filters
yE2				

TABLE 44
FORCEDMEANLENSING: CONTAINS THE MEAN KAISER ET AL. (1995, K95) LENSING PARAMETERS MEASURED FROM THE FORCED PHOTOMETRY OF OBJECTS DETECTED IN STACKED IMAGES ON THE INDIVIDUAL SINGLE EPOCH DATA.

Description					
uniquePspsFOid - BIGINT NA Unique internal PSPS forced object identifier.  randomForcedObjID - FLOAT NA IPP internal object identifier.  randomForcedObjID - SMALLINT - 9999 Number of single epoch detections in all filters.  Internal database batch identifier.  Data release version.  gLensObjSmearX12 arcsec <sup>-2</sup> REAL -999 K95 eq. (A11) smear polarizability X12 term from forced g filter detections.  gLensObjSmearE1 arcsec <sup>-2</sup> REAL -999 K95 eq. (A11) smear polarizability X12 term from forced g filter detections.  gLensObjSmearX11 - REAL -999 K95 eq. (A12) smear polarizability 22 term from forced g filter detections.  gLensObjShearX11 - REAL -999 K95 eq. (A12) smear polarizability 22 term from forced g filter detections.  gLensObjShearX12 - REAL -999 K95 eq. (B11) shear polarizability X12 term from forced g filter detections.  gLensObjShearX12 - REAL -999 K95 eq. (B11) shear polarizability X12 term from forced g filter detections.  gLensObjShearE2 - REAL -999 K95 eq. (B11) shear polarizability X12 term from forced g filter detections.  gLensPSFSmearX11 gLensPSFSmearX12 arcsec <sup>-2</sup> REAL -999 K95 eq. (B12) shear polarizability X12 term from forced g filter detections.  gLensPSFSmearX12 arcsec <sup>-2</sup> REAL -999 K95 eq. (B12) shear polarizability X11 term from PSF model for forced g filter detections.  gLensPSFSmearX12 arcsec <sup>-2</sup> REAL -999 K95 eq. (A11) smear polarizability X12 term from PSF model for forced g filter detections.  gLensPSFSmearX22 arcsec <sup>-2</sup> REAL -999 K95 eq. (A11) smear polarizability X12 term from PSF model for forced g filter detections.  gLensPSFShearX11 arcsec <sup>-2</sup> REAL -999 K95 eq. (A12) smear polarizability X12 term from PSF model for for		units			
ippÖbjID randomForcedObjID nDetections batchID rocessingVersion gLensObjSmearX11 gLensObjSmearX12 gLensObjSmearX22 gLensObjSmearX22 gLensObjSmearE1 gLensObjShearE1 gLensObjShearX11 gLensObjShearX11 gLensObjShearX11 gLensObjShearX12 gLensPSFSmearX11 gLensPSFSmearX12 gLensPSFSmearX12 gLensPSFSmearX12 gLensPSFSmearX12 gLensPSFSmearX12 gLensPSFSmearX12 gLensPSFShearX12 gLensPSFShearX12 gLensPSFShearX12 gLensPSFShearX12 gLensPSFShearX12 gLensPSFShearX12 gLensPSFShearX12 gLensPSFShearX12 gLensPSFShearX12 qrcsec-2 REAL -999 K95 eq. (A11) smear polarizability X12 term from forced g filter detections. K95 eq. (B12) shear polarizability X12 term from PSF model for forced g filter detections. gLensPSFShearX12 qrcsec-2 REAL -999 K95 eq. (A11) smear polarizability X12 term from PSF model for forced g filter detections. gLensPSFShearX12 qrcsec-2 REAL -999 K95 eq. (B11) shear polarizability X12 term from PSF model for forced g filter detections. gLensPSFShearX11 quarticular detections. gLensPSFShearX11 quarticular detections. gLensPSFShearX12 quarticular detections. gLensPSFShearX11 quarticular detections. gLensPSFShearX11 qu		-			
randomForcedObjID - FLOAT NA SMALINT		-			
nDetections batchID - BIGINT NA Internal database batch identifier.  processingVersion - TINYINT NA Data release version.  gLensObjSmearX11 arcsec <sup>-2</sup> REAL -999 K95 eq. (A11) smear polarizability X11 term from forced g filter detections.  gLensObjSmearX22 arcsec <sup>-2</sup> REAL -999 K95 eq. (A11) smear polarizability X12 term from forced g filter detections.  gLensObjSmearE1 arcsec <sup>-2</sup> REAL -999 K95 eq. (A11) smear polarizability X22 term from forced g filter detections.  gLensObjSmearE2 arcsec <sup>-2</sup> REAL -999 K95 eq. (A12) smear polarizability 22 term from forced g filter detections.  gLensObjShearX11 - REAL -999 K95 eq. (A12) smear polarizability 22 term from forced g filter detections.  gLensObjShearX11 - REAL -999 K95 eq. (A12) smear polarizability X11 term from forced g filter detections.  gLensObjShearX12 - REAL -999 K95 eq. (B11) shear polarizability X11 term from forced g filter detections.  gLensObjShearE1 - REAL -999 K95 eq. (B11) shear polarizability X12 term from forced g filter detections.  gLensObjShearE2 - REAL -999 K95 eq. (B11) shear polarizability X22 term from forced g filter detections.  gLensObjShearE2 - REAL -999 K95 eq. (B11) shear polarizability X22 term from forced g filter detections.  gLensPSFSmearX11 gLensPSFSmearX11 gLensPSFSmearX12 arcsec <sup>-2</sup> REAL -999 K95 eq. (B12) shear polarizability X22 term from forced g filter detections.  gLensPSFSmearX22 arcsec <sup>-2</sup> REAL -999 K95 eq. (A11) smear polarizability X12 term from PSF model for forced g filter detections.  gLensPSFSmearX21 arcsec <sup>-2</sup> REAL -999 K95 eq. (A11) smear polarizability X12 term from PSF model for forced g filter detections.  gLensPSFSNearX22 arcsec <sup>-2</sup> REAL -999 K95 eq. (A11) smear polarizability X12 term from PSF model for forced g filter detections.  gLensPSFSNearX21 arcsec <sup>-2</sup> REAL -999 K95 eq. (A12) smear polarizability X12 term from PSF model for forced g filter detections.  gLensPSFSNearX22 arcsec <sup>-2</sup> REAL -999 K95 eq. (A12) smear polarizability X12 term from PSF model for forced g filter detections.  gLensPSFSNearX21 - REAL		-			
batchID processingVersion clensObjSmearX11 gLensObjSmearX12 gLensObjSmearX12 gLensObjSmearX12 gLensObjSmearX12 gLensObjSmearX12 gLensObjSmearX22 gLensObjSmearEX22 gLensObjSmearEX22 gLensObjSmearE2 gLensObjSmearE2 gLensObjSmearE2 gLensObjSmearE2 gLensObjSmearE3 gLensObjSmearE4 gLensObjSmearE4 gLensObjShearX11 gLensObjSmearE5 gLensObjShearX11 gLensObjShearX11 gLensObjShearX11 gLensObjShearX11 gLensObjShearX11 gLensObjShearX11 gLensObjShearX11 gLensObjShearX11 gLensObjShearX11 gLensObjShearX12 gLensObjShearX12 gLensObjShearX12 gLensObjShearX12 gLensObjShearX12 gLensObjShearX12 gLensObjShearX22 gLensObjShearX22 gLensObjShearX22 gLensObjShearE1 gLensObjShearE1 gLensObjShearE2 gLensObjShearE3 gLensObjShearE3 gLensObjShearE4 gLensObjShearE4 gLensObjShearE5 gLensObjShearE5 gLensObjShearE6 gLensObjShearE7 gLensObjShearE8 gLensObjShearE9 arcsec <sup>-2</sup> REAL -999 K95 eq. (B11) shear polarizability X12 term from forced g filter detections. gLensPSFSmearX11 gLensPSFSmearX12 gLensPSFSmearX12 gLensPSFSmearX12 gLensPSFShearX12 arcsec <sup>-2</sup> REAL -999 K95 eq. (B11) shear polarizability X12 term from PSF model for forced g filter detections. gLensPSFShearX12 gLensPSFShearX12 arcsec <sup>-2</sup> REAL -999 K95 eq. (A12) smear polarizability X11 term from PSF model for forced g filter detections. gLensPSFShearX12 arcsec <sup>-2</sup> REAL -999 K95 eq. (B12) shear polarizability X12 term from PSF model for forced g filter detections. gLensPSFShearX12 arc		-			
processing Version gLensObjSmearX11 $arcsec^{-2}$ REAL $-999$ K95 eq. (A11) smear polarizability X12 term from forced g filter detections. $arcsec^{-2}$ gLensObjSmearX12 $arcsec^{-2}$ REAL $-999$ K95 eq. (A11) smear polarizability X22 term from forced g filter detections. $arcsec^{-2}$ gLensObjSmearK22 $arcsec^{-2}$ REAL $-999$ K95 eq. (A12) smear polarizability X22 term from forced g filter detections. $arcsec^{-2}$ gLensObjShearX11 $-$ REAL $-999$ K95 eq. (A12) smear polarizability e2 term from forced g filter detections. $arcsec^{-2}$ gLensObjShearX12 $-$ REAL $-999$ K95 eq. (A12) smear polarizability e2 term from forced g filter detections. $arcsec^{-2}$ gLensObjShearX12 $-$ REAL $-999$ K95 eq. (B11) shear polarizability X12 term from forced g filter detections. $arcsec^{-2}$ gLensObjShearX12 $-$ REAL $-999$ K95 eq. (B11) shear polarizability X12 term from forced g filter detections. $arcsec^{-2}$ gLensObjShearE2 $-$ REAL $-999$ K95 eq. (B11) shear polarizability X22 term from forced g filter detections. $arcsec^{-2}$ REAL $-999$ K95 eq. (B12) shear polarizability X12 term from forced g filter detections. $arcsec^{-2}$ REAL $-999$ K95 eq. (B12) shear polarizability X12 term from forced g filter detections. $arcsec^{-2}$ REAL $-999$ K95 eq. (B12) shear polarizability X12 term from Forced g filter detections. $arcsec^{-2}$ REAL $-999$ K95 eq. (A11) smear polarizability X12 term from PSF model for forced g filter detections. $arcsec^{-2}$ REAL $-999$ K95 eq. (A12) smear polarizability X12 term from PSF model for forced g filter detections. $arcsec^{-2}$ REAL $-999$ K95 eq. (A12) smear polarizability X12 term from PSF model for forced g filter detections. $arcsec^{-2}$ REAL $-999$ K95 eq. (A12) smear polarizability X12 term from PSF model for forced g filter detections. $arcsec^{-2}$ REAL $-999$ K95 eq. (A12) smear polarizability X12 term from PSF model for forced g filter detections. $arcsec^{-2}$ REAL $-999$ K95 eq. (B11) shear polarizability X11 term from PSF model for forced g filter detections. $arcsec^{-$		-			
$\begin{array}{llllllllllllllllllllllllllllllllllll$		-			
gLensObjSmearX12 $arcsec^{-2}$ REAL $-999$ K95 eq. (A11) smear polarizability X12 term from forced g filter detections. $arcsec^{-2}$ REAL $-999$ K95 eq. (A12) smear polarizability X22 term from forced g filter detections. $arcsec^{-2}$ REAL $-999$ K95 eq. (A12) smear polarizability e1 term from forced g filter detections. $arcsec^{-2}$ REAL $-999$ K95 eq. (A12) smear polarizability e2 term from forced g filter detections. $arcsec^{-2}$ REAL $-999$ K95 eq. (A12) smear polarizability X11 term from forced g filter detections. $arcsec^{-2}$ REAL $-999$ K95 eq. (B11) shear polarizability X11 term from forced g filter detections. $arcsec^{-2}$ REAL $-999$ K95 eq. (B11) shear polarizability X12 term from forced g filter detections. $arcsec^{-2}$ REAL $-999$ K95 eq. (B11) shear polarizability X12 term from forced g filter detections. $arcsec^{-2}$ REAL $-999$ K95 eq. (B11) shear polarizability 22 term from forced g filter detections. $arcsec^{-2}$ REAL $-999$ K95 eq. (B12) shear polarizability 22 term from forced g filter detections. $arcsec^{-2}$ REAL $-999$ K95 eq. (B12) shear polarizability X12 term from forced g filter detections. $arcsec^{-2}$ REAL $-999$ K95 eq. (A11) smear polarizability X12 term from PSF model for forced g filter detections. $arcsec^{-2}$ REAL $-999$ K95 eq. (A11) smear polarizability X12 term from PSF model for forced g filter detections. $arcsec^{-2}$ REAL $-999$ K95 eq. (A11) smear polarizability X12 term from PSF model for forced g filter detections. $arcsec^{-2}$ REAL $-999$ K95 eq. (A12) smear polarizability X12 term from PSF model for forced g filter detections. $arcsec^{-2}$ REAL $-999$ K95 eq. (A12) smear polarizability X12 term from PSF model for forced g filter detections. $arcsec^{-2}$ REAL $-999$ K95 eq. (A12) smear polarizability X12 term from PSF model for forced g filter detections. $arcsec^{-2}$ REAL $-999$ K95 eq. (B11) shear polarizability X12 term from PSF model for forced g filter detections. $arcsec^{-2}$ REAL $-999$ K95 eq. (B11) shear polarizability X12 term from PSF m		-			
gLensObjSmearX22 arcsec <sup>-2</sup> REAL -999 K95 eq. (A11) smear polarizability X22 term from forced g filter detections. gLensObjSmearE1 arcsec <sup>-2</sup> REAL -999 K95 eq. (A12) smear polarizability e2 term from forced g filter detections. gLensObjShearX11 - REAL -999 K95 eq. (A12) smear polarizability e2 term from forced g filter detections. gLensObjShearX12 - REAL -999 K95 eq. (B11) shear polarizability X12 term from forced g filter detections. gLensObjShearX22 - REAL -999 K95 eq. (B11) shear polarizability X12 term from forced g filter detections. gLensObjShearE1 - REAL -999 K95 eq. (B11) shear polarizability X22 term from forced g filter detections. gLensObjShearE1 - REAL -999 K95 eq. (B12) shear polarizability e2 term from forced g filter detections. gLensPSFSmearX11 arcsec <sup>-2</sup> REAL -999 K95 eq. (B12) shear polarizability E2 term from forced g filter detections. gLensPSFSmearX12 arcsec <sup>-2</sup> REAL -999 K95 eq. (A11) smear polarizability X11 term from PSF model for forced g filter detections. gLensPSFSmearX12 arcsec <sup>-2</sup> REAL -999 K95 eq. (A11) smear polarizability X12 term from PSF model for forced g filter detections. gLensPSFSmearX12 arcsec <sup>-2</sup> REAL -999 K95 eq. (A11) smear polarizability X12 term from PSF model for forced g filter detections. gLensPSFSmearX12 arcsec <sup>-2</sup> REAL -999 K95 eq. (A11) smear polarizability x12 term from PSF model for forced g filter detections. gLensPSFShearX12 arcsec <sup>-2</sup> REAL -999 K95 eq. (A12) smear polarizability x12 term from PSF model for forced g filter detections. gLensPSFShearX11 - REAL -999 K95 eq. (B11) shear polarizability X12 term from PSF model for forced g filter detections. gLensPSFShearX12 - REAL -999 K95 eq. (B11) shear polarizability X12 term from PSF model for forced g filter detections. gLensPSFShearX12 - REAL -999 K95 eq. (B11) shear polarizability X12 term from PSF model for forced g filter detections. gLensPSFShearE1 - REAL -999 K95 eq. (B12) shear polarizability X12 term from PSF model for forced g filter detections. gLensPSFShearE2 - REAL -999 K95 eq. (B12) shear polari					
gLensObjSmearE1 arcsec <sup>-2</sup> REAL -999 K95 eq. (A12) smear polarizability e1 term from forced g filter detections. gLensObjSmearE2 arcsec <sup>-2</sup> REAL -999 K95 eq. (A12) smear polarizability e2 term from forced g filter detections. gLensObjShearX11 - REAL -999 K95 eq. (B11) shear polarizability X11 term from forced g filter detections. gLensObjShearX22 - REAL -999 K95 eq. (B11) shear polarizability X12 term from forced g filter detections. gLensObjShearE1 - REAL -999 K95 eq. (B11) shear polarizability X22 term from forced g filter detections. gLensObjShearE1 - REAL -999 K95 eq. (B12) shear polarizability e1 term from forced g filter detections. gLensObjShearE2 - REAL -999 K95 eq. (B12) shear polarizability e1 term from forced g filter detections. gLensPSFSmearX11 arcsec <sup>-2</sup> REAL -999 K95 eq. (A11) smear polarizability E1 term from PSF model for forced g filter detections. gLensPSFSmearX22 arcsec <sup>-2</sup> REAL -999 K95 eq. (A11) smear polarizability X11 term from PSF model for forced g filter detections. gLensPSFSmearE1 arcsec <sup>-2</sup> REAL -999 K95 eq. (A11) smear polarizability X22 term from PSF model for forced g filter detections. gLensPSFSmearE2 arcsec <sup>-2</sup> REAL -999 K95 eq. (A12) smear polarizability X22 term from PSF model for forced g filter detections. gLensPSFSmearE1 - REAL -999 K95 eq. (A12) smear polarizability X22 term from PSF model for forced g filter detections. gLensPSFShearX11 - REAL -999 K95 eq. (A12) smear polarizability X11 term from PSF model for forced g filter detections. gLensPSFShearX12 - REAL -999 K95 eq. (B11) shear polarizability X12 term from PSF model for forced g filter detections. gLensPSFShearX12 - REAL -999 K95 eq. (B11) shear polarizability X12 term from PSF model for forced g filter detections. gLensPSFShearX2 - REAL -999 K95 eq. (B11) shear polarizability X12 term from PSF model for forced g filter detections. gLensPSFShearE1 - REAL -999 K95 eq. (B12) shear polarizability X12 term from PSF model for forced g filter detections. gLensPSFShearE1 - REAL -999 K95 eq. (B12) shear polarizability X2	gLensObjSmearX12	$arcsec^{-2}$	REAL	-999	K95 eq. (A11) smear polarizability X12 term from forced g filter detections.
gLensObjSmearE2 arcsec <sup>-2</sup> REAL -999 K95 eq. (A12) smear polarizability e2 term from forced g filter detections. gLensObjShearX11 - REAL -999 K95 eq. (B11) shear polarizability X11 term from forced g filter detections. gLensObjShearX12 - REAL -999 K95 eq. (B11) shear polarizability X12 term from forced g filter detections. gLensObjShearE1 - REAL -999 K95 eq. (B12) shear polarizability x22 term from forced g filter detections. gLensObjShearE2 - REAL -999 K95 eq. (B12) shear polarizability e2 term from forced g filter detections. gLensPSFSmearX11 arcsec <sup>-2</sup> REAL -999 K95 eq. (A11) smear polarizability x11 term from PSF model for forced g filter detections. gLensPSFSmearX12 arcsec <sup>-2</sup> REAL -999 K95 eq. (A11) smear polarizability X12 term from PSF model for forced g filter detections. gLensPSFSmearE2 arcsec <sup>-2</sup> REAL -999 K95 eq. (A11) smear polarizability X22 term from PSF model for forced g filter detections. gLensPSFSmearE2 arcsec <sup>-2</sup> REAL -999 K95 eq. (A12) smear polarizability X22 term from PSF model for forced g filter detections. gLensPSFShearX12 - REAL -999 K95 eq. (A12) smear polarizability e1 term from PSF model for forced g filter detections. gLensPSFShearX12 - REAL -999 K95 eq. (A12) smear polarizability x11 term from PSF model for forced g filter detections. gLensPSFShearX12 - REAL -999 K95 eq. (A12) smear polarizability x11 term from PSF model for forced g filter detections. gLensPSFShearX12 - REAL -999 K95 eq. (B11) shear polarizability X12 term from PSF model for forced g filter detections. gLensPSFShearE1 - REAL -999 K95 eq. (B11) shear polarizability X12 term from PSF model for forced g filter detections. gLensPSFShearE2 - REAL -999 K95 eq. (B12) shear polarizability e2 term from PSF model for forced g filter detections. gLensPSFShearE1 - REAL -999 K95 eq. (B12) shear polarizability e2 term from PSF model for forced g filter detections. gLensPSFShearE2 - REAL -999 K95 eq. (B12) shear polarizability e2 term from PSF model for forced g filter detections. gLensPSFShearE1 - REAL -999 K95 eq. (B12) shea	gLensObjSmearX22	$arcsec^{-2}$	REAL	-999	K95 eq. (A11) smear polarizability X22 term from forced g filter detections.
gLensObjShearX11 - REAL -999 K95 eq. (B11) shear polarizability X11 term from forced g filter detections. gLensObjShearX22 - REAL -999 K95 eq. (B11) shear polarizability X12 term from forced g filter detections. gLensObjShearE1 - REAL -999 K95 eq. (B11) shear polarizability X22 term from forced g filter detections. gLensObjShearE2 - REAL -999 K95 eq. (B12) shear polarizability 22 term from forced g filter detections. gLensPSFSmearX11 arcsec <sup>-2</sup> REAL -999 K95 eq. (B12) shear polarizability e1 term from forced g filter detections. gLensPSFSmearX12 arcsec <sup>-2</sup> REAL -999 K95 eq. (A11) smear polarizability X11 term from PSF model for forced g filter detections. gLensPSFSmearX22 arcsec <sup>-2</sup> REAL -999 K95 eq. (A11) smear polarizability X12 term from PSF model for forced g filter detections. gLensPSFSmearE1 arcsec <sup>-2</sup> REAL -999 K95 eq. (A11) smear polarizability X22 term from PSF model for forced g filter detections. gLensPSFSmearE2 arcsec <sup>-2</sup> REAL -999 K95 eq. (A12) smear polarizability 22 term from PSF model for forced g filter detections. gLensPSFShearX11 - REAL -999 K95 eq. (A12) smear polarizability e2 term from PSF model for forced g filter detections. gLensPSFShearX11 - REAL -999 K95 eq. (A12) smear polarizability X11 term from PSF model for forced g filter detections. gLensPSFShearX12 - REAL -999 K95 eq. (B11) shear polarizability X12 term from PSF model for forced g filter detections. gLensPSFShearX12 - REAL -999 K95 eq. (B11) shear polarizability X12 term from PSF model for forced g filter detections. gLensPSFShearE1 - REAL -999 K95 eq. (B12) shear polarizability X12 term from PSF model for forced g filter detections. gLensPSFShearE2 - REAL -999 K95 eq. (B12) shear polarizability e1 term from PSF model for forced g filter detections. gLensPSFShearE1 - REAL -999 K95 eq. (B12) shear polarizability e1 term from PSF model for forced g filter detections. gLensPSFShearE1 - REAL -999 K95 eq. (B12) shear polarizability e2 term from PSF model for forced g filter detections. gLensPSFShearE1 - REAL -999 K95 eq. (B12) shea	gLensObjSmearE1	$arcsec^{-2}$	REAL	-999	K95 eq. (A12) smear polarizability e1 term from forced g filter detections.
gLensObjShearX12 - REAL -999 K95 eq. (B11) shear polarizability X12 term from forced g filter detections. gLensObjShearE1 - REAL -999 K95 eq. (B11) shear polarizability X22 term from forced g filter detections. gLensObjShearE1 - REAL -999 K95 eq. (B12) shear polarizability e1 term from forced g filter detections. gLensObjShearE2 - REAL -999 K95 eq. (B12) shear polarizability e2 term from forced g filter detections. gLensPSFSmearX11 arcsec <sup>-2</sup> REAL -999 K95 eq. (A11) smear polarizability X11 term from PSF model for forced g filter detections. gLensPSFSmearX22 arcsec <sup>-2</sup> REAL -999 K95 eq. (A11) smear polarizability X12 term from PSF model for forced g filter detections. gLensPSFSmearE1 arcsec <sup>-2</sup> REAL -999 K95 eq. (A11) smear polarizability X22 term from PSF model for forced g filter detections. gLensPSFSmearE1 arcsec <sup>-2</sup> REAL -999 K95 eq. (A12) smear polarizability e1 term from PSF model for forced g filter detections. gLensPSFShearX11 - REAL -999 K95 eq. (A12) smear polarizability e2 term from PSF model for forced g filter detections. gLensPSFShearX11 - REAL -999 K95 eq. (B11) shear polarizability X12 term from PSF model for forced g filter detections. gLensPSFShearX12 - REAL -999 K95 eq. (B11) shear polarizability X12 term from PSF model for forced g filter detections. gLensPSFShearX12 - REAL -999 K95 eq. (B11) shear polarizability X12 term from PSF model for forced g filter detections. gLensPSFShearE1 - REAL -999 K95 eq. (B12) shear polarizability X12 term from PSF model for forced g filter detections. gLensPSFShearE1 - REAL -999 K95 eq. (B12) shear polarizability e1 term from PSF model for forced g filter detections. gLensPSFShearE1 - REAL -999 K95 eq. (B12) shear polarizability e2 term from PSF model for forced g filter detections. gLensPSFShearE1 - REAL -999 K95 eq. (B12) shear polarizability e2 term from PSF model for forced g filter detections. gLensPSFShearE1 - REAL -999 K95 eq. (B12) shear polarizability e2 term from PSF model for forced g filter detections. gLensPSFShearE1 - REAL -999 K95 eq. (B12) sh	gLensObjSmearE2	$arcsec^{-2}$	REAL	-999	K95 eq. (A12) smear polarizability e2 term from forced g filter detections.
gLensObjShearX22 - REAL -999 K95 eq. (B11) shear polarizability X22 term from forced g filter detections. gLensObjShearE1 - REAL -999 K95 eq. (B12) shear polarizability e1 term from forced g filter detections. gLensPSFSmearX11 arcsec <sup>-2</sup> REAL -999 K95 eq. (A11) smear polarizability X11 term from PSF model for forced g filter detections. gLensPSFSmearX12 arcsec <sup>-2</sup> REAL -999 K95 eq. (A11) smear polarizability X12 term from PSF model for forced g filter detections. gLensPSFSmearX22 arcsec <sup>-2</sup> REAL -999 K95 eq. (A11) smear polarizability X22 term from PSF model for forced g filter detections. gLensPSFSmearE1 arcsec <sup>-2</sup> REAL -999 K95 eq. (A12) smear polarizability X22 term from PSF model for forced g filter detections. gLensPSFShearX11 - REAL -999 K95 eq. (A12) smear polarizability 22 term from PSF model for forced g filter detections. gLensPSFShearX11 - REAL -999 K95 eq. (A12) smear polarizability X11 term from PSF model for forced g filter detections. gLensPSFShearX12 - REAL -999 K95 eq. (B11) shear polarizability X12 term from PSF model for forced g filter detections. gLensPSFShearX12 - REAL -999 K95 eq. (B11) shear polarizability X12 term from PSF model for forced g filter detections. gLensPSFShearX22 - REAL -999 K95 eq. (B11) shear polarizability X12 term from PSF model for forced g filter detections. gLensPSFShearE1 - REAL -999 K95 eq. (B12) shear polarizability X22 term from PSF model for forced g filter detections. gLensPSFShearE2 - REAL -999 K95 eq. (B12) shear polarizability e2 term from PSF model for forced g filter detections. gLensPSFShearE1 - REAL -999 K95 eq. (B12) shear polarizability e2 term from PSF model for forced g filter detections. gLensPSFShearE2 - REAL -999 K95 eq. (B12) shear polarizability e2 term from PSF model for forced g filter detections. gLensPSFShearE3 - REAL -999 K95 eq. (B12) shear polarizability e2 term from PSF model for forced g filter detections. gLensPSFShearE3 - REAL -999 K95 eq. (B12) shear polarizability e2 term from PSF model for forced g filter detections.	gLensObjShearX11	-	REAL	-999	K95 eq. (B11) shear polarizability X11 term from forced g filter detections.
gLensObjShearE1 - REAL -999 K95 eq. (B12) shear polarizability e1 term from forced g filter detections. gLensPSFSmearX11 arcsec <sup>-2</sup> REAL -999 K95 eq. (B12) shear polarizability e2 term from forced g filter detections. gLensPSFSmearX12 arcsec <sup>-2</sup> REAL -999 K95 eq. (A11) smear polarizability X11 term from PSF model for forced g filter detections. gLensPSFSmearX22 arcsec <sup>-2</sup> REAL -999 K95 eq. (A11) smear polarizability X12 term from PSF model for forced g filter detections. gLensPSFSmearE1 arcsec <sup>-2</sup> REAL -999 K95 eq. (A11) smear polarizability X22 term from PSF model for forced g filter detections. gLensPSFSmearE2 arcsec <sup>-2</sup> REAL -999 K95 eq. (A12) smear polarizability e1 term from PSF model for forced g filter detections. gLensPSFShearX11 - REAL -999 K95 eq. (A12) smear polarizability x11 term from PSF model for forced g filter detections. gLensPSFShearX12 - REAL -999 K95 eq. (B11) shear polarizability X12 term from PSF model for forced g filter detections. gLensPSFShearX22 - REAL -999 K95 eq. (B11) shear polarizability X12 term from PSF model for forced g filter detections. gLensPSFShearX22 - REAL -999 K95 eq. (B11) shear polarizability X12 term from PSF model for forced g filter detections. gLensPSFShearE1 - REAL -999 K95 eq. (B12) shear polarizability e1 term from PSF model for forced g filter detections. gLensPSFShearE2 - REAL -999 K95 eq. (B12) shear polarizability e1 term from PSF model for forced g filter detections. gLensPSFShearE1 - REAL -999 K95 eq. (B12) shear polarizability e2 term from PSF model for forced g filter detections. gLensPSFShearE1 - REAL -999 K95 eq. (B12) shear polarizability e2 term from PSF model for forced g filter detections. gLensPSFShearE1 - REAL -999 K95 eq. (B12) shear polarizability e2 term from PSF model for forced g filter detections.	gLensObjShearX12	-	REAL	-999	K95 eq. (B11) shear polarizability X12 term from forced g filter detections.
gLensPSFSmearX11 $arcsec^{-2}$ REAL $-999$ K95 eq. (B12) shear polarizability e2 term from forced g filter detections. gLensPSFSmearX12 $arcsec^{-2}$ REAL $-999$ K95 eq. (A11) smear polarizability X11 term from PSF model for forced g filter detections. gLensPSFSmearX22 $arcsec^{-2}$ REAL $-999$ K95 eq. (A11) smear polarizability X12 term from PSF model for forced g filter detections. gLensPSFSmearE1 $arcsec^{-2}$ REAL $-999$ K95 eq. (A11) smear polarizability X22 term from PSF model for forced g filter detections. gLensPSFSmearE2 $arcsec^{-2}$ REAL $-999$ K95 eq. (A12) smear polarizability e1 term from PSF model for forced g filter detections. gLensPSFShearX11 $-$ REAL $-999$ K95 eq. (A12) smear polarizability e2 term from PSF model for forced g filter detections. gLensPSFShearX12 $-$ REAL $-999$ K95 eq. (B11) shear polarizability X11 term from PSF model for forced g filter detections. gLensPSFShearX22 $-$ REAL $-999$ K95 eq. (B11) shear polarizability X12 term from PSF model for forced g filter detections. gLensPSFShearE1 $-$ REAL $-999$ K95 eq. (B11) shear polarizability X22 term from PSF model for forced g filter detections. gLensPSFShearE1 $-$ REAL $-999$ K95 eq. (B12) shear polarizability e1 term from PSF model for forced g filter detections. gLensPSFShearE2 $-$ REAL $-999$ K95 eq. (B12) shear polarizability e1 term from PSF model for forced g filter detections. gLensPSFShearE1 $-$ REAL $-999$ K95 eq. (B12) shear polarizability e2 term from PSF model for forced g filter detections. gLensPSFShearE1 $-$ REAL $-999$ K95 eq. (B12) shear polarizability e2 term from PSF model forced g filter detections. gLensPSFShearE1 $-$ REAL $-999$ K95 eq. (B12) shear polarizability e2 term from PSF model forced g filter detections.	gLensObjShearX22	-	REAL	-999	K95 eq. (B11) shear polarizability X22 term from forced g filter detections.
gLensPSFSmearX11 $arcsec^{-2}$ REAL $-999$ K95 eq. (A11) smear polarizability X11 term from PSF model for forced g filter detections.gLensPSFSmearX12 $arcsec^{-2}$ REAL $-999$ K95 eq. (A11) smear polarizability X12 term from PSF model for forced g filter detections.gLensPSFSmearX22 $arcsec^{-2}$ REAL $-999$ K95 eq. (A11) smear polarizability X22 term from PSF model for forced g filter detections.gLensPSFSmearE1 $arcsec^{-2}$ REAL $-999$ K95 eq. (A12) smear polarizability e1 term from PSF model for forced g filter detections.gLensPSFShearX11 $-$ REAL $-999$ K95 eq. (A12) smear polarizability e2 term from PSF model for forced g filter detections.gLensPSFShearX11 $-$ REAL $-999$ K95 eq. (A12) smear polarizability x11 term from PSF model for forced g filter detections.gLensPSFShearX12 $-$ REAL $-999$ K95 eq. (B11) shear polarizability X12 term from PSF model for forced g filter detections.gLensPSFShearX22 $-$ REAL $-999$ K95 eq. (B11) shear polarizability X22 term from PSF model for forced g filter detections.gLensPSFShearE1 $-$ REAL $-999$ K95 eq. (B12) shear polarizability e1 term from PSF model for forced g filter detections.gLensPSFShearE2 $-$ REAL $-999$ K95 eq. (B12) shear polarizability e2 term from PSF model forced g filter detections.gLensPSFShearX11 $-$ REAL $-999$ K95 eq. (B12) shear polarizability e2 term from PSF model forced g filter detections.	gLensObjShearE1	-	REAL	-999	K95 eq. (B12) shear polarizability e1 term from forced g filter detections.
gLensPSFSmearX12 $arcsec^{-2}$ REAL $-999$ K95 eq. (A11) smear polarizability X12 term from PSF model for forced g filter detections. gLensPSFSmearX22 $arcsec^{-2}$ REAL $-999$ K95 eq. (A11) smear polarizability X22 term from PSF model for forced g filter detections. gLensPSFSmearE1 $arcsec^{-2}$ REAL $-999$ K95 eq. (A12) smear polarizability e1 term from PSF model for forced g filter detections. gLensPSFShearX11 $-$ REAL $-999$ K95 eq. (A12) smear polarizability e2 term from PSF model for forced g filter detections. gLensPSFShearX12 $-$ REAL $-999$ K95 eq. (A12) smear polarizability x11 term from PSF model for forced g filter detections. gLensPSFShearX12 $-$ REAL $-999$ K95 eq. (B11) shear polarizability X12 term from PSF model for forced g filter detections. gLensPSFShearX22 $-$ REAL $-999$ K95 eq. (B11) shear polarizability X12 term from PSF model for forced g filter detections. gLensPSFShearE1 $-$ REAL $-999$ K95 eq. (B12) shear polarizability at 1 term from PSF model for forced g filter detections. gLensPSFShearE2 $-$ REAL $-999$ K95 eq. (B12) shear polarizability e1 term from PSF model for forced g filter detections. gLensPSFShearE2 $-$ REAL $-999$ K95 eq. (B12) shear polarizability e2 term from PSF model for forced g filter detections. same entries repeated for r, i, z, and y filters	gLensObjShearE2	-	REAL	-999	K95 eq. (B12) shear polarizability e2 term from forced g filter detections.
gLensPSFSmearX12 $arcsec^{-2}$ REAL $-999$ K95 eq. (A11) smear polarizability X12 term from PSF model for forced g filter detections. gLensPSFSmearX22 $arcsec^{-2}$ REAL $-999$ K95 eq. (A11) smear polarizability X22 term from PSF model for forced g filter detections. gLensPSFSmearE1 $arcsec^{-2}$ REAL $-999$ K95 eq. (A12) smear polarizability e1 term from PSF model for forced g filter detections. gLensPSFShearX11 $-$ REAL $-999$ K95 eq. (A12) smear polarizability e2 term from PSF model for forced g filter detections. gLensPSFShearX12 $-$ REAL $-999$ K95 eq. (A12) smear polarizability x11 term from PSF model for forced g filter detections. gLensPSFShearX12 $-$ REAL $-999$ K95 eq. (B11) shear polarizability X12 term from PSF model for forced g filter detections. gLensPSFShearX22 $-$ REAL $-999$ K95 eq. (B11) shear polarizability X12 term from PSF model for forced g filter detections. gLensPSFShearE1 $-$ REAL $-999$ K95 eq. (B12) shear polarizability at 1 term from PSF model for forced g filter detections. gLensPSFShearE2 $-$ REAL $-999$ K95 eq. (B12) shear polarizability e1 term from PSF model for forced g filter detections. gLensPSFShearE2 $-$ REAL $-999$ K95 eq. (B12) shear polarizability e2 term from PSF model for forced g filter detections. same entries repeated for r, i, z, and y filters	gLensPSFSmearX11	$arcsec^{-2}$	REAL	-999	K95 eq. (A11) smear polarizability X11 term from PSF model for forced g filter detections.
gLensPSFSmearE1 $arcsec^{-2}$ REAL $-999$ K95 eq. (A12) smear polarizability e1 term from PSF model for forced g filter detections.gLensPSFSmearE2 $arcsec^{-2}$ REAL $-999$ K95 eq. (A12) smear polarizability e2 term from PSF model for forced g filter detections.gLensPSFShearX11-REAL $-999$ K95 eq. (B11) shear polarizability X11 term from PSF model for forced g filter detections.gLensPSFShearX12-REAL $-999$ K95 eq. (B11) shear polarizability X12 term from PSF model for forced g filter detections.gLensPSFShearX22-REAL $-999$ K95 eq. (B11) shear polarizability X12 term from PSF model for forced g filter detections.gLensPSFShearE1-REAL $-999$ K95 eq. (B12) shear polarizability 21 term from PSF model for forced g filter detections.gLensPSFShearE2-REAL $-999$ K95 eq. (B12) shear polarizability e1 term from PSF model for forced g filter detections.rlensObjSmearX11-REAL $-999$ K95 eq. (B12) shear polarizability e2 term from PSF model forced g filter detectionssame entries repeated for r, i, z, and y filters	gLensPSFSmearX12		REAL	-999	K95 eq. (A11) smear polarizability X12 term from PSF model for forced g filter detections.
gLensPSFSmearE1 $arcsec^{-2}$ REAL $-999$ K95 eq. (A12) smear polarizability e1 term from PSF model for forced g filter detections.gLensPSFSmearE2 $arcsec^{-2}$ REAL $-999$ K95 eq. (A12) smear polarizability e2 term from PSF model for forced g filter detections.gLensPSFShearX11-REAL $-999$ K95 eq. (B11) shear polarizability X11 term from PSF model for forced g filter detections.gLensPSFShearX12-REAL $-999$ K95 eq. (B11) shear polarizability X12 term from PSF model for forced g filter detections.gLensPSFShearX22-REAL $-999$ K95 eq. (B11) shear polarizability X12 term from PSF model for forced g filter detections.gLensPSFShearE1-REAL $-999$ K95 eq. (B12) shear polarizability 21 term from PSF model for forced g filter detections.gLensPSFShearE2-REAL $-999$ K95 eq. (B12) shear polarizability e1 term from PSF model for forced g filter detections.rlensObjSmearX11-REAL $-999$ K95 eq. (B12) shear polarizability e2 term from PSF model forced g filter detectionssame entries repeated for r, i, z, and y filters	gLensPSFSmearX22		REAL	-999	
gLensPSFSmearE2 arcsec <sup>-2</sup> REAL -999 K95 eq. (A12) smear polarizability e2 term from PSF model for forced g filter detections. gLensPSFShearX11 - REAL -999 K95 eq. (B11) shear polarizability X12 term from PSF model for forced g filter detections. gLensPSFShearX22 - REAL -999 K95 eq. (B11) shear polarizability X12 term from PSF model for forced g filter detections. gLensPSFShearE1 - REAL -999 K95 eq. (B11) shear polarizability X22 term from PSF model for forced g filter detections. gLensPSFShearE1 - REAL -999 K95 eq. (B12) shear polarizability e1 term from PSF model for forced g filter detections. gLensPSFShearE2 - REAL -999 K95 eq. (B12) shear polarizability e2 term from PSF model for forced g filter detections. rlensObjSmearX11 same entries repeated for r, i, z, and y filters			REAL	-999	
gLensPSFShearX11 - REAL -999 K95 eq. (B11) shear polarizability X11 term from PSF model for forced g filter detections. gLensPSFShearX12 - REAL -999 K95 eq. (B11) shear polarizability X12 term from PSF model for forced g filter detections. gLensPSFShearX22 - REAL -999 K95 eq. (B11) shear polarizability X22 term from PSF model for forced g filter detections. gLensPSFShearE1 - REAL -999 K95 eq. (B12) shear polarizability e1 term from PSF model for forced g filter detections. gLensPSFShearE2 - REAL -999 K95 eq. (B12) shear polarizability e2 term from PSF model for forced g filter detections. same entries repeated for r, i, z, and y filters	gLensPSFSmearE2	$arcsec^{-2}$	REAL	-999	
gLensPSFShearX12 - REAL -999 K95 eq. (B11) shear polarizability X12 term from PSF model for forced g filter detections. gLensPSFShearX22 - REAL -999 K95 eq. (B11) shear polarizability X22 term from PSF model for forced g filter detections. gLensPSFShearE1 - REAL -999 K95 eq. (B12) shear polarizability e1 term from PSF model for forced g filter detections. gLensPSFShearE2 - REAL -999 K95 eq. (B12) shear polarizability e2 term from PSF model for forced g filter detections. same entries repeated for r, i, z, and y filters					
gLensPSFShearX22 - REAL -999 K95 eq. (B11) shear polarizability X22 term from PSF model for forced g filter detections. gLensPSFShearE1 - REAL -999 K95 eq. (B12) shear polarizability e1 term from PSF model for forced g filter detections. gLensPSFShearE2 - REAL -999 K95 eq. (B12) shear polarizability e2 term from PSF model for forced g filter detections. K95 eq. (B12) shear polarizability e2 term from PSF model forced g filter detections. same entries repeated for r, i, z, and y filters		_	REAL	-999	
gLensPSFShearE1 - REAL -999 K95 eq. (B12) shear polarizability e1 term from PSF model for forced g filter detections. gLensPSFShearE2 - REAL -999 K95 eq. (B12) shear polarizability e2 term from PSF model forced g filter detections. rlensObjSmearX11 same entries repeated for r, i, z, and y filters		_			
rlensObjSmearX11 same entries repeated for r, i, z, and y filters	gLensPSFShearE1	-	REAL	-999	
same entries repeated for r, i, z, and y filters	gLensPSFShearE2	-	REAL	-999	K95 eq. (B12) shear polarizability e2 term from PSF model forced g filter detections.
	rlensObjSmearX11				
ylensPSFShearE2					same entries repeated for r, i, z, and y filters
	ylensPSFShearE2				

TABLE 45

FORCEDWARPMETA: CONTAINS THE METADATA RELATED TO A SKY-ALIGNED DISTORTION CORRECTED warp IMAGE, UPON WHICH FORCED PHOTOMETRY IS PERFORMED. THE ASTROMETRIC AND PHOTOMETRIC CALIBRATION OF THE warp IMAGE ARE LISTED.

column name	units	data type	default	description
forcedWarpID	-	BIGINT	NA	Unique forced warp identifier.
batchID	-	BIGINT	NA	Internal database batch identifier.
surveyID	-	TINYINT	NA	Survey identifier. Details in the Survey table.
$\operatorname{filterID}$	-	TINYINT	NA	Filter identifier. Details in the Filter table.
frameID	-	INT	NA	Frame/exposure identifier of the Frame associated with this warp.
ippSkycalID	-	INT	NA	IPP skycal identifier for the run that generated the positions for forced photometry.
stackMetaID	_	INT	NA	Identifier for the <i>stack</i> which yielded the positions for forced photometry.
tessID	_	TINYINT	0	Tessellation identifier. Details in the TessellationType table.
projectionID	_	SMALLINT	-1	Projection cell identifier.
skyCellID	_	TINYINT	255	Skycell region identifier.
photoCalID	_	INT	NA	Photometric calibration identifier. Details in the PhotoCal table.
analysisVer	_	VARCHAR(100)		IPP software analysis release version.
md5sum	_	VARCHAR(100)		IPP MD5 Checksum.
expTime	seconds	REAL	-999	Exposure time of the source frame/exposure for this warp image. Necessary
1	becomes			for converting listed fluxes and magnitudes back to measured ADU counts.
recalAstroScatX	arcsec	REAL	-999	Measurement of the re-calibration (not astrometric error) in the X direction.
recalAstroScatY	arcsec	REAL	-999	Measurement of the re-calibration (not astrometric error) in the Y direction.
recalNAstroStars	-	INT	-999	Number of astrometric reference sources used in recalibration.
recalphotoScat	magnitudes	REAL	-999	Photometric scatter relative to reference catalog.
recalNPhotoStars	-	INT	-999	Number of astrometric reference sources used in recalibration.
psfModelID	-	INT	-999	PSF model identifier.
psfFWHM	arcsec	REAL	-999	Mean PSF full width at half maximum at image center.
psfWidMajor	arcsec	REAL	-999	PSF major axis FWHM at image center.
psfWidMinor	arcsec	REAL	-999	PSF minor axis FWHM at image center.
psfTheta	degrees	REAL	-999	PSF major axis orientation at image center.
photoZero	magnitudes	REAL	-999	Locally derived photometric zero point for this warp image.
ctype1	-	VARCHAR(100)		Name of astrometric projection in RA.
ctype2	-	VARCHAR(100)		Name of astrometric projection in Dec.
crval1	degrees	FLOAT	-999	Right ascension corresponding to reference pixel.
crval2	degrees	FLOAT	-999	Declination corresponding to reference pixel.
crpix1	sky pixels	FLOAT	-999	Reference pixel for RA.
crpix2	sky pixels	FLOAT	-999	Reference pixel for Dec.
cdelt1	degrees/pixel	FLOAT	-999	Pixel scale in RA.
cdelt2	degrees/pixel	FLOAT	-999	Pixel scale in Dec.
pc001001	-	FLOAT	-999	Linear transformation matrix element between image pixel x and RA.
pc001002	-	FLOAT	-999	Linear transformation matrix element between image pixel y and RA.
pc002001	-	FLOAT	-999	Linear transformation matrix element between image pixel x and Dec.
pc002002	-	FLOAT	-999	Linear transformation matrix element between image pixel y and Dec.
processingVersion	-	TINYINT	NA	Data release version.

Forced warp Exposure Tables

TABLE 46
FORCEDWARPMEASUREMENT: CONTAINS SINGLE EPOCH FORCED PHOTOMETRY OF INDIVIDUAL MEASUREMENTS OF OBJECTS DETECTED IN THE STACKED IMAGES. THE IDENTIFIERS CONNECTING THE MEASUREMENT BACK TO THE ORIGINAL IMAGE AND TO THE OBJECT ASSOCIATION ARE PROVIDED. PSF, APERTURE, AND KRON (1980) PHOTOMETRY ARE INCLUDED, ALONG WITH SKY AND DETECTOR COORDINATE POSITIONS.

column name	units	data type	default	description
obiID	-	BIGINT	NA	Unique object identifier.
uniquePspsFWid	_	BIGINT	NA	Unique internal PSPS forced warp identifier.
detectID	_	BIGINT	NA	Unique detection identifier.
ippObjID	_	BIGINT	NA	IPP internal object identifier.
ippDetectID	_	BIGINT	NA	IPP internal detection identifier.
filterID	_	TINYINT	NA	Filter identifier. Details in the Filter table.
surveyID	-	TINYINT	NA	Survey identifier. Details in the Survey table.
forcedSummaryID	-	BIGINT	NA	Unique forced warp summary identifier.
forcedWarpID	-	BIGINT	NA	Unique forced warp identifier.
randomWarpID	-	FLOAT	NA	Random value drawn from the interval between zero and one.
tessID	-	TINYINT	0	Tessellation identifier. Details in the TessellationType table.
projectionID	-	SMALLINT	-1	Projection cell identifier.
skyCellID	-	TINYINT	255	Skycell region identifier.
dvoRegionID	-	INT	-1	Internal DVO region identifier.
obsTime	days	FLOAT	-999	Modified Julian Date at the midpoint of the observation.
zp	magnitudes	REAL	0	Photometric zeropoint. Necessary for converting listed fluxes and magnitudes back to measured ADU counts.
telluricExt	magnitudes	REAL	NA	Estimated Telluric extinction due to non-photometric observing conditions.  Necessary for converting listed fluxes and magnitudes back to measured ADU counts.
expTime	seconds	REAL	-999	Exposure time of the frame/exposure. Necessary for converting listed fluxes and magnitudes back to measured ADU counts.
airMass	-	REAL	0	Airmass at midpoint of the exposure. Necessary for converting listed fluxes
F (F)		DDAI		and magnitudes back to measured ADU counts.
FpsfFlux	$_{ m Jy}$	REAL	-999	PSF flux.
FpsfFluxErr	Jy	REAL	-999	Error in PSF flux.
xPosChip	raw pixels	$egin{array}{c}  ext{REAL} \  ext{REAL} \end{array}$	-999 -999	PSF x position in original chip pixels. PSF y position in original chip pixels.
yPosChip FccdID	raw pixels	SMALLINT	-999 -999	OTA identifier of original chip (see ImageMeta).
FpsfMajorFWHM	arcsec	REAL	-999 -999	PSF major axis FWHM.
FpsfMinorFWHM	arcsec	REAL	-999	PSF minor axis FWHM.
FpsfTheta	degrees	REAL	-999	PSF major axis orientation.
FpsfCore	-	REAL	-999	PSF core parameter k, where $F = F0/(1 + kr^2 + r^{3.33})$ .
FpsfQf	_	REAL	-999	PSF coverage factor.
FpsfQfPerfect	_	REAL	-999	PSF weighted fraction of pixels totally unmasked.
FpsfChiSq	-	REAL	-999	Reduced chi squared value of the PSF model fit.
FmomentXX	$arcsec^2$	REAL	-999	Second moment $M_{xx}$ .
FmomentXY	$arcsec^2$	REAL	-999	Second moment $M_{xy}$ .
FmomentYY	$arcsec^2$	REAL	-999	Second moment $M_{uu}$ .
FmomentR1	arcsec	REAL	-999	First radial moment.
FmomentRH	$arcsec^{0.5}$	REAL	-999	Half radial moment $(r^{0.5}$ weighting).
FmomentM3C	$arcsec^2$	REAL	-999	Cosine of trefoil second moment term: $r^2 cos(3theta) = M_{xxx} - 3 * M_{xyy}$ .
FmomentM3S	$arcsec^2$	REAL	-999	Sine of trefoil second moment: $r^2 \sin(3theta) = 3 * M_{xxy} - M_{yyy}$ .
FmomentM4C	$arcsec^2$	REAL	-999	Cosine of quadrupole second moment: $r^2 cos(4theta) = M_{xxxx} - 6 * M_{xxyy} + M_{yyyy}$ .
FmomentM4S	$arcsec^2$	REAL	-999	Sine of quadrupole second moment: $r^2 sin(4theta) = 4 * M_{xxxy} - 4 * M_{xyyy}$ .
FapFlux	Jy	REAL	-999	Aperture flux.
FapFluxErr	Jy	REAL	-999	Error in aperture flux.
FapFillF	-	REAL	-999	Aperture fill factor.
FapRadius	arcsec	REAL	-999	Aperture radius for forced warp detection.
FkronFlux	Jу	REAL	-999	Kron (1980) flux.
FkronFluxErr	Jу	REAL	-999	Error in Kron (1980) flux.
FkronRad	arcsec	REAL	-999	Kron (1980) radius.
Fsky	$Jy/arcsec^2$	REAL	-999	Background sky level.
FskyErr FinfoFlag	$Jy/arcsec^2$	REAL	-999	Error in background sky level.  Information flag bitmask indicating details of the photometry.
Ü	-	BIGINT	0	Values listed in DetectionFlags.
FinfoFlag2	-	INT	0	Information flag bitmask indicating details of the photometry. Values listed in DetectionFlags2.
FinfoFlag3	-	INT	0	Information flag bitmask indicating details of the photometry. Values listed in DetectionFlags3.
processingVersion		TINYINT	NA	Data release version.

TABLE 47

FORCEDWARPMASKED: CONTAINS AN ENTRY FOR OBJECTS DETECTED IN THE STACKED IMAGES WHICH WERE IN THE FOOTPRINT OF A SINGLE EPOCH EXPOSURE, BUT FOR WHICH THERE ARE NO UNMASKED PIXELS AT THAT EPOCH.

		1	1 6 1	
column name	units	data type	default	description
objID	-	BIGINT	NA	Unique object identifier.
uniquePspsFWid	-	BIGINT	NA	Unique internal PSPS forced warp identifier.
ippObjID	-	BIGINT	NA	IPP internal object identifier.
ippDetectID	-	BIGINT	NA	IPP internal detection identifier.
filterID	-	TINYINT	NA	Filter identifier. Details in the Filter table.
surveyID	-	TINYINT	NA	Survey identifier. Details in the Survey table.
forcedSummaryID	-	BIGINT	NA	Forced warp summary meta identifier
forcedWarpID	-	BIGINT	NA	Unique forced warp identifier.
randomWarpID	-	FLOAT	NA	Random value drawn from the interval between zero and one.
tessID	-	TINYINT	0	Tessellation identifier. Details in the TessellationType table.
projectionID	-	SMALLINT	-1	Projection cell identifier.
skyCellID	-	REAL	-999	Skycell region identifier.
dvoRegionID	-	REAL	-999	Internal DVO region identifier.
obsTime	days	FLOAT	-999	Modified Julian Date at the midpoint of the observation.

TABLE 48

ForcedWarpExtended: Contains the single epoch forced photometry fluxes within the SDSS R5 (R = 3.00 arcsec), R6 (R = 4.63 arcsec), and R7 (R = 7.43 arcsec) apertures (Stoughton et al. 2002) for objects detected in the stacked images.

column name	units	data type	default	description
objID	-	BIGINT	NA	Unique object identifier.
uniquePspsFWid	-	BIGINT	NA	Unique internal PSPS forced warp identifier.
detectID	-	BIGINT	NA	Unique detection identifier.
ippObjID	-	BIGINT	NA	IPP internal object identifier.
ippDetectID	-	BIGINT	NA	IPP internal detection identifier.
filterID	-	TINYINT	NA	Filter identifier. Details in the Filter table.
surveyID	-	TINYINT	NA	Survey identifier. Details in the Survey table.
forcedWarpID	-	BIGINT	NA	Unique forced warp identifier.
randomWarpID	-	FLOAT	NA	Random value drawn from the interval between zero and one.
tessID	-	TINYINT	0	Tessellation identifier. Details in the TessellationType table.
projectionID	_	SMALLINT	-1	Projection cell identifier.
skyCellID	-	TINYINT	255	Skycell region identifier.
dvoRegionID	-	INT	-1	Internal DVO region identifier.
obsTime	days	FLOAT	-999	Modified Julian Date at the midpoint of the observation.
flxR5	Jy	REAL	-999	Flux from forced photometry measurement within an aperture of radius
				r = 3.00 arcsec.
flxR5Err	Jу	REAL	-999	Error in flux from forced photometry measurement within an aperture of
				radius $r = 3.00$ arcsec.
flxR5Std	Jу	REAL	-999	Standard deviation of flux from forced photometry measurement within
				an aperture of radius $r = 3.00$ arcsec.
flxR5Fill	-	REAL	-999	Aperture fill factor for forced photometry measurement within an
				aperture of radius $r = 3.00$ arcsec.
flxR6	$_{ m Jy}$	REAL	-999	Flux from forced photometry measurement within an aperture of radius
				r = 4.63 arcsec.
flxR6Err	Jy	REAL	-999	Error in flux from forced photometry measurement within an aperture of
				radius $r = 4.63$ arcsec.
flxR6Std	$_{ m Jy}$	REAL	-999	Standard deviation of flux from forced photometry measurement within
				an aperture of radius $r = 4.63$ arcsec.
flxR6Fill	-	REAL	-999	Aperture fill factor for forced photometry measurement within an
				aperture of radius $r = 4.63$ arcsec.
flxR7	$_{\mathrm{Jy}}$	REAL	-999	Flux from forced photometry measurement within an aperture of radius
				r = 7.43 arcsec.
flxR7Err	$_{\mathrm{Jy}}$	REAL	-999	Error in flux from forced photometry measurement within an aperture of
				radius $r = 7.43$ arcsec.
flxR7Std	Jу	REAL	-999	Standard deviation of flux from forced photometry measurement within
	•			an aperture of radius $r = 7.43$ arcsec.
flxR7Fill	-	REAL	-999	Aperture fill factor for forced photometry measurement within an
				aperture of radius $r = 7.43$ arcsec.

TABLE 49
FORCEDWARPLENSING: CONTAINS THE KAISER ET AL. (1995, K95) LENSING PARAMETERS MEASURED FROM THE FORCED PHOTOMETRY OF OBJECTS DETECTED IN STACKED IMAGES ON THE INDIVIDUAL SINGLE EPOCH DATA.

column name	units	data type	default	description
objID	-	BIGINT	NA	Unique object identifier.
uniquePspsFWid	-	BIGINT	NA	Unique internal PSPS forced warp identifier.
detectID	-	BIGINT	NA	Unique detection identifier.
ippObjID	-	BIGINT	NA	IPP internal object identifier.
ippDetectID	-	BIGINT	NA	IPP internal detection identifier.
filterID	-	TINYINT	NA	Filter identifier. Details in the Filter table.
surveyID	-	TINYINT	NA	Survey identifier. Details in the Survey table.
forcedWarpID	-	BIGINT	NA	Unique forced warp identifier.
randomWarpID	-	FLOAT	NA	Random value drawn from the interval between zero and one.
tessID	-	TINYINT	0	Tessellation identifier. Details in the TessellationType table.
projectionID	-	SMALLINT	-1	Projection cell identifier.
skyCellID	-	TINYINT	255	Skycell region identifier.
dvoRegionID	-	INT	-1	Internal DVO region identifier.
obsTime	days	FLOAT	-999	Modified Julian Date at the midpoint of the observation.
lensObjSmearX11	$arcsec^{-2}$	REAL	-999	K95 eq. (A11) smear polarizability X11 term from forced photometry.
lensObjSmearX12	$arcsec^{-2}$	REAL	-999	K95 eq. (A11) smear polarizability X12 term from forced photometry.
lensObjSmearX22	$arcsec^{-2}$	REAL	-999	K95 eq. (A11) smear polarizability X22 term from forced photometry.
lensObjSmearE1	$arcsec^{-2}$	REAL	-999	K95 eq. (A12) smear polarizability e1 term from forced photometry.
lensObjSmearE2	$arcsec^{-2}$	REAL	-999	K95 eq. (A12) smear polarizability e2 term from forced photometry.
lensObjShearX11	_	REAL	-999	K95 eq. (B11) shear polarizability X11 term from forced photometry.
lensObjShearX12	_	REAL	-999	K95 eq. (B11) shear polarizability X12 term from forced photometry.
lensObjShearX22	_	REAL	-999	K95 eq. (B11) shear polarizability X22 term from forced photometry.
lensObjShearE1	_	REAL	-999	K95 eq. (B12) shear polarizability e1 term from forced photometry.
lensObjShearE2	_	REAL	-999	K95 eq. (B12) shear polarizability e2 term from forced photometry.
lensPSFSmearX11	$arcsec^{-2}$	REAL	-999	K95 eq. (A11) smear polarizability X11 term from PSF model for forced photometry.
lensPSFSmearX12	$arcsec^{-2}$	REAL	-999	K95 eq. (A11) smear polarizability X12 term from PSF model for forced photometry.
lensPSFSmearX22	$arcsec^{-2}$	REAL	-999	K95 eq. (A11) smear polarizability X22 term from PSF model for forced photometry.
lensPSFSmearE1	$arcsec^{-2}$	REAL	-999	K95 eq. (A12) smear polarizability e1 term from PSF model for forced photometry.
lensPSFSmearE2	$arcsec^{-2}$	REAL	-999	K95 eq. (A12) smear polarizability e2 term from PSF model for forced photometry.
lensPSFShearX11	-	REAL	-999	K95 eq. (B11) shear polarizability X11 term from PSF model for forced photometry.
lensPSFShearX12	_	REAL	-999	K95 eq. (B11) shear polarizability X12 term from PSF model for forced photometry.
lensPSFShearX22	_	REAL	-999	K95 eq. (B11) shear polarizability X22 term from PSF model for forced photometry.
lensPSFShearE1	_	REAL	-999	K95 eq. (B12) shear polarizability e1 term from PSF model for forced photometry.
lensPSFShearE2	_	REAL	-999	K95 eq. (B12) shear polarizability e2 term from PSF model for forced photometry.
psfE1	_	REAL	-999	K95 polarization parameter $e1 = (M_{xx} - M_{yy})/(M_{xx} + M_{yy})$ from forced photometry.
psfE2	_	REAL	-999	K95 polarization parameter $e^2 = (2M_{xy})/(M_{xx} + M_{yy})$ from forced photometry.

TABLE 50 ${\bf FORCEDWARPTOIMAGE:\ CONTAINS\ THE\ MAPPING\ OF\ WHICH\ INPUT\ IMAGE\ COMPRISES\ A\ PARTICULAR\ \textit{warp}\ IMAGE\ USED\ FOR\ FORCED}$  ${\bf PHOTOMETRY.}$ 

column name	units	data type	default	description
forcedWarpID	-	BIGINT	NA	Unique forced warp identifier.
imageID	-	BIGINT	NA	Unique image identifier. Constructed as $(100 * frameID + ccdID)$ .

ForcedGalaxyShape: Contains the extended source galaxy shape parameters. All filters are matched into a single row. The positions, magnitudes, fluxes, and Sersic indices are inherited from their parent measurement in the StackModelFit tables, and are reproduced here for convenience. The major and minor axes and orientation are recalculated on a warp-by-warp basis from the best fit given these inherited properties ((Sérsic 1963)).

column name	units	data type	default	description
objID	-	BIGINT	NA	Unique object identifier.
uniquePspsFGid	-	BIGINT	NA NA	Unique internal PSPS forced galaxy identifier.
	-	BIGINT	NA NA	IPP internal object identifier.
ippObjID	-			
surveyID	-	TINYINT	NA	Survey identifier. Details in the Survey table.
randomForcedGalID	-	FLOAT	NA	Random value drawn from the interval between zero and one.
$\operatorname{galModelType}$	-	TINYINT	-999	Galaxy model identifier.
nFilter	-	TINYINT	-999	Number of filters with valid model measurements.
gippDetectID	-	BIGINT	NA	IPP internal detection identifier.
gstackImageID	-	BIGINT	NA	Unique stack identifier for the g filter stack that was the original detection source.
gGalMajor	arcsec	REAL	-999	Galaxy major axis for g filter measurement.
gGalMajorErr	arcsec	REAL	-999	Error in galaxy major axis for g filter measurement.
gGalMinor	arcsec	REAL	-999	Galaxy minor axis for g filter measurement.
gGalMinorErr	arcsec	REAL	-999	Error in galaxy minor axis for g filter measurement.
gGalMag	AB	REAL	-999	Galaxy fit magnitude for g filter measurement.
gGalMagErr	AB	REAL	-999	Error in galaxy fit magnitude for g filter measurement.
gGalPhi	degrees	REAL	-999	Major axis position angle of the model fit for the g filter measurement.
gGalIndex	-	REAL	-999	Sersic index of the model fit for the g filter measurement.
gGalFlags	_	SMALLINT	-999	Analysis flags for the galaxy model chi-square fit (g filter measurement, values
0 0				defined in ForcedGalaxyShapeFlags).
gGalChisq	_	REAL	-999	Reduced chi squared value for g filter measurement.
rippDetectID		- <del>-</del>		
				same entries repeated for r, i, z, and y filters
vGalChisq				same shortes represent to 1, 1, 2, and 3 more
_ J1				

Forced Galaxy Tables

TABLE 52

DIFFDETOBJECT: CONTAINS THE POSITIONAL INFORMATION FOR DIFFERENCE DETECTION OBJECTS IN A NUMBER OF COORDINATE SYSTEMS. THE OBJECTS ASSOCIATE DIFFERENCE DETECTIONS WITHIN A ONE ARCSECOND RADIUS. THE NUMBER OF DETECTIONS IN EACH FILTER FROM IS LISTED, ALONG WITH MAXIMUM COVERAGE FRACTIONS (SEE SZALAY ET AL. 2007).

column name	units	data type	default	description
diffObjName	-	VARCHAR(32)	NA	IAU name for this object.
diffObjPSOName	_	VARCHAR(32)	NA	Alternate Pan-STARRS name for this object.
diffObjAltName1	_	VARCHAR(32)	IVA	Altername name for this object.
diffObjAltName2	-			Altername name for this object.  Altername name for this object.
		VARCHAR(32)		
diffObjAltName3	-	VARCHAR(32)		Altername name for this object.
diffObjPopularName	-	VARCHAR(140)	37.4	Well known name for this object.
diffObjID	-	BIGINT	NA	Unique difference object identifier.
uniquePspsDOid	-	BIGINT	NA	Unique internal PSPS difference object identifier.
ippObjID	-	BIGINT	NA	IPP internal object identifier.
surveyID	-	TINYINT	NA	Survey identifier. Details in the Survey table.
$_{ m htm ID}$	-	BIGINT	NA	Hierarchical triangular mesh (Szalay 2007) index.
zoneID	-	INT	NA	Local zone index, found by dividing the sky into bands of declination
				1/2 arcminute in height: zoneID = floor((90 + declination)/0.0083333).
randomDiffObjID	-	FLOAT	NA	Random value drawn from the interval between zero and one.
batchID	-	BIGINT	NA	Internal database batch identifier.
dvoRegionID	_	INT	-1	Internal DVO region identifier.
objInfoFlag	_	INT	0	Information flag bitmask indicating details of the photometry. Values
3				listed in ObjectInfoFlags.
qualityFlag	_	TINYINT	0	Subset of objInfoFlag denoting whether this object is real or a
quantyriag		111,111,1	Ü	likely false positive. Values listed in ObjectQualityFlags.
ra	degrees	FLOAT	-999	Right ascension mean.
dec	degrees	FLOAT	-999	Declination mean.
cx	degrees	FLOAT	NA	Cartesian x on a unit sphere.
cy	_	FLOAT	NA	Cartesian y on a unit sphere.
cz	-	FLOAT	NA	Cartesian z on a unit sphere.
lambda	degrees	FLOAT	-999	Ecliptic longitude.
beta	degrees	FLOAT	-999 -999	Ecliptic latitude.
beta 1		FLOAT		
b	degrees		-999	Galactic longitude.
	degrees	FLOAT	-999	Galactic latitude.
gQfPerfect	-	REAL	-999	Maximum PSF weighted fraction of pixels totally unmasked from g
0.00		DEAT		filter detections.
rQfPerfect	-	REAL	-999	Maximum PSF weighted fraction of pixels totally unmasked from r
				filter detections.
iQfPerfect	-	REAL	-999	Maximum PSF weighted fraction of pixels totally unmasked from i
				filter detections.
zQfPerfect	-	REAL	-999	Maximum PSF weighted fraction of pixels totally unmasked from z
				filter detections.
yQfPerfect	-	REAL	-999	Maximum PSF weighted fraction of pixels totally unmasked from y
				filter detections.
processingVersion	_	TINYINT	NA	Data release version.
nDetections	_	SMALLINT	-999	Number of difference detections in all filters.
ng	_	SMALLINT	-999	Number of difference detections in g filter.
nr	_	SMALLINT	-999	Number of difference detections in r filter.
ni	_	SMALLINT	-999	Number of difference detections in i filter.
nz	_	SMALLINT	-999	Number of difference detections in z filter.
ny	_	SMALLINT	-999	Number of difference detections in y filter.
		PWITTIIII	-333	rumber of difference detections in y litter.

 $Diff\ Object\ Tables$ 

TABLE 53

DIFFMETA: CONTAINS METADATA RELATED TO A DIFFERENCE IMAGE CONSTRUCTED BY SUBTRACTING A STACKED IMAGE FROM A SINGLE EPOCH IMAGE, OR IN THE CASE OF THE MD SURVEY FROM A NIGHTLY stack (STACK MADE FROM ALL EXPOSURES IN A SINGLE FILTER IN A SINGLE NIGHT). THE ASTROMETRIC CALIBRATION OF THE REFERENCE stack is listed.

-				
column name	units	data type	default	description
diffImageID	-	BIGINT	NA	Unique difference identifier.
batchID	-	BIGINT	NA	Internal database batch identifier.
surveyID	-	TINYINT	NA	Survey identifier. Details in the Survey table.
filterľD	_	TINYINT	NA	Filter identifier. Details in the Filter table.
diffTypeID	_	TINYINT	0	Difference type identifier. Details in the DiffType table.
frameID	_	INT	NA	Frame/exposure identifier for the positive image in warp-stack
				difference images;
posImageID	_	BIGINT	NA	Image identifier for the positive image.
negImageID	_	BIGINT	NA	Image identifier for the negative image.
ippDiffID	_	BIGINT	NA	IPP diffRun identifier.
tessID	_	TINYINT	0	Tessellation identifier. Details in the TessellationType table.
projectionID	_	SMALLINT	-1	Projection cell identifier.
skyCellID	_	TINYINT	255	Skycell region identifier.
photoCalID	_	INT	NA	Photometric calibration identifier. Details in the PhotoCal table.
analysisVer	_	VARCHAR(100)	1111	IPP software analysis release version.
md5sum		VARCHAR(100)		IPP MD5 Checksum.
detectionThreshold	magnitudes	REAL	-999	Reference magnitude for detection efficiency calculation.
expTime	seconds	REAL	-999 -999	Exposure time of positive image. Necessary for converting listed
expinne	seconds	REAL	-999	fluxes and magnitudes back to measured ADU counts.
psfModelID		INT	-999	PSF model identifier.
	-	REAL	-999 -999	
psfFWHM	arcsec			Mean PSF full width at half maximum at image center.
psfWidMajor	arcsec	REAL	-999	PSF major axis FWHM at image center.
psfWidMinor	arcsec	REAL	-999	PSF minor axis FWHM at image center.
psfTheta	degrees	REAL	-999	PSF major axis orientation at image center.
kernel	-	VARCHAR(100)		Subtraction kernel.
mode	-	TINYINT	0	Subtraction mode for which input to convolve.
numStamps	-	INT	-999	Number of stamps.
$\operatorname{stampDevMean}$	-	REAL	-999	Mean stamp deviation.
stampDevRMS	-	REAL	-999	RMS stamp deviation.
normalization	-	REAL	-999	Normalization.
convolveMax	-	REAL	-999	Maxiumum convolution fraction.
deconvolveMax	-	REAL	-999	Maximum deconvolution fraction.
ctype1	-	VARCHAR(100)		Name of astrometric projection in right ascension.
ctype2	-	VARCHAR(100)		Name of astrometric projection in declination.
crval1	degrees	FLOAT	-999	Right ascension corresponding to reference pixel.
crval2	degrees	FLOAT	-999	Declination corresponding to reference pixel.
crpix1	sky pixels	FLOAT	-999	Reference pixel for right ascension.
crpix2	sky pixels	FLOAT	-999	Reference pixel for declination.
cdelt1	degrees/pixel	FLOAT	-999	Pixel scale in right ascension.
cdelt2	degrees/pixel	FLOAT	-999	Pixel scale in declination.
pc001001	-	FLOAT	-999	Linear transformation matrix element between image pixel x and
P				right ascension.
pc001002	_	FLOAT	-999	Linear transformation matrix element between image pixel y and
pc001002		1 20111	000	right ascension.
pc002001	_	FLOAT	-999	Linear transformation matrix element between image pixel x and
PC002001		1 1 0 1 1 1	555	declination.
pc002002		FLOAT	-999	Linear transformation matrix element between image pixel y and
pc002002	-	FLOAT	-999	declination.
processing Vorsion		TINYINT	NA	Data release version.
processingVersion	-	T IIN I IIN I	INA	Data release version.

Diff Detection Tables

DIFFDETECTION: CONTAINS THE PHOTOMETRY OF INDIVIDUAL DETECTIONS FROM A DIFFERENCE IMAGE. THE IDENTIFIERS CONNECTING THE DETECTION BACK TO THE DIFFERENCE IMAGE AND TO THE OBJECT ASSOCIATION ARE PROVIDED. PSF, APERTURE, AND KRON (1980) PHOTOMETRY ARE INCLUDED, ALONG WITH SKY AND DETECTOR COORDINATE POSITIONS.

column name	units	data type	default	description
diffObjID	-	BIGINT	NA	Unique difference object identifier.
uniquePspsDFid	-	BIGINT	NA	Unique internal PSPS difference detection identifier.
diffDetID	-	BIGINT	NA	Unique difference detection identifier.
diffImageID	-	BIGINT	NA	Difference detection meta identifier.
ippObjĬD ippDetectID	-	BIGINT BIGINT	NA NA	IPP internal object identifier. IPP internal detection identifier.
fromPosImage	_	TINYINT	NA NA	Detection is from positive image (if 1) or negative image (if 0).
filterID	_	TINYINT	NA	Filter identifier. Details in the Filter table.
surveyID	_	TINYINT	NA	Survey identifier. Details in the Survey table.
randomDiffID	-	FLOAT	NA	Random value drawn from the interval between zero and one.
tessID	-	TINYINT	0	Tessellation identifier. Details in the TessellationType table.
projectionID	-	SMALLINT	-1	Projection cell identifier.
skyCellID	-	TINYINT	255	Skycell region identifier.
dvoRegionID	-	INT	-1	Internal DVO region identifier.
obsTime $ xPos$	days sky pixels	FLOAT REAL	-999 -999	Modified Julian Date at the midpoint of the observation.  PSF x center location.
yPos	sky pixels	REAL	-999 -999	PSF y center location.
xPosErr	sky pixels	REAL	-999	Error in PSF x center location.
yPosErr	sky pixels	REAL	-999	Error in PSF y center location.
pltScale	arcsec/pixel	REAL	-999	Local plate scale at this location.
posAngle	degrees	REAL	-999	Position angle (sky-to-chip) at this location.
ra	degrees	FLOAT	-999	Right ascension.
dec	degrees	FLOAT	-999	Declination.
raErr	arcsec	REAL	-999	Right ascension error.
decErr	arcsec	$egin{array}{c}  ext{REAL} \  ext{REAL} \end{array}$	-999 0	Declination error.  Photometric zeropoint for converting fluxes and magnitudes to measured ADU.
$_{ m telluricExt}$	magnitudes magnitudes	REAL	NA	Estimated Telluric extinction due to non-photometric observing conditions.
expTime	seconds	REAL	-999	Exposure time of the positive single-epoch image.
airMass	-	REAL	0	Airmass at midpoint of exposure to convert fluxes and magnitudes to measured ADU.
DpsfFlux	Jy	REAL	-999	Flux from PSF fit.
DpsfFluxErr	Jy	REAL	-999	Error in PSF flux.
xPosChip	raw pixels	$\operatorname{REAL}$	-999	PSF x position in original chip pixels.
yPosChip	raw pixels	REAL	-999	PSF y position in original chip pixels.
ccdID	-	SMALLINT	-999	OTA identifier of original chip (see ImageMeta).
DpsfMajorFWHM DpsfMinorFWHM	arcsec arcsec	$egin{array}{c}  ext{REAL} \  ext{REAL} \end{array}$	-999 -999	PSF major axis FWHM. PSF minor axis FWHM.
DpsfTheta	degrees	REAL	-999 -999	PSF major axis orientation.
DpsfCore	degrees	REAL	-999	PSF core parameter k, where $F = F0/(1 + kr^2 + r^{3.33})$ .
DpsfQf	_	REAL	-999	PSF coverage factor.
DpsfQfPerfect	_	REAL	-999	PSF-weighted fraction of pixels totally unmasked.
DpsfChiSq	-	REAL	-999	Reduced chi squared value of the PSF model fit.
DpsfLikelihood	-	REAL	-999	Likelihood that this detection is best fit by a PSF.
DmomentXX	$arcsec^2$	REAL	-999	Second moment $M_{xx}$ .
DmomentXY	$arcsec^2$	REAL	-999	Second moment $M_{xy}$ .
DmomentYY	$arcsec^2$	$\operatorname{REAL}$	-999	Second moment $M_{yy}$ .
DmomentR1	arcsec	REAL	-999	First radial moment.
DmomentRH	$arcsec^{0.5}$	REAL	-999	Half radial moment ( $r^{0.5}$ weighting).
DapFlux	Jy	REAL	-999	Aperture flux.
DapFluxErr	Jy	$egin{array}{c}  ext{REAL} \  ext{REAL} \end{array}$	-999 -999	Error in aperture flux.
DapFillF DkronFlux	Jу	REAL	-999 -999	Aperture fill factor. Kron (1980) flux.
DkronFluxErr	Jy	REAL	-999	Error in Kron (1980) flux.
DkronRad	arcsec	REAL	-999	Kron (1980) radius.
diffNPos	sky pixels	INT	-999	Number of difference pixels within the aperture that are positive.
diffFPosRatio	-	REAL	-999	Ratio of the sum of positive flux pixel values to the sum of the absolute value
diffNPosRatio		REAL	-999	of all unmasked pixels within the aperture. Ratio of the number of positive flux pixels to the number of unmasked pixels
dilinfositatio	-	REAL	-999	within the aperture.
$\operatorname{diffNPosMask}$	-	REAL	-999	Ratio of the number of positive flux pixels to the number of positive or masked pixels within the aperture.
diffNPosAll	-	REAL	-999	Ratio of the number of positive flux pixels to the total number of all pixels within the aperture.
diffPosDist	sky pixels	REAL	-999	Distance to matching source in positive image.
diffNegDist	sky pixels	REAL	-999	Distance to matching source in negative image.
diffPosSN	-	REAL	-999	Signal to noise of matching source in positive image.
diffNegSN	-	REAL	-999	Signal to noise of matching source in negative image.
Dsky	$Jy/arcsec^2$	REAL	-999	Background sky level.
DskyErr	$Jy/arcsec^2$	REAL	-999	Error in background sky level.
DinfoFlag	-	BIGINT	0	Information flag bitmask indicating details of the photometry. see DetectionFlags.
DinfoFlag2	-	INT	0	Information flag bitmask indicating details of the photometry, see DetectionFlags2.
DinfoFlag3	-	INT	0 N A	Information flag bitmask indicating details of the photometry. see DetectionFlags3.
processingVersion	-	TINYINT	NA	Data release version.

TABLE 55

DIFFTOIMAGE: CONTAINS THE MAPPING OF WHICH INPUT IMAGES WERE USED TO CONSTRUCT A PARTICULAR DIFFERENCE IMAGE.

column name	units	data type	default	description
diffImageID	-	BIGINT	NA	Unique difference identifier.
imageID	-	BIGINT	NA	Unique image identifier. Constructed as $(100 * frameID + ccdID)$ .

TABLE 56

DIFFDETEFFMETA: CONTAINS THE DETECTION EFFICIENCY INFORMATION FOR A GIVEN INDIVIDUAL DIFFERENCE IMAGE. PROVIDES THE NUMBER OF RECOVERED SOURCES OUT OF 500 INJECTED SOURCES AND STATISTICS ABOUT THE MAGNITUDES OF THE RECOVERED SOURCES FOR A RANGE OF MAGNITUDE OFFSETS.

-				
column name	units	data type	default	description
diffImageID	-	BIGINT	NA	Unique difference image identifier.
magref	magnitudes	REAL	NA	Detection efficiency reference magnitude.
nInjected	-	INT	NA	Number of fake sources injected in each magnitude bin.
offset01	magnitudes	REAL	NA	Detection efficiency magnitude offset for bin 1.
counts01	-	REAL	NA	Detection efficiency count of recovered sources in bin 1.
diffMean01	magnitudes	REAL	NA	Detection efficiency mean magnitude difference in bin 1.
diffStdev01	magnitudes	REAL	NA	Detection efficiency standard deviation of magnitude differences in bin 1.
errMean01	magnitudes	REAL	NA	Detection efficiency mean magnitude error in bin 1.
offset 02	magnitudes	REAL	NA	Detection efficiency magnitude offset for bin 2.
counts02	-	REAL	NA	Detection efficiency count of recovered sources in bin 2.
diffMean02	magnitudes	REAL	NA	Detection efficiency mean magnitude difference in bin 2.
diffStdev02	magnitudes	REAL	NA	Detection efficiency standard deviation of magnitude differences in bin 2.
errMean02	magnitudes	REAL	NA	Detection efficiency mean magnitude error in bin 2.
offset03	magnitudes	REAL	NA	Detection efficiency magnitude offset for bin 3.
counts03	-	REAL	NA	Detection efficiency count of recovered sources in bin 3.
diffMean03	magnitudes	REAL	NA	Detection efficiency mean magnitude difference in bin 3.
diffStdev03	magnitudes	REAL	NA	Detection efficiency standard deviation of magnitude differences in bin 3.
errMean03	magnitudes	REAL	NA	Detection efficiency mean magnitude error in bin 3.
offset13	magnitudes	REAL	NA	Detection efficiency magnitude offset for bin 13.
counts13	-	REAL	NA	Detection efficiency count of recovered sources in bin 13.
diffMean13	magnitudes	REAL	NA	Detection efficiency mean magnitude difference in bin 13.
diffStdev13	magnitudes	REAL	NA	Detection efficiency standard deviation of magnitude differences in bin 13.
errMean13	magnitudes	REAL	NA	Detection efficiency mean magnitude error in bin 13.

OBJECTTHIN: THIS DESCRIBES THE SOURCES FOR EACH OF THE COLUMNS WITHIN ObjectThin as well the formula to generate the data within the column, if it is not just copying directly. For this table, DVO cpt NAME shows that this comes from the cpt files in the DVO database, and has a column of NAME. The sources for this table include: the DVO cpt files, IppToPsps, PSPS, as well as a few columns that are not currently being used.

column name	source	notes
objName	DVO cpt IAUNAME /IppToPsps	
objPSOName	DVO cpt PSO_NAME	
objAltName1	not set	
objAltName2	not set	
objAltName3	not set	
objPopularName	not set	
obiID	DVO cpt EXT_ID	
uniquePspsOBid	IppToPsps	uniquePspsOBid = $(batchID*1000000000) + row number)$
ippObjID	DVO cpt OBJ_ID and CAT_ID	OBJ_ID + (CAT_ID << 32)
survevID	Ipp To Psps	set to 0 for $3\pi$
htmID	PSPS	calculated and filled in PSPS (Szalay et al. 2007)
zoneID	PSPS	calculated and filled in PSPS
tessID	DVO cpt TESS_ID	calculated and inled in 1 of 5
projectionID	DVO cpt PROJECTION_ID	
skyCellID	DVO cpt 11to3ECTION_ID	
randomID		non-domaio accorded with DAND(hotalsID)
batchID	Ipp ToPsps	random is seeded with RAND(batchID)
	IppToPsps	sequentially ncreases as batches are made
dvoRegionID	DVO cpt CAT_ID	the of the last of Divin
processingVersion	IppToPsps	set to 3 for this data release, for PV3
objInfoFlag	DVO cpt FLAGS	ELACCES DE CONTRACTOR
qualityFlag	DVO cpt FLAGS	FLAGS >> 23 & 0xFF
raStack	DVO cpt RA_STK	
decStack	DVO cpt DEC_STK	
raStackErr	DVO cpt RA_STK_ERR	
decStackErr	DVO cpt DEC_STK_ERR	
raMean	DVO cpt RA_MEAN	
decMean	DVO cpt DEC_MEAN	
raMeanErr	DVO cpt RA_ERR	
decMeanErr	DVO cpt DEC_ERR	
epochMean	DVO cpt EPOCH_MEAN	
posMeanChisq	DVO cpt CHISQ_POS	
cx	PSPS	set to 0 initially; calculated and filled by PSPS
cy	PSPS	set to 0 initially; calculated and filled by PSPS
CZ	PSPS	set to 0 initially; calculated and filled by PSPS
lambda	PSPS set to 0; calculated and filled by PSPS	
$_{ m beta}$	PSPS set to 0; calculated and filled by PSPS	
1	PSPS	set to 0; calculated and filled by PSPS
b	PSPS	set to 0; calculated and filled by PSPS
nStackObjectRows	IppToPsps	set to -999 for $3\pi$
nStackDetections	DVO cpt NSTACK_DET	sum of NSTACK_DET for all 5 filters
nDetections	$IppTo ilde{P}sps$	sum of non-null $ng + nr + ni + nz + ny$
ng	DVO cpt NCODE	
$ \widetilde{nr} $	DVO cpt NCODE	
ni	DVO cpt NCODE	
nz	DVO cpt NCODE	
ny	DVO cpt NCODE	

IPPTOPSPS TRANSLATION TABLES

MEANOBJECT: THIS DESCRIBES THE SOURCES FOR EACH OF THE COLUMNS WITHIN MEANOBJECT AS WELL THE FORMULA TO GENERATE THE DATA WITHIN THE COLUMN, IF IT IS NOT JUST COPYING DIRECTLY. FOR THIS TABLE, DVO CPS NAME SHOWS THAT THIS COMES FROM THE CPS FILES IN THE DVO DATABASE, AND HAS A COLUMN OF NAME. THE SOURCES FOR THIS TABLE INCLUDE: THE DVO CPS FILES AND IppToPsps.

column name	source	notes
objID	IppToPspsobjectThin.objID	
uniquePspsOBid	IppToPspsobjectThin.uniquePspsOBid	
gQfPerfect	DVO cps PSF_QF_PERF_MAX	
gMeanPSFMag	DVO cps MAG	
gMeanPSFMagErr	DVO cps MAG_ERR	
gMeanPSFMagStd	DVO cps MAG_STDEV	
gMeanPSFMagNpt	DVO cps NUSED	
gMeanPSFMagMin	DVO cps MAG_MIN	
gMeanPSFMagMax	DVO cps MAG_MAX	
gMeanKronMag	DVO cps MAG_KRON	
gMeanKronMagErr	DVO cps MAG_KRON_ERR	
gMeanKronMagStd	DVO cps MAG_KRON_STDEV	
gMeanKronMagNpt	DVO cps NUSED_KRON	
gMeanApMag	DVO cps MAG_AP	
gMeanApMagErr	DVO cps MAG_AP_ERR	
gMeanApMagStd	DVO cps MAG_AP_STDEV	
gMeanApMagNpt	DVO cps NUSED_AP	
gFlags	DVO cps FLAGS	
rQfPerfect	_	
		same entries repeated for r, i, z, and y filters
yFlags		- · · · · · · · · · · · · · · · · · · ·

# TABLE 59

StackObjectThin: This describes the sources for each of the columns within StackObjectThin as well the formula to generate the data within the column, if it is not just copying directly. For this table, DVO cps NAME shows that this comes from the cps files in the DVO database, and has a column of NAME. The sources for this table include: the DVO cps files and IppToPsps.

$ \begin{array}{c ccccccccccccccccccccccccccccccccccc$	ow number)
uniquePspsSTid $IppToPsps$ uniquePspsSTid = (batchID*1000000000) + redippObjIDDVO cpt OBJ.ID and CAT.IDOBJ.ID + (CAT.ID << 32)	ow number)
$\begin{array}{llllllllllllllllllllllllllllllllllll$	ow number)
$\begin{array}{cccccccccccccccccccccccccccccccccccc$	
tessIDcmf filefrom header: TESS_IDprojectionIDcmf filefrom header, first 4 numbers in SKYCELLskyCellIDcmf filefrom header, last 4 numbers in SKYCELLrandomStackObjIDipptopspsrandom number generated in ipptopsps, seededprimaryDetectionDVO cpt $(dvo.flags\&0x10000) >> 16$	
projectionID cmf file from header, first 4 numbers in SKYCELL skyCellID cmf file from header, last 4 numbers in SKYCELL from header, last 4 numbers in SKYCELL randomStackObjID primaryDetection DVO cpt random number generated in ipptopsps, seeded $(dvo.flags\&0x10000) >> 16$	
skyCellIDcmf filefrom header, last 4 numbers in SKYCELLrandomStackObjIDipptopspsrandom number generated in ipptopsps, seededprimaryDetectionDVO cpt $(dvo.flags\&0x10000) >> 16$	
randomStackObjID ipptopsps ipptopsps random number generated in ipptopsps, seeded primaryDetection DVO cpt $(dvo.flags\&0x10000) >> 16$	
primaryDetection $\dot{\text{DVO}}$ cpt $(dvo.flags\&0x10000) >> 16$	
	d with batch_id
7// 1 7 1 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2	
bestDetection DVO cpt $(??)$ $(((dvo).objflags\&0x8000) >> 15)$	
dvoRegionID DVO cpt (dvo).catID	
processing Version ipptopsps set to 3 for this data release, for PV3	
gippDetectID DVO cpm ippDetectID	
gstackDetectID DVO cpm (dvo).detectID	
gstackImageID gpc1 database internal stack ID for this stack	
gra DVO cpm (dvo).ra	
gdec DVO cpm (dvo).dec	
graErr cmf file $X_PSF_SIG*PLTSCALE$	
gdecErr cmf file $Y_{-}PSF_{S}IG * PLTSCALE$	
gEpoch cmf file from header, MJD-OBS	
gPSFMag DVO cpm (dvo).Mpsf	
gPSFMagErr DVO cpm (dvo).dMpsf	
gApMag DVO cpm (dvo).Map	
gApMagErr DVO cpm (dvo).dMap	
gKronMag DVO cpm (dvo).Mkron	
gKronMagErr DVO cpm (dvo).dMkron	
ginfoFlag cmf file FLAGS	
ginfoFlag2 cmf FLAGS2	
ginfoFlag3 DVO cpt (??) FLAGS	
gnFrames cmf file, header N_FRAMES	
rippDetectID	
same entries repeated for r, i, z, and y filters	
ynFrames	