



Fast Penalized Regression and Cross Validation for Tall Data with the `oem` Package

Jared Huling

Department of Statistics
University of Wisconsin-Madison

Peter Z.G. Qian

Department of Statistics
University of Wisconsin-Madison

Abstract

A large body of research has focused on theory and computation for variable selection techniques for high dimensional data. There has been substantially less work in the big “tall” data paradigm, where the number of variables may be large, but the number of observations is much larger. The orthogonalizing expectation maximization (OEM) algorithm is one approach for computation of penalized models which excels in the big tall data regime. The `oem` package is an efficient implementation of the OEM algorithm which provides a multitude of computation routines with a focus on big tall data, such as a function for out-of-memory computation, for large-scale parallel computation of penalized regression models. Furthermore, in this paper we propose a specialized implementation of the OEM algorithm for cross validation, dramatically reducing the computing time for cross validation over a naive implementation.

Keywords: lasso, mcp, optimization, expectation maximization, C++, OpenMP, parallel computing, out-of-memory computing.

1. Introduction

Penalized regression has been a widely used technique for variable selection for many decades. Computation for such models has been a challenge due to the non-smooth properties of penalties such as the lasso (Tibshirani 1996). A plethora of algorithms now exist such as the Least Angle Regression (LARS) algorithm (Efron, Hastie, Johnstone, and Tibshirani 2004) and coordinate descent (Tseng 2001; Friedman, Hastie, and Tibshirani 2010), among many others. There exist for these algorithms even more packages for various penalized regression routines such as `glmnet` (Friedman, Hastie, Simon, and Tibshirani 2016), `lars` (Hastie and Efron 2013), `ncvreg` (Breheny and Lee 2016), `grpreg` (Breheny 2016), and `gglasso` (Yang and

Zou 2014), among countless others. Each of the above packages focuses on a narrow class of penalties, such as group regularization, non-convex penalties, or the lasso. The existence of many options often makes it hard to choose between packages, and furthermore difficult to develop a consistent workflow when it is not clear which type of penalty is suitable for a given problem. There has been much focus on algorithms for scenarios where the number of variables p is much larger than the number of observations n , such as the LARS algorithm, yet many applications of “internet scale” typically involve an extraordinarily large number of observations and a moderate number of variables. In these applications, speed is crucial. The **oem** package is intended to provide a highly efficient framework for penalized regression in these tall data settings. It provides computation for a comprehensive selection of penalties, including the lasso and elastic net, group-wise penalties, and non-convex penalties and allows for simultaneous computation of these penalties. Most of the algorithms and packages listed above, however, are more efficient than the **oem** package for scenarios when the number of variables is larger than the number of observations. Roughly speaking, **oem** package is most effective when the ratio of the number of variables to the number of observations is less than 1/10. This is ideal for data settings, such as in internet applications, where a large number of variables are available, but the number of observations grows rapidly over time.

Centered around the orthogonalizing expectation maximization (OEM) algorithm of Xiong, Dai, Huling, and Qian (2016), the **oem** package provides a unified framework for computation for penalized regression problems with a focus on big *tall* data scenarios. The OEM algorithm is particularly useful for regression scenarios when the number of observations is significantly larger than the number of variables. It is efficient even when the number of variables is large (in the thousands) as long as the number of observations is yet larger (hundreds of thousands or more). The OEM algorithm is particularly well-suited for penalized linear regression scenarios when the practitioner must choose between a large number of potential penalties, as the OEM algorithm can compute full tuning parameter paths for multiple penalties nearly as efficiently as for just one penalty.

The **oem** package also places an explicit emphasis on practical aspects of penalized regression model fitting, such as tuning parameter selection, in contrast to the vast majority of penalized regression packages. The most common approach for tuning parameter selection for penalized regression is cross validation. Cross validation is computationally demanding, yet there has been little focus on efficient implementations of cross validation. Here we present a modification of the OEM algorithm to dramatically reduce the computational load for cross validation. Additionally, the **oem** package provides some extra unique features for very large-scale problems. The **oem** package provides functionality for out-of-memory computation, allowing for fitting penalized regression models on data which are too large to fit into memory. Feasibly, one could use these routines to fit models on datasets hundreds of gigabytes in size on just a laptop. The **biglasso** package (Zeng and Breheny 2016) also provides functionality for out-of-memory computation, however its emphasis is on ultrahigh-dimensional data scenarios and is limited to the lasso, elastic-net, and ridge penalties. Also provided are OEM routines based off of the quantities $\mathbf{X}^\top \mathbf{X}$ and $\mathbf{X}^\top \mathbf{y}$ that may already be available to researchers from exploratory analyses. This can be especially useful for scenarios when data are stored across a large cluster, yet the sufficient quantities can be computed easily on the cluster, making penalized regression computation very simple and quick for datasets with an arbitrarily large number of observations.

The core computation for the **oem** package is in C++ using the **Eigen** numerical linear alge-

bra library (Guennebaud, Jacob *et al.* 2010) with an R interface via the **RcppEigen** (Bates, Eddelbuettel, Francois, Qiu, and the authors of **Eigen** for the included version of **Eigen** 2016) package. Out-of-memory computation capability is provided by interfacing to special C++ objects for referencing objects stored on disk using the **bigmemory** package (Kane, Emerson, Haverty, and Jr. 2016).

In Section 2, we provide a review of the OEM algorithm. In Section 3 we present a new efficient approach for cross validation based on the OEM algorithm. In Section 4 we show how the OEM algorithm can be extended to logistic regression using a proximal Newton algorithm. Section 5 provides an introduction to the package, highlighting useful features. Finally, Section 6 demonstrates the computational efficiency of the package with some numerical examples.

2. The orthogonalizing EM algorithm

2.1. Review of the OEM algorithm

The OEM algorithm is centered around the linear regression model:

$$\mathbf{y} = \mathbf{X}\boldsymbol{\beta} + \boldsymbol{\varepsilon}, \quad (1)$$

where $\mathbf{X} = (x_{ij})$ is an $n \times p$ design matrix, $\mathbf{y} \in \mathbb{R}^n$ is a vector of responses, $\boldsymbol{\beta} = (\beta_1, \dots, \beta_p)^\top$ is a vector of regression coefficients, and $\boldsymbol{\varepsilon}$ is a vector of random error terms with mean zero. When the number of covariates is large, researchers often want or need to perform variable selection to reduce variability or to select important covariates. A sparse estimate $\hat{\boldsymbol{\beta}}$ with some estimated components exactly zero can be obtained by minimizing a penalized least squares criterion:

$$\hat{\boldsymbol{\beta}} = \underset{\boldsymbol{\beta}}{\operatorname{argmin}} \|\mathbf{y} - \mathbf{X}\boldsymbol{\beta}\|^2 + P_\lambda(\boldsymbol{\beta}), \quad (2)$$

where the penalty term P_λ has a singularity at the zero point of its argument. Widely used examples of penalties include the lasso (Tibshirani 1996), the group lasso (Yuan and Lin 2006), the smoothly clipped absolute deviation (SCAD) penalty (Fan and Li 2001), and the minimax concave penalty (MCP) (Zhang 2010), among many others.

The OEM algorithm can solve (2) under a broad class of penalties, including all of those previously mentioned. The basic motivation of the OEM algorithm is the triviality of minimizing this loss when the design matrix \mathbf{X} is orthogonal. However, the majority of design matrices from observational data are not orthogonal. Instead, we seek to augment the design matrix with extra rows such that the augmented matrix is orthogonal. If the non-existent responses of the augmented rows are treated as missing, then we can embed our original minimization problem inside a missing data problem and use the EM algorithm. Let $\boldsymbol{\Delta}$ be a matrix of pseudo observations whose response values \mathbf{z} are missing. If $\boldsymbol{\Delta}$ is designed such that the augmented regression matrix

$$\mathbf{X}_c = \begin{pmatrix} \mathbf{X} \\ \boldsymbol{\Delta} \end{pmatrix}$$

is column orthogonal, an EM algorithm can be used to solve the augmented problem efficiently similar to Healy and Westmacott (1956). The OEM algorithm achieves this with two steps:

Step 1. Construct an augmentation matrix Δ .

Step 2. Iteratively solve the orthogonal design with missing data by EM algorithm.

Step 2.1. E-step: impute the missing responses \mathbf{z} by $\mathbf{z} = \Delta\boldsymbol{\beta}^{(t)}$, where $\boldsymbol{\beta}^{(t)}$ is the current estimate.

Step 2.2. M-step: solve

$$\boldsymbol{\beta}^{(t+1)} = \underset{\boldsymbol{\beta}}{\operatorname{argmin}} \frac{1}{2} \|\mathbf{y} - \mathbf{X}\boldsymbol{\beta}\|^2 + \frac{1}{2} \|\mathbf{z} - \Delta\boldsymbol{\beta}\|^2 + P_\lambda(\boldsymbol{\beta}). \quad (3)$$

An augmentation matrix Δ can be constructed using the active orthogonalization procedure. The procedure starts with any positive definite diagonal matrix \mathbf{S} and Δ can be constructed conceptually by ensuring that $\Delta^\top \Delta = d\mathbf{S}^2 - \mathbf{X}^\top \mathbf{X}$ is positive semidefinite for some constant $d \geq \lambda_1(\mathbf{S}^{-1} \mathbf{X}^\top \mathbf{X} \mathbf{S}^{-1})$, where $\lambda_1(\cdot)$ is the largest eigenvalue. The term Δ need not be explicitly computed, as the EM iterations in the second step result in closed-form solutions which only depend on $\Delta^\top \Delta$. To be more specific, let $\mathbf{A} = \Delta^\top \Delta$ and $\mathbf{u} = \mathbf{X}^\top \mathbf{y} + \mathbf{A}\boldsymbol{\beta}^{(t)}$. Furthermore, assume the regression matrix \mathbf{X} is standardized so that

$$\sum_{i=1}^n x_{ij}^2 = 1, \text{ for } j = 1, \dots, p.$$

Then the update for the regression coefficients when $P_\lambda(\boldsymbol{\beta}) = 0$ has the form $\beta_j^{(t+1)} = u_j/d_j$. When $P_\lambda(\boldsymbol{\beta})$ is the ℓ_1 norm, corresponding to the lasso penalty,

$$\beta_j^{(t+1)} = \operatorname{sign}(u_j) \left(\frac{|u_j| - \lambda}{d_j} \right)_+,$$

where $(a)_+$ denotes $\max\{a, 0\}$.

Xiong *et al.* (2016) used a scalar value for d and for simplicity chose \mathbf{S} to be the diagonal matrix. Furthermore, they showed that while the above algorithm converges for all $d \geq \lambda_1(\mathbf{X}^\top \mathbf{X})$, using $d = \lambda_1(\mathbf{X}^\top \mathbf{X})$ results in the fastest convergence. Such a d can be computed efficiently using the Lanczos algorithm (Lanczos 1950).

2.2. Penalties

The **oem** package uses the OEM algorithm to solve penalized least squares problems with the penalties outlined in Table 1. For a vector \mathbf{u} of length k and an index set $g \subseteq \{1, \dots, k\}$ we define the length $|g|$ subvector \mathbf{u}_g of a vector \mathbf{u} as the elements of \mathbf{u} indexed by g . Furthermore, for a vector \mathbf{u} of length k let $\|\mathbf{u}\| = \sqrt{\sum_{j=1}^k u_j^2}$.

For $\lambda > 0$ let:

$$P_{\lambda, \gamma}^{SCAD}(\beta) = \begin{cases} \lambda|\beta| & |\beta| \leq \lambda; \\ -\frac{|\beta|^2 - 2\gamma\lambda|\beta| + \lambda^2}{2(\gamma-1)} & \lambda < |\beta| \leq \gamma\lambda; \\ \frac{(\gamma+1)\lambda^2}{2} & |\beta| > \gamma\lambda \end{cases}$$

for $\gamma > 2$ and

$$P_{\lambda, \gamma}^{MCP}(\beta) = \begin{cases} \lambda|\beta| - \frac{\beta^2}{2\gamma} & |\beta| \leq \gamma\lambda; \\ \frac{\gamma\lambda^2}{2} & |\beta| > \gamma\lambda \end{cases}$$

Penalty	Penalty form
Lasso	$\lambda \sum_{j=1}^p w_j \beta_j $
Elastic Net	$\alpha \lambda \sum_{j=1}^p w_j \beta_j + \frac{1}{2}(1 - \alpha) \lambda \sum_{j=1}^p w_j \beta_j^2$
MCP	$\sum_{j=1}^p P_{\lambda w_j, \gamma}^{MCP}(\beta_j)$
SCAD	$\sum_{j=1}^p P_{\lambda w_j, \gamma}^{SCAD}(\beta_j)$
Group Lasso	$\lambda \sum_{k=1}^G c_k \ \beta_{g_k}\ $
Group MCP	$\lambda \sum_{k=1}^G P_{\lambda c_k, \gamma}^{MCP}(\ \beta_{g_k}\)$
Group SCAD	$\lambda \sum_{k=1}^G P_{\lambda c_k, \gamma}^{SCAD}(\ \beta_{g_k}\)$
Sparse Group Lasso	$\lambda(1 - \tau) \sum_{k=1}^G c_k \ \beta_{g_k}\ + \lambda \tau \sum_{j=1}^p w_j \beta_j $

Table 1: Listed above are the penalties available in the **oem** package. In the group lasso, g_k refers to the index set of the k th group. The vector $\mathbf{w} \in \mathbb{R}^p$ is a set of variable-specific penalty weights and the vector $\mathbf{c} \in \mathbb{R}^G$ is a set of group-specific penalty weights.

for $\gamma > 1$. The updates for the above penalties are given below:

1. **Lasso**

$$\beta_j^{(t+1)} = S(u_j, w_j \lambda, d) = \text{sign}(u_j) \left(\frac{|u_j| - w_j \lambda}{d} \right)_+ . \quad (4)$$

2. **Elastic Net**

$$\beta_j^{(t+1)} = \text{sign}(u_j) \left(\frac{|u_j| - w_j \alpha \lambda}{d + w_j (1 - \alpha) \lambda} \right)_+ . \quad (5)$$

3. **MCP**

$$\beta_j^{(t+1)} = M(u_j, w_j \lambda, \gamma, d) = \begin{cases} \text{sign}(u_j) \frac{\gamma(|u_j| - w_j \lambda)_+}{(\gamma d - 1)}, & \text{if } |u_j| \leq w_j \gamma \lambda d, \\ u_j / d, & \text{if } |u_j| > w_j \gamma \lambda d. \end{cases} \quad (6)$$

where $\gamma > 1$

4. **SCAD**

$$\beta_j^{(t+1)} = C(u_j, w_j \lambda, \gamma, d) = \begin{cases} \text{sign}(u_j) (|u_j| - w_j \lambda)_+ / d, & \text{if } |u_j| \leq (d + 1) w_j \lambda, \\ \text{sign}(u_j) \frac{[(\gamma - 1)|u_j| - w_j \gamma \lambda]}{[(\gamma - 1)d - 1]}, & \text{if } (d + 1) w_j \lambda < |u_j| \leq w_j \gamma \lambda d, \\ u_j / d, & \text{if } |u_j| > w_j \gamma \lambda d. \end{cases} \quad (7)$$

where $\gamma > 2$.

5. **Group Lasso**

The update for the k th group is

$$\beta_{g_k}^{(t+1)} = G(\mathbf{u}_{g_k}, c_k \lambda, d) = \frac{\mathbf{u}_{g_k}}{d} \left(1 - \frac{c_k \lambda}{\|\mathbf{u}_{g_k}\|_2} \right)_+ . \quad (8)$$

6. Group MCP

The update for the k th group is

$$\boldsymbol{\beta}_{g_k}^{(t+1)} = M(\|\mathbf{u}_{g_k}\|, c_k \lambda, \gamma, d) \frac{\mathbf{u}_{g_k}}{\|\mathbf{u}_{g_k}\|}. \quad (9)$$

7. Group SCAD

The update for the k th group is

$$\boldsymbol{\beta}_{g_k}^{(t+1)} = C(\|\mathbf{u}_{g_k}\|, c_k \lambda, \gamma, d) \frac{\mathbf{u}_{g_k}}{\|\mathbf{u}_{g_k}\|}. \quad (10)$$

8. Sparse Group Lasso

The update for the k th group is

$$\boldsymbol{\beta}_{g_k}^{(t+1)} = G(\mathbf{v}_{g_k}, c_k \lambda(1 - \tau), 1), \quad (11)$$

where the j th element of \mathbf{v} is $S(u_j, w_j \lambda \tau, d)$. This is true because the thresholding operator of two nested penalties is the composition of the thresholding operators where innermost nested penalty's thresholding operator is evaluated first. For more details and theoretical justification of the composition of proximal operators for nested penalties, see [Jenatton, Mairal, Bach, and Obozinski \(2010\)](#).

3. Parallelization and fast cross validation

The OEM algorithm lends itself naturally to efficient computation for cross validation for penalized linear regression models. When the number of variables is not too large (ideally $n \gg p$) relative to the number of observations, computation for cross validation using the OEM algorithm is on a similar order of computational complexity as fitting one model for the full data. To see why this is the case, note that the key computational step in OEM is in forming the matrix \mathbf{A} . Recall that $\mathbf{A} = d\mathbf{I}_p - \mathbf{X}^\top \mathbf{X}$. In K -fold cross validation, the design matrix is randomly partitioned into K submatrices as

$$\mathbf{X} = \begin{pmatrix} \mathbf{X}_1 \\ \vdots \\ \mathbf{X}_K \end{pmatrix}.$$

Then for the k^{th} cross validation model, the oem algorithm requires the quantities $\mathbf{A}_{(k)} = d_{(k)}\mathbf{I}_p - \mathbf{X}_{-k}^\top \mathbf{X}_{-k}$ and $\mathbf{X}_{-k}^\top \mathbf{y}_{-k}$, where \mathbf{X}_{-k} is the design matrix X with the k^{th} submatrix \mathbf{X}_k removed and \mathbf{y}_{-k} is the response vector with the elements from the k^{th} fold removed. Then trivially, we have that $\mathbf{A} = d\mathbf{I}_p - \sum_{k=1}^K \mathbf{X}_k^\top \mathbf{X}_k$, $\mathbf{A}_{(k)} = d\mathbf{I}_p - \sum_{c=1, \dots, K, c \neq k} \mathbf{X}_c^\top \mathbf{X}_c$, and $\mathbf{X}_{-k}^\top \mathbf{y}_{-k} = \sum_{c=1, \dots, K, c \neq k} \mathbf{X}_c^\top \mathbf{y}_c$. Then the main computational tasks for fitting a model on the entire training data and for fitting k models for cross validation is in computing $\mathbf{X}_k^\top \mathbf{X}_k$ and $\mathbf{X}_k^\top \mathbf{y}_k$ for each k , which has a total computational complexity of $O(np^2 + np)$ for any k . Hence, we can precompute these quantities and the computation time for the entire cross validation procedure can be dramatically reduced from the naive procedure of fitting models

for each cross validation fold individually. It is clear that $\mathbf{X}_k^\top \mathbf{X}_k$ and $\mathbf{X}_k^\top \mathbf{y}_k$ can be computed independently across all k and hence we can reduce the computational load even further by computing them in parallel. The techniques presented here are not applicable to models beyond the linear model, such as logistic regression.

4. Extension to logistic regression

The logistic regression model is often used when the response of interest is a binary outcome. The OEM algorithm can be extended to handle logistic regression models by using a proximal Newton algorithm similar to that used in the **glmnet** package and described in [Friedman *et al.* \(2010\)](#). OEM can act as a replacement for coordinate descent in the inner loop in the algorithm described in Section 3 of [Friedman *et al.* \(2010\)](#). While we do not present any new algorithmic results here, for the sake of clarity we will outline the proximal Newton algorithm of [Friedman *et al.* \(2010\)](#) that we use.

The response variable Y takes values in $\{0, 1\}$. The logistic regression model posits the following model for the probability of an event conditional on predictors:

$$\mu(x) = \Pr(Y = 1|x) = \frac{1}{1 + \exp-(x^\top \boldsymbol{\beta})}.$$

Under this model, we compute penalized regression estimates by maximizing the following penalized log-likelihood with respect to $\boldsymbol{\beta}$:

$$\frac{1}{n} \sum_{i=1}^n \left\{ y_i x_i^\top \boldsymbol{\beta} + \log(1 + \exp(x_i^\top \boldsymbol{\beta})) \right\} - P_\lambda(\boldsymbol{\beta}). \quad (12)$$

Then, given a current estimate $\hat{\boldsymbol{\beta}}$, we approximate (12) with the following weighted penalized linear regression:

$$-\frac{1}{2n} \sum_{i=1}^n w_i \{ z_i - x_i^\top \boldsymbol{\beta} \} - P_\lambda(\boldsymbol{\beta}), \quad (13)$$

where

$$z_i = x_i^\top \hat{\boldsymbol{\beta}} + \frac{y_i - \hat{\mu}(x_i)}{\hat{\mu}(x_i)(1 - \hat{\mu}(x_i))}$$

$$w_i = \hat{\mu}(x_i)(1 - \hat{\mu}(x_i))$$

and $\hat{\mu}(x_i)$ is evaluated at $\hat{\boldsymbol{\beta}}$. Here, z_i are the working responses and w_i are the weights. For each iteration of the proximal Newton algorithm, we maximize (13) using the OEM algorithm. Similar to [Krishnapuram, Carin, Figueiredo, and Hartemink \(2005\)](#); [Friedman *et al.* \(2010\)](#), we optionally employ an approximation to the Hessian using an upper-bound of $w_i = 0.25$ for all i . This upper bound is often quite efficient for big tall data settings.

5. The oem package

5.1. The oem() function

The function `oem()` is the main workhorse of the `oem` package.

```
nobs <- 1e4
nvars <- 25
rho <- 0.25
sigma <- matrix(rho, ncol = nvars, nrow = nvars)
diag(sigma) <- 1
x <- mvrnorm(n = nobs, mu = numeric(nvars), Sigma = sigma)
y <- drop(x %*% c(0.5, 0.5, -0.5, -0.5, rep(0, nvars - 4))) +
  rnorm(nobs, sd = 3)
```

The group membership indices for each covariate must be specified for the group lasso via the argument `groups`. The argument `gamma` specifies the γ value for MCP. The function `plot.oemfit()` allows the user to plot the estimated coefficient paths. Its argument `which.model` allows the user to select model to be plotted.

```
fit <- oem(x = x, y = y, penalty = c("lasso", "mcp", "grp.lasso"),
  gamma = 2, groups = rep(1:5, each = 5),
  lambda.min.ratio = 1e-3)
```

```
par(mar=c(5, 5, 5, 3) + 0.1)
layout(matrix(1:3, ncol = 3))
plot(fit, which.model = 1, xvar = "lambda",
  cex.main = 3, cex.axis = 1.25, cex.lab = 2)
plot(fit, which.model = 2, xvar = "lambda",
  cex.main = 3, cex.axis = 1.25, cex.lab = 2)
plot(fit, which.model = 3, xvar = "lambda",
  cex.main = 3, cex.axis = 1.25, cex.lab = 2)
```

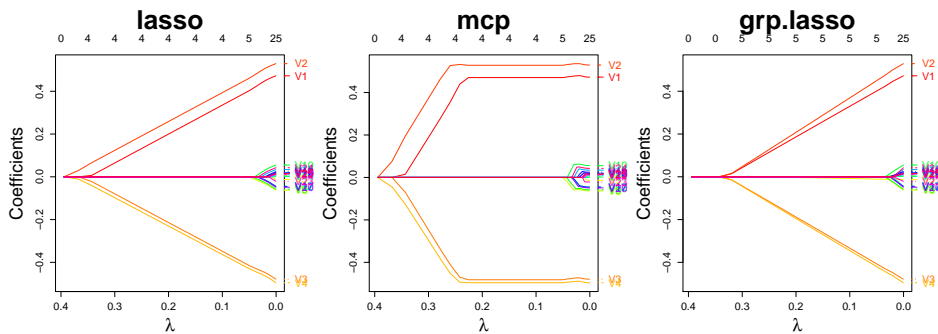


Figure 1: The plots above depict estimated coefficient paths for the lasso, MCP, and group lasso.

To compute the loss function in addition to the estimated coefficients, the argument `compute.loss` must be set to `TRUE` like the following:


```
fit <- oem(x = x, y = y, penalty = c("lasso", "mcp", "grp.lasso"),
  gamma = 2, groups = rep(1:5, each = 5),
  lambda.min.ratio = 1e-3, compute.loss = TRUE)
```

By default, `compute.loss` is set to `FALSE` because it adds a large computational burden, especially when many penalties are input. The function `logLik.oemfit()` can be used in complement with fitted with `oem()` objects with `compute.loss = TRUE` with the model specified using the `which.model` argument like the following:

```
logLik(fit, which.model = 2)[c(1, 25, 50, 100)]

[1] -14189.39 -13804.72 -13795.76 -13795.11
```

5.2. Fitting multiple penalties

The OEM algorithm is well-suited to quickly estimate a solution path for multiple penalties simultaneously for the linear model if the number of variables is not too large, often when the number of variables is several thousand or fewer, provided the number of observations is larger than the number of variables. Ideally the number of observations should be at least ten times larger than the number of variables for best performance. Once the quantities \mathbf{A} and $\mathbf{X}^T \mathbf{y}$ are computed initially, then the remaining computational complexity for OEM for a given model and tuning parameter is just $O(p^2)$ per iteration. To demonstrate the efficiency, consider the following simulated example:

```
nobs <- 1e6
nvars <- 100
rho <- 0.25
sigma <- matrix(rho, ncol = nvars, nrow = nvars)
diag(sigma) <- 1
x2 <- mvrnorm(n = nobs, mu = numeric(nvars), Sigma = sigma)
y2 <- drop(x2 %*% c(0.5, 0.5, -0.5, -0.5, rep(0, nvars - 4))) +
  rnorm(nobs, sd = 5)

mb <- microbenchmark(
  "oem[lasso]" = oem(x = x2, y = y2,
    penalty = c("lasso"),
    gamma = 3,
    groups = rep(1:20, each = 5)),
  "oem[all]" = oem(x = x2, y = y2,
    penalty = c("lasso", "mcp",
      "grp.lasso", "scad"),
    gamma = 3,
    groups = rep(1:20, each = 5)),
  times = 10L)
print(mb, digits = 3)
```

Unit: seconds

	expr	min	lq	mean	median	uq	max	neval	cld
oem[lasso]		2.38	2.39	2.41	2.42	2.44	2.46	10	a
oem[all]		2.88	2.89	2.92	2.91	2.93	3.00	10	b

5.3. Parallel support via OpenMP

As noted in Section 3, the key quantities necessary for the OEM algorithm can be computed in parallel. By specifying `ncores` to be a value greater than 1, the `oem()` function automatically employs **OpenMP** ([OpenMP Architecture Review Board 2015](#)) to compute \mathbf{A} and $\mathbf{X}^\top \mathbf{y}$ in parallel. Due to memory access inefficiencies in breaking up the computation of \mathbf{A} into pieces, using multiple cores does not speed up computation linearly. It is typical for **OpenMP** not to result in linear speedups, especially on Windows machines, due to its overhead costs. Furthermore, if a user does not have OpenMP on their machine, the `oem` package will still run normally on one core. In the following example, we can see a slight benefit from invoking the use of extra cores.

```
nobs <- 1e5
nvars <- 500
rho <- 0.25
sigma <- rho ** abs(outer(1:nvars, 1:nvars, FUN = "-"))
x2 <- mvrnorm(n = nobs, mu = numeric(nvars), Sigma = sigma)
y2 <- drop(x2 %*% c(0.5, 0.5, -0.5, -0.5, rep(0, nvars - 4))) +
  rnorm(nobs, sd = 5)
mb <- microbenchmark(
  "oem" = oem(x = x2, y = y2,
    penalty = c("lasso", "mcp",
      "grp.lasso", "scad"),
    gamma = 3,
    groups = rep(1:20, each = 25)),
  "oem[parallel]" = oem(x = x2, y = y2,
    ncores = 2,
    penalty = c("lasso", "mcp",
      "grp.lasso", "scad"),
    gamma = 3,
    groups = rep(1:20, each = 25)),
  times = 10L)
print(mb, digits = 3)
```

Unit: seconds

	expr	min	lq	mean	median	uq	max	neval	cld
oem		4.80	4.85	4.93	4.93	5.00	5.07	10	b
oem[parallel]		3.72	3.84	3.98	3.95	4.11	4.31	10	a

5.4. The `cv.oem()` function

The `cv.oem()` function is used for cross validation of penalized models fitted by the `oem()` function. It does not use the method described in Section 3 and hence can be used for models beyond the linear model. It can also benefit from parallelization using either **OpenMP** or the **foreach** package. For the former, one only need specify the `ncores` argument of `cv.oem()` and computation of the key quantities for OEM are computed in parallel for each cross validation fold. With the **foreach** package (Calaway, Revolution Analytics, and Weston 2015b), cores must be “registered” in advance using **doParallel** (Calaway, Revolution Analytics, Weston, and Tenenbaum 2015c), **doMC** (Calaway, Revolution Analytics, and Weston 2015a), or otherwise. Each cross validation fold is computed on a separate core, which may be more efficient depending on the user’s hardware.

```
cvfit <- cv.oem(x = x, y = y,
  penalty = c("lasso", "mcp", "grp.lasso"),
  gamma = 2, groups = rep(1:5, each = 5),
  nolds = 10)
```

The best performing model and its corresponding best tuning parameter can be accessed via:

```
cvfit$best.model
```

```
[1] "mcp"
```

```
cvfit$lambda.min
```

```
[1] 0.0739055
```

A summary method is available as `summary.cv.oem()`, similar to the `summary` function of `cv.ncvreg()` of the **ncvreg** package, which prints output from all of the cross validated models. It can be used like the following:

```
summary(cvfit)
```

```
lasso-penalized linear regression with n=10000, p=25
At minimum cross-validation error (lambda=0.0242):
```

```
-----
Nonzero coefficients: 13
Cross-validation error (Mean-Squared Error): 9.11
Scale estimate (sigma): 3.018
```

```
<=====>
```

```
mcp-penalized linear regression with n=10000, p=25
At minimum cross-validation error (lambda=0.0739):
```

```
-----
Nonzero coefficients: 5
Cross-validation error (Mean-Squared Error): 9.10
```

```
Scale estimate (sigma): 3.016
```

```
<=====>
```

```
grp.lasso-penalized linear regression with n=10000, p=25
At minimum cross-validation error (lambda=0.0242):
```

```
-----
Nonzero coefficients: 16
Cross-validation error (Mean-Squared Error): 9.10
Scale estimate (sigma): 3.017
```

Predictions from any model (`which.model = 2`) or the best of all models (`which.model = "best.model"`) using `cv.oem` objects. The tuning parameter is specified via the argument `s`, which can take numeric values or `"lambda.min"` for the best tuning parameter or `"lambda.1se"` for a good but more conservative tuning parameter.

```
predict(cvfit, newx = x[1:3,], which.model = "best.model", s = "lambda.min")
```

```
      [,1]
[1,] -0.2233264
[2,]  0.2211386
[3,]  0.4760399
```

5.5. The `xval.oem()` function

The `xval.oem()` function is much like `cv.oem()` but is limited to use for linear models only. It is significantly faster than `cv.oem()`, as it uses the method described in Section 3. Whereas `cv.oem()` functions by repeated calls to `oem()`, all of the primary computation in `xval.oem()` is carried out in C++. We chose to keep the `xval.oem()` function separate from the `cv.oem()` because the underlying code between the two methods is vastly different and furthermore because `xval.oem()` is not available for logistic regression models.

```
xvalfit <- xval.oem(x = x, y = y,
  penalty = c("lasso", "mcp", "grp.lasso"),
  gamma = 2, groups = rep(1:5, each = 5),
  nfolds = 10)

yrng <- range(c(unlist(xvalfit$cvup), unlist(xvalfit$cvlo)))
layout(matrix(1:3, ncol = 3))
par(mar=c(5, 5, 5, 3) + 0.1)
plot(xvalfit, which.model = 1, ylim = yrng,
  cex.main = 3, cex.axis = 1.25, cex.lab = 2)
plot(xvalfit, which.model = 2, ylim = yrng,
  cex.main = 3, cex.axis = 1.25, cex.lab = 2)
plot(xvalfit, which.model = 3, ylim = yrng,
  cex.main = 3, cex.axis = 1.25, cex.lab = 2)
```

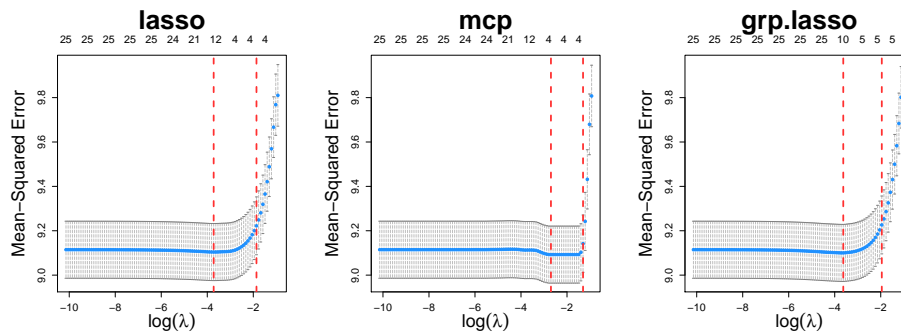


Figure 2: Depicted above are the cross validated mean squared prediction errors for paths of tuning parameters for the lasso, MCP, and group lasso.

5.6. OEM with precomputation for linear models with the `oem.xtx()` function

The key quantities, $\mathbf{X}^\top \mathbf{X}$ and $\mathbf{X}^\top \mathbf{y}$ can be computed in parallel, and when data are stored across a large cluster, their computation can be performed in a straightforward manner. When they are available, the `oem.xtx()` function can be used to carry out the OEM algorithm based on these quantities instead of on the full design matrix \mathbf{X} and the full response vector \mathbf{y} . All methods available to objects fitted by `oem()` are also available to objects fitted by `oem.xtx()`.

```
xtx <- crossprod(x) / nrow(x)
xty <- crossprod(x, y) / nrow(x)

fitxtx <- oem.xtx(xtx, xty,
  penalty = c("lasso", "mcp", "grp.lasso"),
  gamma = 2, groups = rep(1:5, each = 5))
```

5.7. Out-of-Memory computation with the `big.oem()` function

Standard R objects are stored in memory and thus, when a design matrix is too large for memory it cannot be used for computation in the standard way. The **bigmemory** package offers objects which point to data stored on disk and thus allows users to bypass memory limitations. It also provides access to C++ objects which do the same. These objects are highly efficient due to memory mapping, which is a method of mapping a data file to virtual memory and allows for efficient moving of data in and out of memory from disk. For further details on memory mapping, we refer readers to [Bovet and Cesati \(2005\)](#); [Kane, Emerson, and Weston \(2013\)](#). The `big.oem()` function allows for out-of-memory computation by linking **Eigen** matrix objects to data stored on disk via **bigmemory**.

The standard approach for loading the data from **SEXP** objects ($X_$ in the example below) to **Eigen** matrix objects (X in the example below) in C++ looks like:

```
using Eigen::Map;
using Eigen::MatrixXd;
const Map<MatrixXd> X(as<Map<MatrixXd> >(X_));
```

To instead map from an object which is a pointer to data on disk, we first need to load the **bigmemory** headers:

```
#include <bigmemory/MatrixAccessor.hpp>
#include <bigmemory/BigMatrix.h>
```

Then we link the pointer (passed from R to C++ as `X_` and set as `bigPtr` below) to data to an **Eigen** matrix object via:

```
XPtr<BigMatrix> bigPtr(X_);
const Map<MatrixXd> X = Map<MatrixXd>
  ((double *)bigPtr->matrix(), bigPtr->nrow(), bigPtr->ncol() );
```

The remaining computation for OEM is carried out similarly as for `oem()`, yet here the object `X` is not stored in memory.

To test out `big.oem()` and demonstrate its memory usage profile we simulate a large dataset and save it as a “filebacked” `big.matrix` object from the **bigmemory** package.

```
nobs      <- 1e6
nvars     <- 250
bkFile    <- "big_matrix.bk"
descFile  <- "big_matrix.desc"
big_mat   <- filebacked.big.matrix(nrow      = nobs,
                                   ncol      = nvars,
                                   type      = "double",
                                   backingfile = bkFile,
                                   backingpath = ".",
                                   descriptorfile = descFile,
                                   dimnames  = c(NULL, NULL))

for (i in 1:nvars)
{
  big_mat[, i] = rnorm(nobs)
}

yb <- rnorm(nobs, sd = 5)
```

Using the `profvis()` function of the **profvis** package (Chang, Luraschi, RStudio, jQuery Foundation, jQuery contributors, Mike Bostock, D3 contributors, and Ivan Sagalaev 2016), we can see that no copies of the design matrix are made at any point. Furthermore, a maximum of 173 Megabytes are used by the R session during this simulation, whereas the size of the design matrix is 1.9 Gigabytes. The following code generates an interactive html visualization of the memory usage of `big.oem()` line-by-line:

```
profvis::profvis({
  bigfit <- big.oem(x      = big_mat, y = yb,
```

```

    penalty = c("lasso", "grp.lasso", "mcp", "scad"),
    gamma   = 3,
    groups  = rep(1:50, each = 5))
})

```

Here we save a copy of the design matrix in memory for use by `oem()`:

```

xb <- big_mat[,]

print(object.size(xb), units = "Mb")

1907.3 Mb

print(object.size(big_mat), units = "Mb")

0 Mb

```

The following benchmark for on-disk computation is on a system with a hard drive with 7200 RPM, 16MB Cache, and SATA 3.0 Gigabytes per second (a quite modest setup compared with a system with a solid state drive). Even without a solid state drive we pay little time penalty for computing on disk over computing in memory.

```

mb <- microbenchmark(
  "big.oem" = big.oem(x      = big_mat, y = yb,
                    penalty = c("lasso", "grp.lasso",
                                "mcp", "scad"),
                    gamma   = 3,
                    groups  = rep(1:50, each = 5)),
  "oem"     = oem(x        = xb, y = yb,
                 penalty = c("lasso", "grp.lasso",
                             "mcp", "scad"),
                 gamma   = 3,
                 groups  = rep(1:50, each = 5)),
  times = 10L)

print(mb, digits = 3)

```

Unit: seconds

expr	min	lq	mean	median	uq	max	neval	cld
big.oem	8.46	8.51	8.73	8.57	8.69	9.73	10	a
oem	9.81	9.85	10.36	10.08	10.65	12.03	10	b

5.8. Sparse matrix support

The `oem()` and `cv.oem()` functions can accept sparse design matrices as provided by the `CsparseMatrix` class of objects of the **Matrix** package (Bates and Maechler 2016). If the design matrix provided has a high degree of sparsity, using a `CsparseMatrix` object can result in a substantial computational speedup and reduction in memory usage.

```

library(Matrix)
n.obs <- 1e5
n.vars <- 200
true.beta <- c(runif(15, -0.25, 0.25), rep(0, n.vars - 15))
xs <- rsparsematrix(n.obs, n.vars, density = 0.01)
ys <- rnorm(n.obs, sd = 3) + as.vector(xs %*% true.beta)
x.dense <- as.matrix(xs)

mb <- microbenchmark(fit = oem(x = x.dense, y = ys,
                             penalty = c("lasso", "grp.lasso"),
                             groups = rep(1:40, each = 5)),
                    fit.s = oem(x = xs, y = ys,
                                penalty = c("lasso", "grp.lasso"),
                                groups = rep(1:40, each = 5)),
                    times = 10L)

print(mb, digits = 3)

```

Unit: milliseconds

expr	min	lq	mean	median	uq	max	neval	cld
fit	669.9	672.5	679.3	680.3	682.2	690.6	10	b
fit.s	63.2	64.1	65.5	65.3	66.8	68.2	10	a

5.9. API comparison with glmnet

The application program interface (API) of the **oem** package was designed to be familiar to users of the **glmnet** package. Data ready for use by `glmnet()` can be used directly by `oem()`. Most of the arguments are the same, except the `penalty` argument and other arguments relevant to the various penalties available in `oem()`.

Here we fit linear models with a lasso penalty using `oem()` and `glmnet()`:

```

oem.fit <- oem(x = x, y = y, penalty = "lasso")
glmnet.fit <- glmnet(x = x, y = y)

```

Here we fit linear models with a lasso penalty using `oem()` and `glmnet()` with sparse design matrices:

```

oem.fit.sp <- oem(x = xs, y = ys, penalty = "lasso")
glmnet.fit.sp <- glmnet(x = xs, y = ys)

```

Now we make predictions using the fitted model objects from both packages:

```

preds.oem <- predict(oem.fit, newx = x)
preds.glmnet <- predict(glmnet.fit, newx = x)

```

We now plot the coefficient paths using both fitted model objects:


```
plot(oem.fit, xvar = "norm")
plot(glmnet.fit, xvar = "norm")
```

We now fit linear models with a lasso penalty and select the tuning parameter with cross validation using `cv.oem()`, `xval.oem()`, and `cv(glmnet())`:

```
oem.cv.fit    <- cv.oem(x = x, y = y, penalty = "lasso")
oem.xv.fit    <- xval.oem(x = x, y = y, penalty = "lasso")
glmnet.cv.fit <- cv(glmnet(x = x, y = y))
```

We now plot the cross validation errors using all fitted cross validation model objects:

```
plot(oem.cv.fit)
plot(oem.xv.fit)
plot(glmnet.cv.fit)
```

We now make predictions using the best tuning parameter according to cross validation error using all fitted cross validation model objects:

```
preds.cv.oem    <- predict(oem.cv.fit, newx = x, s = "lambda.min")
preds.xv.oem    <- predict(oem.xv.fit, newx = x, s = "lambda.min")
preds.cv(glmnet) <- predict(glmnet.cv.fit, newx = x, s = "lambda.min")
```

6. Timings

Extensive numerical studies are conducted in [Xiong *et al.* \(2016\)](#) regarding the OEM algorithm for computation time for paths of tuning parameters for various penalties, so in the following simulation studies, we will focus on computation time for the special features of the **oem** package such as cross validation and sparse matrix support. All simulations are run on a 64-bit machine with an Intel Xeon E5-2470 2.30 GHz CPU and 128 Gigabytes of main memory and a Linux operating system.

6.1. Cross validation

In this section we will compare the computation time of the `cv.oem()` and `xval.oem()` for various penalties, both individually and simultaneously, with the cross validation functions from other various packages, including **glmnet**, **ncvreg**, **grpreg**, **gglasso**, and the Python package **sklearn** (Pedregosa, Varoquaux, Gramfort, Michel, Thirion, Grisel, Blondel, Prettenhofer, Weiss, Dubourg, Vanderplas, Passos, Cournapeau, Brucher, Perrot, and Édouard Duchesnay 2011). The model class we use from **sklearn** is **LassoCV**, which performs cross validation for lasso linear models. In particular, we focus on the comparison with **glmnet**, as it has been carefully developed with computation time in mind and has long been the gold standard for computational performance.

In the simulation setup, we generate the design matrix from a multivariate normal distribution with covariance matrix $(\sigma_{ij}) = 0.5^{|i-j|}$. Responses are generated from the following model:

$$\mathbf{y} = \mathbf{X}\boldsymbol{\beta} + \boldsymbol{\epsilon}$$

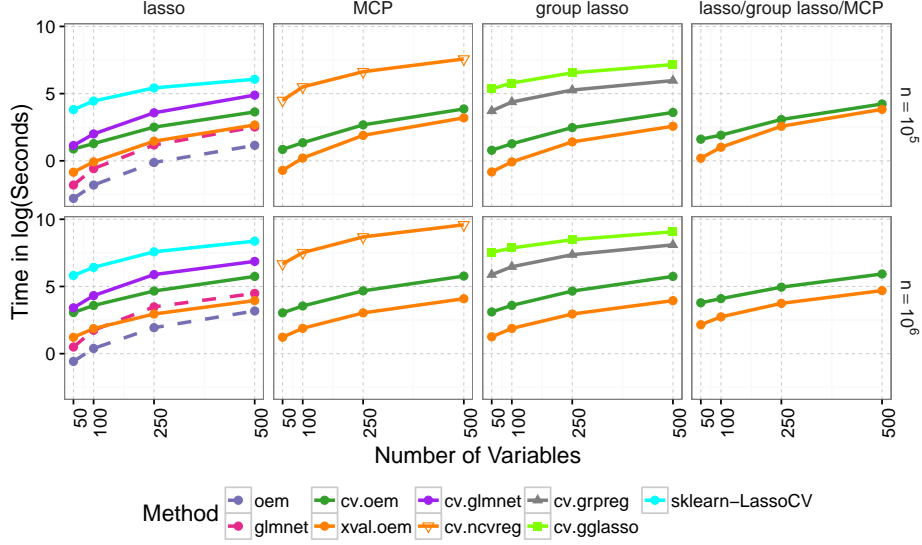


Figure 3: Depicted above is the average computing time over ten runs in $\log(\text{Seconds})$ for the functions that perform cross validation for selection of the tuning parameter for various penalized regression methods.

where the first five elements of β are $(-0.5, -0.5, 0.5, 0.5, 1)$ and the remaining are zero and ϵ is an independent mean zero normal random variable with standard deviation 2. The total number of observations n is set to 10^5 and 10^6 , the number of variables p is varied from 50 to 500, and the number of folds for cross validation is set to 10. For grouped regularization, groups of variables of size 25 are chosen contiguously. For the MCP regularization, the tuning parameter γ is chosen to be 3. Each method is fit using the same sequence of 100 values of the tuning parameter λ and convergence is specified to be the same level of precision for each method. The computation times for the `glmnet` and `oem` functions without cross validation are given as a reference point.

From the results in Figure 3, both the `xval.oem()` and `cv.oem()` functions are competitive with all other cross validation alternatives. Surprisingly, the `xval.oem()` function for the lasso penalty only is competitive with and in many scenarios is even faster than `glmnet`, which does not perform cross validation. The `xval.oem()` is clearly faster than `cv.oem()` in all scenarios. In many scenarios `cv.oem()` takes at least 6 times longer than `xval.oem()`. Both cross validation functions from the `oem` package are nearly as fast in computing for three penalties simultaneously as they are for just one. We have found in general that for any scenario where $n \gg p$ and cross validation is required, it is worth considering `oem` as a fast alternative to other packages. In particular, a rough rule of thumb is that `oem` is advantageous when $n > 10p$, however, `oem` may be advantageous with fewer observations than this for penalties other than the lasso, such as MCP, SCAD, and group lasso.

Now we test the impact of parallelization on the computation time of `xval.oem()` using the same simulation setup as above except now we additionally vary the number of cores used. From the results in Figure 4, we can see that using parallelization through **OpenMP** helps to some degree. However, it is important to note that using more cores than the number of

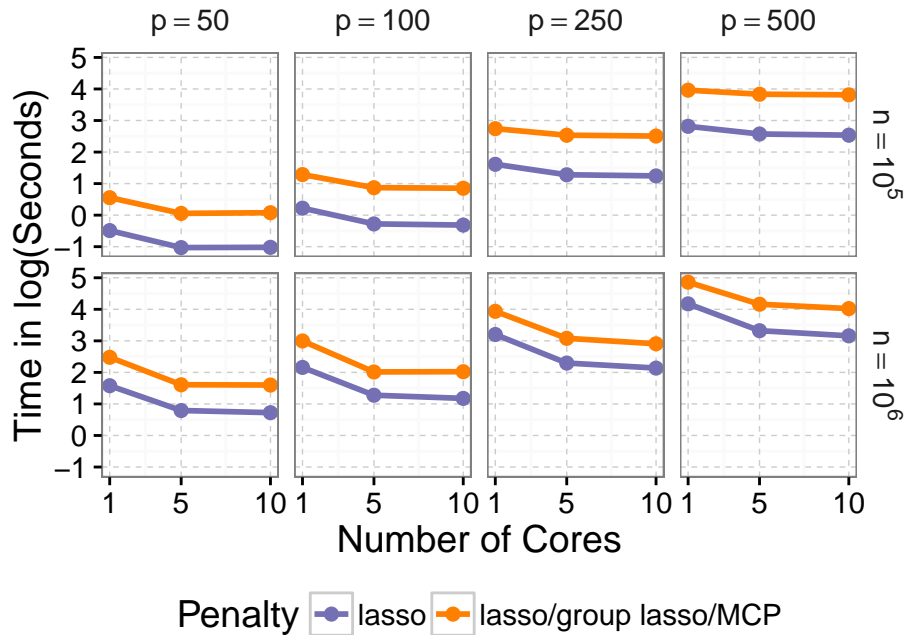


Figure 4: Depicted above is the average computing time over ten runs in log(Seconds) for the `xval.oem()` function with a varying number of cores. Results are shown for just one penalty (lasso) and three penalties fit simultaneously (lasso, group lasso, and MCP) with 100 values for the tuning parameter λ for each penalty.

cross validation folds will unlikely result in better computation time than the same number of cores as the number of folds due to how parallelization is implemented.

6.2. Sparse matrices

In the following simulated example, sparse design matrices are generated using the function `rsparsematrix()` of the **Matrix** package with nonzero entries generated from an independent standard normal distribution. The proportion of zero entries in the design matrix is set to 0.99, 0.95, and 0.9. The total number of observations n is set to 10^5 and 10^6 and the number of variables p is varied from 250 to 1000. Responses are generated from the same model as in Section 6.1. Each method is fit using the same sequence of 100 values of the tuning parameter λ and convergence is specified to be the same level of precision for each method. The authors are not aware of penalized regression packages other than **glmnet** that provide support for sparse matrices, so we just compare `oem` with **glmnet**. From the results in Figure 5, it can be seen that `oem()` is superior in computation time for very tall data settings with a high degree of sparsity of the design matrix.

6.3. Penalized logistic regression

In this simulation, we generate the design matrix from a multivariate normal distribution

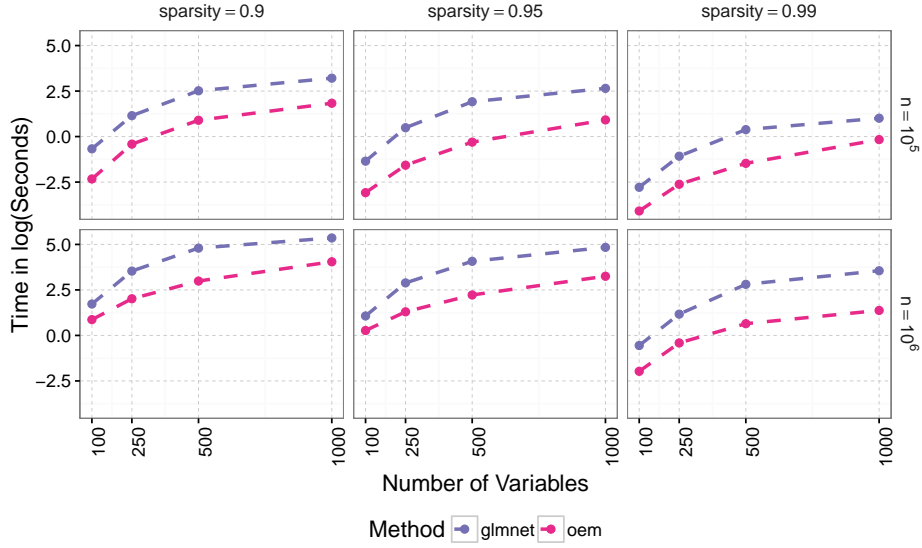


Figure 5: Depicted above is the average computing time over ten runs in log(Seconds) for computation of lasso linear regression models using sparse matrices.

with covariance matrix $(\sigma_{ij}) = 0.5^{|i-j|}$. Responses are generated from the following model:

$$\Pr(Y_i = 1|x_i) = \frac{1}{1 + \exp(-x_i^\top \boldsymbol{\beta})}, \text{ for } i = 1, \dots, n$$

where the first five elements of $\boldsymbol{\beta}$ are $(-0.5, -0.5, 0.5, 0.5, 1)$ and the remaining are zero. The total number of observations n is set to 10^4 and 10^5 , the number of variables p is varied from 50 to 500. For grouped regularization, groups of variables of size 25 are chosen contiguously. For the MCP regularization, the tuning parameter γ is chosen to be 3. Each method is fit using the same sequence of 25 values of the tuning parameter λ . Both `glmnet()` and `oem()` allow for a Hessian upper-bound approximation for logistic regression models, so in this simulation we compare both the vanilla versions of each in addition to the Hessian upper-bound versions. For logistic regression models, unlike linear regression, the various functions compared use vastly different convergence criterion, so care was taken to set the convergence thresholds for the different methods to achieve a similar level of precision.

The average computing times over 10 runs are displayed in Figure 6. The Hessian upper-bound versions of `glmnet()` and `oem()` are given by the dashed lines. The `glmnet()` function is the fastest for lasso-penalized logistic regression, but `oem()` with an without the use of a Hessian upper-bound is nearly as fast as `glmnet()` when the sample size gets larger. For the MCP and group lasso, `oem()` with the Hessian upper-bound option is the fastest across the vast majority of simulation settings. In general, the Hessian upper-bound is most advantageous when the number of variables is moderately large.

6.4. Quality of solutions

In this section we present information about the quality of solutions provided by each of the compared packages. Using the same simulation setup and precisions for convergence as

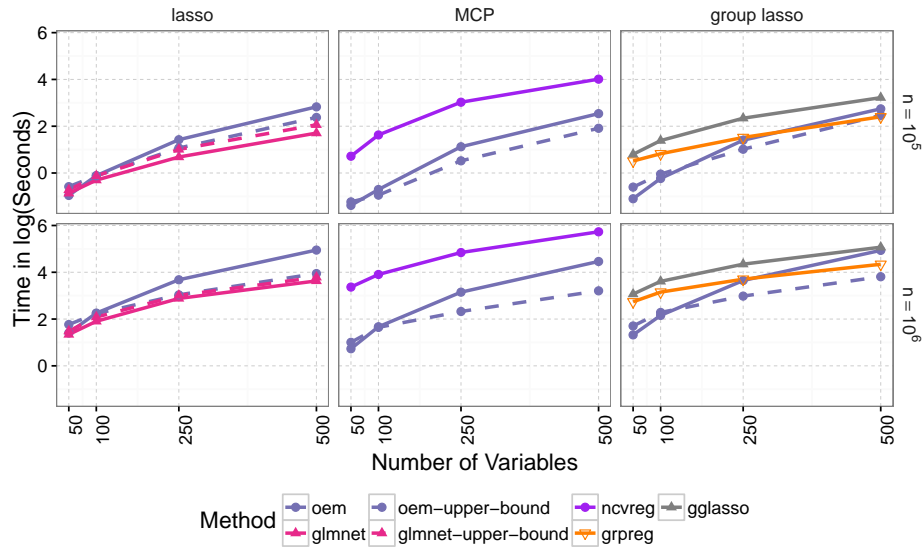


Figure 6: Depicted above is the average computing time over ten runs in $\log(\text{Seconds})$ for the functions that penalized estimates for binomial regression models.

the cross validation and binomial simulations, we investigate the numerical precision of the methods by presenting the objective function values corresponding to the given solutions. Specifically, we look at the difference in the objective function values between `oem()` and the comparative functions. A Negative value here indicates that the `oem()` function results in solutions with a smaller value of the objective function. Since each simulation is run on a sequence of tuning parameter values we present the differences in objective functions averaged over the tuning parameters. Since the objective function values across the different tuning parameter values are on the same scale, this comparison is reasonable. While the `grpreg()` function from the `grpreg` package provides solutions for the group lasso, it minimizes a slightly modified objective function, wherein the covariates are orthonormalized within groups as described in Section 2.1 of [Brehehy and Huang \(2015\)](#). Due to this fact we do not compare the objective function values associated with results returned by `grpreg()`.

The objective function value differences for the linear model simulations are presented in [Table 2](#). We can see that the solutions provided by `oem()` are generally more precise than those of other functions except `ncvreg()` for the MCP. However, the differences between the solutions provided by `oem()` and `ncvreg()` for the MCP are close to machine precision. The objective function value differences for the logistic model simulations are presented in [Tables 3](#) and [4](#). [Table 3](#) refers to comparisons between `oem()` using the full Hessian and other methods and [Table 4](#) refers to comparisons between `oem()` using the Hessian upper-bound. We can see that `oem()` in both cases results in solutions which are generally more precise than other methods. Interestingly, for the logistic regression simulations unlike the linear regression simulations, we see that `oem()` provides solutions which are dramatically more precise than `ncvreg()` for the MCP. These results indicate that the nonconvexity of the MCP has more serious consequences for logistic regression in terms of algorithmic choices.

7. Acknowledgments

This material is based upon work supported by, or in part by, the U. S. Army Research Laboratory and the U. S. Army Research Office under contract/grant number W911NF1510156, NSF Grants DMS 1055214 and DMS 1564376, and NIH grant T32HL083806.

References

- Bates D, Eddelbuettel D, Francois R, Qiu Y, the authors of **Eigen** for the included version of **Eigen** (2016). *RcppEigen: ‘Rcpp’ Integration for the ‘Eigen’ Templated Linear Algebra Library*. R package version 0.3.2.9.0, URL <https://CRAN.R-project.org/package=RcppEigen>.
- Bates D, Maechler M (2016). *Matrix: Sparse and Dense Matrix Classes and Methods*. R package version 1.2-7.1, URL <https://CRAN.R-project.org/package=Matrix>.
- Bovet D, Cesati M (2005). *Understanding the Linux Kernel*. O’Reilly Media, Inc.
- Breheny P (2016). *grpreg: Regularization Paths for Regression Models with Grouped Covariates*. R package version 3.0-2, URL <https://CRAN.R-project.org/package=grpreg>.
- Breheny P, Huang J (2015). “Group descent algorithms for nonconvex penalized linear and logistic regression models with grouped predictors.” *Statistics and Computing*, **25**(2), 173–187.
- Breheny P, Lee S (2016). *ncvreg: Regularization Paths for SCAD and MCP Penalized Regression Models*. R package version 3.6-0, URL <https://CRAN.R-project.org/package=ncvreg>.
- Calaway R, Revolution Analytics, Weston S (2015a). *doMC: Foreach Parallel Adaptor for ‘parallel’*. R package version 1.3.4, URL <https://CRAN.R-project.org/package=doMC>.
- Calaway R, Revolution Analytics, Weston S (2015b). *foreach: Sparse and Dense Matrix Classes and Methods*. R package version 1.4.3, URL <https://CRAN.R-project.org/package=foreach>.
- Calaway R, Revolution Analytics, Weston S, Tenenbaum D (2015c). *doParallel: Foreach Parallel Adaptor for the ‘parallel’ Package*. R package version 1.0.10, URL <https://CRAN.R-project.org/package=doParallel>.
- Chang W, Luraschi J, RStudio, jQuery Foundation, jQuery contributors, Mike Bostock, D3 contributors, Ivan Sagalaev (2016). *profvis: Interactive Visualizations for Profiling R Code*. R package version 0.3.2, URL <https://CRAN.R-project.org/package=profvis>.
- Efron B, Hastie T, Johnstone I, Tibshirani R (2004). “Least Angle Regression.” *The Annals of Statistics*, **32**(2), 407–499.
- Fan J, Li R (2001). “Variable Selection via Nonconcave Penalized Likelihood and Its Oracle Properties.” *Journal of the American Statistical Association*, **96**(456), 1348–1360.

- Friedman J, Hastie T, Simon N, Tibshirani R (2016). *glmnet: Lasso and Elastic-Net Regularized Generalized Linear Models*. R package version 2.0-5, URL <https://CRAN.R-project.org/package=glmnet>.
- Friedman JH, Hastie T, Tibshirani R (2010). “Regularization Paths for Generalized Linear Models via Coordinate Descent.” *Journal of Statistical Software*, **33**(1), 1–22. ISSN 1548-7660.
- Guennebaud G, Jacob B, *et al.* (2010). “**Eigen** v3.” <http://eigen.tuxfamily.org>.
- Hastie T, Efron B (2013). *lars: Least Angle Regression, Lasso and Forward Stagewise*. R package version 1.2, URL <https://CRAN.R-project.org/package=lars>.
- Healy, Westmacott (1956). “Missing Values in Experiments Analysed on Automatic Computers.” *Applied Statistics*, **5**, 203–206. ISSN 0885-7474.
- Jenatton R, Mairal J, Bach FR, Obozinski GR (2010). “Proximal methods for sparse hierarchical dictionary learning.” In *Proceedings of the 27th international conference on machine learning*, pp. 487–494.
- Kane MJ, Emerson JW, Haverty P, Jr CD (2016). *bigmemory: Manage Massive Matrices with Shared Memory and Memory-Mapped Files*. R package version 4.5.19, URL <https://CRAN.R-project.org/package=bigmemory>.
- Kane MJ, Emerson JW, Weston S (2013). “Scalable Strategies for Computing with Massive Data.” *Journal of Statistical Software*, **55**(1), 1–19. doi:10.18637/jss.v055.i14. URL <https://www.jstatsoft.org/index.php/jss/article/view/v055i14>.
- Krishnapuram B, Carin L, Figueiredo MA, Hartemink AJ (2005). “Sparse multinomial logistic regression: Fast algorithms and generalization bounds.” *IEEE transactions on Pattern Analysis and Machine Intelligence*, **27**(6), 957–968.
- Lanczos C (1950). “An Iteration Method for the Solution of the Eigenvalue Problem of Linear Differential and Integral Operators.” *Journal of Research of the National Bureau of Standards*, **45**, 255–282.
- OpenMP** Architecture Review Board (2015). *OpenMP Application Program Interface Version 4.5*. URL <http://www.openmp.org/wp-content/uploads/openmp-4.5.pdf>.
- Pedregosa F, Varoquaux G, Gramfort A, Michel V, Thirion B, Grisel O, Blondel M, Prettenhofer P, Weiss R, Dubourg V, Vanderplas J, Passos A, Cournapeau D, Brucher M, Perrot M, Édouard Duchesnay (2011). “Scikit-learn: Machine Learning in Python.” *Journal of Machine Learning Research*, **12**, 2825–2830. Python package version 0.18.1, URL <http://dl.acm.org/citation.cfm?id=1953048.2078195>.
- Tibshirani R (1996). “Regression Shrinkage and Selection via the Lasso.” *Journal of the Royal Statistical Society B*, pp. 267–288.
- Tseng P (2001). “Convergence of a Block Coordinate Descent Method for Nondifferentiable Minimization.” *Journal of Optimization Theory and Applications*, **109**(3), 475–494.

- Xiong S, Dai B, Huling J, Qian PZG (2016). “Orthogonalizing EM: A Design-Based Least Squares Algorithm.” *Technometrics*, **58**(3), 285–293.
- Yang Y, Zou H (2014). *gglasso: Group Lasso Penalized Learning Using a Unified BMD Algorithm*. R package version 1.3, URL <https://CRAN.R-project.org/package=gglasso>.
- Yuan M, Lin Y (2006). “Model Selection and Estimation in Regression with Grouped Variables.” *Journal of the Royal Statistical Society B*, **68**(1), 49–67.
- Zeng Y, Breheny P (2016). *biglasso: Big Lasso: Extending Lasso Model Fitting to Big Data in R*. R package version 1.2-3, URL <https://CRAN.R-project.org/package=biglasso>.
- Zhang CH (2010). “Nearly Unbiased Variable Selection Under Minimax Concave Penalty.” *The Annals of Statistics*, **38**(2), 894–942.

Affiliation:

Jared Huling
Department of Statistics
University of Wisconsin-Madison
Wisconsin 53706, United States of America
E-mail: huling@wisc.edu
URL: <http://www.stat.wisc.edu/~huling/>

n	p	glmnet	gglasso	ncvreg
10^5	50	-4.50^{-09}	-3.46^{-06}	2.47^{-11}
	100	-5.38^{-09}	-3.38^{-06}	-1.46^{-12}
	250	-1.93^{-08}	-3.37^{-06}	-1.15^{-12}
	500	-3.58^{-08}	-3.29^{-06}	7.11^{-12}
10^6	50	-2.00^{-09}	-3.32^{-06}	7.00^{-14}
	100	-4.34^{-09}	-3.30^{-06}	-1.39^{-14}
	250	-8.82^{-09}	-3.36^{-06}	6.76^{-12}
	500	-1.75^{-08}	-3.34^{-06}	1.69^{-14}

Table 2: The results above are the averages differences between the `oem()` function and other methods in objective function values averaged over all of the values of the tuning parameter for the linear regression simulations. Negative here means the `oem()` function results in estimates with a lower objective function value.

n	p	glmnet	glmnet (ub)	gglasso	ncvreg
10^4	50	-2.79^{-13}	-4.30^{-12}	-4.33^{-07}	-5.31^{-03}
	100	-1.82^{-13}	-4.74^{-12}	-4.95^{-07}	-4.90^{-03}
	250	-6.52^{-13}	-3.87^{-12}	-5.06^{-07}	-5.03^{-03}
	500	-4.80^{-13}	-6.90^{-12}	-5.30^{-07}	-5.48^{-03}
10^5	50	-1.48^{-13}	-2.72^{-12}	-4.79^{-07}	-3.05^{-03}
	100	-1.30^{-13}	-2.17^{-12}	-4.78^{-07}	-4.55^{-03}
	250	-9.30^{-14}	-2.78^{-12}	-4.78^{-07}	-4.47^{-03}
	500	-2.07^{-13}	-4.49^{-12}	-4.51^{-07}	-3.07^{-03}

Table 3: The results above are the averages differences between the full Hessian version of `oem()` and other methods in objective function values averaged over all of the values of the tuning parameter for the logistic regression simulations. Negative here means the `oem()` function results in estimates with a lower objective function value. The heading “**glmnet (ub)**” corresponds to `glmnet()` with the Hessian upper bound option.

n	p	glmnet	glmnet (ub)	gglasso	ncvreg
10^4	50	-7.01^{-14}	-4.09^{-12}	-4.20^{-07}	-5.31^{-03}
	100	6.74^{-13}	-3.88^{-12}	-4.76^{-07}	-4.90^{-03}
	250	-3.88^{-14}	-3.25^{-12}	-4.97^{-07}	-5.03^{-03}
	500	-4.06^{-13}	-6.82^{-12}	-5.16^{-07}	-5.47^{-03}
10^5	50	3.16^{-12}	5.87^{-13}	-4.71^{-07}	-3.05^{-03}
	100	3.06^{-12}	1.02^{-12}	-4.61^{-07}	-4.55^{-03}
	250	2.72^{-12}	3.40^{-14}	-4.71^{-07}	-4.47^{-03}
	500	1.09^{-12}	-3.19^{-12}	-4.31^{-07}	-3.07^{-03}

Table 4: The results above are the averages differences between the upper bound version of `oem()` and other methods in objective function values averaged over all of the values of the tuning parameter for the logistic regression simulations. Negative here means the `oem()` function results in estimates with a lower objective function value. The heading “**glmnet (ub)**” corresponds to `glmnet()` with the Hessian upper bound option.