

Solving Minimum k -supplier in Adleman-Lipton model

Saeid Safaei

Department of Computer Science
University of Georgia
Athens, GA U.S.A.
ssa@uga.edu

Vahid Safaei

Mechanical Engineering
Yasouj University
Yasouj, Iran

Elizabeth D. Trippe

Institute of Bioinformatics
University of Georgia
Athens, GA U.S.A.
elizabeth.trippe25@uga.edu

Karen Aguar

Department of Computer Science
University of Georgia
Athens, GA U.S.A.
kaguar@uga.edu

Hamid R. Arabnia

Department of Computer Science
University of Georgia
Athens, GA U.S.A.
hra@cs.uga.edu

Abstract—In this paper, we consider an algorithm for solving the minimum k -supplier problem using the Adleman–Lipton model. The procedure works in $O(n^2)$ steps for the minimum k -supplier problem of an undirected graph with n vertices, which is an NP-hard combinatorial optimization problem.

Keywords-DNA Computing, minimum k -supplier, Adleman-Lipton

I. INTRODUCTION

An example of non-silicon-based computing that has increased in popularity in recent years is DNA computing. DNA computing uses DNA(deoxyribonucleic acid) strands to store information. The DNA molecule itself has several features that make it ideal for use in computations. The most important of these are Watson-Crick complementarity and massive parallelism. These allow an NP-complete problem to be solved in a polynomial number of steps in contrast to a silicon-based computer, which would require an exponential number of steps. Adleman [1] first proposed the idea of using DNA computing to solve the Hamiltonian path problem of size n in $O(n)$ steps. Lipton [2] solved the second NP-complete problem. Subsequently, several scientists have solved other NP-complete problems [3, 4, 5, 6, 7, 8].

To find the solution to minimum k -supplier NP-hard [9] problem, we will elaborate on DNA operations defined by Adleman [1] and Lipton [2]. The k -supplier problem [10] begins with a set of clients, C , and a set of facilities, F located in a metric $(C \cup F, d)$, with a bound k . The goal of the k -supplier problem is to find a subset of k facilities which minimize the maximum distance of a client to an open facility, i.e, $\min_{S \subseteq F: |S|=k} \max_{v \in C} d(v, S)$ where $d(v, S) = \min_{u \in S} d(v, u)$ is the minimum distance of client v to any facility in S . The graph G in Fig. 1 defines such a problem. Here we define $\{C = \{2, 5\}, F = \{1, 3, 4, 6\}\}$ and $k = 3$. For set F we have 4 different subsets $\{S_1 = \{1, 3, 4\}, S_2 = \{1, 3, 6\}, S_3 = \{1, 4, 6\}, S_4 = \{3, 4, 6\}\}$. For example the

maximum distance of S_1 to Client C is $\max\{5, 2, 4\} = 5$. As we can see the minimum of the maximum distances of those subsets to Client C is $\min\{5, 6, 6, 6\} = 5$.

The remainder of this paper is structured as follows. In Section 2, we further introduce and describe the Adleman-Lipton model and define the DNA operations used here. In Section 3, we introduce a DNA algorithm for solving the k -supplier problem and we give conclusions in Section 4.

II. THE ADLEMAN-LIPTON MODEL

Silicon-based computers use bytes to store information while living systems use DNA to store information in molecular form. Biomolecular systems function at the molecular level and DNA has many physical features that make it ideal to implement biological computing.

First, DNA is a double stranded polymer in which an adenine (A) on one strand always matches thymine (T) on the other strand, so A and T are considered a Watson-Crick base pair. Also, cytosine (C) always matches guanine (G) giving another Watson-Crick base pairing. This feature is called Watson-Crick complementarity and is one of the main physical features that makes the DNA molecule so unique in its structure and function. DNA strands are also described by their length in base pairs (bp) as l -mers, where l is the length. For example, the single strand ATTCAGCTACG will pair with TAAGTCGATGC to form a double stranded DNA molecule 11 bp long.

A. Operations in the Adleman-Lipton model

According to the Adleman–Lipton model, certain operations were defined for DNA molecules. A molecule of DNA is a finite string over the alphabet $\{A, C, G, T\}$ and a test tube is a set of molecules of DNA.

(1) Merge(T_1, T_2): It accepts two test tubes, T_1 and T_2 , and it finds $T_1 \cup T_2$ which is stored in T_1 while T_2 is left empty [11].

(2) Detect(T): It accepts a test tube T , and it outputs “no” if T is empty, otherwise, it outputs “yes” [12].

(3) Separation(T_1, X, T_2): It accepts a test tube, T_1 , and a single string, X . It selects all single strands containing X from T_1 , and generates a test tube, T_2 , with the selected strands [11].

(4) Selection(T_1, L, T_2): It accepts a test tube, T_1 , and a given integer, L . It selects all strands with length L from T_1 , and generates a test tube, T_2 , with the selected strands [11].

(5) Annealing (T): It accepts a test tube, T , and the output is all feasible double strands in T [11].

(6) Denaturation (T): It accepts a test tube, T , and it separates each double strand in T into two single strands [11].

(7) Discard (T): It accepts a test tube, T , and it removes T [13].

(8) Append(T, Z): It accepts a test tube, T , and a short singled stranded DNA fragment, Z . This fragment, Z , is appended onto the end of every strand in the tube T [13, 14].

Because the previous operations have a constant number of biological steps, the complexity of each operation is assumed to be $O(1)$.

III. DNA ALGORITHM FOR THE MINIMUM k -supplier PROBLEM

Let $G = (V, E)$ be a edge-weighted graph with the set of vertices $V = \{V_i | i = 1, 2, \dots, n\}$, the set of edges $E = \{e_{i,j} | 1 \leq i, j \leq n, i \neq j\}$ and $SP = \{sp_{i,j} | 1 \leq i, j \leq n, i \neq j\}$. Note that $e_{i,j}$ is in E if the vertices v_i and v_j are connected by an edge. Also, $sp_{i,j}$ shows the weight of the shortest path from v_i to v_j . We have

$$|E| \leq \frac{1}{2}n(n+1).$$

In the following, we use the symbols $\#, 0, 1, 2, X, A_i, B_i (i = 1, 2, \dots, n)$ and $w_{i,j}$ to denote distinct DNA single strands for which $\|\#\| = \|A_i\| = \|B_i\| = \|0\| = \|1\| = \|2\| = \|X\|$, where $\|\cdot\|$ denotes the length of the DNA single strand. The symbols $A_i B_i (i = 1, 2, \dots, n)$ denote the vertex v_i . The symbol $\#$ is the signal of the start and the signal of the end. Suppose that all weights in the given graph are commensurable. The DNA single strands $w_{i,j}$ are used to denote the weights of the shortest path $s_{i,j}$ from v_i to v_j with $\|w_{i,j}\| = sp_{i,j} * w$ where w is a constant, e.g., take $w = 10$ mer in the following discussion. Then, the $\|w_{i,j}\| = 10 * sp_{i,j}$. Let $m = \max_{sp_{i,j} \in SP} w_{i,j}$ and we consider $\|\#\| = \|A_i\| = \|B_i\| = \|0\| = \|1\| = \|2\| = \|X\| = 10$. Since the length of $\|w_{i,j}\| = 10 * sp_{i,j}$ then we can show $w_{i,j}$ by the combination of single strand X with itself so $w_{i,j} = \underbrace{XX \dots XX}_{sp_{i,j}}$. Let

$$P = \{0, 1, 2, \#A_1, B_d A_{d+1}, B_n \#, w_{i,j} | e_{i,j} \in E, d = 1, 2, \dots, n-1\}$$

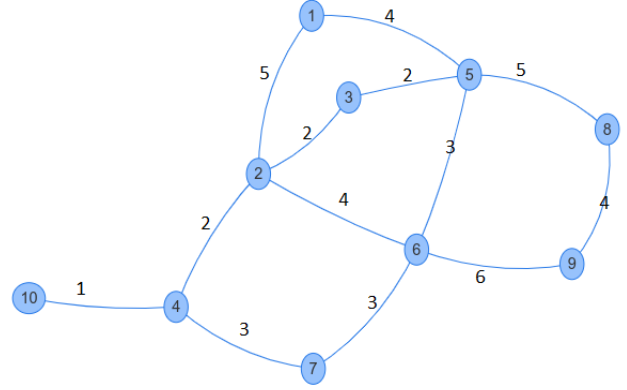


Figure 1. $\{C = \{2, 5\}, F = \{1, 3, 4, 6\}\}$ and $k=3$

$$Q = \{\overline{\#}, \overline{A_d 0 B_d}, \overline{A_d 1 B_d}, \overline{A_d 2 B_d} | e_{i,j} \in E, 1 \leq i, j \leq n, d = 1, 2, \dots, n-1\}$$

We designed the following algorithm to solve the minimum k -supplier problem, which we describe below.

A. Produce all possible subsets of E

In this step, we consider three subsets, S, C, R , and we want to produce all states. We can put all vertices in these subsets. S, C , and R are subsets which show open facility, Client, and renaming vertices respectively.

- (1-1) Merge(P, Q);
- (1-2) Annealing(P);
- (1-3) Denaturation(P);
- (1-4) Separation($P, \#A_1 B_1, T_{tmp}$);
- (1-5) Discard(P);
- (1-6) Separation($T_{tmp}, A_1 B_1 \#, P$).

After the above six steps of manipulation, the single strands in tube P will encode all subsets. For example, the single strands $A_l 0 B_l, A_l 1 B_l, A_l 2 B_l | 1 \leq l \leq n$ show vertex l belongs to C, S, R respectively. For another example, from the graph in Fig. 1, we have the single strand $\#A_1 1 B_1 A_2 0 B_2 A_3 1 B_3 A_4 1 B_4 A_5 0 B_5 A_6 2 B_6 A_7 1 B_7 A_8 2 B_8 A_9 2 B_9 A_{10} 2 B_{10} \# \in P$ which corresponds to the subsets $\{C = \{2, 5\}, S = \{1, 3, 4, 7\}, R = \{6, 8, 9, 10\}\}$. As we can see, it is an invalid subset, because in Fig 1 we defined $C = \{2, 5\}$ and $F = \{1, 3, 4, 6\}$ and S should be a subset of F . Also, the cardinality of S must be 3.

Here is another example.

$\#A_1 1 B_1 A_2 0 B_2 A_3 1 B_3 A_4 2 B_4 A_5 0 B_5 A_6 1 B_6 A_7 2 B_7 A_8 2 B_8 A_9 2 B_9 A_{10} 2 B_{10} \# \in P$ corresponds to the subset $\{C = \{2, 5\}, S = \{1, 3, 6\}, R = \{4, 7, 8, 9, 10\}\}$. This is a valid subset according to Fig 1. This algorithm is finished in $O(1)$ since we have six steps.

B. Separate valid subsets

As we mentioned before,
 $\#A_11B_1A_20B_2A_31B_3A_41B_4A_50B_5A_62B_6A_71B_7A_82B_8A_92B_9A_{10}2B_{10}\# \in P$ is invalid subset. In this step we want to remove those invalid subsets. If $v_l \in C$, then all valid strands should contain A_l0B_l . So all strands which contains A_l1B_l or A_l2B_l are invalid because A_l1B_l or A_l2B_l denotes $v_l \in S$ or R . We repeat this process for $v_l \in F$. The algorithm is as follows:

```

For  $j = 1$  to  $j = n$ 
  IF  $V_j \in C$  Then
    (2-1) Separation( $P, A_j1B_j, T_1$ )
    (2-2) Separation( $P, A_j2B_j, T_2$ )
    (2-3) Discard( $T_1$ )
    (2-4) Discard( $T_2$ )
  End IF
  IF  $V_j \in F$  Then
    (2-5) Separation( $P, A_j0B_j, T_1$ )
    (2-6) Separation( $P, A_j2B_j, T_2$ )
    (2-7) Discard( $T_1$ )
    (2-8) Discard( $T_2$ )
  End IF
End For

```

This algorithm is finished in $O(n)$ steps since each manipulation above works in $O(1)$ steps.

C. Count the number of members in each subset

In previous algorithm, we produced single strands for each subset. If a single strand contains B_k1A_k , it means v_k belongs to subset S and we will add the single string X to the end of that strand. the number of string X at the end of each strands shows the cardinality of S.

At the end we will count the number of vertices belong to each specific subset.

In this algorithm, we need those subsets which contains exactly K members. First we choose all subsets which contains $K + 1$ members and remove them. From those remaining, we choose all subsets contain K members.

```

For  $j = n$  to  $j = 1$ 
  IF  $V_j \in F$  Then
    (3-1) Separation( $P, w_{i,j}, T_1$ )
    (3-2) Append( $T_1, w_{i,j}$ )
    (3-4) Merge( $P, T_1$ )
  End IF
End For

```

We consider the previous example,
 $\#A_11B_1A_20B_2A_31B_3A_42B_4A_50B_5A_61B_6A_72B_7A_82B_8A_92B_9A_{10}2B_{10}\#$. This algorithm add XXX to the end of this strand. In this case we have
 $\#A_11B_1A_20B_2A_31B_3A_42B_4A_50B_5A_61B_6A_72B_7A_82B_8A_92B_9A_{10}2B_{10}\#XXX$.

This algorithm is finished in $O(n)$ steps since each manipulation above works in $O(1)$ steps.

D. Find the longest distance of each subset to the open facility

For each path we have a DNA strand. In previous algorithms, we counted the number of all vertices in the subset. In the definition of the problem we defined $d(v, S) = \min_{u \in S} d(v, u)$ where the goal is to open a subset of k facilities so as to minimize the maximum distance of a client to an open facility. To achieve this purpose we will create a descending array for all paths. The first element of this array is the longest one. For example, the first element is $w_{l,m}$. As we mentioned before, we divided all vertices into three subsets, C, S, R , we need to collect all subsets where v_l belongs to C and V_m belongs to S or vice versa. This means we found all subsets for which the longest path of client to open facility is $w_{l,m}$ and we put those subsets into a new set. For the next step, we choose the second longest path and repeat the same process which we will continue for all path. To run the algorithm, we create a two-dimensional array based on descending order of paths. The first element is the source of the path and the second element is the destination of that path. For example in Fig 1, the longest path from an element in C to an element in F is a path from v_5 to v_4 which is equal to 6. In the first step, we select all strands which contain B_50A_5 which is equivalent to $v_5 \in C$ and B_41A_4 which is equivalent to $v_4 \in F$. We append $w_{5,4}$ to the end of those strands.

```

For  $i = 1$  to  $i = n^2$ 
  (4-1) Separation( $P, B_{arr[i][1]}1A_{arr[i][1]}, T_1$ )
  (4-2) Separation( $T_1, B_{arr[i][2]}0A_{arr[i][2]}, T_2$ )
  (4-1) Separation( $P, B_{arr[i][1]}0A_{arr[i][1]}, T_3$ )
  (4-2) Separation( $T_3, B_{arr[i][2]}1A_{arr[i][2]}, T_4$ )
  (4-4) Merge( $T_2, T_4$ )
  (4-5) Append( $T_2, w_{i,j}$ )
  (4-6) Merge( $T_5, T_2$ )
  (4-7) Merge( $P, T_1$ )
End For
(4-8) Discard( $P$ )
(4-9) Merge( $P, T_2$ )

```

This algorithm is finished in $O(n^2)$ steps since each manipulation above works in $O(1)$ steps.

E. Find the optimal solution

We need to find a subset with minimum distance. We will introduce two different algorithms both of which run in $O(n^2)$.

1) *First algorithm* : The output of previous algorithm , is a set of strands with this format
 $\#A_1? B_1A_2? B_2A_3? B_3A_4? B_4A_5? B_5A_6? B_6A_7? B_7A_8? B_8A_9? B_9A_{10}? B_{10}\#|W_{i,j}| 1 \leq i, j \leq n, ? \in \{0, 1, 2\}$. Since we considered $\|\#\| = \|A_i\| = \|0\| = \|1\| = \|2\| = \|B_i\| = 10$ then the length of each strand is $\|\#\| + \|A_1\| + \|1\| + \|B_1\| + \dots + \|A_n\| + \|1\| + \|B_n\| + \|\#\| + \|w_{i,j}\|$. So the length of each

strand is $30*n + ||\#|| + ||\#|| + ||w_{i,j}|| = 30*n + 20 + ||w_{i,j}||$. Since the lengths of the first parts of each strand are identical, the shortest strand is the one which has the shortest $||w_{i,j}|| \mid 0 \leq i, j \leq n$.

Suppose $u_{i,j}$ are used to denote the weights of edge $e_{i,j}$. Let $Y = \max_{e_{i,j} \in E} u_{i,j}$. Then the length of each shortest path from two arbitrary vertices is smaller than $Y * n^2$

For $i = 1$ to $i = Y * n^2$

(5.1 – 1) *Selection*($P, 30n + 20 + 10 * i, T$)

(5.1 – 2) *IF Detect*(T) is “yes”, then Exit

End For

This algorithm is finished in $O(n^2)$ steps since each Y is a constant.

2) *Second algorithm* : As we discussed, we created $||w_{i,j}|| \mid 0 \leq i, j \leq n$ strand with the combination of single strand X. since the actual format of each strand is $\#A_1? B_1A_2? B_2A_3? B_3A_4? B_4A_5? B_5A_6? B_6A_7? B_7A_8? B_8A_9? B_9A_{10}? B_{10}\# \underbrace{XX\dots XX}_{sp_{i,j}} \mid 1 \leq i, j \leq n, ? \in \{0, 1, 2\}$.

the shortest $||w_{i,j}||$ is X and the longest one could be $\underbrace{XX\dots XX}_{Y * n^2 / 10}$. so we are looking for strands which contains

X. if exist then exit . else we will looking for XX . and continue this process to find minimum solution.

For $i = 1$ to $i = Y * n^2$

(5.2 – 1) *Separation*($P, \underbrace{X\dots X}_{i \text{ times}}, T_1$)

(5.2 – 2) *Discard*(P)

(5.2 – 3) *Separation*($T_2, \underbrace{X\dots X}_{i+1 \text{ times}}, T_2$)

(5.2 – 4) *Merge*(P, T_1)

(5.2 – 5) *IF Detect*(T) is “yes”, then Exit

End For

This algorithm is finished in $O(n^2)$ steps since each Y is a constant.

IV. CONCLUSIONS

Building on Adleman’s and Lipton’s work on DNA computing, we have solved the minimum k -supplier problem which is an NP-hard problem in $O(n^2)$. The k -supplier problem is a combinatorial optimization problem which has applications in finding locations for warehouses, clustering data, etc. In this algorithm, we first produced a space which contained all possible solutions and removed the invalid solutions. In the last part, we searched the solution space to find the minimum value. The advantage of DNA computing is that we can generate a solution space in $O(1)$, which is exponential in silicon-based computers. Since it is hard to replace mathematical operations with biological ones and Cook’s theorem is not always valid for DNA computing [15], our work has value by describing a new algorithm for one NP-hard problem. Also it is valuable to introduce new algorithms for problems in Mechanical engineering [16, 17], Civil engineering [18, 19] and forecasting problems [20, 21].

REFERENCES

- [1] L. M. Adleman, “Molecular computation of solutions to combinatorial problems,” *Nature*, vol. 369, p. 40, 1994.
- [2] R. J. Lipton, “Dna solution of hard computational problems,” *Science*, vol. 268, no. 5210, p. 542, 1995.
- [3] Q. Ouyang, P. D. Kaplan, S. Liu, and A. Libchaber, “Dna solution of the maximal clique problem,” *Science*, vol. 278, no. 5337, pp. 446–449, 1997.
- [4] L. Kari, G. Păun, G. Rozenberg, A. Salomaa, and S. Yu, “Dna computing, sticker systems, and universality,” *Acta Informatica*, vol. 35, no. 5, pp. 401–420, 1998.
- [5] A. Dolati, M. S. Haghghat, S. Safaei, and H. Mozaffar, “Solving minimum beta-vertex separator problems in the adleman-lipton model.” in *FCS*, 2008, pp. 97–101.
- [6] S. Safaei, B. Dalvand, B. Esmaeili, and V. Safaei, “Molecular solutions for the minimum edge dominating set problem on dna-based supercomputing.” in *FCS*, 2009, pp. 32–36.
- [7] S. Safaei, H. Mozaffar, and B. Esmaeili, “Solving minimum k-center problem in the adleman-lipton model.” in *FCS*, vol. 8, 2008, pp. 182–186.
- [8] N. Safaei, B. Dalvand, S. Safaei, and V. Safaei, “Molecular solutions for the maximum k-facility dispersion problem on dna-based supercomputing.” *FCS*, 2011.
- [9] T. Feder and D. Greene, “Optimal algorithms for approximate clustering,” in *Proceedings of the twentieth annual ACM symposium on Theory of computing*. ACM, 1988, pp. 434–444.
- [10] V. Nagarajan, B. Schieber, and H. Shachnai, “The euclidean k-supplier problem,” in *International Conference on Integer Programming and Combinatorial Optimization*. Springer, 2013, pp. 290–301.
- [11] D. Xiao, W. Li, Z. Zhang, and L. He, “Solving maximum cut problems in the adleman–lipton model,” *BioSystems*, vol. 82, no. 3, pp. 203–207, 2005.
- [12] Z. Wang, D. Xiao, W. Li, and L. He, “A dna procedure for solving the shortest path problem,” *Applied mathematics and computation*, vol. 183, no. 1, pp. 79–84, 2006.
- [13] W. Li, E. Patrikeev, and D. Xiao, “A dna algorithm for the maximal matching problem,” *Automation and Remote Control*, vol. 76, no. 10, pp. 1797–1802, 2015.
- [14] N. Matsakis, “Solving the rural postman problem using the adleman-lipton model,” *arXiv preprint arXiv:1012.2527*, 2010.
- [15] M. Guo, W.-L. Chang, M. Ho, J. Lu, and J. Cao, “Is optimal solution of every np-complete or np-hard problem determined from its characteristic for dna-based computing,” *BioSystems*, vol. 80, no. 1, pp. 71–82, 2005.
- [16] S. Aghniaey and S. M. S. Mahmoudi, “Exergy analysis of a novel absorption refrigeration cycle with expander

- and compressor,” *Indian Journal of Scientific Research*, vol. 1, pp. 815–822, 2014.
- [17] S. Aghniaey, S. M. S. Mahmoudi, and V. Khalilzad-Sharghi, “A comparison between the novel absorption refrigeration cycle and the conventional ammonia-water absorption refrigeration cycle.” International Conference on Heat Transfer, Fluid Mechanics and Thermodynamics, 2014.
- [18] M. G. Chorzepa, A. Saeidpour, J. Christian, and S. Durham, “Design of coastal bridges against severe storms and sea-level rise.”
- [19] M. Chorzepa, A. Saeidpour, J. Christian, and S. Durham, “Hurricane vulnerability of coastal bridges using multiple environmental parameters,” *International Journal of Safety and Security Engineering*, vol. 6, no. 1, pp. 10–18, 2016.
- [20] M. S. Fazli and J.-F. Lebraty, “A comparative study on forecasting polyester chips prices for 15 days, using different hybrid intelligent systems,” in *Neural Networks (IJCNN), The 2013 International Joint Conference on*. IEEE, 2013, pp. 1–7.
- [21] M. S. Fazli, K. Keshavarzi, and S. Setayeshi, “Designing a hybrid neuro-fuzzy system for classifying the complex data, application on cornea transplant,” in *Proceedings on the International Conference on Artificial Intelligence (ICAI)*. The Steering Committee of The World Congress in Computer Science, Computer Engineering and Applied Computing (WorldComp), 2013, p. 1.