# Towards Diverse and Accurate Image Captions via Reinforcing Determinantal Point Process

# Qingzhong Wang and Antoni B.Chan

Department of Computer Science, City University of Hong Kong qingzwang2-c@my.cityu.edu.hk, abchan@cityu.edu.hk

## **Abstract**

Although significant progress has been made in the field of automatic image captioning, it is still a challenging task. Previous works normally pay much attention to improving the quality of the generated captions but ignore the diversity of captions. In this paper, we combine determinantal point process (DPP) and reinforcement learning (RL) and propose a novel reinforcing DPP (R-DPP) approach to generate a set of captions with high quality and diversity for an image. We show that R-DPP performs better on accuracy and diversity than using noise as a control signal (GANs, VAEs). Moreover, R-DPP is able to preserve the modes of the learned distribution. Hence, beam search algorithm can be applied to generate a single accurate caption, which performs better than other RL-based models.

# 1 Introduction

Image captioning, which combines the fields of computer vision (CV) and natural language processing (NLP), is a challenging task, which has drawn much attention from the two communities and significant progress has been achieved. Earlier works (Kulkarni et al., 2013; Farhadi et al., 2010; Fang et al., 2015) generally directly employ vision and language models. However, these two-stage models cannot be trained in a end-to-end manner, which limits their performance.

Recently, CNN-LSTM models have become popular (Vinyals et al., 2015; Xu et al., 2015). CNN-LSTM models are typically composed of three modules: (1) a visual CNN, (2) a language LSTM, and (3) the connection module between them, which can be trained in an end-to-end manner. More powerful captioning models are later proposed (Anderson et al., 2017; Rennie et al., 2017; Wang et al., 2019), and trained using reinforcement learning (RL) where the evaluation

metric (e.g., CIDEr) is used as the reward function. As a result, the generated captions obtain high quality according to the most popular metrics, such as BLEU (Papineni et al., 2002), METEOR (Denkowski and Lavie, 2014), ROUGLE (Lin, 2004), CIDEr (Vedantam et al., 2015) and SPICE (Anderson et al., 2016).

However, most of the above models do not focus on the diversity of captions. While directly maximizing the metrics using RL (Rennie et al., 2017) significantly improves the metric scores, they lack diversity even though they are randomly drawn from the learned distribution (Wang and Chan, 2019). The lack of diversity in the captions is further exacerbated when using beam search to find the mode of the learned distribution.

The main issue of RL-based methods that leads to generating less diverse captions is they only consider the quality (as measured by BLEU or CIDEr) of samples during training. To address this issue, in this paper, we propose a novel approach that combines RL and determinantal point processes (DPP) (Kulesza and Taskar, 2012) that generates both accurate and diverse image captions. Inspired by DPPs, which account for the quality and diversity of subsets, we first propose a new metric that is able to reflect the quality and diversity of a set of captions. We then maximize the proposed metric score using RL, which is equivalent to a DPP training process. We evaluate our model using the diversity metrics from (Wang and Chan, 2019), and our proposed R-DPP model achieves both high accuracy and high diversity scores. In addition, R-DPP preserves the modes of the learned distribution - applying the beam search algorithm to generate one high-quality caption yields better performance than the baseline captioning model. Moreover, R-DPP outperforms its counterparts on the oracle test (see Table 2).

# 2 Related Work

Diverse image captioning. Recently, generating diverse captions receives much attention, and a variety of captioning models are developed, such as CVAE (Wang et al., 2017), CGAN (Dai et al., 2017), GroupTalk (Wang et al., 2016), GroupCap (Chen et al., 2018a), POS (Deshpande et al., 2018) and SCT (Cornia et al., 2018). CVAE and CGAN employ random noise vectors to control the difference among the generated captions. However, the diversity is highly related to the variance of the noise, which makes it difficult to balance diversity and accuracy. GroupTalk employ multiple captioners<sup>1</sup> and a classifier to generated diverse captions. Each captioner generate one caption and the classifier is used to control the diversity among the captions. However the computational cost is high due to its use of multiple captioners. Group-Cap considers the structure relevance and diversity constraint to generate both accurate and diverse captions, in which VP-trees are constructed. POS introduces part-of-speech (POS) tags to control the difference among captions, which contains two branches: 1) POS tag prediction, 2) word prediction. The same POS tag could result in using different words (synonyms), leading to diversity. Instead of employing POS tags as control signals, SCT applies noun chunks that are obtained by dependency parsing (Chen and Manning, 2014). Compared with the above captioning models, our proposed RL using DPP is much simpler and more efficient, does not require any other branches or control signals, and can be applied to any baseline captioning model.

**Determinantal point process (DPP).** Given a discrete set  $\mathcal{X} = \{x_1, x_2, \cdots, x_N\}$ , a DPP  $\mathcal{P}$  measures the probability of each subset  $\mathbf{X}$  of  $\mathcal{X}$ , which is defined as (Kulesza and Taskar, 2012):

$$\mathcal{P}_L(\mathbf{X}) = \frac{\det(L_{\mathbf{X}})}{\det(L+I)},\tag{1}$$

where L is a positive semidefinite matrix, representing an L-ensemble, I denotes the  $N \times N$  identity matrix and  $\det(L+I) = \sum_{\mathbf{X} \subset \mathcal{X}} \det(L_{\mathbf{X}})$ .

Generally,  $L = [L_{ij}]$  can be decomposed as a Gram matrix with elements  $L_{ij} = q_i \phi_i^T \phi_j q_j$ , where  $q_i$  denotes the quality of the *i*th element and  $s_{ij} = \phi_i^T \phi_j$  denotes the similarity between the *i*th and *j*th elements, where  $||\phi_i|| = 1$ .

A DPP is trained by maximizing the loglikelihood  $\log \mathcal{P}_L(\mathbf{X})$ , where the subset with larger  $\det(L_{\mathbf{X}})$  will be assigned a higher probability. Inference involves finding the subset with highest posterior probability (MAP). DPP has been used in applications that require both quality and diversity: text summarization (Kulesza and Taskar, 2012), video summarization (Zhang et al., 2016), recommendation (Chen et al., 2018b) and neural conversation (Song et al., 2018).

# 3 DPP-based Reinforcement Learning for Image Captioning

We consider each caption as an item, and define the quality of a caption using CIDEr,

$$q_i = \mathbf{CIDEr}(c_i, \mathcal{C}_{GT}),$$
 (2)

where  $c_i$  denotes the *i*th caption in a subset,  $C_{GT}$  denotes human annotations and **CIDEr**( $\cdot$ ,  $\cdot$ ) is the CIDEr score. We define the similarity between captions as (i.e., "self-CIDEr" in (Wang and Chan, 2019)),

$$s_{ij} = \mathbf{CIDEr}(c_i, c_j). \tag{3}$$

The L matrix in DPP is then

$$L = \mathbf{q}^T \mathbf{q} \odot \mathbf{S},\tag{4}$$

where  $\mathbf{q} = [q_1, \dots, q_N]$ ,  $\mathbf{S} = [s_{ij}]$ , and  $\odot$  denotes element-wise multiplication.

Let  $M(\theta)$  be the captioning model and  $\mathcal{C} = \{c_1, c_2, \cdots, c_m\}$  a subset of m captions sampled from  $M(\theta)$ . The probability of  $\mathcal{C}$  can be measured with (1), using the determinants of  $L_{\mathcal{C}}$  and L+I. Unfortunately, to compute L is intractable since the number of possible captions N is huge, roughly  $|D|^{l_m}$ , where |D| is the dictionary size (10,000) and  $l_m$  is the caption length (16). Although computing L is intractable, we note that L is a constant w.r.t.  $\theta$  for a fixed dictionary D and caption length  $l_m$ . Thus, the denominator in (1) can be ignored when maximizing the likelihood of the generated captions  $\mathcal{C}$  w.r.t.  $\theta$ ,

$$\theta^* = \operatorname{argmax} \mathcal{P}_L(\mathcal{C}) = \operatorname{argmax} \log(\det(L_{\mathcal{C}})).$$

To compute the quality scores and similarity matrix, we should sample a set of captions  $\mathcal C$  from  $M(\theta)$ , and thus we cannot directly calculate the gradient of  $\log(\det(L_{\mathcal C}))$  w.r.t.  $\theta$ . Alternatively, we can first compute the derivative  $\frac{\partial \log(\det(L_{\mathcal C}))}{\partial L_{ii}^{\mathcal C}} =$ 

<sup>&</sup>lt;sup>1</sup>A captioner could be a captioning model.

 $\hat{L}_{ij}^{\mathcal{C}}$ , where  $L_{ij}^{\mathcal{C}}$  is the element of  $L_{\mathcal{C}}$  and  $\hat{L}_{ij}^{\mathcal{C}}$  is the element of  $L_{\mathcal{C}}^{-1}$ . Considering the derivative  $\hat{L}_{ij}^{\mathcal{C}}$ , its sign indicates whether we should reduce or increase  $L_{ij}^{\mathcal{C}}$  to enlarge  $\log(\det(L_{\mathcal{C}}))$ .

Recall that the reward function in (Rennie et al., 2017) is the expectation of CIDEr,

$$R(\theta) = \sum_{i=1}^{m} q_i p_{\theta}(c_i), \tag{5}$$

and the corresponding policy gradient is

$$\nabla_{\theta} R(\theta) = \sum_{i=1}^{m} q_i \nabla_{\theta} \log(p_{\theta}(c_i)) \cdot p_{\theta}(c_i). \quad (6)$$

(6) shows that the probability of the high-quality captions will increase, and finally the model could tend to generate captions that have high quality but lack diversity.

The main issue of using (5) is that it only accounts for the quality of captions. To promote diversity, we employ a new reward function that considers each pair of captions in C,

$$R(\theta) = \sum_{i=1}^{m} \sum_{j=1}^{m} \operatorname{sign}(\hat{L}_{ij}^{\mathcal{C}}) L_{ij}^{\mathcal{C}} p_{\theta}(c_i) p_{\theta}(c_j), \quad (7)$$

where  $\operatorname{sign}(x)$  is the sign of x, and  $p_{\theta}(c_i)$  is the probability of the ith caption according to  $M(\theta)$ . Note that  $p_{\theta}(c_i)p_{\theta}(c_j)$  is the joint probability of the ith and jth captions, since the captions are sampled independently. Our reward function considers both the quality of captions as well as the similarity among captions (see Eq. (4))<sup>3</sup>, thus is able to balance the quality and diversity. The corresponding policy gradient is (see supplemental for derivation):

$$\nabla_{\theta} R(\theta) = 2 \sum_{i=1}^{m} \nabla_{\theta} \log(p_{\theta}(c_{i})) p_{\theta}(c_{i}) \underbrace{\sum_{j=1}^{m} \operatorname{sign}(\hat{L}_{ij}^{\mathcal{C}}) L_{ij}^{\mathcal{C}} p_{\theta}(c_{j})}_{\mathbb{E}\left[\operatorname{sign}(\hat{L}_{ij}^{\mathcal{C}}) L_{ij}^{\mathcal{C}}\right]}$$
(8)

which has the same form as (6), but here we consider both quality and similarity among captions.

# 4 Experiments

**Experimental setup.** We conduct our experiments on MSCOCO dataset, which has 123,287 annotated images, each with at least 5 captions.

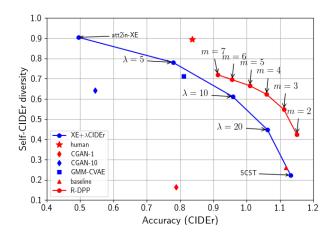


Figure 1: Performance on diversity and accuracy. The captions are generated via random sampling from the learned distribution. For each model we sample 10 captions to compute the self-CIDEr diversity scores (Wang and Chan, 2019), and the accuracy score is the average of CIDEr scores. CGAN-{1,10} use standard deviations of 1 and 10 to train CGANs, and greedy search is used for inference. m is the number of samples used to train our R-DPP.

Following (Rennie et al., 2017), we use 5k images for validation, 5k for testing and the remaining for training. Our baseline captioning model is based on Att2in (Rennie et al., 2017). We first train the model for 100 epochs using cross-entropy loss, and then refine it for another 100 epochs using our policy gradient in (8). During training, we apply Adam with learning rate 0.0004. For comparison, we also refine the baseline model for 100 epochs using original policy gradient in (6). We also compare with CGAN4, GMM-CVAE (Wang et al., 2017), SCST (Rennie et al., 2017), and XE+ $\lambda$ CIDEr (Wang and Chan, 2019). The diversity metric is self-CIDEr diversity, which is shown to be more correlated to human judgment (Wang and Chan, 2019).

**Results.** Fig. 1 shows the performance of different models in the diversity-accuracy space. Human annotations achieve relatively high diversity and accuracy<sup>5</sup>, and there is still a large gap between the proposed models and human annotations. Our R-DPP model slightly improves the accuracy of SCST and the baseline model (Att2in), when m=2, but the diversity score roughly doubles (0.2 to 0.4). Our R-DPP achieves comparable

<sup>&</sup>lt;sup>2</sup>Adding a small constant  $\epsilon I$  to  $L_{\mathcal{C}}$  ensures invertability.

<sup>&</sup>lt;sup>3</sup>Note that the expectation of  $L_{ij}^{\mathcal{C}}$  could be enlarged or reduced based on  $\operatorname{sign}(\hat{L}_{ij}^{\mathcal{C}})$ , which is different with Eq. (5) where the expectation of  $q_i$  is always enlarged.

<sup>&</sup>lt;sup>4</sup>We train CGAN without using rollout, which is different from (Dai et al., 2017)

<sup>&</sup>lt;sup>5</sup>The accuracy score of human annotations is the leave-one-out CIDEr score as in (Wang and Chan, 2019).

Model	bw	B-4	M	R	С	S
Adaptive-XE (Lu et al., 2017)	3	0.332	0.266	-	1.085	-
Updown-XE (Anderson et al., 2017)	5	0.362	0.270	0.564	1.135	0.203
Updown-RL (Anderson et al., 2017)	5	0.363	0.277	0.569	1.201	0.214
DISC-RL (Luo et al., 2018)	2	0.363	0.273	0.571	1.141	0.211
Hieratt-XE (Wang et al., 2019)	3	0.362	0.275	0.566	1.148	0.206
Hieratt-RL (Wang et al., 2019)	3	0.376	0.278	0.581	1.217	0.215
SCST (Rennie et al., 2017)	-	0.333	0.263	0.553	1.114	-
Att2in-XE (Rennie et al., 2017)	-	0.313	0.260	0.543	1.013	-
XE+5CIDEr (Wang and Chan, 2019)	3	0.382	0.277	0.579	1.172	0.206
XE+10CIDEr (Wang and Chan, 2019)	3	0.378	0.276	0.580	1.174	0.207
XE+20CIDEr (Wang and Chan, 2019)	3	0.375	0.276	0.579	1.173	0.209
Our R-DPP $(m=2)$	3	0.371	0.279	0.579	1.222	0.214
Our R-DPP $(m=3)$	3	0.369	0.278	0.577	1.216	0.214
Our R-DPP $(m=4)$	3	0.360	0.280	0.572	1.198	0.214
Our R-DPP $(m = 5)$	3	0.357	0.278	0.568	1.179	0.212
Our R-DPP $(m=6)$	3	0.352	0.276	0.566	1.146	0.208
Our R-DPP $(m=7)$	3	0.347	0.272	0.562	1.124	0.206

Table 1: Performance on single caption generation. The caption is generated using beam search (bw is the beam width). m is the number of samples used during training of our R-DPP. The "-XE" suffix indicates training using cross-entropy loss, and "-RL" means finetuned with RL.  $\{B, M, R, C, S\}$  are abbreviations for BLEU, METEOR, ROUGE, CIDEr, and SPICE.

diversity scores as XE+ $\lambda$ CIDEr, but the captions generated by XE+ $\lambda$ CIDEr have lower accuracy compared to R-DPP. By maximizing  $det(L_C)$ , our R-DPP can simultaneously improves the quality and suppresses the similarity among captions (improves diversity). Comparing GMM-CVAE and R-DPP, both methods can generate captions with similar diversity, while R-DPP (m = 6) has higher accuracy (0.8 vs 0.95), which indicates that R-DPP better approximates the modes of the groundtruth distribution. Finally, the R-DPP curve shows that the number of samples m used during training balances the diversity and accuracy of the model. A larger m leads to a more diverse set of captions, although it also incurs higher training computational cost.

Another advantage of R-DPP is that it can be used to generate a single high-quality caption for an image. Table 1 shows the comparison between R-DPP and the state-of-the-art models. Compared with SCST, R-DPP improves the CIDEr score from 1.114 to 1.222, and the other metric scores are also improved by around 5% or larger. Comparing with Hieratt-RL (state-of-the-art), R-DPP obtains similar CIDEr score, however, the Hieratt model cannot generate diverse captions.

Fig. 1 and Table 1 show the effectiveness of R-DPP on generating both diverse and accurate captions, whereas they do not consider the optimal selection of m. Hence, we conduct experiments on oracle test (see Table 2)—the upper bound of each metric. R-DPP outperforms other methods, pro-

Model	#	B-4	M	R	С
AG-CVAE (Wang et al., 2017)	20	0.471	0.309	0.638	1.308
GMM-CVAE (Wang et al., 2017)	20	0.449	0.299	0.624	1.251
POS (Deshpande et al., 2018)	20	0.449	0.365	0.678	1.468
SCT (Cornia et al., 2018)	20	0.448	0.366	0.689	1.565
SCST (Rennie et al., 2017)	20	0.332	0.322	0.630	1.383
Att2in-XE (Rennie et al., 2017)	20	0.329	0.326	0.621	1.216
XE+5CIDEr (Wang and Chan, 2019)	20	0.462	0.372	0.682	1.512
XE+10CIDEr (Wang and Chan, 2019)	20	0.465	0.372	0.689	1.568
XE+20CIDEr (Wang and Chan, 2019)	20	0.427	0.359	0.673	1.525
Our R-DPP $(m=2)$	10	0.407	0.349	0.659	1.495
	20	0.443	0.365	0.677	1.563
Our R-DPP $(m=3)$	10	0.442	0.367	0.677	1.567
	20	0.494	0.388	0.702	1.656
Our R-DPP $(m=4)$	10	0.455	0.374	0.686	1.585
	20	0.518	0.400	0.713	1.691
Our R-DPP $(m=5)$	10	0.463	0.375	0.688	1.585
	20	0.527	0.405	0.717	1.700
Our R-DPP $(m=6)$	10	0.458	0.374	0.686	1.585
	20	0.528	0.403	0.718	1.690
Our R-DPP $(m=7)$	10	0.452	0.373	0.683	1.545
	20	0.529	0.404	0.718	1.684

Table 2: Oracle (upper bound) performance based on each metric. # represents the number of samples during inference. For Att2in-XE, XE+ $\lambda$ CIDEr, SCST and our R-DPP models, we randomly sample captions from the trained model and the results of other models are from their papers. The blue numbers are the highest scores when sample 10 captions and the bold ones are the highest scores when sample 20 captions.

viding the highest-quality caption based on generating 20 captions. Even sampling 10 captions, R-DPP obtains higher scores. With the increase of m, the scores increase in the beginning, but then fall, e.g., when we sample 20 captions, CIDEr score rises from 1.563 to 1.700 when m increases from 2 to 5, after that it falls to 1.684. Also, when we sample 10 captions, R-DPP(m=5) performs better. Thus, using m=5 could be a better choice to well balance diversity and accuracy, which also obtains the highest-quality caption. We show more qualitative examples in the supplemental.

# 5 Conclusion

We have presented the reinforcing DPP (R-DPP) model, which is a simpler but efficient method for training a caption model to generate both diverse and accurate captions. Compared with other models, R-DPP obtains similar diversity score, but much higher accuracy score. In addition, the state-of-the-art oracle performance is significantly improved by R-DPP. In the future, we believe that more quality and diversity measurements should be introduced into R-DPP. It is also possible to extend R-DPP to other text generation tasks, such as dialog and machine translation, in order to provide diverse high-quality choices to the users.

# References

- Peter Anderson, Basura Fernando, Mark Johnson, and Stephen Gould. 2016. Spice: Semantic propositional image caption evaluation. In *ECCV*.
- Peter Anderson, Xiaodong He, Chris Buehler, Damien Teney, Mark Johnson, Stephen Gould, and Lei Zhang. 2017. Bottom-up and top-down attention for image captioning and vqa. *arXiv preprint arXiv:1707.07998*.
- Danqi Chen and Christopher Manning. 2014. A fast and accurate dependency parser using neural networks. In *EMNLP*, pages 740–750.
- Fuhai Chen, Rongrong Ji, Xiaoshuai Sun, Yongjian Wu, and Jinsong Su. 2018a. Groupcap: Groupbased image captioning with structured relevance and diversity constraints. In *CVPR*.
- Laming Chen, Guoxin Zhang, and Eric Zhou. 2018b. Fast greedy map inference for determinantal point process to improve recommendation diversity. In *NIPS*, pages 5622–5633.
- Marcella Cornia, Lorenzo Baraldi, and Rita Cucchiara. 2018. Show, control and tell: A framework for generating controllable and grounded captions. *CoRR*, abs/1811.10652.
- Bo Dai, Sanja Fidler, Raquel Urtasun, and Dahua Lin. 2017. Towards diverse and natural image descriptions via a conditional gan. In *ICCV*.
- M. Denkowski and A. Lavie. 2014. Meteor universal: Language specific translation evaluation for any target language. In *EACL Workshop on Statistical Machine Translation*.
- Aditya Deshpande, Jyoti Aneja, Liwei Wang, Alexander Schwing, and David A Forsyth. 2018. Diverse and controllable image captioning with part-of-speech guidance. *arXiv preprint arXiv:1805.12589*.
- Hao Fang, Saurabh Gupta, Forrest Iandola, Rupesh K.
  Srivastava, Li Deng, Piotr Dollar, Jianfeng Gao,
  Xiaodong He, Margaret Mitchell, John C. Platt,
  C. Lawrence Zitnick, and Geoffrey Zweig. 2015.
  From captions to visual concepts and back. In CVPR.
- Ali Farhadi, Mohsen Hejrati, Mohammad Amin Sadeghi, Peter Young, Cyrus Rashtchian, Julia Hockenmaier, and David Forsyth. 2010. Speaking the same language: Matching machine to human captions by adversarial training. In *ECCV*.
- Alex Kulesza and Ben Taskar. 2012. Learning determinantal point processes. *arXiv preprint arXiv:1202.3738*.
- G. Kulkarni, V. Premraj, V. Ordonez, S. Dhar, S. Li, Y. Choi, A. C. Berg, and T. L. Berg. 2013. Babytalk: Understanding and generating simple image descriptions. *IEEE Transactions on Pattern Analysis* and Machine Intelligence, 35(12):2891–2903.

- C.-Y. Lin. 2004. Rouge: A package for automatic evaluation of summaries. In *ACL Workshop*.
- Jiasen Lu, Caiming Xiong, Devi Parikh, and Richard Socher. 2017. Knowing when to look: Adaptive attention via a visual sentinel for image captioning. In CVPR.
- Ruotian Luo, Brian Price, Scott Cohen, and Gregory Shakhnarovich. 2018. Discriminability objective for training descriptive captions. In *CVPR*.
- K. Papineni, S. Roukos, T. Ward, and W.-J. Zhu. 2002. Bleu: a method for automatic evaluation of machine translation. In *ACL*.
- Steven J Rennie, Etienne Marcheret, Youssef Mroueh, Jerret Ross, and Vaibhava Goel. 2017. Self-critical sequence training for image captioning. In *CVPR*.
- Yiping Song, Rui Yan, Yansong Feng, Yaoyuan Zhang, Dongyan Zhao, and Ming Zhang. 2018. Towards a neural conversation model with diversity net using determinantal point processes. In *AAAI*.
- R. Vedantam, C. Lawrence Zitnick, and D. Parikh. 2015. Cider: Consensus-based image description evaluation. In CVPR.
- Oriol Vinyals, Alexander Toshev, Samy Bengio, and Dumitru Erhan. 2015. Show and tell: A neural image caption generator. In *CVPR*.
- Liwei Wang, Alexander Schwing, and Svetlana Lazebnik. 2017. Diverse and accurate image description using a variational auto-encoder with an additive gaussian encoding space. In *NIPS*.
- Qingzhong Wang and Antoni B. Chan. 2019. Describing like humans: on diversity in image captioning. *CoRR*, abs/1903.12020.
- Weixuan Wang, Zhihong Chen, and Haifeng Hu. 2019. Hierarchical attention network for image captioning. In *AAAI*.
- Zhuhao Wang, Fei Wu, Weiming Lu, Jun Xiao, Xi Li, Zitong Zhang, and Yueting Zhuang. 2016. Diverse image captioning via grouptalk. In *IJCAI*, pages 2957–2964. AAAI Press.
- Kelvin Xu, Jimmy Ba, Ryan Kiros, Kyunghyun Cho, Aaron Courville, Ruslan Salakhudinov, Rich Zemel, and Yoshua Bengio. 2015. Show, attend and tell: Neural image caption generation with visual attention. In *ICML*.
- Ke Zhang, Wei-Lun Chao, Fei Sha, and Kristen Grauman. 2016. Video summarization with long short-term memory. In *ECCV*, pages 766–782. Springer.

The supplemental is arranged as follows:

- Details of the gradient computation.
- Qualitative examples of diverse image captions.

# A Gradient Computation

We show how to compute the policy gradient in Eq. (11) in our paper. Recall that the reward function is defined as follows:

$$R(\theta) = \sum_{i=1}^{m} \sum_{j=1}^{m} \operatorname{sign}(\hat{L}_{ij}^{\mathcal{C}}) L_{ij}^{\mathcal{C}} p_{\theta}(c_i) p_{\theta}(c_j). \tag{9}$$

Note that only  $p_{\theta}(\cdot)$  is a function of  $\theta$ , then we have

$$\nabla_{\theta} R(\theta) = \sum_{i=1}^{m} \sum_{i=1}^{m} \operatorname{sign}(\hat{L}_{ij}^{\mathcal{C}}) L_{ij}^{\mathcal{C}} \left( \nabla_{\theta} p_{\theta}(c_i) p_{\theta}(c_j) + \nabla_{\theta} p_{\theta}(c_j) p_{\theta}(c_i) \right)$$

$$\tag{10}$$

$$= \sum_{i=1}^{m} \sum_{j=1}^{m} \operatorname{sign}(\hat{L}_{ij}^{\mathcal{C}}) L_{ij}^{\mathcal{C}} \nabla_{\theta} p_{\theta}(c_{i}) p_{\theta}(c_{j}) + \sum_{i=1}^{m} \sum_{j=1}^{m} \operatorname{sign}(\hat{L}_{ij}^{\mathcal{C}}) L_{ij}^{\mathcal{C}} \nabla_{\theta} p_{\theta}(c_{j}) p_{\theta}(c_{i})$$

$$(11)$$

$$= \sum_{i=1}^{m} \sum_{j=1}^{m} \operatorname{sign}(\hat{L}_{ij}^{\mathcal{C}}) L_{ij}^{\mathcal{C}} \nabla_{\theta} \log(p_{\theta}(c_i)) p_{\theta}(c_i) p_{\theta}(c_j) + \sum_{i=1}^{m} \sum_{j=1}^{m} \operatorname{sign}(\hat{L}_{ij}^{\mathcal{C}}) L_{ij}^{\mathcal{C}} \nabla_{\theta} \log(p_{\theta}(c_j)) p_{\theta}(c_j) p_{\theta}(c_i)$$
(12)

$$=2\sum_{i=1}^{m}\sum_{j=1}^{m}\operatorname{sign}(\hat{L}_{ij}^{\mathcal{C}})L_{ij}^{\mathcal{C}}\nabla_{\theta}\log(p_{\theta}(c_{i}))p_{\theta}(c_{i})p_{\theta}(c_{j})$$
(13)

$$=2\sum_{i=1}^{m} \nabla_{\theta} \log(p_{\theta}(c_{i})) p_{\theta}(c_{i}) \underbrace{\sum_{j=1}^{m} \operatorname{sign}(\hat{L}_{ij}^{\mathcal{C}}) L_{ij}^{\mathcal{C}} p_{\theta}(c_{j})}_{\mathbb{E}[\operatorname{sign}(\hat{L}_{ij}^{\mathcal{C}}) L_{ij}^{\mathcal{C}}]}.$$
(14)

Since  $L^{\mathcal{C}}$  and  $\hat{L}^{\mathcal{C}}$  are symmetric mtrices, we can derive Eq. (13) from Eq. (12). Note that  $\frac{\partial \log p_{\theta}}{\partial \theta} \equiv \frac{1}{p_{\theta}} \frac{\partial p_{\theta}}{\partial \theta}$  for  $p_{\theta} > 0$ , hence, we obtain Eq. (12) from Eq. (11).

# **B** Qualitative Examples

We show more qualitative results of R-DPP. Fig. 2 to 5 show the comparison between R-DPP and other models, and Fig. 6 to 9 show the generated captions by R-DPP with different numbers of samples during training. Compared with other methods, our R-DPP could generate more fluent and diverse captions. We find that R-DPP is able to generate captions with different sentence structures (syntactic diversity), such as using synonyms, redundant and concise descriptions.

```
1. a man sits in a diner photograph-
                                                                                                                                                                                                         1. a man is eating a meal at a restaurant
                                                                                                                                                                                                        2. a man taking a bite of a pizza with a fork
3. a man is eating a meal at a restaurant
4. a man is eating a piece of bread
5. a man is taking a bite of a pizza
6. a man is taking a picture of a man in a white shirt
                                                                              ing his meal

    photographer taking a picture of a
meal in a small restaurant

                                                                                      a man taking a photo of food on a
                                                                              table
                                                                                                                                                                                                         7. a man is holding a bowl of food on a table
8. a man in a red shirt is looking at a pizza
                                                                              4. a man takes a picture of his food in
                                                                              a restaurant
                                                                             5. a man taking a picture of his meal at a diner table
                                                                                                                                                                                                        9. a man sitting at a table with a plate of food 10. a large plate of food on a table
 Att2in-XE:
                                                                                                                                                                                                                                       1. a man taking a picture of a pizza
 1. the man takes a picture in front on a bowl
1. the man takes a picture in front on a bowl
2. a man taking a selfie of a view of a white pizza
3. person with close photo of a personal reflection on the pizza
4. lady in a taking in picture in front of
5. a woman takes a camera of a very glass window
6. a man in the waiting taking while woman
7. a man sits in a chair holding a white and a pair of wine sitting around
8. a person looking at himself and sitting on a table
9. a guy looking at something grilled black topping pizza
10. a man taking a photo of a simple side of pizza

    a woman taking a picture of a pizza
    a man taking a picture of a pizza

                                                                                                                                                                                                                                       4. a man taking a picture of a pizza
                                                                                                                                                                                                                                       a woman taking a picture of a pizza

    a man taking a picture of a pizza
    a man taking a picture of a pizza

    a man taking a picture of a pizza
    a man taking a picture of a pizza

 10. a man taking a photo of a small slice of pizza
                                                                                                                                                                                                                                      10. a man taking a picture of a pizza"
 XE+5CIDEr:
                                                                                                                                                                                     XE+10CIDEr:
 1. a man taking a picture of a pizza with a pizza
2. a man taking a picture of a pizza with a slice of pizza
3. a man taking a picture of a pizza with a pizza
                                                                                                                                                                                     1. a man taking a picture of a pizza with a camera

    a man taking a picture of pizza on a table with a camera
    a man taking a picture of a pizza with a camera


3. a man taking a picture of a pizza with a pizza
4. a man taking a picture of pizza on a table
5. a man taking a picture of pizza on a plate
6. a man taking a picture of a pizza with a pizza
7. a man taking a picture of a pizza with a
8. a man taking a picture of a pizza on a table
9. a man taking a picture of a pizza with a pizza
10. a man taking a picture of a pizza with a pizza
                                                                                                                                                                                     4. a man taking a picture of pizza with a persons of 5. a man taking a picture of a pizza with a knife 6. a man taking a picture of a pizza with a salad 7. a person taking a picture of a pizza with a salad
                                                                                                                                                                                     8. a man taking a picture of a pizza with a salad
9. a person taking a picture of a pizza with a salad
10. a person taking a camera of a pizza with a salad
R-DPP(m=5):

1. a man taking a photo of a pizza in a restaurant
2. a man taking a photo of a pizza in a restaurant
3. a woman taking a selfie in front of a pizza
4. a close up of a person taking a picture of a pizza
5. a person taking a picture of a pizza in a restaurant
6. a man taking a picture of a pizza on a table
7. a woman taking a picture of a pizza on a table
7. a woman taking a picture of a pizza on a plate
8. a man taking a picture of a pizza on a plate
9. a man taking a picture of a pizza on a plate
10. a woman taking a picture of a pizza in a restaurant
10. a woman taking a picture of a pizza on a plate
10. a woman taking a picture of a pizza on a plate
10. a woman taking a picture of a pizza on a plate
10. a man taking a photo of a pizza on a plate
10. a man taking a photo of a pizza on a plate
10. a man taking a photo of a pizza on a plate
10. a man taking a photo of a pizza on a plate
10. a man taking a photo of a pizza on a plate
10. a man taking a photo of a pizza on a plate
10. a man taking a photo of a pizza on a plate
10. a man taking a photo of a pizza on a plate
10. a man taking a photo of a pizza on a plate
 R-DPP(m=5):
```

GMM-CVAE:

Human annotations:

Figure 2:

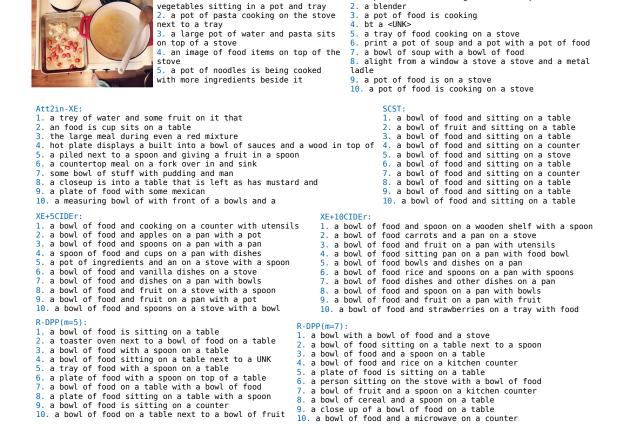

GMM-CVAE:

a blender

a pot of food is being cooked in a pan

Human annotations:

different assortment of noodles and

Figure 3:



Figure 4:

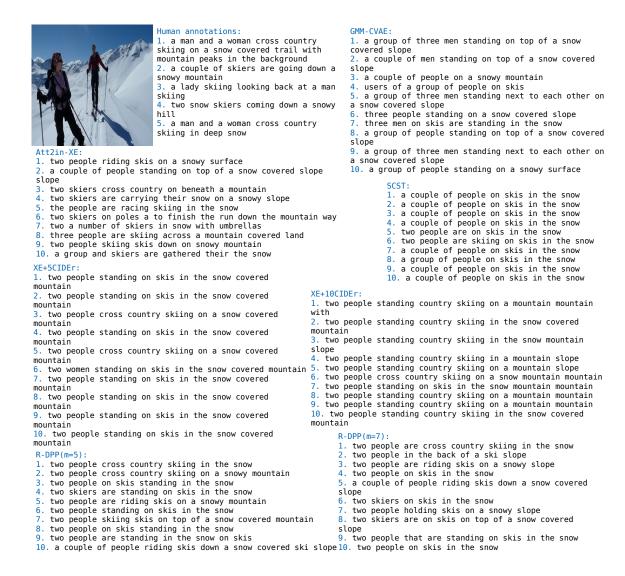


Figure 5:

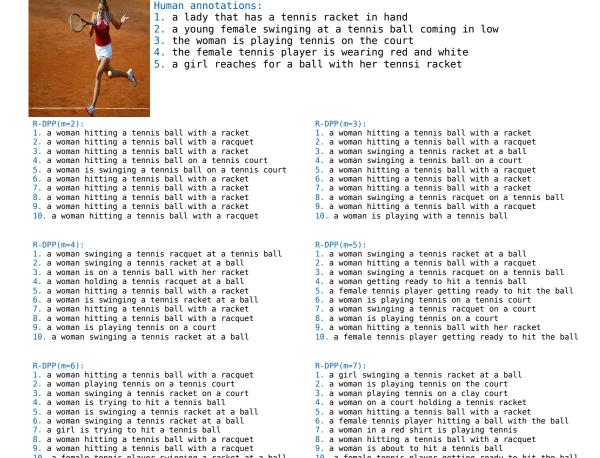


Figure 6:

10. a female tennis player swinging a racket at a ball

 ${f 10.}$  a female tennis player getting ready to hit the ball



### Human annotations:

- 1. a large pile of a variety of donuts seen from above
- 2. a large stack of a variety of donuts all set on top of each other to make a pyramid like design
- 3. a pile of different flavored donuts topped with chocolate and coconut
- overhead shot of a pyramid of assorted cake donuts
   various decorated donuts are stacked on top of each other
- R-DPP(m=2):

- R-DPP(m=2):

  1. a pile of donuts sitting on top of a table
  2. a pile of donuts are sitting on a table
  3. a pile of donuts are sitting on a table
  4. a box of donuts are sitting on a table
  5. a box of donuts sitting on a table
  6. a box of donuts sitting on a table
  7. a pile of donuts sitting on a table
  8. a box of donuts are on a table
  9. a box of donuts are sitting on a table
  10. a pile of donuts sitting on a table

### R-DPP(m=4):

- R-DPP(m=4):

  1. a bunch of glazed donuts in a box
  2. a box filled with lots of donuts in it
  3. a bunch of doughnuts are sitting on a plate
  4. a bunch of glazed donuts sitting on a table
  5. a pile of glazed donuts on a white plate
  6. a pile of glazed donuts sitting on a table
  7. a pile of glazed donuts sitting on a table
  8. a bunch of donuts are sitting on a box
  9. a bunch of doughnuts sitting on a table
  10. a bunch of glazed donuts in a box

# R-DPP(m=6):

- R-DPP(m=6):

  1. a variety of donuts sitting on a table
  2. a close up of a bunch of glazed donuts
  3. a close up of a bunch of doughnuts
  4. a bunch of doughnuts are on a plate
  5. a close up of a bunch of doughnuts
  6. a box filled with different types of doughnuts
  7. a box filled with different types of doughnuts
  8. a variety of donuts that are sitting on a table
  9. a close up of a pile of donuts
  10. a box filled with two donuts and doughnuts

### R-DPP(m=3):

- R-DPP(m=3):

  1. a box of donuts sitting on top of a table
  2. a pile of doughnuts on a table
  3. a pile of donuts on a plate
  4. a bunch of glazed donuts on a plate
  5. a box of doughnuts on a table
  6. a box of doughnuts on top of a table
  7. a close up of a box filled with donuts
  8. a plate of donuts sitting on a table
  9. a pile of donuts on a plate
  10. a box of donuts in a table

- R-DPP(m=5):

  1. a box filled with lots of donuts sitting in it

  2. a bunch of donuts sitting on a glass

  3. a close up of a pile of doughnuts

  4. a box of different types of donuts

  5. a pile of donuts with a on a plate

  6. a pile of donuts sitting on a box

  7. a close up of a white of doughnuts

  8. a bunch of doughnuts that are on a table

  9. a group of doughnuts are sitting on a plate

  10. a variety of glazed donuts on a table

- R-DPP(m=7):

  1. a close up of a bunch of donuts

  2. a variety of doughnuts that are sitting on a table

  3. a close up of three doughnuts on a plate

  4. a box of donuts that are sitting on a table

  5. a pile of donuts sitting on top of a stack of doughnuts

  6. a box filled with donuts in the background

  7. a close up of a group of doughnuts

  8. a glazed donuts on a plate next to a UNK

  9. a bunch of donuts are in a display

  10. a bunch of glazed donuts on a plate

- 10. a bunch of glazed donuts on a plate



a couple of people that are sitting on mopeds
 a street that has some motorcycles going down it

3. a city street with multiple shops and people riding motorcycles

Human annotations:

Figure 8:



### Human annotations:

- 1. a young boy throwing up a blue card
- 2. a very blurry image of two small children in motion
- 3. a group of children looking up a the person taking the picture
- 4. two children playing with a kite on the sidewalk
- 5. a pair of children playing catch on the street

### R-DPP(m=2):

R-DPP(m=2):

1. a man is walking in the street with a kite

2. a man standing in the street with a kite

3. a man walking in the street with a kite

4. a man is walking in the street with a kite

5. a man is standing in a street with a kite

6. a man is standing in a street with a frisbee

7. a man is walking in a street with a kite

8. a man walking in the street with a kite

9. a man is standing in the street with a kite

10. a man walking in the street with a kite

R-OPP(m=4):

1. a man walking a kite at a street

2. a man is holding a kite on a street

3. a man is playing with a kite in a city street

4. a man holding a kite on the side of a street

5. a man standing on a street with a kite

6. a man is holding a kite on a city street

7. a man is standing on a street flying a kite

8. a man is walking in the street with a kite

9. a man is holding a kite at a city street

10. a person is standing on a field holding a kite

R-DPP(m=6):

1. a man holding a blue kite on top of a street
2. a man is standing in the street with a kite
3. a man with a kite on a street
4. a man walking on the side of a kite at a road
5. a man standing on the beach with a blue kite
6. a little boy is holding a kite in the sky
7. a man standing on the beach holding a kite
8. a man is standing in the water with a kite
9. a man is playing with a kite in a rainy street
10. a young man holding a kite in front of a man

R-DPP(m=3): R-DPP(m=3):

1. a man is standing in the street with a kite

2. a person is walking in the street with a kite

3. a man walking in the street with a kite

4. a man is running in the rain with a kite

5. a man is standing in the street with a kite

6. a man standing in the street with a kite

7. a man is flying a kite in the street 8. a man is holding a kite in the air 9. a man is flying a kite in a street 10. a man standing in a street holding a kite

R-DPP(m=5):

1. a man standing in the air with a kite
2. a person walking with a kite in a field
3. a man walking on the street with a kite
4. a man walking down a street with an umbrella
5. a man walking with a person in a boat with an umbrella
6. a man is standing on a field holding a kite
7. a man is standing on a beach with a UNK umbrella
8. a man with a umbrella standing on a road
9. a man holding a kite on a dirt road
10. a man is flying a kite in a wet beach

### R-DPP(m=7):

R-DPP(m=7):

1. a man walking through the street carrying a frisbee
2. a man holding a kite in the middle of a street
3. a person is walking with a kite in a skate board
4. a man walking with a kite in the air
5. a man walking through the street with a small kite
6. a black and white photo of a man holding a kite
7. a person carrying a kite in a dark sky
8. a person is walking in the rain with a kite
9. a man is walking in the rain with a frisbee
10. a man is holding a kite in the sky

Figure 9: