

Rydberg-positronium velocimetry and self-ionization studies in 1T magnetic field and cryogenic environment

M. Antonello,^{1,2} A. Belov,³ G. Bonomi,^{4,5} R. S. Brusa,^{6,7} M. Caccia,^{1,2} A. Camper,^{8,*} R. Caravita,⁶ F. Castelli,^{1,9} D. Comparat,¹⁰ G. Consolati,^{11,1} L. Di Noto,^{12,13} M. Doser,⁸ M. Fani,^{12,13,8} R. Ferragut,^{14,1} J. Fesel,⁸ S. Gerber,⁸ A. Gligorova,¹⁵ L. T. Glöggler,⁸ F. Guatieri,^{6,7} S. Haider,⁸ A. Hinterberger,⁸ O. Khalidova,⁸ D. Krasnický,¹³ V. Lagomarsino,^{12,13} C. Malbrunot,⁸ S. Mariazzi,^{6,7} V. Matveev,^{3,16} S. R. Müller,¹⁷ G. Nebbia,¹⁸ P. Nedelec,¹⁹ L. Nowak,⁸ M. Oberthaler,¹⁷ E. Oswald,⁸ D. Pagano,^{4,5} L. Penasa,^{6,7} V. Petracek,²⁰ F. Prelz,¹ B. Rienäcker,^{8,†} O. M. Røhne,²¹ A. Rotondi,^{5,22} H. Sandaker,²¹ R. Santoro,^{1,2} G. Testera,¹³ I. C. Tietje,⁸ T. Wolz,⁸ C. Zimmer,^{8,21,23} and N. Zurlo^{5,24}

(The AEGIS collaboration)

¹INFN, Sezione di Milano, via Celoria 16, 20133 Milano, Italy

²Department of Science and High Technology, University of Insubria, Via Valleggio 11, 22100 Como, Italy

³Institute for Nuclear Research of the Russian Academy of Science, Moscow 117312, Russia

⁴Department of Mechanical and Industrial Engineering, University of Brescia, via Branze 38, 25123 Brescia, Italy

⁵INFN Pavia, via Bassi 6, 27100 Pavia, Italy

⁶Department of Physics, University of Trento, via Sommarive 14, 38123 Povo, Trento, Italy

⁷TIFPA/INFN Trento, via Sommarive 14, 38123 Povo, Trento, Italy

⁸Physics Department, CERN, 1211 Geneva 23, Switzerland

⁹Department of Physics “Aldo Pontremoli”, Università degli Studi di Milano, via Celoria 16, 20133 Milano, Italy

¹⁰Laboratoire Aimé Cotton, Université Paris-Sud, ENS Paris

Saclay, CNRS, Université Paris-Saclay, 91405 Orsay Cedex, France

¹¹Department of Aerospace Science and Technology, Politecnico di Milano, via La Masa 34, 20156 Milano, Italy

¹²Department of Physics, University of Genova, via Dodecaneso 33, 16146 Genova, Italy

¹³INFN Genova, via Dodecaneso 33, 16146 Genova, Italy

¹⁴LNESS, Department of Physics, Politecnico di Milano, via Anzani 42, 22100 Como, Italy

¹⁵Stefan Meyer Institute for Subatomic Physics, Austrian Academy of Sciences, Boltzmanngasse 3, 1090 Vienna, Austria

¹⁶Joint Institute for Nuclear Research, Dubna 141980, Russia

¹⁷Kirchhoff-Institute for Physics, Heidelberg University, Im Neuenheimer Feld 227, 69120 Heidelberg, Germany

¹⁸INFN Padova, via Marzolo 8, 35131 Padova, Italy

¹⁹Institute of Nuclear Physics, CNRS/IN2p3, University of Lyon 1, 69622 Villeurbanne, France

²⁰Czech Technical University, Prague, Břehová 7, 11519 Prague 1, Czech Republic

²¹Department of Physics, University of Oslo, Sem Saelandsvei 24, 0371 Oslo, Norway

²²Department of Physics, University of Pavia, via Bassi 6, 27100 Pavia, Italy

²³Department of Physics, Heidelberg University, Im Neuenheimer Feld 226, 69120 Heidelberg, Germany

²⁴Department of Civil, Environmental, Architectural Engineering and

Mathematics, University of Brescia, via Branze 43, 25123 Brescia, Italy

(Dated: November 1, 2021)

We characterized the pulsed Rydberg-positronium production inside the AEGIS (Antimatter Experiment: Gravity, Interferometry, Spectroscopy) apparatus in view of antihydrogen formation by means of a charge exchange reaction between cold antiprotons and slow Rydberg-positronium atoms. Velocity measurements on positronium along two axes in a cryogenic environment (≈ 10 K) and in 1 T magnetic field were performed. The velocimetry was done by MCP-imaging of photoionized positronium previously excited to the $n = 3$ state. One direction of velocity was measured via Doppler-scan of this $n = 3$ -line, another direction perpendicular to the former by delaying the exciting laser pulses in a time-of-flight measurement. Self-ionization in the magnetic field due to motional Stark effect was also quantified by using the same MCP-imaging technique for Rydberg positronium with an effective principal quantum number n_{eff} ranging between 14 and 22. We conclude with a discussion about the optimization of our experimental parameters for creating Rydberg-positronium in preparation for an efficient pulsed production of antihydrogen.

PACS numbers: 32.80.Rm, 36.10.Dr, 78.70.Bj

INTRODUCTION


Antimatter has been thoroughly studied for almost a century now, first theoretically, when the antiparticle of the electron - the positron (e^+) - emerged from Dirac's

* Corresponding author, antoine.camper@cern.ch

† Corresponding author, benjamin.rienaecker@cern.ch

equations [1], and a few years later also experimentally, when Anderson observed it for the first time [2]. Since then, positronium (Ps), the bound state of a positron and an electron, was predicted and discovered [3, 4]. Increasingly precise values for higher excited states of Ps plus their annihilation and de-excitation rates were calculated using methods from quantum-electrodynamics (QED) [5–7], and eventually experiments showed many of these features to be correct in the limits of reachable precision [8–12].

Of special interest is antihydrogen ($\bar{\text{H}}$), the first observed anti-atom in a laboratory [13]. The first *cold* antihydrogen was produced by direct mixing of antiprotons and positrons [14, 15]. The AEGIS experiment (Antimatter Experiment: Gravity, Interferometry, Spectroscopy) [16] has, between others, the objective to produce antihydrogen to experimentally probe the antimatter gravitational acceleration. In particular, the current goal of AEGIS is to demonstrate *pulsed* cold antihydrogen production via charge-exchange reaction [17]:



where Ps^* is a positronium atom excited to a Rydberg state, hence a state with high principal quantum number n , the symbol \bar{p} denotes an antiproton, e^- the standard electron and $\bar{\text{H}}^*$ is a Rydberg-antihydrogen atom. The greatest advantage using the charge-exchange reaction is the scaling of its cross-section with n^4 . However, as the experiment has to be executed in a strong magnetic field of 1 T, the addressed Rydberg state must not be too high in order to avoid Ps self-ionization. Furthermore, the Ps has to be in the right velocity regime because fast Ps components have a small cross-section [18] and their contribution to the charge exchange reaction is negligible. Here, we neglect antiproton velocities, since these are generally two orders of magnitude smaller than for Ps, which allows in our case to monitor only the Ps-velocity distribution in order to characterize the charge exchange reaction. From the study of the charge-exchange cross-section performed in Ref. [18] it follows that the useful Ps-velocities range from zero up to $\sim 1.3 \times 10^5 \text{ m s}^{-1}$, where the upper limit is defined by the heavily decreasing cross-section for the addressed Rydberg-state at higher velocities.

In this work we have produced ortho-positronium via implantation of positron bunches into a positron/Ps converter kept at 10 K in the 1 T field of the AEGIS apparatus. Positronium emitted into vacuum has been laser-excited via the two-step transition $1^3\text{S} \rightarrow 3^3\text{P} \rightarrow$ Rydberg levels [19, 20]. The velocity of produced Ps and the fraction of Rydberg-Ps surviving self-ionization caused by motional Stark effects in the magnetic field [19] have been characterized in view of the optimization of the charge-exchange cross-section. The characterization has been performed via MCP-imaging [21] of ionized 3^3P -Ps and Rydberg-Ps, respectively. In this paper we

present the experimental results of the Ps-source characterization and the techniques by which we adjusted the system's parameters for creating Rydberg-Ps in view of antihydrogen production.

EXPERIMENT

The AEGIS apparatus, the environment for the presented measurements, consists of: a positron system, able to accumulate up to some 10^7 positrons from a 25 mCi ^{22}Na source within few minutes and to magnetically transport them to a kicker, an isolated segment of the beam tube where a high potential pulse can be applied to (like this, the positrons can reach a few keV kinetic energy); a positron/positronium converter placed in the 1 T cryogenic environment ($\approx 10 \text{ K}$) where antihydrogen will be formed; a laser system to excite positronium to Rydberg states; an antiproton trapping/cooling system (not operated for the measurements presented here). The used converter was a nanochanneled silicon target similar to the one reported in Ref. [22] with a channel diameter of about 10 nm and a depth of $\sim 1.5 \mu\text{m}$. It was tilted by 30° against the positron beam axis, while the implantation energy of positrons was set via the kicker to 4.6 keV in order to allow produced Ps atoms to cool enough before they are emitted into vacuum. The whole assembly for Rydberg-Ps production and excitation is sketched in Fig. 1. For the measurements presented here, a few 10^6 positrons per bunch have been used. Positronium emission was observed to be slightly less than 10 % with respect to the implanted positrons [23]. The Ps yield was mainly limited by the adsorption of contaminants from vacuum over time [24], which could not be removed from the converter due to a failure in the dedicated target heater, whose repair would have caused a too long interruption for parallel antihydrogen measurements in the 1 T region.

The positronium excitation is achieved by two synchronized and superimposed laser pulses. The first one enabling the $1^3\text{S} \rightarrow 3^3\text{P}$ transition is a 1.5 ns long UV-pulse, tunable from 204.9 nm to 205.2 nm at 43 μJ with a bandwidth of 118 GHz. The second is for the transition to Rydberg states, namely an IR-pulse, 3 ns long and tunable from 1671 nm to 1715 nm at 1.6 mJ with a bandwidth of 430 GHz. In addition, a 1064 nm IR-pulse at 30 mJ can be delivered in order to selectively photoionize all Ps in the 3^3P state. The positron [25] and laser [20] systems are described in detail elsewhere.

The electrodes of the antihydrogen production trap, placed below the Ps-excitation area and partially visible in Fig.1, allow to store antiprotons during the procedure. The maximum antihydrogen production within the magnetic field \vec{B} (parallel to the z-axis) will be achieved by steering the highest Rydberg-Ps flux originating from the target towards that trap, and by optimizing the Ps-state

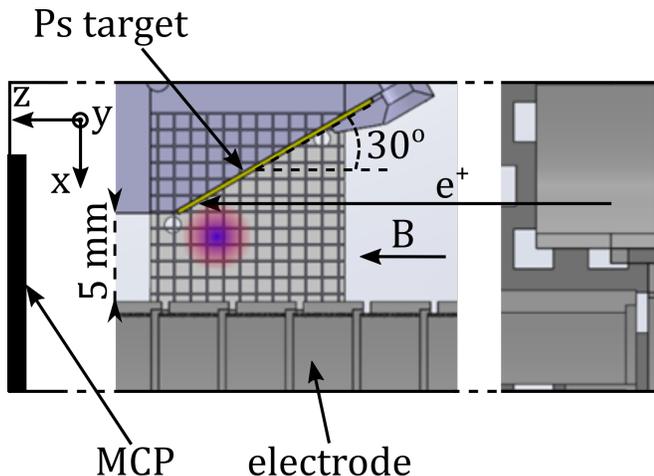


Figure 1. Sketch of the Ps-excitation area. One can see the MACOR screen in the back, covered with a mesh-grid, the positron/Ps converter target and the trap electrodes. Note the 5 mm gap between the bottom of the converter target and the top of the electrodes which enables the Ps velocimetry. The two-colored spot marks the laser position of an UV-beam (purple), superimposed with an IR-laser (red) used for Ps-excitation as specified in the text. The lasers are centered at -3.2 mm in z -direction and 1.7 mm in x -direction from the lower edge of the target.

as well as the laser-selected Ps velocity regime in the x - y plane. At the top of these trap electrodes is an opening covered by a meshed grid which allows Ps to enter. The exciting laser pulses are aligned parallel to the e^+ /Ps converter target, thus along the y -axis. In Fig. 1 we indicate the position of the UV and IR laser-beams which was used throughout the whole presented measurement series. A MACOR-screen has been placed in the proximity of the target in the x - z plane in order to image the laser pulses and monitor their position. For the measurements presented here, the central position of the laser was set to -3.2 mm in z -direction and 1.7 mm in x -direction from the lower edge of the target.

The laser timing was referenced to the prompt annihilation peak of implanted positrons, which we defined as $t = 0$. For this, the positron annihilation radiation was detected with scintillator-slabs (EJ200) coupled to a photomultiplier-tube (PMT). Additionally, we acquired the electric signal on the MCP-frontface which was generated immediately after irradiation with scattered UV-light. Both the positron peak and the laser peak were absolutely calibrated to each other as described in Ref. [26].

The characterization of the Ps velocity profiles and the fraction of Rydberg-Ps surviving self-ionization was studied by performing three different types of experimental procedures: (i) timing scans, (ii) Doppler scans and (iii) Rydberg self-ionization scans.

- (i) The timing scans focused on the determination of the Ps-velocity component aligned with the vertical

x -axis by means of photoionization of Ps atoms via a two-step optical transition and a subsequent measurement of the intensity distribution of released positrons. The timing scans were performed by changing the delay between positron implantation into the target and the trigger for laser excitation. Delays from -5 ns up to 265 ns were applied to both the UV-pulse exciting Ps via $1^3S \rightarrow 3^3P$, operating at resonance ($\lambda = 205.045$ nm, taken as a reference in the following), and to the IR-pulse at 1064 nm in order to photoionize selectively the fraction of Ps in the $n = 3$ state. This fraction goes up to 15% of the whole Ps-cloud being emitted into vacuum [20]. The released photo-positrons were guided by the homogeneous 1 T magnetic field towards a Micro-Channel Plate coupled to a phosphor screen (MCP Hamamatsu F2223 + Phosphor screen P46) and imaged by this assembly [21]. The front-face of the MCP was biased to -180 V, the gain voltage between the two stages of the MCP has been set to 1120 V. The intensity distribution of the positrons released by Ps-photoionization vs. laser-pulse delays was thus acquired. Using the known x -position of the Ps-origin, the obtained distribution can be converted to a discrete velocity distribution along the x -axis, v_x .

- (ii) The Doppler scans [20, 27] are performed in order to determine the Ps-velocity distribution parallel to the target, i.e. v_y . These scans were performed for fixed laser-delays (once 23 ns and 31 ns for a second series), but with linearly adjustable UV-wavelength between 204.900 nm and 205.200 nm in steps of 0.005 nm. Like this, one can investigate the $1^3S \rightarrow 3^3P$ transition in the vicinity of resonance. The IR laser was again set to 1064 nm as for (i) in order to produce photo-positrons.
- (iii) The self-ionization scans reveal the fraction of Rydberg-Ps surviving the magnetically induced motional Stark field as a function of the effective principal quantum number n_{eff} , a quantum number characterizing the Rydberg states in fields that will be defined later. These scans were done by changing the IR-wavelength that is inducing the transition from $3^3P \rightarrow$ Rydberg. It was tuned from 1671 nm to 1715 nm, addressing effective Rydberg states between 14 and 22 , while the UV-laser was kept unchanged and at the reference wavelength. Both laser pulses were synchronously delayed by 25 ns. The internal MCP gain voltage was increased to 1200 V in order to be more sensitive to the emerging positrons from self-ionization effects. This enhancement of sensitivity is necessary, because a low-intensity signal is expected for Ps self-ionization at higher IR-wavelengths. The intensity of the image on the MCP was thus acquired as a

function of the effective n-state of Ps.

RESULTS AND DISCUSSION

The measurements produce a photo-positron induced image on the MCP+phosphor screen assembly, acquired by a CMOS camera (Hamamatsu C11440-22CU). An example for a signal after photoionization is shown in Fig. 2. One can see the ionized positronium cloud (red), emerging from below the border of the target. Note that here for visual verification of the internal alignment the image was overlaid with an electron-image (green), where the MCP front-face was charged with +180 V, which attracted in turn photo-electrons released from all surfaces after irradiation with the UV-laser [28]. As a result, one can see the target border plus its holder on the top and the MACOR-screen on the left. The laser approaches from the right in this view. The back of the target seems also to emit photo-electrons, which we attribute to multiple scattering of the UV-laser. For analysis, only the positron-image was taken into account.

The transverse spatial profile and energy-distribution of both laser-pulses, which are well-described by a Gaussian, determine the absolute amount of ionized and thus detectable Ps-atoms. A fraction of the photo-released positrons, constrained to move along the magnetic field lines in z-direction, is hidden behind the target, the holder or just out of the MCP-range and is therefore not available for the analysis. The UV beam has a full-width-half-maximum (FWHM) of approximately 4.4 mm, which at the same time defines the border of a sufficiently high fluence guaranteeing saturation of the Ps excitation across the illuminated surface [21]. The FWHM of the IR-laser is about $\sim 4-5$ mm. For analysis, we choose several rather narrow windows in the x-y-plane on the MCP-image, of which we will present three specific ones labeled *roi 1*, *roi 2* and *roi 3* in Fig. 2. The windows have an extent of 20 x 500 pixel (0.46 x 11.5 mm) and cover the visible region of 5 mm along the x-axis. For each *roi*, the integrated signal of ionized Ps along the z-axis depends on the geometrical overlap of the window with the laser beam at the instant of excitation. This implies that one can effectively compare different delays for the same *roi*, while other windows have different overall intensities. Generally, a narrow window is preferable since the broadness of it has an influence on how precise a specific velocity can be estimated in the case of timing scans. Furthermore, in the region close to the target border edge-effects (e.g. inhomogeneous fields) might influence the analysis.

As a first step in the experimental procedure, we had to place correctly the position of the positron-beam incident on the converter, which we used as reference for the Ps-origin. For this, we have measured the dimension of the positron-spot in the center of the MCP, which was found

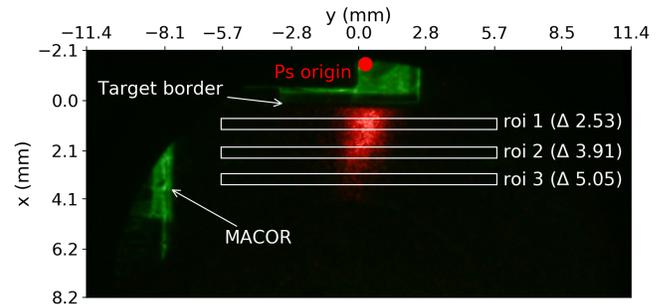


Figure 2. Combination of an electron reference image (green) and a Ps photoionization image (red): Positronium is emerging from the target border and gets instantaneously ionized when the laser pulses are sent. Unbound positrons are then guided towards the MCP, producing a light-spot. We define regions of interest (*roi 1*, *roi 2*, *roi 3*), which have a width of 20 pixel (0.46 mm) and a length of 500 pixel (11.5 mm). The window *roi 1* is 2.53 mm away from the Ps origin, *roi 2* 3.91 mm and *roi 3* 5.05 mm. We sum all the intensities within the windows and subtract a background obtained from the averaged signal of the last six delays where no Ps-photoionization could be observed.

to be 0.46 mm. We then have moved up the positron implantation point by adjusting the current of a vertical correction coil in the positron-beamline, which did not influence the shape of the positron spot. A linear correlation of the vertical x-coordinate and the current in the correction coil was observed. By means of this calibration we were able to steer the positron implantation point to a fixed, hidden position on the positron/Ps converter target which serves as zero. The distances between this point and the center of *roi 1*, *roi 2* and *roi 3* were found to be $x_0 = 2.53(38)$ mm, $3.91(38)$ mm and $5.05(38)$ mm, respectively. The systematic errors on x_0 have been estimated by Gaussian error propagation, arising from the positron spot-size (± 0.23 mm), the calibration measurement (± 0.2 mm) and the broadness of the analysis window (± 0.23 mm). The highest Ps flux has been assumed to originate from the center of the positron implantation spot.

(i) Timing scans

The timing scans were repeated three times, so that an average image could be calculated for each delay. A background obtained from the averaged signal at very long delays with no evident photoionization signal was subtracted from the raw data-points' amplitudes. We then obtain asymmetrical distributions displaying the intensities of observed Ps over different delays, see Fig. 3. After 140 ns, there is no evident signal anymore. We find that the distributions shift towards later times for windows that are more distant from the Ps origin, which is what one would expect. Furthermore, the peak intensities de-

crease with increasing distance, which is the net effect of the laser-beam selecting a fraction of the expanding Ps cloud.

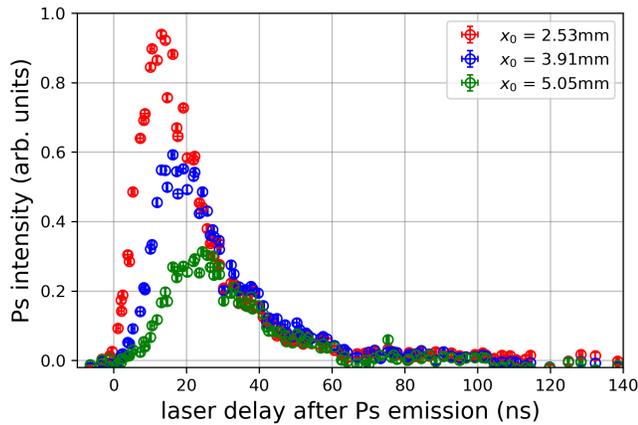


Figure 3. Observed positronium intensity vs. lasers delay for three different windows (*roi* 1,2,3). The distributions shift towards later times for more distant windows and at the same time decrease in intensity due to the limited geometrical overlap with the laser.

By using the relation $v_x = x_0/t$, we can translate the Ps time-of-flights t into velocities using the distance x_0 between Ps-origin and the analysis windows introduced above. The velocity-distributions were obtained by multiplying the observed Ps-distributions of Fig. 3 with the term $t \cdot e^{t/142 \text{ ns}}$, i.e. by using the Jacobian determinant for converting the observed space-distribution into a velocity-distribution and correcting for the natural decay of ground-state ortho-Ps as is usually done for Ps-TOF measurements (see also [29]). We then apply a sliding average in order to smooth the curves and increase the statistics especially for the less intense low velocity components (corresponding to long delays). The result is reported in Fig. 4. The solid lines are the outcome of a simulation aiming to qualitatively model the performed experiment (more details are given in appendix). All distances investigated result in a velocity distribution peaking between $1.4 \times 10^5 \text{ m s}^{-1}$ and $1.8 \times 10^5 \text{ m s}^{-1}$ (orange circles), where more distant windows have higher velocities.

We attribute this to a combination of two effects. The first is simply a geometrical effect, because for more distant *rois* the contribution of Ps components aligned with the z -axis is decreasing. As a consequence, the cleanest v_x -distribution is obtained for the most distant window. The second effect is a permanence time of Ps in the nanochannels (t_{perma}), because in reality Ps emission from the nanochannels is not instantaneous [30]. The real Ps time-of-flight rather is $t_f = t - t_{perma}$, where t is the measured time elapsed from positron implantation to Ps ionization. The permanence time t_{perma} depends both on the positron implantation depth and the nanochannel

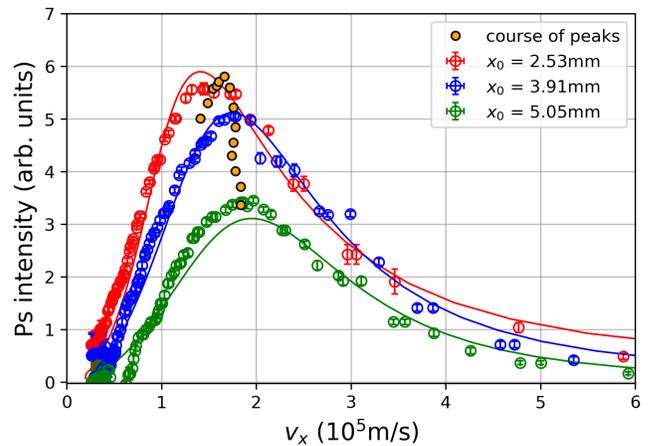


Figure 4. Distribution of Ps velocities along the x -axis as obtained from the timing scan of Fig. 3 after the treatment specified in the text. The solid lines are obtained from a simulation which is specified in the appendix. The peak-velocities have been marked with orange spots not only for the defined analysis windows, but also for additional windows with the same extent, sliding in steps of 10 pixel from the target border towards the trap electrodes.

diameter [22]. For closer *rois*, the presence of a permanence time yields a non-negligible overestimation of the generally smaller time-of-flights and, consequently, to an underestimation of Ps velocities. Increasing the *rois*' distance from the Ps origin minimizes this disturbing effect of the permanence time, rendering together with the first effect the most distant window to be the most trustworthy. In Fig. 4, we report the most probable velocity as a function of the *roi*-distance (course of peaks) showing that the peak velocity stabilizes for distances greater than $\sim 4 \text{ mm}$.

In the light of this discussion, we use the velocity-distribution obtained from the window at 5.05 mm (green curve in Fig. 4) as reference. It has a most frequent velocity component $v_{x,max}$ at $1.80(25) \times 10^5 \text{ m s}^{-1}$. The given error was derived from the width of the window that we used for the sliding average.

(ii) Doppler scans

The Doppler scans were repeated five times so that we could average the images per wavelength. The v_y -distribution has been extracted from the photoionization images in the following way. Within the reference window *roi* 3, all intensity values of one averaged image have been summed up and a constant background, i.e. the average value of a region on the MCP image where no Ps can be photoionized, was subtracted. Repeating this for all wavelengths, one obtains the photoionization-signal dependent on the UV-laser setting. Furthermore, the wavelength can directly be expressed as the Ps velocity-

component v_y propagating parallel/antiparallel to the laser beam by using the Doppler relation:

$$v_y = c \left(1 - \frac{\lambda}{\lambda_r} \right) \quad (2)$$

where c is the speed of light in vacuum and $\lambda_r = 205.045$ nm the reference wavelength for the excitation of the $n = 3$ manifold in our experimental conditions. In Fig. 5 the summed intensities are shown as a function of the velocity v_y as well as Gaussian fits, from which the sigmas of the distributions have been extracted. Doppler scans strictly distinguish between velocities propagating towards the light source and those moving away from it. This is expressed by positive and negative velocities in Fig. 5, respectively. Note that this measurement of the v_y -distribution is independent from the result of timing scans, which led to the v_x -distribution. The plot labeled a), with a laser delay of 23 ns, has a sigma of $1.03(3) \times 10^5$ m s⁻¹. The plot labeled b), with a set delay of 31 ns, has a sigma of $0.94(2) \times 10^5$ m s⁻¹. These velocities correspond to the mean velocity of the distribution aligned with the y-axis. For the greater delay, the velocity-spread of positronium being in the visible region on the MCP seems a bit decreased, which could be due to faster Ps components having moved out of view or due to non-isotropic Ps-emission from the target.

The best UV-wavelength for AEGIS' setup is the one where the greatest fraction of Rydberg-Ps is moving towards the meshed grid at the top of the \bar{H} -production trap. With the current alignment of laser, target and trap this is just the $v_y = 0$ component, i.e. $\lambda = \lambda_r$.

(iii) Self-ionization scan of Rydberg-Ps

Rydberg-Ps has a strong dipole moment scaling with the principal quantum number squared. Hence, it is sensibly affected by electric fields despite the general neutrality of Ps. This, on one hand, enables motional control for example via Stark deceleration as described in Ref. [31], but on the other hand it also puts constraints to its production in strong magnetic fields. In such, the motion of Rydberg-Ps induces an electrical field following $\vec{F}_{mot} = \vec{v} \times \vec{B}$. This is the so called motional Stark effect and its strength depends on the velocity components perpendicular to the magnetic field. Here, this is only v_x , because with the laser set to resonance we selected $v_y \approx 0$ m s⁻¹. The presence of this electric field can cause self-ionization of the moving Ps-atom. In particular, the minimal electric field causing ionization on some Ps-states, usually called the *ionization threshold*, generally depends on a principal quantum number n [19, 32] and can be written in our case as:

$$F_{limit}(n) = \frac{E_{Ps}}{9ea_0} \cdot \frac{1}{n_{eff}^4} \quad (3)$$

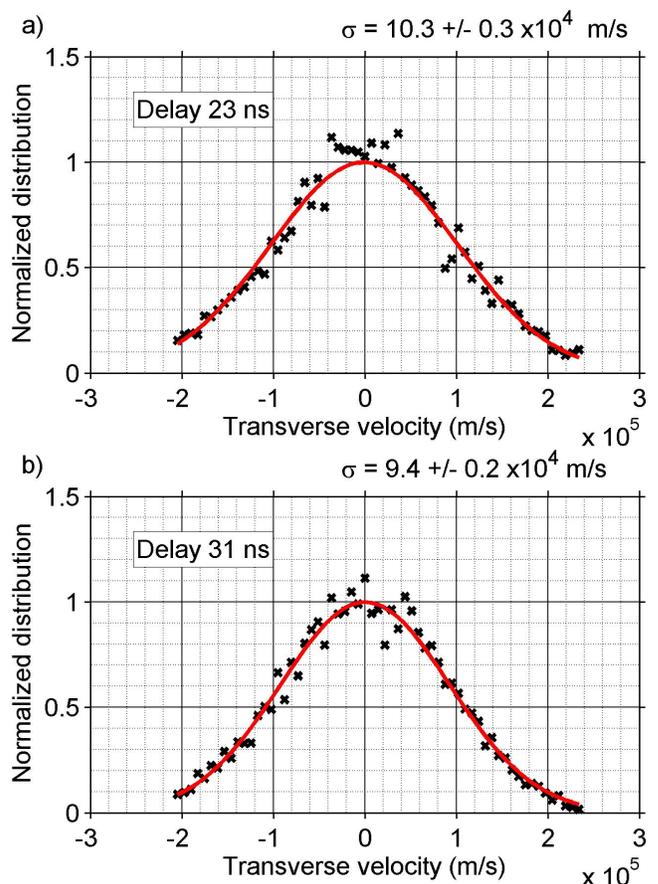


Figure 5. a) Doppler scan at 23 ns delay b) Doppler scan at 31 ns delay: Both distributions have a peak at $v_y = 0$ m s⁻¹ corresponding to $\lambda = 205.045$ nm.

Here, E_{Ps} is the Rydberg energy for positronium (equal to 6.8 eV), e is the electric charge and a_0 is the standard Bohr-radius, while n_{eff} represents an effective quantum number depending only on the wavelength λ characterizing the $n = 3 \rightarrow$ Rydberg transition through the well-established Rydberg-formula for hydrogen-like systems:

$$\frac{hc}{\lambda} = E_{Ps} \left(\frac{1}{(n=3)^2} - \frac{1}{n_{eff}^2} \right) \quad (4)$$

This reformulation is possible since the distribution of Ps-Rydberg-states resembles a continuum rather than well-separated single states as the classical formula would imply. In fact, the presence of the motional Stark effect is highly relevant for Rydberg-excited Ps-atoms: it destroys the axial symmetry and determines via mixing of ℓ and m sub-states the spread of energy levels for the n -manifold. It also determines the interleaving of nearby n -manifolds, finally leading to a quasi-continuum structure of energy levels [19, 33]. This also has the consequence that the efficiency of the transition $n = 3 \rightarrow$ Rydberg is essentially dominated by the IR-laser's bandwidth of 430 GHz.

By using the relation in Eq. 4, one finally obtains the self-ionization limit as a function of the IR-excitation

wavelength λ :

$$F_{limit}(\lambda) = \frac{E_{Ps}}{9ed_0} \cdot \left(\frac{1}{9} - \frac{hc}{E_{Ps}\lambda} \right)^2, \quad (5)$$

and from the relation $v_{x,limit} = F_{limit}/B$, with $B = 1$ T, the corresponding limiting velocity that is used in the following analysis of experimental data.

Also in the case of Rydberg-Ps self-ionization produced positrons can be imaged on the MCP, although the number of detectable particles turns out generally smaller. Therefore, unlike before, we used a larger analysis window ranging from the target border to *roi* 3 for a better signal intensity, and normalized it with the corresponding signal from the measurement at the lowest possible wavelength ($\lambda = 1671$ nm). At the same time, one can calculate the effective ionization threshold for this lowest wavelength by using Eq. 5, which gives 6×10^4 m s⁻¹. Integrating the reference v_x -velocity distribution found in the previous paragraph for all values that are greater than this threshold and normalizing the result to the total integral, one obtains an estimate for the maximum expected self-ionization signal which resulted in 97%.

The outcome of a self-ionization scan for a fixed delay of 25 ns and for the UV-laser set to our reference wavelength is shown in Fig. 6 (black circles with error bars). For $\lambda = 1700$ nm (i.e. $n_{eff} \approx 16$), only about 25% ionizes, thus this state seems a reasonable choice when optimizing the charge exchange reaction, as the visible self-ionizing Ps is still very dim, while n_{eff} is not too small.

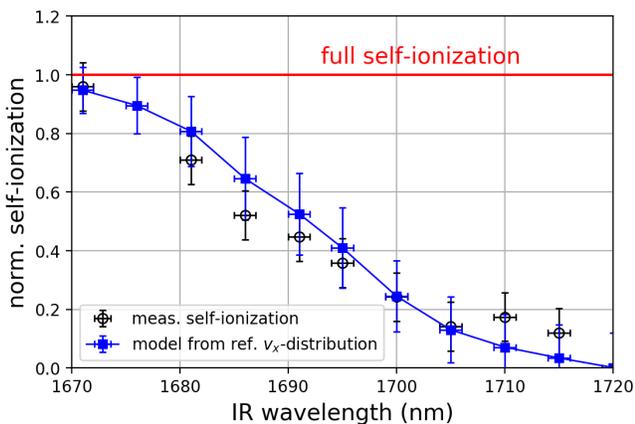


Figure 6. IR-wavelengths scan corresponding to Ps-Rydberg states (black marks with error bars). The self-ionizing fractions have been normalized to the expected full self-ionization. For $\lambda = 1680$ nm, around 70% of Ps ionizes. At $\lambda = 1700$ nm, which corresponds to $n_{eff} \approx 16$, only 25% is lost. Blue squares are the result of a modeling of the self-ionizing fraction, as detailed in the text. The model resembles the measured self-ionization per effective state.

The velocimetry result of Fig. 4 obtained for the window at 5.05 mm has been used to model the self-ionizing

fraction of Rydberg-Ps. For each IR-wavelength, the threshold of self-ionization and the corresponding limiting velocity $v_{x,limit}$ have been calculated from Eq. 5. Then, the fraction of self-ionizing positronium has been computed via numerical integration: all bins with a velocity higher than the ionization-limit contribute to a signal, which is normalized to the result of an integration over all velocities. The model (blue squares) is plotted together with the measured self-ionization over the wavelengths in Fig. 6. The model follows roughly the course of the measured self-ionization, which is an indication for the quality of the velocity-distribution along the x-axis.

Expected impact on the \bar{H} -production cross-section

The cross-section for \bar{H} -production via the charge-exchange reaction was studied theoretically by different groups. Classical simulations [18] based on Monte-Carlo numerical experiments have given insight into the process for Rydberg states up to $n = 50$. Quantum effects have also been studied in simulations up to $n = 5$, but subsequent investigations have pointed out that the scaling laws are identical [34, 35]. Within the framework of the classical Monte-Carlo approach, the predicted cross-section gets larger with increasing Ps principal quantum number n (proportional to n^2 at very small velocities and to n^4 at intermediate ones), and decreases monotonically with the Ps velocity, becoming negligible at the fast end.

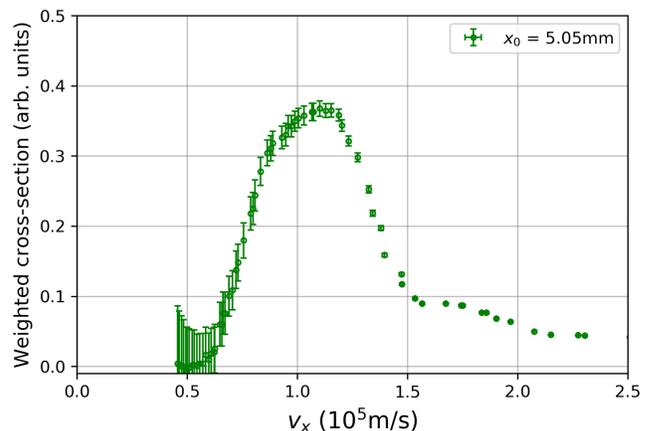


Figure 7. Weighted cross-section for antihydrogen production using Rydberg-Ps with $\lambda_{IR} = 1700$ nm, plotted over the whole accessible range of Ps velocities along the x-axis.

By using these studies, one can optimize the described Rydberg-Ps source for future efficient antihydrogen-production in AEGIS. For this purpose, we weighted the classical cross-section with the measured reference v_x -velocity distribution of Ps. This has been done for all accessible IR-wavelengths. The result for $\lambda_{IR} = 1700$ nm is shown in Fig. 7. The weighted cross-section shows a plateau in the region of 1×10^5 m s⁻¹, which is due to the

strong suppression of faster components, where the relative velocity between Ps and antiprotons is mismatched. When properly tuning the laser pulses' delay and thus the selected range of velocities, one can maximize the weighted cross-section (with an optimal velocity v_{best}). More so, as it is expected to progressively increase with decreasing λ_{IR} .

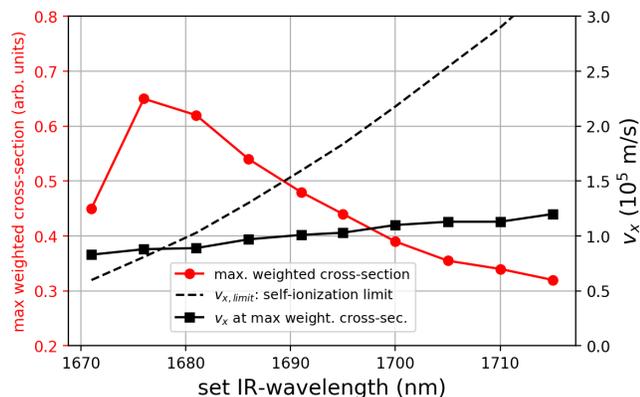


Figure 8. On the left ordinate in red: maximum of the weighted cross-sections; on the right ordinate in black: the vertical velocity-component v_x ; both plotted over the set IR-laser wavelength addressing the effective Rydberg-state. The solid lines are meant as eye-guides, while the dashed line represents the limiting velocity of self-ionization.

If v_{best} is smaller than the limiting velocity $v_{x,limit}$ for a given IR-wavelength, it is convenient to address positronium with that velocity to have the highest weighted cross-section for \bar{H} -production. On the other side, if v_{best} is greater than the limiting velocity, positronium travelling with that velocity would self-ionize and cannot be used. In this case, Ps with a velocity regime slightly before the limit should be addressed by an appropriate choice of laser delay.

In Fig. 8 the behaviour of v_{best} and of $v_{x,limit}$ is shown as a function of the IR-wavelength. For $\lambda_{IR} \geq 1680$ nm, v_{best} is lower than $v_{x,limit}$. For example, the weighted cross-section gains roughly a factor of two when going from 1700 nm to 1676 nm with our Ps-source, despite the dramatic increase in self-ionization. The improvement originates from the scaling of the surviving fraction with n^4 . Additionally, when optimizing the positron implantation energy or possibly the morphology of the target itself, one could obtain a slower Ps velocity-distribution, which potentially allows to reduce the wavelength even more as the self-ionizing fraction is reduced.

CONCLUSIONS

In this work we have characterized the velocity emission of positronium from a nanochanneled positron/positronium converter in a cryogenic environ-

ment within a magnetic field of 1 T. The self-ionization of positronium due to motional Stark effect has also been studied as a function of the wavelength of the IR-laser exciting Ps to Rydberg states, with an effective principal quantum number n_{eff} ranging between 14 and 22. The measurements have been performed by means of MCP-imaging of ionized positronium. In the case of velocimetry, positronium was photoionized after excitation, while for the study of the motional Stark-effect, self-ionized Rydberg-positronium has been imaged. The velocimetry was performed for two axis. The velocity-components aligned parallel to the laser beam have been studied by Doppler-scanning the UV-wavelength populating the $n = 3$ -manifold, the velocity-components perpendicular to the laser and to the magnetic field were measured by timing scans of the delays for the laser pulses. The choice of the positronium velocity and Rydberg state of the atom has been discussed in view of their optimization for \bar{H} -production via charge exchange reaction.

APPENDIX

Modeling of the Ps v_x -distribution

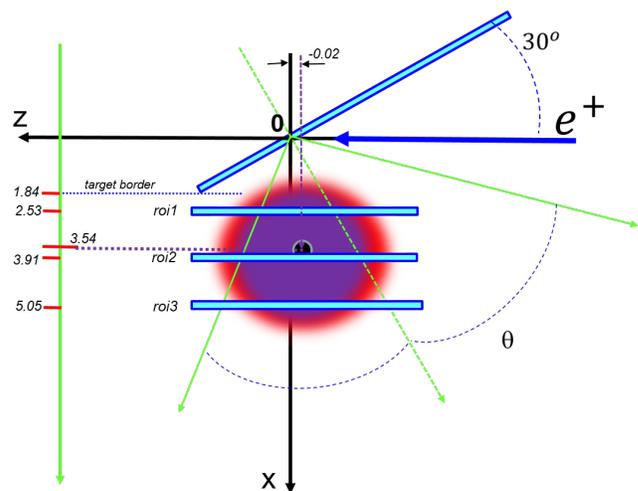


Figure 9. Geometry used for the modelling of Ps photoionization with the three rois 1,2,3 as used during the experimental analysis.

We consider a positron bunch impacting and entering the positron/Ps converter at the reference position $(0, 0, 0)$ of our coordinate system and assign a temporal spread modelled by a normalized Gaussian function centered at time $t = 0$ to it:

$$n_p(t) = \frac{1}{\sigma_p \sqrt{2\pi}} e^{-t^2/2\sigma_p^2} \quad (\text{A-1})$$

For σ_p we assume a value of 5 ns as was estimated from experimental data. Every positron in the bunch is then

assumed to form Ps, which exits the converter from the reference point after an averaged Ps permanence time t_{perma} inside the target. Hence, we get an initial Ps-cloud with the same time-distribution as the positron bunch, but centered at $t = t_{perma}$. We then also define a velocity distribution function $f_0(v_x, v_y, v_z)$ for the Ps-cloud, which we model with a Gaussian function as well, centered at $v_{x,y,z} = 0 \text{ m s}^{-1}$.

The possible resulting velocity-vectors are limited to an emission cone with its vertex located at the Ps-origin and a half opening-angle θ from the target normal (see Fig. 9). The Ps cloud is freely expanding in space obeying the linear law:

$$x(t_f) = v_x t_f, \quad y(t_f) = v_y t_f, \quad z(t_f) = v_z t_f, \quad (\text{A-2})$$

where t_f is the real Ps flight-time. We can therefore describe the Ps cloud by a spatial distribution function $f(x(t_f), y(t_f), z(t_f))$ within the emission cone. Equating the number of Ps contained in a spatial volume-element $dx dy dz$ with the number of Ps contained in a velocity volume-element $dv_x dv_y dv_z$ we can express the spatial

distribution in terms of the initial velocity distribution f_0 for each time $t_f > 0$:

$$\begin{aligned} f(x, y, z) dx dy dz &= f_0(v_x, v_y, v_z) dv_x dv_y dv_z \\ \Rightarrow f(x, y, z) &= \frac{1}{t_f^3} f_0(v_x, v_y, v_z) \end{aligned} \quad (\text{A-3})$$

During their free flight in vacuum, Ps atoms can be probed by two synchronized and spatially overlapped laser pulses (UV+IR, aligned with the y-axis) by means of an initial excitation to $n = 3$ and a subsequent ionization, which we assume for practical reasons to work instantaneously. The instant of laser-firing corresponds to a time $t = t_f + t_{perma}$. The laser beam profiles are assumed to be Gaussian transverse functions centered in (x_L, z_L) , and with $2\Delta r$ as FWHM. We define a function $\chi_{cone}(\theta)$ which is describing the overlap of the Ps emission cone and the laser beam. If θ is sufficiently large, which is the case for $\theta \geq 60^\circ$, the function $\chi_{cone}(\theta) = 1$.

The number of detected ionized Ps atoms in the *roi* centered at x_r at observation time t is given by a spatial integral:

$$N_r(t) \equiv N_r(t_f + t_p) = g_r \int_{x_r - \Delta x/2}^{x_r + \Delta x/2} dx \int_{-\Delta y/2}^{\Delta y/2} dy \int_{z_L - \Delta z}^{z_L + \Delta z} dz \chi_{cone}(\theta) \times f(x(t_f), y(t_f), z(t_f)), \quad (\text{A-4})$$

where g_r is the efficiency of ionization as was calculated following the procedure described in Ref. [19]. The slightly varying values for $g_{1,2,3}$ as given in Tab. I are due to the geometrical overlap of the *rois* with the Gaussian spatial laser profile, which at the same time is defining the third integral's boundary, Δz , via Pythagorean theorem:

$$\Delta z = \sqrt{\Delta r^2 - (x_r - x_L)^2} \begin{cases} \Delta z \text{ for } |x_r - x_L| \leq \Delta r \\ 0 \text{ for } |x_r - x_L| > \Delta r \end{cases} \quad (\text{A-5})$$

From the distribution $N_r(t)$ we finally can derive the measurable v_x -velocity distribution with the formula:

$$P_r(v_x) = \frac{t_f}{g_r \Delta x} N_r(t) \quad (\text{A-6})$$

The approximate simulations reported in Fig. 4 have been obtained using the parameters in Tab. I. We show the influence of the parameters t_{perma} and θ in Fig. 10 and Fig. 11, where a reasonable range has been explored for our reference *roi* 3. The Ps intensity varies less, the peak-velocity more when changing the permanence time t_{perma} . As the velocities directly depend on the real time-of-flight, this strong correlation is expected. Varying the Ps emission cone, for angles greater than 60° no change is occurring because the laser beam is fully overlapping with

Δx	0.46 mm	<i>roi</i> -width along x
Δy	11.5 mm	<i>roi</i> -width along y
x_1	2.53 mm	center of <i>roi</i> 1
x_2	3.91 mm	center of <i>roi</i> 2
x_3	5.05 mm	center of <i>roi</i> 3
x_L	3.54 mm	x-position of laser center
z_L	-0.02 mm	z-position of laser center
Δr	2.2 mm	laser spot HWHM
g_1	0.55	efficiency of Ps ionization in <i>roi</i> 1
g_2	0.62	efficiency of Ps ionization in <i>roi</i> 2
g_3	0.53	efficiency of Ps ionization in <i>roi</i> 3
θ	60°	half opening-angle of Ps emission
σ_p	5 ns	temporal spread of e^+ bunch
σ_v	$2 \times 10^5 \text{ m/s}$	velocity spread of Ps cloud
t_{perma}	3 ns	Ps permanence time

Table I. Experimental and assumed parameters for the simulation

the Ps cloud. Reducing that angle, the amplitude decreases rapidly while the peak velocity slightly increases.

ACKNOWLEDGMENTS

This work was supported by Istituto Nazionale di Fisica Nucleare; the CERN Fellowship programme and the CERN Doctoral student programme; the Swiss

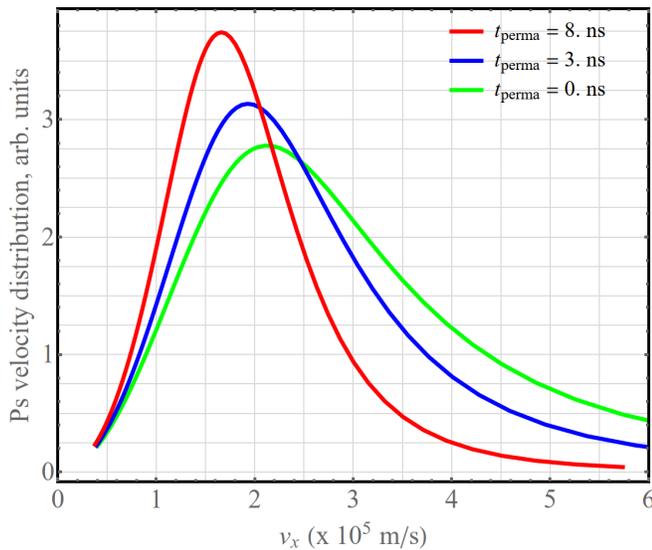


Figure 10. Variance of the modelled v_x -velocity distribution for a reasonable range of permanence times t_{perma} in *roi* 3.

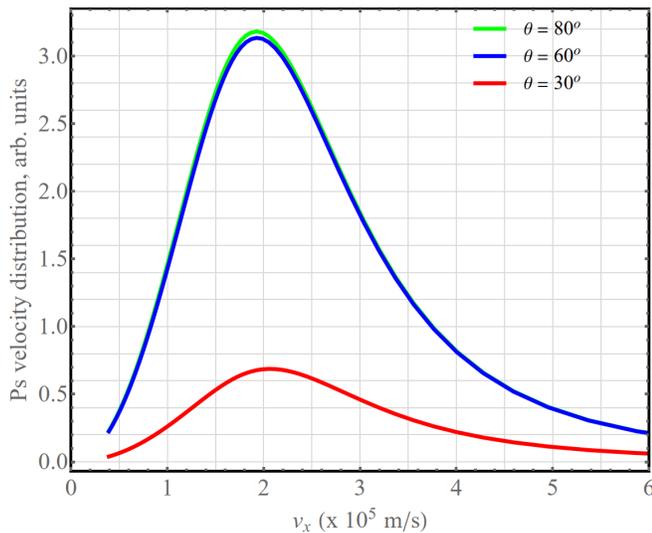


Figure 11. Dependence of the modelled v_x -velocity distribution on Ps emission cone defined by θ in *roi* 3.

National Science Foundation Ambizione Grant (No. 154833); a Deutsche Forschungsgemeinschaft research grant; an excellence initiative of Heidelberg University; Marie Skłodowska-Curie Innovative Training Network Fellowship of the European Commission's Horizon 2020 Programme (No. 721559 AVA); European Research Council under the European Unions Seventh Framework Program FP7/2007-2013 (Grants Nos. 291242 and 277762); European Union's Horizon 2020 research and innovation programme under the Marie Skłodowska-Curie grant agreement ANGRAM No. 748826; Austrian Ministry for Science, Research, and Economy; Research Council of Norway; Bergen Research Foundation; John Templeton Foundation; Ministry of Education and Science of the Russian Federation and Russian Academy of

Sciences and the European Social Fund within the framework of realizing research infrastructure for experiments at CERN, LM2015058.

-
- [1] P. Dirac, Proc. R. Soc. Lond. A **126**, 360 (1930).
 - [2] W. Anderson, Phys. Rev. **43**, 491 (1933).
 - [3] S. Mohorovičić, Astronomische Nachrichten **253**, 6052 (1934).
 - [4] M. Deutsch, Phys. Rev. **82**, 455 (1951).
 - [5] A. I. Alekseev, Sov. Phys. JETP **826** (1958).
 - [6] A. I. Alekseev, Sov. Phys. JETP **1312** (1959).
 - [7] W. Caswell and G. P. Lepage, Phys. Rev. A **20**, 36 (1979).
 - [8] D. B. Cassidy, T. H. Hisakado, H. W. K. Tom, and A. P. Mills, Phys. Rev. Lett. **106**, 133401 (2011).
 - [9] D. B. Cassidy, T. H. Hisakado, H. W. K. Tom, and A. P. Mills, Phys. Rev. Lett. **109**, 073401 (2012).
 - [10] S. Aghion et al. (AEgIS collaboration), Phys. Rev. A **98**, 013402 (2018).
 - [11] S. Chu and A. P. Mills, Phys. Rev. Lett. **48**, 1333 (1982).
 - [12] D. B. Cassidy, Eur. Phys. J. D **72**, 53 (2018).
 - [13] G. Baur et al., Phys. Ref. Lett. B **368** (1996).
 - [14] M. Amoretti et al., Nature **419**, 456 (2002).
 - [15] G. Gabrielse et al., Phys. Rev. Lett. **89**, 213401 (2002).
 - [16] M. Antonello et al. (AEgIS collaboration), *Progress report on the AEgIS experiment (2018)*, CERN SPSC report (2018).
 - [17] M. Charlton, Phys. Lett. A **143**, 143 (1990).
 - [18] D. Krasnický, R. Caravita, C. Canali, and G. Testera, Phys. Rev. A **94**, 022714 (2016).
 - [19] F. Castelli, I. Boscolo, S. Cialdi, M. G. Giammarchi, and D. Comparat, Phys. Rev. A **78**, 052512 (2008).
 - [20] S. Aghion et al. (AEgIS collaboration), Phys. Rev. A **94**, 012507 (2016).
 - [21] M. Antonello et al., Nucl. Instr. Meth. B **457**, 44 (2019).
 - [22] S. Mariazzi, P. Bettotti, and R. S. Brusa, Phys. Rev. Lett. **104**, 243401 (2010).
 - [23] R. Caravita et al., AIP Conf. Proc. (2019), in print.
 - [24] B. S. Cooper et al., Phys. Ref. B **93**, 125305 (2016).
 - [25] S. Aghion et al. (AEgIS collaboration), Nucl. Instrum. Methods Phys. Res., Sect. B **362**, 86 (2015).
 - [26] R. Caravita et al., Proceedings SLOPOS15 (2019).
 - [27] D. Cassidy, P. Crivelli, et al., Phys. Rev. A **81**, 012715 (2010).
 - [28] A. Camper et al., EPJ Web of Conferences **198**, 00004 (2019).
 - [29] R. H. Howell, I. J. Rosenberg, M. J. Fluss, R. E. Goldberg, and R. B. Laughlin, Phys. Rev. B **35(10)**, 5303 (1987).
 - [30] D. B. Cassidy, T. H. Hisakado, V. E. Meline, H. W. K. Tom, and A. P. Mills, Phys. Rev. A **82**, 052511 (2010).
 - [31] S. D. Hogan, EPJ Tech. Instr. **3**, 2 (2016).
 - [32] T. F. Gallagher, Cambridge University Press (2005).
 - [33] F. Castelli, Eur. Phys. J. Special Topics **203** (2012).
 - [34] A. S. Kadyrov, I. Bray, M. Charlton, and I. I. Fabrikant, Nature Communications **8** (2017).
 - [35] D. Krasnický, G. Testera, and N. Zurlo, J. Phys. B: At. Mol. Opt. Phys **52**, 115202 (2019).