

Product Insights: Analyzing Product Intents in Web Search

Nikitha Rao
t-nirao@microsoft.com
Microsoft Research
Bangalore, India

Subhabrata Mukherjee
submukhe@microsoft.com
Microsoft Research
Redmond, WA, USA

Chetan Bansal
chetanb@microsoft.com
Microsoft Research
Redmond, WA, USA

Chandra Maddila
chmaddil@microsoft.com
Microsoft Research
Redmond, WA, USA

ABSTRACT

Web search engines are frequently used to access information about products. This has increased in recent times with the rising popularity of e-commerce. However, there is limited understanding of what users search for and their intents when it comes to product search on the web. In this work, we study search logs from Bing web search engine to characterize user intents and study user behavior for product search. We propose a taxonomy of product intents by analyzing product search queries. This is a challenging task given that only 15% – 17% of web search queries are about products. We train machine learning classifiers with query log features to classify queries based on intent with an overall F_1 -score of 78%. We further analyze various characteristics of product search queries in terms of search metrics like dwell time, success, popularity and session-specific information.

KEYWORDS

product search; user intent; query logs

ACM Reference Format:

Nikitha Rao, Chetan Bansal, Subhabrata Mukherjee, and Chandra Maddila. 2019. Product Insights: Analyzing Product Intents in Web Search. In *Proceedings of ACM Conference (Conference'17)*. ACM, New York, NY, USA, 6 pages. <https://doi.org/10.1145/nnnnnnn.nnnnnnn>

1 INTRODUCTION

Product search refers to the user intent of accessing product-related information from the web. A number of these searches are geared for online shopping or accessing e-commerce websites. As per a recent study [16], 7 out of 10 individuals in the U.S. purchased at least 1 product online in 2018 with a total spending of \$500 billion. According to various surveys¹, Amazon.com accounts for half of the product search queries in the web. However, traditional search

¹<https://blog.survata.com/amazon-takes-49-percent-of-consumers-first-product-search-but-search-engines-rebound>

Permission to make digital or hard copies of all or part of this work for personal or classroom use is granted without fee provided that copies are not made or distributed for profit or commercial advantage and that copies bear this notice and the full citation on the first page. Copyrights for components of this work owned by others than the author(s) must be honored. Abstracting with credit is permitted. To copy otherwise, or republish, to post on servers or to redistribute to lists, requires prior specific permission and/or a fee. Request permissions from permissions@acm.org.
Conference'17, July 2017, Washington, DC, USA

© 2019 Copyright held by the owner/author(s). Publication rights licensed to ACM.
ACM ISBN 978-x-xxxx-xxxx-x/YY/MM... \$15.00
<https://doi.org/10.1145/nnnnnnn.nnnnnnn>

engines are still popular among internet users when they do not have a specific purchase in mind. For instance, nearly 46% of such users will start on search engines compared to 39% for Amazon. Therefore, it is useful to characterize and better understand user intent for product search on the web.

Query understanding for general web search and user intent has been extensively studied in the past for domains like healthcare [19], developer behavior [3], employment [6] and security [2]. One of the earliest works in this space is by Broder [5] who proposed a taxonomy to categorize web search into Navigational, Informational and Transactional queries. This work was followed up by Rose and Levinson [20] who created a framework for understanding user goals. In the e-commerce space, Moe et al. [18] perform a study to better understand online shoppers' behavior by classifying their intents into categories like buying, browsing, searching and knowledge-building, etc. This work is followed by Su et al. [21] who worked on building a taxonomy of product-related search queries by conducting a controlled user study within an e-commerce website. There has also been some work done on improving product search within e-commerce websites [11, 15] primarily with regards to the purchase intent. In contrast, our work focuses on general web search queries with a broader set of applicable user intents.

In this work, we want to answer the following questions:

- RQ1. What percentage of web search queries are related to product search?
- RQ2. What are the different user intents for product search?
- RQ3. How does product search intent correlate with search metrics like popularity, success and dwell time, and what are their underlying characteristics?

A study [13] performed a decade back shows that approximately 5%-7% of the distinct web search queries contain product intent. With RQ1 (discussed in Section 3.1), we want to validate if that still holds in recent times given the change induced by e-commerce search engines. Traditional web search queries have intents like *Navigational*, *Informational* and *Transactional* [5]. With RQ2 (discussed in Section 3), we investigate if product search has similar or additional intents. With RQ3 (in Section 4), we want to study the characteristics and distribution of different product search intents.

Consequently, we analyze user search behavior from a random sample of 1 million search queries collected from the first week of September 2019 from a popular web search engine. A large number of user queries are found to be not related to products upon inspection. Therefore, we develop a machine learning model to identify

product-related queries. We then build a product search intent taxonomy following open coding technique and human annotation as used in prior works [12] for web search intent categorization. Finally, we develop an intent classification model to further classify the product-related queries to one of several intent types leveraging various query log attributes as features. We apply our models to large-scale web search query logs to find the distribution of different intents and analyze how they correlate with several search metrics. We discover several interesting insights like Transactional queries are the most popular whereas Navigational queries have the highest rate of success (in Section 4).

2 PRODUCT QUERY CLASSIFICATION

In this paper, we want to analyze and characterize how web search is used for product search. In order to do so, we first need to distinguish product search queries from general search queries. One possibility is to manually label a large number of queries to find names of different products and variations. This is unlikely to give a lot of true positives given that only 5%-7% of the distinct web search queries are likely to be product queries from prior research [13]. To alleviate this problem, we leverage various search engine features to identify product-related queries that can be used to train machine learning models to identify similar related queries.

Distant supervision heuristics: We explore and evaluate the following heuristics to automatically collect a large amount of positive examples for product-related queries to train the classifiers. Negative examples for non-product queries are randomly sampled from the remaining query set.

- (1) **Product Ads:** Most of the major search engines such as Google and Bing allow advertisers to create Ad campaigns [10] for queries related to products. We label those queries as product-specific for which one or more product Ads were displayed. Note that this technique implicitly uses the Ad recommendation and ranking algorithm of the search engine.
- (2) **Product Categories:** We consider another heuristic that relies on the list of product categories from Amazon.com [1]. These categories (such as, automotive, books, etc.) cover the vast majority of products available therein. We label each query as product related if the search query or the click url contains any of the product category names.
- (3) **Product Ads and Categories:** This uses a combination of the previous two heuristics.
- (4) **Product list:** Finally, we also use the top 10 best selling products of all time ². We classify any query where the query text or the click url contains any of these products as a positive example.

Dataset: We want to select the best heuristic from the above list to generate our training data. Subsequently, we randomly sampled 500 search queries from the query logs and manually labeled them as *product* or *non-product* queries. We found that 17.4% of these queries were product queries. Table 1 presents the evaluation of all the heuristics on our manually annotated query set. We observe that the *Product Ads and Categories* heuristic is the most accurate one with 71% F_1 -score for the product class and 91% accuracy overall. Now, we generate the training data by sampling 500k queries that

Table 1: Heuristics evaluation for distant supervision.

Heuristic	Precision	Recall	F1-score	Accuracy
Product List	57	5	9	83
Product Ads	74	54	62	89
Product Categories	83	24	37	86
Ads & Categories	74	68	71	91

Table 2: Five-fold cross validation of product query classifiers.

Classifier	Precision	Recall	F1-score	Accuracy
AdaBoost	76	74	75	75
LinearSVC	82	77	79	79
LogisticRegression	82	77	79	79
MLP	83	84	84	83

satisfy this heuristic as positive examples and another 500k queries that do not as negative examples.

Product query classifier: The search query and click urls from the training dataset are tokenized and pre-trained Word2Vec [17] embeddings are used to generate distributed representations of these features. Both the query and the click urls are represented in a 300 dimensional embedding space. Word embeddings have been shown to improve performance in many classification tasks [14, 22]. We train several classifiers and report five fold cross validation results in Table 2. Among all the classifiers, Multi-Layer Perceptron obtain the best performance with an F_1 -score of 84% and used for the remaining analysis.

3 PRODUCT QUERY INTENT TAXONOMY

Users can have different intents behind product-related searches. They might be looking for some information about a product, compare them to other similar items, make a purchase and so on. In this section, we study the various user intents for product search.

3.1 Dataset generation

We use the best performing product query classification model (multi-layer perceptron) on a random sample of 1 million search queries, collected from the first week of September 2019, and obtain 149,579 product-related queries which implies that approximately 15% of all search queries in the web are product searches. We found this number to be around 17% on the manually labeled set of 500 randomly sampled queries in Section 2. Our findings demonstrate that product search queries account for 15% – 17% which is significantly higher than the study [13] from a decade ago which found the volume to be 5% – 7%. For the next phase of analysis, we use the above classified product-related queries along with other query features from the search engine like the click urls, click snippets, click counts, etc. that provide more context about the search intent.

3.2 Clustering and sampling for annotation

Given a large number of queries from the previous step, we want to sample a set of queries for manual annotation. Random sampling of queries result in the risk of missing those from less popular or scarcely appearing intents. To explore queries from diverse intents,

²<https://time.com/92765/10-best-selling-products-ever/>

Table 3: Intent categories for product search queries with distribution as per manual annotation on 1500 samples.

Intent (Distribution)	Description	Examples
Not Product Related (42.50%)	Queries which are not product related.	'apple stock price', 'homedepot jobs', 'walmart customer relations address'
Comparison (11.75%)	Queries for comparing products in a category or based on attributes such as features, price, etc.	'skype vs microsoft teams', 'ironman action figures', 'compare iphone x and xr'
Informational (15.56%)	User is looking for some specific product-related information.	'what does apple care cover on watches', 'sprinkler system design', 'where to buy battens?'
Navigational (11.19%)	User wants to navigate to a specific website associated with a product.	'itunes sign in', 'amazon chime', 'apple care', 'myamazon/kdp', 'alexa apps'
Support (8.88%)	Here the user is looking for help to troubleshoot some product specific issue.	'hp mouse not working', 'cannot connect to display mininet', 'access denied amazon aws'
Transactional (10.12%)	Such queries depict that the user is interested in transactions like buying, downloading or installing a specific product.	'antique german wind up car', 'qvc gold jewelry clearance diamonique', 'h.h. scott S 10 speakers for sale'

we leverage Latent Dirichlet Allocation (LDA) [4] to cluster textually similar queries and sample queries from each cluster.

LDA assumes a document (query in our case) to have a distribution over latent topics (intent in our case), and each topic to have a distribution over words. We use wordpiece tokenization [24] to tokenize the query string, clicked urls and click snippets to get all the keywords associated with the query that are concatenated to form the input document for the LDA model. The clicked urls and snippets provide additional context to the query. The tokenization considers a fixed vocabulary size (e.g., 30k tokens) and segments words into wordpieces such that every piece is present in the vocabulary. A special symbol '##' is used to mark the split of a word into its sub-pieces. We remove the domain information from the feature set to prevent trivial clustering based on domain name. The length of the feature vector is 30k given by wordpiece vocabulary size. We set the number of latent topics to 50. We then randomly sample 30 queries from each topic cluster resulting in 1500 samples that are used for manual annotation.

3.3 Manual annotation

Three annotators manually inspected all the queries collected in the previous step along with all the relevant contextual features. Each annotator was asked the following questions for each query:

- (1) Is the query related to a product?
- (2) For product-related queries, does any of the following intent categories apply, *Informational*, *Navigational*, *Transactional*?
- (3) Is there any other intent for product-related queries that is not included in the above intent categories?

The intents corresponding to Informational, Navigational and Transactional are commonly observed in web search queries [5]. In addition to those, the annotators observed (i) a large number of product queries for comparing various products based on attributes such as features and price, and (ii) a large number of support-related queries where the user is looking for help to troubleshoot some product specific issue. Given these observations, the annotators were asked to re-annotate such queries with the intent categories corresponding to *Comparison* and *Support*. We ignored queries in


Table 4: Taxonomy of user search intent in prior work.

Reference	Taxonomy
Broder et al. [5]	Informational, Navigational, Transactional
Buyer Decision Process [23]	Problem/Need Recognition, Information Search, Evaluation of Alternatives, Purchase Decision, Post Purchase Behavior
Su et al. [21]	Target Finding, Decision Making, Exploration
Rose et al. [20]	Navigational, Informational (Directed, Undirected, Advice, Locate, List), Resource (Download, Entertainment, Interact, Obtain)
Fourney et al. [8]	Operation Instruction, Troubleshooting, Reference, Download, General Information, Off-Topic
This work	Informational, Navigational, Transactional, Comparison, Support, Not-product-related

languages other than English. This resulted in five intent categories for product-related queries. Table 3 shows a detailed description for each intent category with examples and key indicators from our analysis. Introducing product specific intents like Comparison and Support can help improve the quality of search results for product queries. We computed the inter-annotator agreement using Fleiss kappa [7] as 0.79 indicating substantial agreement among the annotators for different intent categories. Note that the distribution of intents in Table 3 is computed over the manually annotated set of 1500 queries and does not reflect the true distribution of intents in the wild. An analysis of the true distribution of intents has been carried out in Section 4.

In Table 4, we show a comparison of user search intent taxonomies as developed in prior works including general web search [5, 20], product search within e-commerce search engines [21], decision making by consumers for buying goods and services [23] and search in the context of interactive applications [8]. We observe significant overlap in the taxonomy of all these search intents. Our newly introduced product search intent categories, namely comparison and support overlap with the *evaluation of alternatives* and *post purchase behaviour* from the buyer decision process [23].

Figure 1: Feature distribution across different intents.

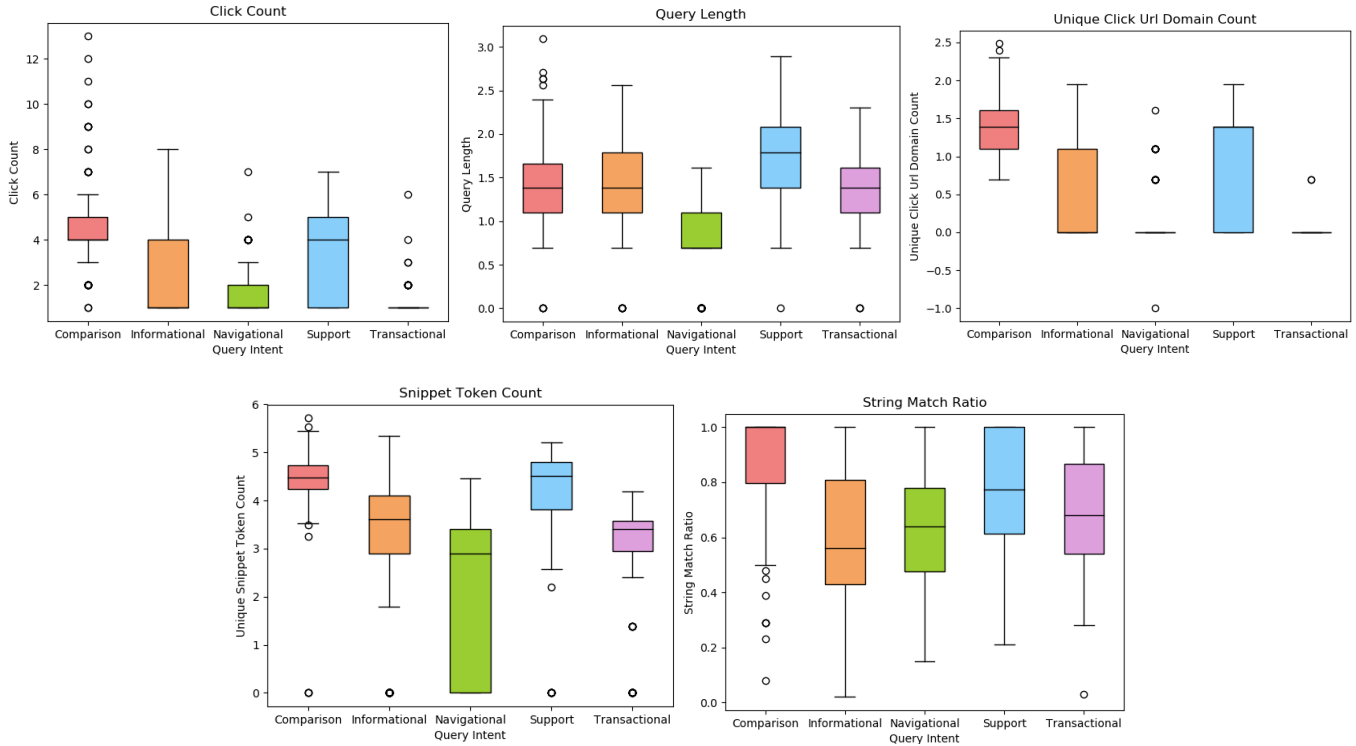

3.4 Intent Classification

Given the set of 1500 manually annotated queries with product search intents, we aim to train machine learning models to automatically perform intent classification of user queries.

Features and preliminary analysis: We use the following query log features for intent classification. Figure 1 shows a distribution of these features over different intent categories in our labeled data.

- Query embeddings:** Average of the individual (wordpiece tokenized) word embeddings from pre-trained Word2Vec [17] model.
- Url embeddings:** Similar to query embeddings, we tokenize and aggregate the word embeddings for the clicked urls.
- Click Count:** Number of urls the user has clicked on. From Figure 1, we observe that Transactional queries mostly have a single click depicting a crisp user objective. Navigational queries have one or two clicks where the user can easily recognize the website they want to navigate to from the suggestions. On the other hand, Support, Comparison and Informational queries tend to have a much higher click count since these intents are more exploratory in nature.
- Query length:** Number of tokens present in the query string. From Figure 1, we observe that Navigational queries are significantly shorter in length; whereas queries with Support intent are significantly longer as they tend to be more descriptive.
- Snippet token count:** Number of tokens present in the click snippets. From Figure 1, we observe that the number of

snippet tokens is much higher for Support, Comparison and Informational queries, since the clicked websites have much higher textual content when compared to Navigational and Transactional queries.

- Url domain count:** Number of unique domains in the clicked urls. From Figure 1, we observe that the count is at most two for Navigational queries as the user knows which website they want to navigate to. The url domain count is much higher for Comparison queries as the user compares the product feature or price across multiple websites. Similarly, Informational and Support queries are more exploratory in nature.
- Similarity:** Ratio of unique tokens that are present in the query string to those in the clicked urls. This ratio is higher for Support queries where the query and clicked urls are more descriptive of the issue the user is facing. Similarly, for Comparison queries most of the query tokens are contained in the clicked urls. Navigational and Transactional queries tend to be much shorter resulting in a low ratio. Similarly, Informational queries are more exploratory in nature and have a low ratio.

Model: For each intent, we use 80% of the labeled data for training, 20% for test and report five fold cross validation results. We train different classification models and evaluate them based on accuracy, precision, recall and F_1 scores, as reported in Table 5. We observe that Linear Support Vector Machines perform the best across all the classes with an overall accuracy of 77% and F_1 score of 78%.

Table 5: Comparison of various models for intent classification with five-fold cross validation.

Classifier	Test Accuracy	Comparison			Informational			Navigational			Support			Transactional		
		P	R	F1	P	R	F1	P	R	F1	P	R	F1	P	R	F1
Random Forest	64.67	75	88	81	48	49	48	74	71	73	67	64	65	65	53	58
Linear SVM	77.17	91	84	88	69	70	70	78	81	79	75	75	75	76	78	77
Gaussian SVM	70.65	66	95	78	72	42	53	67	81	73	79	86	83	75	77	76
K-Nearest Neighbors	74.45	83	70	76	57	53	55	62	86	72	51	71	60	96	66	78

Table 6: Comparison of product intent metrics.

Intent	Success Rate (%)	Popularity (%)	Estimated Effort (Relative Scale)
Comparison	61.31	0.27	1
Informational	70.97	21.72	1.7
Navigational	77.28	25.71	2.63
Support	68.95	1.28	1.44
Transactional	64.69	51.03	1.43

4 QUERY INTENT ANALYSIS


We apply the best intent classification model (linear SVM) from the previous section to analyze the product queries (described in Section 3.1) based on several measures like popularity, success rate and effort estimation. We also do a session-wise analysis to gain insights on what intents co-occur within a given session.

Intent success rate: A search is said to be successful if the user spends more than 30 seconds on the clicked url page as per a study in [9]. Since a user may click on multiple urls during product search, we consider a search to be successful if the dwell time on the last clicked url is more than 30 seconds. From Table 6, we observe that Navigational queries have the highest success rate of 77.28% whereas Comparison queries are least successful.

Intent popularity is calculated as the percentage of product queries having a specific intent out of all query intents. From Table 6 we observe that the most popular intent is Transactional followed by Navigational; whereas Comparison and Support queries are less popular ones.

Intent Effort Estimation: The effort taken to complete a search is proportional to the dwell time. The values are then transformed to be relative to the comparison intent. From Table 6, we observe that the effort put into Comparison, Support and Transactional query is much less compared to that for Informational and Navigational query. This results from the former intents (e.g., queries like 'skype vs microsoft teams' and 'iphone x price') being more task-specific compared to the latter exploratory intents (e.g., queries like 'sprinkler system design' and 'alexa apps').

Intent Co-occurrence: We analyzed the temporal co-occurrence of different intents in a given session aggregated across all the sessions. From Figure 2 we observe that while less than 1% of Comparison and Support queries are preceded by other intents, 56% of the Transactional queries are preceded by Comparison queries indicating that many users indeed compare products before making a purchase. Comparison is also often followed by Informational (41%) queries depicting that the user is looking for more information about a product after shortlisting the choice. Another interesting insight we observed is that Support queries are commonly followed

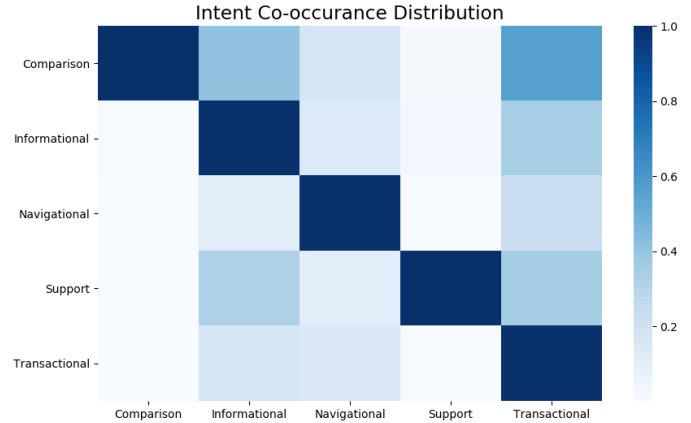Figure 2: Intent Co-occurrence Distribution.

by Informational (33%) and Transactional (36%) queries indicating that users seek additional information to help understand the solution (i.e. troubleshoot) or purchase a replacement for the product.

5 CONCLUSION

In this work, we performed an extensive study to characterize product search queries and their intents from query log analysis of Bing web search engine. This is in contrast to prior work that heavily focused on e-commerce search engines with limited diversity of product search intents. We developed the product query intent taxonomy for web search and trained machine learning models with a judicious selection of features from search engine and query context to automatically identify product search intents. We applied our intent classification models to large-scale query logs and reported our findings from the intent distribution analysis.

REFERENCES

- [1] Amazon.com. 2019. Overview of Categories - Amazon Seller Central. https://sellercentral.amazon.com/gp/help/external/G200332540?language=en_US
- [2] Chetan Bansal, Pantazis Deligiannis, Chandra Maddila, and Nikitha Rao. 2020. Studying Ransomware Attacks Using Web Search Logs. *arXiv:cs.CR/2005.00517*
- [3] Chetan Bansal, Thomas Zimmermann, Ahmed Hassan Awadallah, and Nachiappan Nagappan. 2019. The Usage of Web Search for Software Engineering. *arXiv preprint arXiv:1912.09519* (2019).
- [4] David M Blei, Andrew Y Ng, and Michael I Jordan. 2003. Latent dirichlet allocation. *Journal of machine Learning research* 3, Jan (2003), 993–1022.
- [5] Andrei Broder. 2002. A Taxonomy of Web Search. *SIGIR Forum* 36 (2002).
- [6] Stevie Chancellor and Scott Counts. 2018. Measuring Employment Demand Using Internet Search Data. In *CHI 2018*.
- [7] Joseph L Fleiss. 1971. Measuring nominal scale agreement among many raters. *Psychological bulletin* 76, 5 (1971), 378.
- [8] Adam Fourney, Richard Mann, and Michael Terry. 2011. Characterizing the usability of interactive applications through query log analysis. *CHI - Proceedings*.

- [9] Steve Fox, Kuldeep Karnawat, Mark Mydland, Susan Dumais, and Thomas White. 2005. Evaluating implicit measures to improve web search. *ACM Transactions on Information Systems (TOIS)* 23, 2 (2005), 147–168.
- [10] Google.com. 2019. About Shopping campaigns and Shopping ads - Google Ads Help. <https://support.google.com/google-ads/answer/2454022?hl=en>
- [11] Yangyang Guo, Zhiyong Cheng, Liqiang Nie, Xin-Shun Xu, and Mohan Kankanhalli. 2018. Multi-modal preference modeling for product search. In *2018 ACM Multimedia Conference on Multimedia Conference*. ACM, 1865–1873.
- [12] Jim Jansen, Danielle Booth, and Amanda Spink. 2008. Determining the Informational, Navigational, and Transactional Intent of Web Queries. *Information Processing & Management* 44 (05 2008), 1251–1266.
- [13] Xiao Li, Ye-Yi Wang, and Alex Acero. 2008. Learning query intent from regularized click graphs. In *SIGIR - Proceedings*. ACM, 339–346.
- [14] Joseph Lilleberg, Yun Zhu, and Yanqing Zhang. 2015. Support vector machines and word2vec for text classification with semantic features. In *ICCI* CC*. IEEE.
- [15] Bo Long, Jiang Bian, Anlei Dong, and Yi Chang. 2012. Enhancing product search by best-selling prediction in e-commerce. In *CIKM Proceedings*. ACM, 2479–2482.
- [16] Manufacturing.Net. 2019. The Rise Of E-Commerce In The United States. <https://www.manufacturing.net/data-focus/2018/05/rise-e-commerce-united-states>
- [17] Tomas Mikolov, Ilya Sutskever, Kai Chen, Greg Corrado, and Jeffrey Dean. 2013. Distributed Representations of Words and Phrases and Their Compositionality. In *NIPS'13 - Proceedings (Volume 2)*. USA.
- [18] Wendy Moe. 2003. Buying, Searching, or Browsing: Differentiating Between Online Shoppers Using In-Store Navigational Clickstream. *Journal of Consumer Psychology - J CONSUM PSYCHOL* 13 (03 2003), 29–39. https://doi.org/10.1207/S15327663JCP13-1&2_03
- [19] Michael Paul, Ryen White, and Eric Horvitz. 2015. Diagnoses, Decisions, and Outcomes: Web Search as Decision Support for Cancer. 831–841.
- [20] Daniel E. Rose and Danny Levinson. 2004. Understanding User Goals in Web Search.
- [21] Ning Su, Jiyin He, Yiqun Liu, Min Zhang, and Shaoping Ma. 2018. User intent, behaviour, and perceived satisfaction in product search. In *WSDM*. ACM.
- [22] Duyu Tang, Furu Wei, Nan Yang, Ming Zhou, Ting Liu, and Bing Qin. 2014. Learning sentiment-specific word embedding for twitter sentiment classification. In *ACL - Proceedings (Volume 1: Long Papers)*. 1555–1565.
- [23] Wikipedia. 2020. Buyer decision process. https://en.wikipedia.org/wiki/Buyer_decision_process
- [24] Yonghui Wu, Mike Schuster, Zhifeng Chen, and Quoc V. Le et al. 2016. Google's Neural Machine Translation System: Bridging the Gap between Human and Machine Translation. *CoRR* (2016). arXiv:1609.08144