
Application Notes

EDGE COVID-19: A Web Platform to generate submission-ready genomes from SARS-CoV-2 sequencing efforts

Chien-Chi Lo^{1*}, Migun Shakya¹, Karen Davenport, Mark Flynn, Adán Myers y Gutiérrez, Bin Hu, Po-E Li, Elais Player Jackson, Yan Xu, and Patrick S. G. Chain^{*}

Bioscience Division, Los Alamos National Laboratory, Los Alamos, New Mexico

¹Contributed equally to this work.

*To whom correspondence should be addressed.

Associate Editor: XXXXXXXX

Received on XXXXX; revised on XXXXX; accepted on XXXXX

Abstract

Genomics has become an essential technology for surveilling emerging infectious disease outbreaks. A wide range of technologies and strategies for pathogen genome enrichment and sequencing are being used by laboratories worldwide, together with different, and sometimes ad hoc, analytical procedures for generating genome sequences. As a result, public repositories now contain non-standard entries of varying quality. A standardized analytical process for consensus genome sequence determination, particularly for outbreaks such as the ongoing COVID-19 pandemic, is critical to provide a solid genomic basis for epidemiological analyses and well-informed decision making. To address this need, we have developed a bioinformatic workflow to standardize the analysis of SARS-CoV-2 sequencing data generated with either the Illumina or Oxford Nanopore platforms. Using an intuitive web-based interface, this workflow automates SARS-CoV-2 reference-based genome assembly, variant calling, lineage determination, and provides the ability to submit the consensus sequence and necessary metadata to GenBank or GISAID. Given a raw Illumina or Oxford Nanopore FASTQ read file, this web-based platform enables non-bioinformatics experts to automatically produce a SARS-CoV-2 genome that is ready for submission to GISAID or GenBank.

Availability: <https://edge-covid19.edgebioinformatics.org>; <https://github.com/LANL-Bioinformatics/EDGE/tree/SARS-CoV2>

Contact: Chien-Chi Lo (chienchi@lanl.gov) and Patrick Chain (pchain@lanl.gov)

Supplementary information: Supplementary data are available at *Bioinformatics* online.

1 Introduction

Public health laboratories and scientists around the world have been sequencing the genome of SARS-CoV-2, the etiological agent responsible for the COVID-19 pandemic. In just over a year, more than 1 million genomes have been sequenced and made publicly available via genome repositories, such as GISAID (Shu and McCauley, 2017) and GenBank (Clark, et al., 2016). Multiple sequencing platforms (Illumina, Oxford Nanopore, and PacBio) and experimental approaches are being used to obtain these genomes, including enriching for the virus before sequencing,

amplifying and sequencing overlapping genomic regions, or performing deep, random, ‘shotgun’ sequencing. While multiple strategies and platforms provide different trade-offs that can be tailored to address specific scientific questions, they complicate the development of a bioinformatic workflow that can process diverse input data to produce high quality genome sequences.

There are many available software options for each individual bioinformatic step in genome consensus generation, and often for each sequencing technology and/or approach. However, most of these can only be executed from the command-line in a Linux environment and are not readily available as an automated workflow. This accessibility barrier and

lack of standardization (e.g., on consensus base calling and thresholds for underlying read data), presents a major challenge to most bench scientists without extensive training in bioinformatics, and can result in *ad hoc* procedures for deciding the final genome sequence for an individual sample. Finally, the lack of automated genome sequence submission to public repositories results in paucity or delays in publicly available data, and increases the chance of introducing human errors that can further confound downstream analyses.

There is a need for a standardized, easy-to-use, GUI-based, bioinformatics application that help automate the routine, though complex, bioinformatics steps required to generate high quality genomes for submission to public repositories. Such an application would position labs with limited computational resources and bioinformatics expertise to perform their own analyses, while encouraging standardization of SARS-CoV-2 genome processing. To address this need, we developed EDGE COVID-19 (EC-19), a user-friendly, web-based platform that enables rapid, automated, and standardized processing of FASTQ read datasets from either Illumina or Oxford Nanopore (ONT) platforms generated using either amplicon or random shotgun-based methods. The output of this workflow is a consensus genome, an inventory of all SNPs and variants, the predicted lineage of the consensus genome (Rambaut, et al., 2020), and metadata information sufficient for submitting genomes to GenBank, GISAID, and Sequence Read Archive (SRA). This platform is freely available as a Docker container for local installation and as a public web-service, where users can register for accounts, upload data, run analyses, and download results.

2 Design, Implementation, and Features

EC-19 is a tailored version of the more generic open-source, EDGE bioinformatics platform (Li, et al., 2017) that was developed to democratize genomic analysis and make complex bioinformatic tools available to non-experts. Although it includes portions of the original EDGE platform, EC-19 has been specifically customized to generate high-quality SARS-CoV-2 genomes from raw sequencing data.

EC-19 allows users to input their own Illumina or ONT sequencing FASTQ files, or identify datasets to be automatically obtained from the INSDC (International Nucleotide Sequence Database Collaboration) raw read repositories. The default workflow (**Figure 1**) includes quality control, mapping reads to a SARS-CoV-2 reference genome, removal of primer sequences, generation of consensus genomes, variant calling, and the ability to take sample metadata and automatically deposit genomes to GISAID and GenBank, and raw reads to INSDC. A slightly modified SARS-CoV-2 Wuhan Hu-1 NCBI RefSeq genome, [NC_045512.2](https://www.ncbi.nlm.nih.gov/nuccore/NC_045512.2) (33 poly-A tail nucleotides from the 3' end of the genome are removed) is used as the reference by default (Wu, et al., 2020). Users are allowed to specify additional SARS-CoV-2 genome references available from GenBank, or upload their own specific reference genome to generate a consensus genome. Additionally, to account for higher error rate in ONT data, particularly within homopolymeric nucleotide, we use a more stringent ONT-specific 60% threshold for detection of insertions/deletions (indels) (Cretu Stancu, et al., 2017; Rang, et al., 2018). Detailed parameters for each step can be found in the [online documentation](#), most of which are able to be modified by the users. The *de novo* assembly and annotation modules are disabled by default, as genome consensus generation from read alignment to a reference sequence has been the *de facto* standard approach to reconstructing highly similar genomes during current SARS-CoV-2 outbreak.

Outputs of the EC-19 workflow include statistics for quality control, read mapping, and consensus genome generation, as well as all original

output files from any tool used during the analysis. The integrated genome browser JBrowse (Buels, et al., 2016) enable a deeper, visual inspection of the underlying data. Finally, EC-19 provides an option for the automated submission of the consensus genome sequence GISAID and/or GenBank and raw data to SRA, which can be performed per genome or in batch mode after inspecting the results.

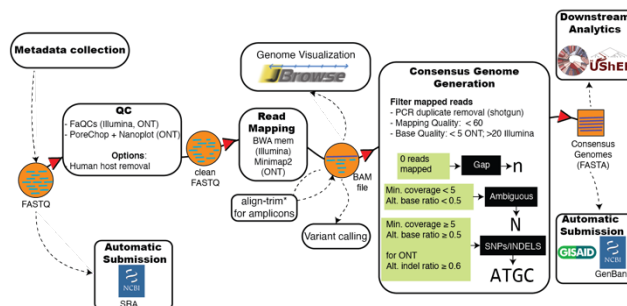


Figure 1: Overview of EDGE COVID-19 workflow. The workflow includes Quality Control (QC) and removal of low quality data in raw reads (FaQCs v2.09 (Lo and Chain, 2014), Porechop v0.2.3 (Wick, et al., 2017)), mapping reads to a SARS-CoV-2 reference genome sequence using BWA v0.7.12 (Li and Durbin, 2009) (default for Illumina) or minimap2 v2.17 (Li, 2018) (default for ONT), removing primer sequences (modified ver. of *align_trim* for genomes sequenced using amplicon-based enrichment strategies (like ARTIC (Tyson, et al., 2020), SWIFT, CDC-SC2 (Paden, et al., 2020), etc.), generation of consensus genomes, variant calling (using SAMtools v1.10 and BCFtools v1.10.2 (Li, 2011), lineage call using Pangolin v3.1.3, and phylogenetic placement using UsheR v0.3.1. Dotted line indicates optional steps. More details at: https://edge-covid19.edgebioinformatics.org/docs/EDGE_COVID-19_guide.pdf

3 Genome Processing

Dozens of SARS-CoV-2 genomes sequenced as part of a surveillance program in New Mexico, USA have been successfully processed and submitted to both GISAID and GenBank genome repositories using EC-19 (**Supplementary Table 1**). Individual samples were sequenced using either ONT or Illumina platforms with either the ARTIC or SWIFT PCR enrichment protocols. The EC-19 results can also be accessed from the public project list on the EC-19 website (<https://edge-covid19.edgebioinformatics.org/>).

4 Conclusion

While the SARS-CoV-2 pandemic has both highlighted the utility of genome sequencing and our collective ability to generate enormous numbers of genomes during an outbreak, it is often unclear how individual genome sequences have been generated and how much confidence to assign to consensus sequences, in part or in whole. This is rendered enormously complex by the number of different sequencing protocols available, the number of different sequencing technologies used, the number of different bioinformatics strategies being applied, and the number of different labs (with diverse expertise and experience with genomics) generating the data. Efforts such as the EC-19 web platform are meant to lower the barrier for submitting genomes for public use, while helping to standardize and generate high quality genomes. EC-19 produces submission-ready, high-quality genomes from raw Illumina or

Article short title

ONT FASTQ data generated using a range of enrichment protocols and provides a potential solution to democratizing genomic surveillance capabilities for the global community by using a robust suite of standardized bioinformatics workflows in a user-friendly web browser. The EC-19 source code is being actively maintained and developed, with a commitment to adopting community-agreed upon standards (such as those being discussed and implemented within the SPHERES consortium). While this workflow is an example for standardized generation of viral consensus genomes, it is clear that adoption of this type of standardized workflow by the scientific and public health communities during an outbreak would facilitate the timely downstream use and interpretation of outbreak genomes.

Acknowledgements

Funding

The development of the EC-19 and the EDGE platform is supported by the Los Alamos National Laboratory LDRD (20200732ER), DTRA (CB10152 and CB10623), and DOE (KP160101 and 4000150817).

Conflict of Interest: none declared.

References

Buels, R., *et al.* JBrowse: a dynamic web platform for genome visualization and analysis. *Genome Biol* 2016;17:66.

Clark, K., *et al.* GenBank. *Nucleic Acids Res* 2016;44(D1):D67-72.

Cretu Stancu, M., *et al.* Mapping and phasing of structural variation in patient genomes using nanopore sequencing. *Nat Commun* 2017;8(1):1326.

Li, H. A statistical framework for SNP calling, mutation discovery, association mapping and population genetical parameter estimation from sequencing data. *Bioinformatics* 2011;27(21):2987-2993.

Li, H. Minimap2: pairwise alignment for nucleotide sequences. *Bioinformatics* 2018;34(18):3094-3100.

Li, H. and Durbin, R. Fast and accurate short read alignment with Burrows-Wheeler transform. *Bioinformatics* 2009;25(14):1754-1760.

Li, P.E., *et al.* Enabling the democratization of the genomics revolution with a fully integrated web-based bioinformatics platform. *Nucleic Acids Res* 2017;45(1):67-80.

Lo, C.C. and Chain, P.S. Rapid evaluation and quality control of next generation sequencing data with FaQCs. *BMC Bioinformatics* 2014;15:366.

Paden, C.R., *et al.* Rapid, Sensitive, Full-Genome Sequencing of Severe Acute Respiratory Syndrome Coronavirus 2. *Emerg Infect Dis* 2020;26(10):2401-2405.

Rambaut, A., *et al.* A dynamic nomenclature proposal for SARS-CoV-2 lineages to assist genomic epidemiology. *Nat Microbiol* 2020;5(11):1403-1407.

Rang, F.J., Kloosterman, W.P. and de Ridder, J. From squiggle to basepair: computational approaches for improving nanopore sequencing read accuracy. *Genome Biol* 2018;19(1):90.

Shu, Y. and McCauley, J. GISAID: Global initiative on sharing all influenza data - from vision to reality. *Euro Surveill* 2017;22(13).

Tyson, J.R., *et al.* Improvements to the ARTIC multiplex PCR method for SARS-CoV-2 genome sequencing using nanopore. *bioRxiv* 2020.

Wick, R.R., *et al.* Completing bacterial genome assemblies with multiplex MinION sequencing. *Microb Genom* 2017;3(10):e000132.

Wu, F., *et al.* A new coronavirus associated with human respiratory disease in China. *Nature* 2020;579(7798):265-269.