

Low-Resource Neural Machine Translation for Southern African Languages

Evander Nyoni^a and Bruce A. Bassett^{a,b,c}

^aAfrican Institute for Mathematical Sciences, 6 Melrose Road, Muizenberg, 7945, South Africa

^bDepartment of Maths and Applied Maths, University of Cape Town, Cape Town, South Africa

^cSouth African Astronomical Observatory, Observatory, Cape Town, 7925, South Africa

Abstract

Low-resource African languages have not fully benefited from the progress in neural machine translation because of a lack of data. Motivated by this challenge we compare zero-shot learning, transfer learning and multilingual learning on three Bantu languages (Shona, isiXhosa and isiZulu) and English. Our main target is English-to-isiZulu translation for which we have just 30,000 sentence pairs, 28% of the average size of our other corpora. We show the importance of language similarity on the performance of English-to-isiZulu transfer learning based on English-to-isiXhosa and English-to-Shona parent models whose BLEU scores differ by 5.2. We then demonstrate that multilingual learning surpasses both transfer learning and zero-shot learning on our dataset, with BLEU score improvements relative to the baseline English-to-isiZulu model of 9.9, 6.1 and 2.0 respectively. Our best model also improves the previous SOTA BLEU score by more than 10.

1 Introduction

Machine translation (MT) is the automation of text (or speech) translations from one language to another, by a software. The rise of MT commenced sometime in the mid-twentieth century (Weaver, 1955) and has since the early 1900s experienced rapid growth due to the increase in the availability of parallel corpora and computational power (Marino et al., 2006). Subject to the inception of neural machine translation (NMT) (Sutskever et al., 2014; Bahdanau et al., 2014), MT has seen substantial advancements in translation quality as modern MT systems draw closer and closer to human translation quality. Notwithstanding the progress achieved in the domain of MT, the idea of NMT system development being data-hungry remains a significant challenge in expanding this work to low resource languages.

Unfortunately, most African languages fall under the low-resourced group and as a result, MT of these languages has seen little progress. Irrespective the great strategies (or techniques) that have been developed to help alleviate the low resource problem, African languages still have not seen any substantial research or application of these strategies (Orife et al., 2020). With a considerable number of African languages being endangered (Eberhard et al., 2019), this shows that these languages are in dire need of MT translation tools to help save them from disappearing. In other words, this poses a challenge to the African community of NLP practitioners.

This paper examines the application of low-resource learning techniques on African languages of the Bantu family. Of the three Bantu languages under consideration, isiZulu, isiXhosa and Shona, the first two fall under the Nguni language subclass indicating a close relationship between the two, as shown in Figure 1. Shona is not closely related to the Nguni language sub-class (Holden and Mace, 2003). Comparing MT on these three gives us the opportunity to explore the effect of correlations and similarities between languages. We give a comparative analysis of three learning protocols, namely, *transfer learning*, *zero-shot learning* and *multilingual modeling*.

Our experiments indicate the tremendous opportunity of leveraging the inter-relations in the Bantu language sub-classes, to build translation systems. We show that with the availability of data, multilingual modeling provides significant improvements on baseline models. In the case of transfer learning, we show that language sub-class inter-relations play a major role in translation quality. Furthermore, we demonstrate that zero-shot learning only manages to surpass transfer learning when we employ a parent model that is distantly related to the task of interest.

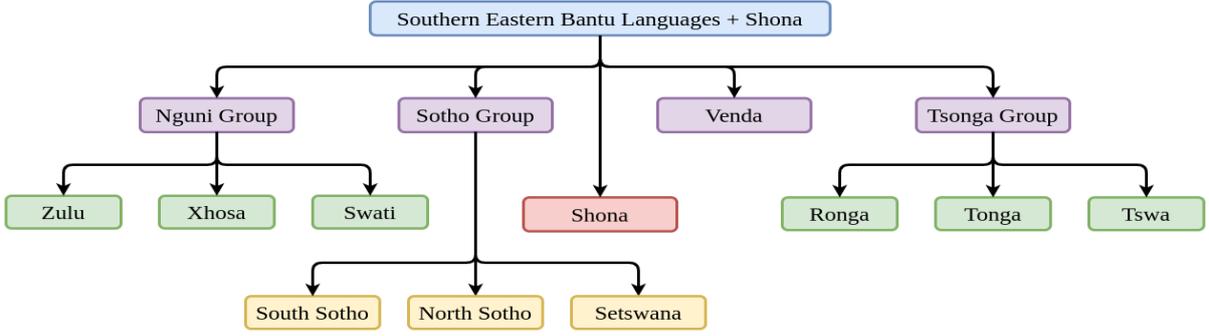


Figure 1: The language family tree of the South-Eastern Bantu languages including Shona. This tree demonstrates the relationship between languages with languages of the same subclass being closely related (Doke et al., 2014).

The following sections of this paper are presented as follows: in Section 2 we briefly review NMT and the main architecture we use in this work. Section 3 then gives a brief outline of the training protocols employed in this paper. Thereafter, we discuss the work that is related to this paper in Section 4. Section 6 discusses our experiments on the translation of English-to-Shona (E-S), English-to-isiXhosa (E-X), English-to-isiZulu (E-Z) and isiXhosa-to-isiZulu (X-Z). Finally, the results and conclusion of this work are outlined in Sections 7 and 8 respectively.

2 Background

Modern NMT models have the encoder-decoder mechanism (Sutskever et al., 2014) as the vanilla architecture. Given an input sequence $x = (x_1, \dots, x_S)$ and target sequence $y = (y_1, \dots, y_T)$. A NMT model decomposes the conditional probability distribution over the output sentences as follows:

$$p(y|x) = \prod_{t=1}^T p(y_t|y_{1:t-1}, x_{1:S}) \quad (1)$$

Jointly trained, the encoder-decoder mechanism learns to maximize the conditional log-likelihood

$$\max_{\theta} \frac{1}{|x|} \sum_{(x,y) \in D} \log p_{\theta}(y|x), \quad (2)$$

where D denotes the set of training pairs and θ the set of parameters to be learned.

Several encoder-decoder architectures have been developed and they each model the probability distribution $P(y_i|y_{1:i-1}, x)$ differently. For example, appertaining to the general encoder-decoder architecture by Sutskever et al. (2014), the introduction

of an encoder-decoder mechanism with attention (Bahdanau et al., 2014) has produced significant improvements on translation quality. The Bahdanau et al. (2014) architecture modifies the factorized conditional probability as follows:

$$\begin{aligned} p(y|x) &= \prod_{t=1}^T p(y_t|y_{1:t-1}, x_{1:S}) \\ &= \prod_{t=1}^T g(y_t|y_{1:t-1}, s_t, c(x)) \end{aligned} \quad (3)$$

where $g(\cdot)$ denotes the decoder which generates the target output in auto-regressive fashion, and s_t denotes decoder recurrent neural network (RNN) hidden state. The widely used RNN variants are the gated recurrent units (GRU) and the long term short term memory (LSTM) networks as these help mitigate the vanishing gradient problem (Pouget-Abadie et al., 2014). The encoder compresses the input sequence into a fixed length vector $c(x)$, which is widely known as the context vector. This vector is then relayed to the decoder, where it is taken in as input.

Attention-based models (Bahdanau et al., 2014; Chorowski et al., 2015; Luong et al., 2015b) have become the conventional architectures of most sequence to sequence transduction tasks. In the domain of NMT, the transformer model introduced by Vaswani et al. (2017) has become the vanilla architecture of NMT and has produced remarkable results on several translation tasks. In this work, we employ the transformer model in all our training protocols. The transformer architecture’s fundamental unit is the multi-head attention mechanism that is solely based on learning different sequence representations with its multiple attention heads.

The key aspect of the transformer architecture is its ability to jointly pay attention to or learn different sequence representations that belong to different sub-spaces of distinct positions. In other words, the transformer model focuses on learning pair relation representations which in turn are employed to learn the relations amongst each other. The multi-head attention mechanism consists of N attention layers such that for each head, the query and key-value pairs are first projected to some sub-space with some dense layers of sizes h_q , h_k , and h_v respectively. Suppose the query, key and value have dimensions n_q , n_k and n_v respectively, each attention head then maps the query and key-value pairs to some output $o^{(j)}$ as follows

$$o^{(j)} = \sigma(W_q^{(j)}q, W_k^{(j)}k, W_v^{(j)}v) \quad (4)$$

where σ is a dot-product attention function, $W_q^{(j)} \in \mathbb{R}^{h_q \times n_q}$, $W_k^{(j)} \in \mathbb{R}^{h_k \times n_k}$ and $W_v^{(j)} \in \mathbb{R}^{h_v \times n_v}$. Thereafter, the N outputs of length $h_q = h_v = h_k$ each, are then concatenated and fed to a dense layer of n_o hidden units, to produce a multi-head attention output

$$o = W_o \begin{bmatrix} o^{(1)} \\ \vdots \\ o^{(N)} \end{bmatrix} \quad (5)$$

where $W_o \in \mathbb{R}^{n_o \times N h_v}$. In all our training protocols (or experiments), we employ the transformer architecture with 6 encoder-decoder blocks, 8 attention heads, a 256-dimensional word representations, a dropout rate of 0.1 and positional feed-forward layers of 1024 inner dimension. Both learning rate schedules and optimization parameters are adopted from the work of Vaswani et al. (2017).

3 Training Protocols

All the training protocols employed in this paper are discussed in this section. For all our baseline models, we employ the conventional NMT training protocol as introduced by Sutskever et al. (2014).

3.1 Transfer learning

To formally define transfer learning we begin by introducing the nomenclature used in the definition. We define our pair $\mathcal{D} = \{\mathcal{X}, P(X)\}$ as the ‘‘domain’’, where the input feature space is denoted by \mathcal{X} and the marginal probability distribution over $X \in \mathcal{X}$ is denoted $P(X)$. Considering the domain \mathcal{D} , we define our learning ‘‘task’’ as the pair

$\mathcal{T} = \{\mathcal{Y}, f(\cdot)\}$ where \mathcal{Y} denotes the target feature space with $f(\cdot)$ the denoting the target predictive function, for example the conditional distribution $P(y|x)$.

Definition 1 *Accorded with a source and target domain \mathcal{D}_S and \mathcal{D}_T respectively, along with their respective tasks \mathcal{T}_S and \mathcal{T}_T . Provided that either $\mathcal{D}_S \neq \mathcal{D}_T$ or $\mathcal{T}_S \neq \mathcal{T}_T$, transfer learning intends to better the predictive function $f_T(\cdot)$ by leveraging the learned representations in domain \mathcal{D}_S and task \mathcal{T}_S .*

The transfer learning definition above is conditioned on one of two scenarios: the first being that the source domain \mathcal{D}_S and target domain \mathcal{D}_T are not equal, $\mathcal{D}_S \neq \mathcal{D}_T$, which implies that either the source task input feature space and target task input feature space are dissimilar, $\mathcal{X}_S \neq \mathcal{X}_T$, or the source and target domain’s marginal probability distributions are dissimilar $P_S(X) \neq P_T(X)$. The second condition states that the source and target tasks are not similar, $\mathcal{T}_S \neq \mathcal{T}_T$, which suggests that either the two target feature spaces are dissimilar $\mathcal{Y}_S \neq \mathcal{Y}_T$ or it could be that the two target predictive functions are dissimilar $P(Y_S|X_S) \neq P(Y_T|X_T)$. In simple terms, transfer learning is an ingenious performance improvement technique of training models by transferring knowledge gained on one task to a related task, especially those with low-resources. (Torrey and Shavlik, 2010).

3.2 Multilingual learning

Multilingual NMT is a quintessential method of mapping to and from multiple languages and was first suggested by Dong et al. (2015) with a one-to-many model. Thereafter, this technique was extended to performing many-to-many translations contingent of a task-specific encoder-decoder pair (Luong et al., 2015a; Firat et al., 2016b). Afterwards, a single encoder-decoder architecture for performing many-to-many translations was developed (Johnson et al., 2017; Ha et al., 2017) by adding a target language specific token at the beginning of each input sequence. In this paper we employ this many-to-many translation technique.

Definition 2 *Given a training tuple (x_i, y_j) where $i, j \in \{1, \dots, T\}$, the multilingual model’s task is to translate source language i to target language j . It then follows that the model’s objective is to maximize the log-likelihood over all the training sets $D_{i,j}$ appertaining to all the accessible language*

pairs \mathcal{S} :

$$\max_{\theta} \frac{1}{|\mathcal{S}| \cdot |D_{i,j}|} \sum_{(x_i, y_j) \in \mathcal{D}_{i,j}, (i,j) \in \mathcal{S}} \log p_{\theta}(y_j | x_i, j^*), \quad (6)$$

where j^* denotes the target language ID.

The main advantage of a multilingual model is that it leverages the learned representations from individual translation pairs. In other words, the model learns a universal representation space for all the accessible language pairs, which promotes translation of low-resource pairs (Firat et al., 2016a; Gu et al., 2018).

3.3 Zero-shot learning

In addition to facilitating low-resource translations, the universal representation space in multilingual models also facilitates *zero-shot learning*, an extreme variant of transfer learning. First proposed by Johnson et al. (2017) and Ha et al. (2017), who demonstrated that multilingual models can translate between untrained language pairs by leverage the universal representations learned during the training process. Adopting the definitions of a task and domain described in Section 3.1, we give a formal definition of zero-shot learning as follows:

Definition 3 *Accorded with source domain $\mathcal{D}_S = \{\mathcal{X}_S, P(X_S)\}$ and the respective task $\mathcal{T}_S = \{\mathcal{Y}_S, P(Y_S|X_S)\}$ where \mathcal{X}_S and \mathcal{Y}_S denote the input and label feature spaces respectively. The objective of zero-shot learning is to estimate the predictive function or conditional probability distribution $P(Y_S|X_T)$, where X_T is the target task input feature space on which the source model has not been trained.*

4 Related work

Notwithstanding the tremendous achievements in the domain of MT, the few publications on MT of African languages bears testament to little growth of this area. The earliest notable work on MT of African languages was done by Wilken et al. (2012), where they demonstrated that phrase-based SMT was a promising technique of translating African languages using a English-Setswana language pair. Wolff and Kotzé (2014) extended this technique to a E-Z pair, however they employed isiZulu syllables as their source tokens and this modification proved to be efficient as it improved the results by 12.9%. van Niekerk (2014) employed unsupervised word segmentation coupled

with phrase-based SMT to translate English to Afrikaans, Northern-Sotho, Tsonga and isiZulu. In their final analysis, the authors found their experiment to be efficient only for Afrikaans and isiZulu datasets, with a SOTA BLEU of 7.9 for the isiZulu translations of none biblical corpora.

Abbott and Martinus (2018) adopted NMT to the translation of English to Setswana where they demonstrated that NMT outperformed the previous SMT (Wilken et al., 2012) model by 5.33 BLEU. The findings of Abbott and Martinus (2018) prompted opportunities of extending NMT to other African languages. Martinus and Abbott (2019) proposed a benchmark of NMT for translating English to four of South Africa’s official languages, namely isiZulu, Northern Sotho, Setswana and Afrikaans.

Transfer learning has been widely used on non African languages. Zoph et al. (2016) investigate the effects of transfer learning in a scenario where the source task (or parent model) is based on a high resource language. This source model is then used to train the target task (or child model). Closely related to the work of Zoph et al. (2016) is Nguyen and Chiang (2017) who perform transfer learning on closely related languages. Furthermore, in the work of Nguyen and Chiang (2017), the authors use a low resource languages as a source model which makes their work closely related to this paper. The main difference being that our work is on African languages.

Similarly, zero-shot learning and multilingual modeling have largely been applied on non African languages. For example, both Johnson et al. (2017) and Ha et al. (2017) applied zero shot learning on languages that are not from Africa. In their work (Johnson et al. (2017) and Ha et al. (2017)), they show that multilingual systems can perform translation between language pairs that have not been encountered during training. In this work, we seek to leverage these techniques (multilingual and zero-shot learning) on South-Eastern Bantu languages. The applications of zero-shot learning and transfer multilingual learning in this work are closely related to the work of Lakew et al. (2018) and Johnson et al. (2017), with the major difference being that this work applies these techniques to low-resource south-eastern Bantu languages.

	E-S	E-Z	E-X	X-Z
Sentence count	77 500	30 253	128 342	125 098
Source token count	7 588	4 649	10 657	27 144
Target token count	16 408	9 424	33 947	25 465

Table 1: Summary statistics for our four language pairs. The number of examples in each language is denoted by the sentence count. The number of words in the discrete source languages is denoted by the source sentence token count. Likewise, the word count in the respective target languages is denoted by the target token count.

	E-S	E-Z	E-X	X-Z
Train	54 250	21 177	88 192	87 570
Valid	11 625	4 538	20 075	18 765
Test	11 625	4 538	20 075	18 763

Table 2: Summary statistics for the number of examples per partition. We split our data into validation, test and set based on a ratio of 3:3:14 respectively. The sum of examples per language pair can be obtained by adding the train, validation and test set examples count, respectively.

5 Our data

Our datasets comprise of parallel texts obtained from [orpus corpus \(2019\)](#), [omniglot encyclopedia \(2020\)](#), [linguanaut phrases center \(2019\)](#) and the [wild coast xhosa phrase book \(2019\)](#). As in the case of most machine learning problems, this work included data cleaning, a crucial part of developing machine learning algorithms. The cleaning involved decomposition of contractions, shortening the sequences, manually verifying some of the randomly selected alignments and dropping all duplicate pairs to curb data leakage. We also decomposed contractions and performed subword level tokenization. The datasets comprise of four language pairs, namely E-S, E-X, E-Z and X-Z. Table 1 gives a summary of the data-set sizes and token count per language pair. We split our data-sets into train, validation and test sets at a ratio of 14 : 3 : 3 respectively, as shown in Table 2.

6 Experiments

For all our training pairs, we train ten transformer models with unique initialization parameters each and take the mean BLEU along with its standard deviation as the final result. We examine the effects of language similarity when performing transfer learning by using E-X and E-S source models to perform on transfer learning on a E-Z task. In this case the similar languages are isiXhosa and isiZulu while on the other hand Shona is the distant lan-

guage, though still a Bantu language like the other two. We start of by training the base model or source model on a large data-set, for example the E-X pairs. Thereafter we initialize our target model with the source model, whereby the target model is to be trained on a low resourced pair. In other words, instead of starting the target model’s training procedure from scratch we leverage the source model’s weights to initialize the target model without freezing any of the architecture’s layers.

The rationale behind this knowledge transfer technique being that in a case where one is faced with few training examples, they can make the most of a prior probability distribution over the model space. Taking the base model (trained on the larger data-set) as the anchor point, the apex of the prior probability distribution belonging to the model space. In setting the base model as the anchor point, the model adapts all the parameters that are useful in both tasks. For example, in the E-S and E-Z tasks, all the source task input language embeddings are adopted to the target task while target language embeddings are modified at training.

To compare the performance of transfer learning, multilingual leaning and zero-shot learning we train a many-to-many multilingual model that translates E-X, X-Z and E-Z language pairs. The zero-short learning model is trained on E-X and X-Z language pairs.

7 Results

Our experimental findings are summarized in Table 3. We obtain the highest baseline BLEU of 34.9 ± 2.5 on the X-Z model, followed by the E-X model with 20.9 ± 1.4 BLEU. On the E-S and E-Z baseline models, we obtained 16.5 ± 0.8 and 8.7 ± 0.3 BLEU, respectively. As expected, the X-Z language pair had the highest score, mainly owing to the vocabulary overlap between the source language and target language, evidenced by both languages falling under the Nguni sub-class. All

Model type	E-Z	E-X	X-Z	E-S	E-Z Gain
Baseline	8.7 \pm 0.3	20.9 \pm 1.4	34.9 \pm 2.5	16.5 \pm 0.8	-
Multilingual _A	18.6 \pm 1.0	18.5 \pm 1.2	30.4 \pm 1.5	-	9.9 \pm 1.0
Multilingual _B	6.0 \pm 0.3	-	-	14.3 \pm 0.2	-2.7 \pm 0.4
Multilingual _C	14.6 \pm 0.2	18.7 \pm 0.8	-	-	5.9 \pm 0.3
Transfer learning E-X _{parent}	14.8 \pm 0.2	-	-	-	6.1 \pm 0.4
Transfer learning E-S _{parent}	9.6 \pm 0.7	-	-	-	0.9 \pm 0.8
Zero-shot learning	10.6 \pm 0.2	18.1 \pm 1.5	34.0 \pm 2.4	-	2.0 \pm 0.4

Table 3: BLEU scores for the baseline, transfer learning, multilingual and zero-shot learning for the language pairs built from English (E), Shona (S), isiXhosa (X), isiZulu (Z). The gains are calculated only for English-to-isiZulu (E-Z), our target pair. Error bars are given by the standard deviations from ten separate re-training of the models in each case. Zero-shot learning applies only to E-Z, built from a multilingual E-X & X-Z model.

three Nguni languages have a lot of vocabulary in common.

From the multilingual results, we note that though with some loss in performance, the multilingual model closely resembles the E-X and X-Z baseline model results. The average BLEU loss for the E-X and X-Z pairs is approximately 2.4 ± 1.8 and 4.5 ± 3 , respectively. This loss is perhaps due to the complexity of learning shared representations across all language pairs. On the other hand, the E-Z pair obtained a BLEU gain of 9.9 ± 1.0 , which is probably a consequence of isiZulu and isiXhosa target languages having significant overlap in vocabulary. As a result, the model’s decoder utilizes the learned representations from the target language with more training examples (isiXhosa in this case) to improve the translations with lower training examples (isiZulu in this case).

We train the two transfer learning models on a E-Z task, one with the E-X model as the source model and the other with the E-S source model. The transfer learning results show that both source models do improve the BLEU for the E-Z target task, with the greatest improvement coming from the source task that is more closely related to the target task. In our experiments, the E-X task is more closely related to the target task E-Z. The E-S and E-X parent (or source) models had 6.6 and 0.9 BLEU improvements, respectively. These results indicate that the E-X parent model surpassed the E-S model by a significant margin. To be precise, the E-X gain was 5.2 ± 0.7 BLEU higher than the E-S model.

Compared to the multilingual model, the E-X parent model had 3.8 ± 1.1 less BLEU. The E-S parent model on the other hand had 9 ± 1.3 less BLEU than multilingual model. These results suggest that with the necessary data available, many to

many multilingual modeling is the favourable translation technique. Especially in the case of Southern African languages that have sub-classes with a lot of vocabulary in common. For example, the Nguni, Sotho and Tsonga language sub-classes as shown in Figure 1.

To perform zero-shot learning, we train our multilingual model on the E-X and X-Z language pairs. The E-X zero-shot preliminary results were 18.1 ± 1.5 BLEU, which indicates a 2.8 ± 2.1 loss in BLEU. Similarly, this model produced a BLEU of 34.0 ± 2.4 on the X-Z language pair, indicating a 0.9 ± 3.5 loss in BLEU. On the zero-shot learning task, we recorded a score of 10.6 ± 0.2 , which is approximately 2.0 ± 0.4 BLEU greater than the baseline model. Overall, multilingual learning performs better than transfer learning and zero-shot learning. Second to multilingual learning, transfer learning proved to be an efficient technique only when we employ a parent model with a target language of the same sub-class as the target language in the target task. This is evidenced by the zero-shot learning model obtaining 1.0 ± 0.7 BLEU more than the transfer learning model with E-S model as the parent model.

8 Conclusion

This work examines the opportunities in leveraging low resource translation techniques in developing translation models for Southern African languages. We focus on English-to-isiZulu (E-Z) as it is the smallest of our corpora with just 30,000 sentence pairs. Using multilingual English-isiXhosa-isiZulu learning we achieve a BLEU score for English-to-isiZulu of 18.6 ± 1.0 , more than doubling the previous state-of-the-art and yielding significant gains (9.9 in BLEU score) over the baseline English-to-

isiZulu transformer model. Multilingual learning for this dataset outperforms both transfer learning and zero-shot learning, though both of these techniques are better than the baseline mode, with BLEU score gains of 6.1 and 2.0 respectively.

We further found that transfer learning is a highly effective technique for training low resource translation models for closely related South-Eastern Bantu languages. Using the English-to-isiXhosa baseline model, transfer learning to isiZulu had a BLEU score gain of 6.1 while using the English-to-Shona baseline model for transfer learning yielded no statistical significant gain at all (0.9 ± 0.8). Since isiXhosa is similar to isiZulu while Shona is quite different, this illustrates the performance gains that can be achieved by exploiting language inter-relationships with transfer learning, a conclusion further emphasised by the fact that zero-shot learning, in which no English-to-isiZulu training data was available, outperformed transfer learning using the English-to-Shona baseline model.

9 Acknowledgements

Our greatest appreciation goes to Jade Abbott and Herman Kamper for discussions and the African Institute for Mathematical Sciences (AIMS) and the National Research Foundation of South Africa, for supporting this work with a research grant. We further express our sincere gratitude to the South African Centre for High-Performance Computing (CHPC) for CPU and GPU cluster access.

References

- Jade Z Abbott and Laura Martinus. 2018. Towards neural machine translation for african languages. *arXiv preprint arXiv:1811.05467*.
- Dzmitry Bahdanau, Kyunghyun Cho, and Yoshua Bengio. 2014. Neural machine translation by jointly learning to align and translate. *arXiv preprint arXiv:1409.0473*.
- wild coast xhosa phrase book. 2019. Wild Coast Xhosa phrase book. <https://www.wildcoast.co.za/xhosa-phrasebook>. [Accessed: 10-October-2019].
- linguanaut phrases center. 2019. Linguanaut Foreign Language Learning, Copyright © 2013 Linguanaut. <http://www.linguanaut.com/index.htm>. [Accessed: 15-September-2019].
- Jan K Chorowski, Dzmitry Bahdanau, Dmitriy Serdyuk, Kyunghyun Cho, and Yoshua Bengio. 2015. Attention-based models for speech recognition. In *Advances in neural information processing systems*, pages 577–585.
- opus corpus. 2019. ORPUS corpus the open parallel corpus. <http://opus.nlpl.eu/>. [Accessed: 10-September-2019].
- Clement Martyn Doke, Benedict Wallet Vilakazi, DM Malcolm, and Mzilikazi Khumalo. 2014. *English-isiZulu/isiZulu-English Dictionary*. NYU Press.
- Daxiang Dong, Hua Wu, Wei He, Dianhai Yu, and Haifeng Wang. 2015. Multi-task learning for multiple language translation. In *Proceedings of the 53rd Annual Meeting of the Association for Computational Linguistics and the 7th International Joint Conference on Natural Language Processing (Volume 1: Long Papers)*, pages 1723–1732.
- Eberhard, David M., Gary F. Simons, and Charles D. Fennig. 2019. Ethnologue: Languages of the world. twenty-second edition. <https://www.ethnologue.com/guides/how-many-languages-endangered>. [Accessed: 19-September-2019].
- omniglot encyclopedia. 2020. Omniglot the online encyclopedia of writing systems and languages. <https://omniglot.com/language/phrases/zulu.php>. [Accessed: 10-May-2020].
- Orhan Firat, Kyunghyun Cho, and Yoshua Bengio. 2016a. Multi-way, multilingual neural machine translation with a shared attention mechanism. *arXiv preprint arXiv:1601.01073*.
- Orhan Firat, Baskaran Sankaran, Yaser Al-Onaizan, Fatos T Yarman Vural, and Kyunghyun Cho. 2016b. Zero-resource translation with multilingual neural machine translation. *arXiv preprint arXiv:1606.04164*.
- Jiatao Gu, Hany Hassan, Jacob Devlin, and Victor OK Li. 2018. Universal neural machine translation for extremely low resource languages. *arXiv preprint arXiv:1802.05368*.
- Thanh-Le Ha, Jan Niehues, and Alexander Waibel. 2017. Effective strategies in zero-shot neural machine translation. *arXiv preprint arXiv:1711.07893*.
- Clare Janaki Holden and Ruth Mace. 2003. Spread of cattle led to the loss of matrilineal descent in africa: a coevolutionary analysis. *Proceedings of the Royal Society of London. Series B: Biological Sciences*, 270(1532):2425–2433.
- Melvin Johnson, Mike Schuster, Quoc V Le, Maxim Krikun, Yonghui Wu, Zhifeng Chen, Nikhil Thorat, Fernanda Viégas, Martin Wattenberg, Greg Corrado, et al. 2017. Google’s multilingual neural machine translation system: Enabling zero-shot translation. *Transactions of the Association for Computational Linguistics*, 5:339–351.

- Surafel M Lakew, Marcello Federico, Matteo Negri, and Marco Turchi. 2018. Multilingual neural machine translation for low-resource languages. *IJCoL. Italian Journal of Computational Linguistics*, 4(4-1):11–25.
- Minh-Thang Luong, Quoc V Le, Ilya Sutskever, Oriol Vinyals, and Lukasz Kaiser. 2015a. Multi-task sequence to sequence learning. *arXiv preprint arXiv:1511.06114*.
- Minh-Thang Luong, Hieu Pham, and Christopher D Manning. 2015b. Effective approaches to attention-based neural machine translation. *arXiv preprint arXiv:1508.04025*.
- José B Marino, Rafael E Banchs, Josep M Crego, Adrià de Gispert, Patrik Lambert, José AR Fonollosa, and Marta R Costa-jussà. 2006. N-gram-based machine translation. *Computational linguistics*, 32(4):527–549.
- Laura Martinus and Jade Z Abbott. 2019. Benchmarking neural machine translation for southern african languages. *arXiv preprint arXiv:1906.10511*.
- Toan Q Nguyen and David Chiang. 2017. Transfer learning across low-resource, related languages for neural machine translation. *arXiv preprint arXiv:1708.09803*.
- Daniel R van Niekerk. 2014. Exploring unsupervised word segmentation for machine translation in the south african context. In *Proceedings of the 2014 PRASA, RobMech and AfLaT International Joint Symposium*, pages 202–206.
- Iroro Orife, Julia Kreutzer, Blessing Sibanda, Daniel Whitenack, Kathleen Siminyu, Laura Martinus, Jamiil Toure Ali, Jade Abbott, Vukosi Marivate, Salomon Kabongo, Musie Meressa, Espoir Murhabazi, Orevaoghene Ahia, Elan van Biljon, Arshath Ramkilwan, Adewale Akinfaderin, Alp Öktem, Wole Akin, Ghollah Kioko, Kevin Degila, Herman Kamper, Bonaventure Dossou, Chris Emezue, Kelechi Ogueji, and Abdallah Bashir. 2020. [Masakhane – machine translation for africa](#).
- Jean Pouget-Abadie, Dzmitry Bahdanau, Bart Van Merriënboer, Kyunghyun Cho, and Yoshua Bengio. 2014. Overcoming the curse of sentence length for neural machine translation using automatic segmentation. *arXiv preprint arXiv:1409.1257*.
- Ilya Sutskever, Oriol Vinyals, and Quoc V Le. 2014. Sequence to sequence learning with neural networks. In *Advances in neural information processing systems*, pages 3104–3112.
- Lisa Torrey and Jude Shavlik. 2010. Transfer learning. In *Handbook of research on machine learning applications and trends: algorithms, methods, and techniques*, pages 242–264. IGI global.
- Ashish Vaswani, Noam Shazeer, Niki Parmar, Jakob Uszkoreit, Llion Jones, Aidan N Gomez, Łukasz Kaiser, and Illia Polosukhin. 2017. Attention is all you need. In *Advances in neural information processing systems*, pages 5998–6008.
- Warren Weaver. 1955. Translation. *Machine translation of languages*, 14(15-23):10.
- Ilana Wilken, Marissa Griesel, and Cindy McKellar. 2012. Developing and improving a statistical machine translation system for english to setswana: a linguistically-motivated approach. In *Twenty-Third Annual Symposium of the Pattern Recognition Association of South Africa*, page 114.
- Friedel Wolff and Gideon Kotzé. 2014. Experiments with syllable-based zulu-english machine translation. In *Proceedings of the 2014 PRASA, RobMech and AfLaT International Joint Symposium*, pages 217–222.
- Barret Zoph, Deniz Yuret, Jonathan May, and Kevin Knight. 2016. Transfer learning for low-resource neural machine translation. *arXiv preprint arXiv:1604.02201*.